

Fully Distributed Fog Load Balancing with Multi-Agent Reinforcement Learning

Maad Ebrahim, Abdelhakim Senhaji Hafid, *Member, IEEE*,

Abstract—Real-time Internet of Things (IoT) applications require real-time support to handle the ever-growing demand for computing resources to process IoT workloads. Fog Computing provides high availability of such resources in a distributed manner. However, these resources must be efficiently managed to distribute unpredictable traffic demands among heterogeneous Fog resources. This paper proposes a fully distributed load-balancing solution with Multi-Agent Reinforcement Learning (MARL) that intelligently distributes IoT workloads to optimize the waiting time while providing fair resource utilization in the Fog network. These agents use transfer learning for lifelong self-adaptation to dynamic changes in the environment. By leveraging distributed decision-making, MARL agents effectively minimize the waiting time compared to a single centralized agent solution and other baselines, enhancing end-to-end execution delay. Besides performance gain, a fully distributed solution allows for a global-scale implementation where agents can work independently in small collaboration regions, leveraging nearby local resources. Furthermore, we analyze the impact of a realistic frequency to observe the state of the environment, unlike the unrealistic common assumption in the literature of having observations readily available in real-time for every required action. The findings highlight the trade-off between realism and performance using an interval-based Gossip-based multi-casting protocol against assuming real-time observation availability for every generated workload.

Index Terms—Internet of Things, Fog Computing, Load Balancing, Reinforcement Learning, Multi-Agent Learning

I. INTRODUCTION

In the era of interconnected devices, Internet of Things (IoT) has emerged as a pervasive technology, facilitating seamless communication and data exchange among various devices. However, the surge in IoT devices has posed significant challenges in efficiently managing and processing the generated data. Fog computing has emerged as a promising paradigm to address these challenges by distributing computing resources closer to data sources. Unlike the Cloud, Fog nodes can serve time-sensitive and computationally intensive applications of resource-limited IoT devices.

Fog Computing necessitates efficient resource management due to its distributed nature and latency-sensitive applications. Distributing IoT load efficiently between available Fog resources is essential to reduce end-to-end latency and enhance the system performance. High workload generation rates can increase the waiting delay due to the accumulation of tasks in the queues of Fog nodes. Hence, minimizing the waiting

delay is the key to reducing the overall end-to-end execution delay of IoT workloads.

Load balancing in Fog computing environments plays a crucial role in ensuring optimal resource utilization and timely processing of IoT data; this allows for minimizing task completion time and improving overall network performance. Traditional load-balancing techniques often struggle with the dynamic nature of Fog environments, characterized by heterogeneous resources, limited communication bandwidth, and fluctuating workloads. This is where Reinforcement Learning (RL) comes into play, as it allows agents to learn optimal decision-making policies through interaction with the environment. However, managing Fog and IoT resources must be done at the network edge, in a distributed manner. This will avoid the need for distant decisions, taking full advantage of the distributed computing capabilities of Fog systems [1].

Unlike centralized RL-based load-balancing solutions, fully distributed Multi-Agent RL (MARL) overcomes scalability limitations by allowing autonomous agents to learn from their local observations and interactions. These agents can be deployed in network Access Points (APs), i.e., Base Stations, to distribute the load their associated end devices generate. This paper presents a novel fully distributed approach for Fog load balancing using MARL. Our approach introduces distributed self-learning agents capable of efficiently distributing IoT load across the Fog environment. These agents incorporate self-adaptation mechanisms, leveraging practical lifelong transfer learning to adapt to dynamic environmental changes seamlessly. This distributed solution outperforms the centralized lifelong learning agent proposed in our previous work [2].

Available MARL solutions in the literature provide collaboration between RL agents through one or more centralized components, like a centralized policy and a centralized experience replay buffer, which is not practical for a global-scale Fog load-balancing solution. Without fully decentralizing decision-making, the communication overhead grows exponentially with the number of agents and Fog nodes in the system, especially when the agents need to communicate with each other. In addition, proposing fully independent agents lowers the state and action spaces of individual agents to reduce the computational complexity of the solution. This is done by considering smaller sets of Fog nodes, e.g., within a certain proximity, as possible candidates for each group of agents (see Fig. 1).

Fig. 1 shows the formation of smaller collaboration regions, where the group of agents accessing the same set of candidate Fog nodes can form a collaboration region. Each region contains one or more agents that need to distribute the load

M. Ebrahim and A. S. Hafid are with the NRL, Department of Computer Science and Operational Research, University of Montreal, Montreal, QC H3T-1J4, Canada (e-mail: maad.ebrahim@umontreal.ca; ahafid@iro.umontreal.ca).

Corresponding author: Maad Ebrahim (maad.ebrahim@umontreal.ca).

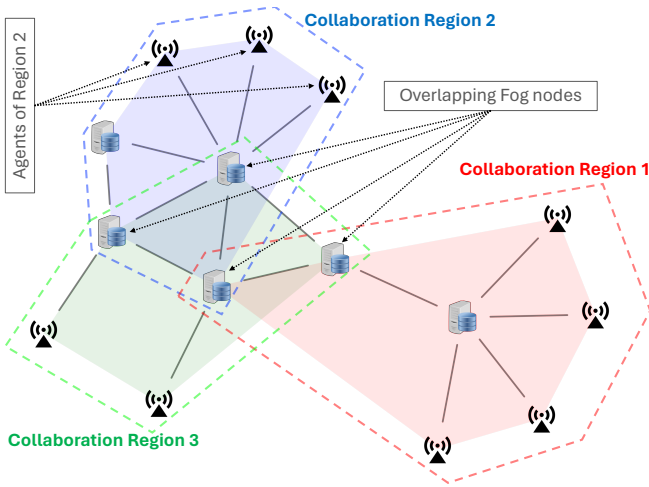


Fig. 1. A simplified Fog network with overlapping collaboration regions.

between one or more candidate Fog nodes. In this setup, an agent can only be part of a single collaboration region. Candidate Fog nodes can be shared between two or more overlapping regions, while an isolated collaboration region does not share its set of candidate Fog nodes with other regions. Allowing the agents to independently, i.e., blindly, learn to collaborate in each collaboration region leads to the global optimization of the whole system.

The independent agents must learn to optimize the same objective of minimizing the overall system waiting delay. To avoid unnecessary communication overhead, each agent observes the same state from the environment while independently taking actions and receiving rewards for those actions. Hence, our independent distributed agents can work without sharing their knowledge, experience, or actions, avoiding the need for a centralized coordination entity and inter-agent communication. In addition, a realistic multi-cast approach for observing the environment is proposed in this work, compared to unrealistic real-time observations often considered in the literature.

This paper proposes the first fully distributed, efficient, and self-adapting MARL load distribution solution for realistic global-scale Fog Computing implementations without centralized components or inter-agent communication. Through empirical evaluation, we show the effectiveness of our novel truly distributed MARL-based load-balancing solution and compare it with baseline solutions and a centralized state-of-the-art RL solution. We also show the performance of observing the environment using realistic multi-cast intervals compared to unrealistic real-time observations. Hence, the key contributions of this paper can be summarized as follows:

- Propose fully distributed self-learning LB RL agents that efficiently distribute IoT load into a Fog Computing environment.
- Augment the independent distributed agents with lifelong self-adaptation to dynamic environment changes using transfer learning.
- Provide a global-scale solution by allowing the agents to work independently in small collaboration regions, unlike

centralized architectures.

- Evaluate realistic interval-based collection of observations using Gossip multi-casting protocol compared to the common practice in the literature of unrealistically providing this information in real-time.

The rest of the paper is organized as follows. Section II presents the related work. Section III presents the system model. Section IV presents the proposed approach. Section V presents the evaluation of our proposed approach. Finally, Section VI concludes the paper.

II. RELATED WORK

In recent years, researchers have made significant contributions toward developing efficient resource management solutions for Fog Computing environments. One such approach is centralized RL, where a single agent manages the entire network. However, centralization causes scalability limitations and single-point-of-failure vulnerabilities. Using a centralized load-balancing node in large-scale Fog networks increases the time needed to make the load assignment decision, increasing end-to-end execution delay. Mitigating the limitations of single-agent RL solutions requires distributed multi-agent solutions, where multiple agents collaborate to manage Fog resources across the network.

Jain *et al.* [3] proposed training an agent for each Fog node to mitigate the delay of decision-making in centralized solutions. However, they trained all the agents offline on a centralized cloud data center to later distribute the trained models to each Fog node to make offloading decisions locally with minimal delay. However, training these agents using this approach, and retraining them in case of changes in the environment, requires the collection of local experience trajectories of each agent, i.e., observations, actions, rewards, and next observations. Transferring such information to a centralized entity to retrain these agents is inefficient compared to local retraining, especially for highly dynamic environments that keep changing over time.

Determining the optimal timing for retraining these agents in the centralized entity presents a critical trade-off between decision accuracy and the significant retraining overhead. In addition, an RL decision can only be made when the observation of the current step is available, along with the reward of the previous step. Observing the state, for each decision, of every Fog node in large-scale Fog networks will cause a significant delay, especially with frequently generated workloads [4]. This delay is often not considered in the literature when proposing load-balancing solutions with real-time decision-making. Hence, the effectiveness of these solutions in practice can not be guaranteed without considering the time needed to transfer Fog load provisioning information to all RL agents.

Gao *et al.* [5] used MARL to address the scalability problem of RL-based load-balancing solutions. They provide task offloading and resource allocation in large-scale heterogeneous Multi-access Edge Computing (MEC) systems. In their design, each edge server is regarded as an actor agent while still considering a centralized critic, where the critic is a neural

network used to evaluate the actions of actor networks [6]. This centralized critic facilitates the coordination of offloading policies among those distributed actors. Besides not being fully distributed, the authors assumed that observations are readily available when the agents need to make assignment decisions. This is a common unrealistic assumption in the literature, where the delay of exchanging Fog status information to every agent is often ignored.

Baek *et al.* [7] proposed a centralized critic network with distributed individual actor networks. Those distributed agents are located in APs and they cooperatively learn to solve the joint link and server load-balancing problem. The policy of the distributed cooperative agents is optimized using parameter-sharing and distributed execution; the agents communicate among themselves while evaluating a common value function. The authors assume that updated policy parameters are shared between the agents by exchanging communication messages over limited bandwidth channels. However, they did not show the transmission delay associated with those communication messages, which augments when scaling up the solution for a larger-scale Fog environment. Such a delay can have a significant impact on the collaboration of the agents due to sharing outdated parameters.

Similarly, Goudarzi *et al.* [8] proposed a MARL framework to improve the execution delay of heterogeneous Fog services using multiple actors and a centralized critic. They deployed distributed agents across different Fog nodes to work in parallel, i.e., brokers that make service offloading decisions. Then, they train a centralized service offloading model, i.e., the learner of the target policy, using the experience trajectories generated by the distributed actors. But again, they did not consider the delay caused by exchanging such information in a large-scale environment with high request rates. In addition, they did not consider the delay when updating the common value function of each actor from the centralized critic network.

Wei *et al.* [9] proposed a scheme to improve vehicular Fog resource utilization in large-scale Vehicular Fog Computing (VFC) networks. They used MARL to decide on multi-tier task offloading in a distributed manner. Like most MARL-based solutions in the literature, they used the approach of centralized training with decentralized execution (CTDE). They used the attention mechanism to share the agents' parameters with a joint critic network. This joint network incorporates the learning process of distributed gated actors that exploit the local computational potentials.

Zhang *et al.* [10] also used CTDE-based MARL to reduce the long-term average delay and energy consumption while improving the throughput of dynamic Edge networks using online Request Scheduling. Centralized training was adopted to improve the long-term system performance by realizing the implicit cooperation among edge nodes. This cooperation was obtained by transmitting the replay buffer data of each agent into a shared training server to train a common policy. During distributed execution, on the other hand, only local environment information is needed for each edge node to make the request scheduling decision. However, the authors did not discuss the scope of the local information, and the

delay associated with transmitting such information over the network. In a large-scale network, this delay is not tolerable for real-time decisions required by real-time applications.

Lu *et al.* [11] proposed MARL-based dynamic scheduling to handle the massive number of service requests by the ever-increasing number of vehicles in Internet-of-Vehicle (IoV) networks. They leveraged CTDE to learn high-quality scheduling rules for the service function scheduling problem. In their architecture, the generated scheduling actions of the distributed policies are evaluated by separate critic networks deployed in a centralized controller node. Similarly, Cui *et al.* [12] proposed offline CTDE to cooperatively optimize the offloading strategy for computation-intensive and delay-sensitive IoV applications. Offline CTDE helped reduce the communication between the agents while increasing the stability of the environment. However, offline execution does not allow the agents to dynamically adapt to environment changes. In addition, their solution will not scale to larger networks as all their agents must observe the global state of the environment, which are assumed, unrealistically, readily available for every decision to be made.

CTDE was also used by Gao *et al.* [13] to predict the queuing delay of edge servers by training a centralized critic in the Cloud. To evaluate each agent's policy, the critic network needs to collect observations and their corresponding actions from all agents in the system. Then, the agents independently make their decisions using their policies distributively. Likewise, Suzuki *et al.* [14] used CTDE to send learning samples from each agent to a centralized training entity to avoid the non-stationary problem of independently trained agents. A non-stationary environment is when the new state depends on the joint action of multiple agents instead of a single agent's behavior. To learn and make offloading decisions, the agents in these approaches observe task information, network link utilization, and Fog resources utilization, which are all unrealistically assumed available in real-time for all agents decisions.

Mangiaracina *et al.* [15] proposed adaptive MARL to manage data placement among Fog nodes considering Quality of Service (QoS) requirements. Unlike CTDE, they enabled cooperation between multiple agents using the concept of a shared repository accessible by all agents. This repository contains knowledge bases and event logs shared between those agents to improve their decision-making. The authors claim that this centralized repository does not affect the overall performance as a bottleneck in the architecture. However, they did not consider the time each agent needs to access information from this repository.

To coordinate the decisions of independent agents, Yang *et al.* [16] proposed that the decisions of each agent must depend on shared global state information. They proposed a centralized migration scheduling model to collect server load information and calculate the migration likelihood. They estimate the global information in a centralized model to reduce the communication overhead caused by broadcasting this information from each agent to the centralized critic network. They showed a 20% gap in performance between their approach and the optimal solution but with only half

TABLE I
COMPARISON OF STATE-OF-THE-ART MARL-BASED FOG LOAD BALANCING SOLUTIONS.

SOTA	Training	Retraining	Information Sharing	Observation Availability
Jain <i>et al.</i> [3]	Centralized	No	A shared trained model	Unrealistically instant
Gao <i>et al.</i> [5]	Centralized	No	Parameter Sharing (Centralized)	Unrealistically instant
Baek <i>et al.</i> [7]	Centralized	No	Parameter Sharing (Inter-agent)	Unrealistically instant
Goudarzi <i>et al.</i> [8]	Centralized	No	Experience Sharing (Centralized)	Unrealistically instant
Wei <i>et al.</i> [9]	Centralized	No	Parameter Sharing (Centralized)	Unrealistically instant
Zhang <i>et al.</i> [10]	Centralized	No	Experience Sharing (Centralized)	Unrealistically instant
Lu <i>et al.</i> [11]	Centralized	No	Experience Sharing (Centralized)	Unrealistically instant
Cui <i>et al.</i> [12]	Centralized	No	Experience Sharing (Centralized)	Unrealistically instant
Gao <i>et al.</i> [13]	Centralized	No	Experience Sharing (Centralized)	Unrealistically instant
Suzuki <i>et al.</i> [14]	Centralized	No	Experience Sharing (Centralized)	Unrealistically instant
Mangiaracina <i>et al.</i> [15]	Distributed	No	Shared knowledge base	Unrealistically instant
Yang <i>et al.</i> [16]	Centralized	No	A shared trained model	Unrealistically instant
Our fully distributed approach	Distributed	Lifelong learning	None	Interval-based observations

the decision-making time, where the optimal solution is a centralized decision-making method having the states and actions available for all agents.

Most existing MARL solutions adopt a centralized training approach, no fine-tuning for dynamic adaptation, and unrealistic assumptions for observation availability (see Table I). The centralized component in these solutions raises several challenges, especially in large-scale environments, including computational complexity, exploration of larger state and action spaces, and the communication overhead of inter-agent exchanges. Despite the efforts to mitigate these challenges in CTDE-based solutions, a truly distributed solution remains preferable to enhance scalability and decision-making time. With true distribution of decision-making, each agent makes decisions independently, without having access to the state of other collaborating agents in the system.

This paper proposes a fully distributed solution that efficiently coordinates decision-making among independent agents without reliance on centralized components or inter-agent communication. This truly distributed MARL framework effectively handles the complexities of Fog environments, scales well to a global-scale solution, and minimizes communication overhead and decision latency. In addition, this work presents the first attempt to evaluate a realistic way to observe the environment and the reward of the actions of each agent based on a multi-cast Gossip protocol.

III. THE FOG SYSTEM MODEL

This section defines the system model of the Fog network and the formulation of the load balancing problem. Table II shows the definitions of the mathematical symbols used throughout this paper. We reproduce the realistic Fog environments used in our previous works [17], [18] to compare the proposed fully distributed multi-agent solution with the centralized single-agent solution in [17].

The Fog environment has a mesh-like topology, with a central cloud, interconnected Fog nodes, and APs that work as gateways for their associated IoT devices. Load-balancing agents are deployed in these APs, where each agent makes its own decisions to distribute the load of its associated IoT devices between the Fog nodes in its collaboration region, i.e., its candidate Fog nodes. Agents in each collaboration region

TABLE II
LIST OF MATHEMATICAL NOTATIONS.

Symbol	Definition
N	Set of AP, Fog, and Cloud nodes (N^{AP}, N^F, N^C)
IPT_n	Compute capabilities of node n (Instructions/timestep)
RAM_n	Memory capabilities of node n
L	Set of Network links connecting the nodes
BW_l	Bandwidth of link l
PR_l	Propagation delay of link l
DA	Set of distributed applications
M_{da}	Set of modules of application da
D_{da}	Set of dependencies between the modules of da
w	A category from the set of workload categories W
β	The scale parameter of the exponential distribution
Q_n	The number of queued jobs in node n
s_t	The observed state at step t , from a set of possible states S
a_t	The agent's action at step t , from a set of possible actions A
r_t	The agent's immediate reward at step t
G	The discounted sum of immediate rewards (return)
γ	The discount factor of the return
\mathcal{F}	Set of candidate Fog nodes in a collaboration region \mathcal{R}
\mathcal{F}_S	Shared Fog nodes between two collaboration regions
$\pi(s, a)$	The agent policy for taking action a in state s
$Q_\pi(s, a)$	The value for using π after taking action a in state s
Q^*	The optimal Q -Value for using the optimal policy π^*
$\phi(s, a)$	A mapping of the state-action pairs
θ	The neural network weights for the state-action pairs
α	The learning rate for updating the Q -Value
$\max_a Q$	The maximum Q -Value in state s for all actions
$\arg \max_a Q$	The action that maximizes the Q -Value in state s
$E_{\mathcal{T}}$	The new environment (target task \mathcal{T})
\mathcal{I}_S	Information from the source task S (old environment)
\mathcal{B}	Experiences stored in the agent's replay buffer

share a set of candidate Fog nodes, requiring the agents to optimize the resources of all candidate Fog nodes collaboratively. To be fully distributed, the agents must collaborate blindly, i.e., without sharing their experience or decision-making policies.

The Fog network is defined by the set of $N = n_1, n_2, \dots, n_z$ nodes described by their compute IPT_n and memory RAM_n resources [17], [18]. The Nodes, including N^{AP} AP nodes, N^F Fog nodes, and N^C Cloud nodes, are connected through $L = l_1, l_2, \dots, l_z$ bidirectional links. Each link is characterized by the pair (n_i, n_j) that it connects, its bandwidth BW_l , and its propagation delay PR_l . The network has a set of distributed applications $DA = da_1, da_2, \dots, da_z$ that simultaneously run in the system; each application has a set of modules M_{da} and dependency messages D_{da} between

these modules, i.e., workloads or requests.

Nodes and network links have heterogeneous resources and must serve three different workload categories $|W|$ each with different compute requirements, i.e., light, medium, and heavy workloads. Workloads are generated as a Poisson Point Process using exponential distributions with three different scale parameters β to simulate high, medium, and low workload generation rates, allowing for dynamic representation of job arrivals in our Fog environment. Nodes and links are modeled with M/M/1 queuing models to handle the generated workloads, giving the ability to provide insights into performance metrics such as queue lengths and waiting times. The agents must learn to minimize the number of queued jobs Q_n in the queue of each Fog node n to minimize the workload waiting delay, reducing the end-to-end execution delay over the system [17].

To optimize this objective, each agent learns a policy to select the best Fog node for each generated workload. To do this, each agent in a collaboration region observes the number of jobs queued in every candidate Fog node in that region. These observations represent the state of the environment at each step, and it is the same for all agents in a collaboration region. This state is used to select an action a from the set of possible actions A , corresponding to the set of candidate Fog nodes N^F in that region. Each agent learns to select the action that maximizes its performance measure, i.e., the reward, which is evaluated at the end of every decision step. For each agent, the reward is the number of jobs queued in the Fog node selected in its previous action. To reduce the average system waiting delay, this number is negated to be maximized by the RL algorithm. This reduces the accumulation of workloads in Fog nodes, lowering overload probability and overall execution delay.

IV. DISTRIBUTED RL LOAD BALANCING

A fully independent Double Deep Q-Learning (DDQL) agent is deployed in each of the N^{AP} APs of the Fog network. The state, action, and reward function of every agent at every decision step t are defined as follows:

- **State:** $s_t = (w_t, Q_{n,t} : \forall n \in N^{CF})$, where w represents the category of the workload to be assigned and Q_n represents the number of queued jobs in candidate Fog node n .
- **Action:** $a_t \in A$ is the decision to assign the current workload to the best candidate Fog node from the set of candidates considered for that agent.
- **Reward:** $r_t = -Q_{a_{t-1},t}$ represents the number of queued jobs in the Fog node previously selected by that agent, i.e, the reward at decision step t is the performance measure of the action taken at decision step $t - 1$ (it is part of the observed state, and thus, does not need to be transmitted separately to each agent). The negation is used to represent the reward as a cost to be minimized instead of a utility to be maximized. The accumulation of these rewards is the expected discounted return $G = \sum_{t=0}^{\infty} \gamma^t r_t$, where γ defines the importance of future rewards compared to recent ones.

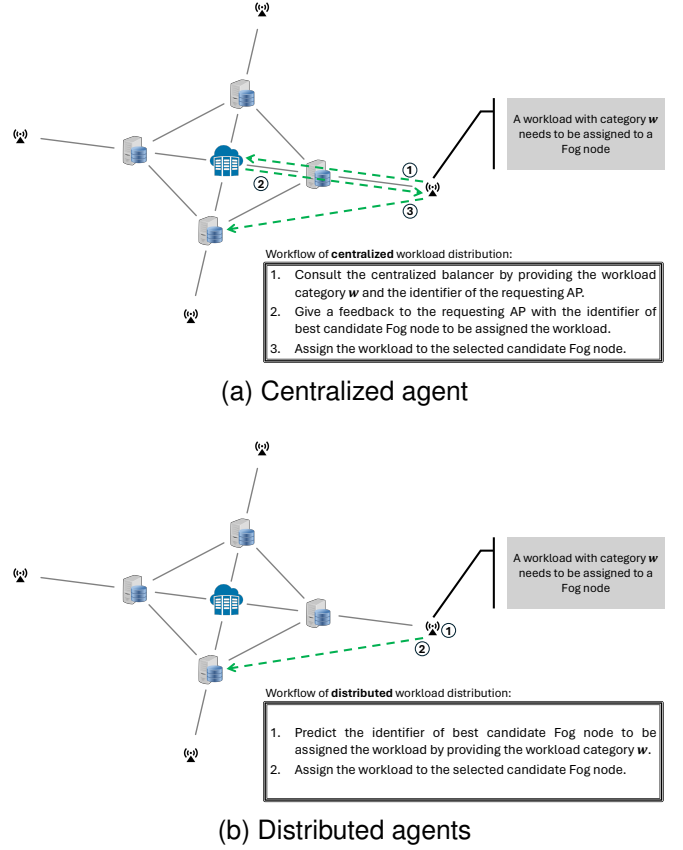


Fig. 2. Workflow of workload distribution.

In centralized single-agent solutions [2], [17], the state space consists of the number of queued jobs from all Fog nodes at each decision step, i.e., $Q_{n,t} : \forall n \in N^F$. The centralized agent also requires the identity of the AP connected to the source IoT device, i.e., workload from n_t^{AP} to be assigned at decision step t . When shifting to a distributed multi-agent solution in large-scale networks, considering all Fog nodes for every agent can unnecessarily increase the state and action spaces of each agent. However, it is sufficient to design the agents with feasible subsets of Fog nodes within a certain proximity. This leads to creating multiple groups of agents, each observing the queues of their own set of candidate Fog nodes $Q_{n,t} : \forall n \in N^{CF}$.

In addition to increasing the state and action spaces, a centralized agent causes a significant delay for each workload assignment due to the three-way communication between the centralized agent and the workload AP (see Fig. 2(a)). For every generated workload in centralized load distribution solution, an assignment request is sent to the centralized agent along with the workload category and the identifier of its AP. After receiving this request, the centralized agent predicts the best Fog node for that workload using the provided information and the observed number of queued jobs in each Fog node in the system. The agent then responds to the requesting AP with the identifier of the selected Fog node. Finally, the AP assigns and sends the workload to the selected Fog node and waits for the next generated workload.

With a distributed load balancing solution, however, each

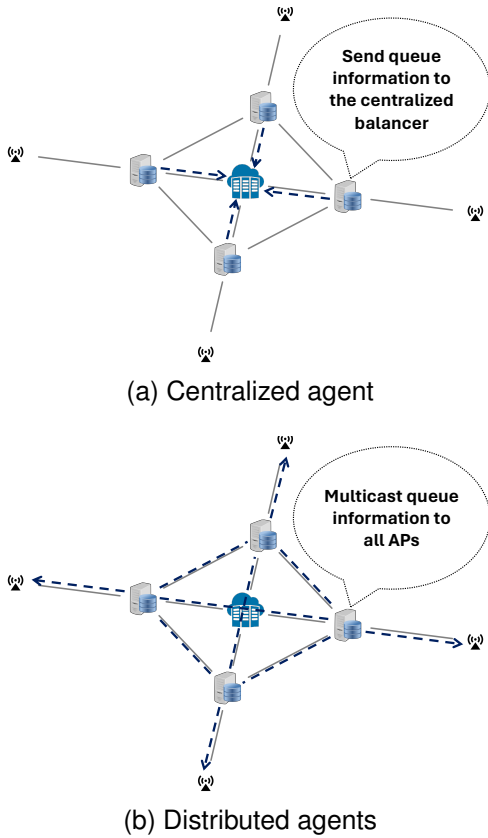


Fig. 3. Transmission of Fog queue information.

agent has this prediction capability locally, and hence, each agent makes its own assignment decisions (see Fig. 2(b)). As soon as the AP receives a workload, it predicts the best candidate Fog node for that workload by providing the workload category w and the number of queued jobs in each candidate Fog node. The workload is then immediately assigned and transmitted to the selected Fog node, minimizing the decision delay compared to a centralized solution.

In addition to the decision-making delay induced by the agent's location, i.e., centralized vs. distributed, observing the number of queued jobs in each Fog node causes a significant delay, often neglected in the literature. In a centralized solution, each Fog node sends its queue information to the centralized agent as in Fig. 3(a). In a distributed solution, however, each agent/AP needs to receive this information from all candidate Fog nodes (see Fig. 3(b)). To do this in a real-world environment, Fog nodes need to multi-cast their queue information, introducing a significant delay compared to a centralized solution.

Frequently multi-casting the observations, i.e., for every generated workload, in large-scale networks consumes a significant amount of network bandwidth. Hence, providing this information in real-time for every workload assignment decision becomes infeasible, especially with a large number of Fog nodes and IoT devices, and high workload generation rates. Therefore, addressing the frequency of transferring this information between the agents becomes essential. In addition, dividing large-scale networks into smaller subsets of collaboration regions limits the transfer of this information to fewer

agents within a smaller geographical scope, thereby reducing the communication overhead.

A distributed load balancing solution allows the network to be clustered into smaller, possibly overlapping, regions based on geographical proximity between Fog nodes and APs. This significantly reduces the state and action spaces by only considering feasible Fog nodes for the agents in each collaboration region, which helps reduce the computational complexity of the solution. The agents in each region will then collaborate within their respective boundaries to optimize the resources of their feasible candidate Fog nodes. Unlike centralized load balancing solutions, where all Fog nodes must be included in the observation of the centralized agent, whether they are feasible options for all APs or not.

In this paper, we evaluate our fully distributed solution on a single collaboration region, where all agents collaborate to optimize the resources of the candidate Fog nodes in their region. To show the scalability of this solution to a larger network with multiple collaboration regions, these agents must be able to independently collaborate to minimize the number of queued jobs in each candidate Fog node. To learn independently, the agents must collaborate blindly, i.e., without knowing the policies and actions of the other agents in the system.

Lemma IV.1. *Given two non-overlapping sets of candidate Fog nodes $\mathcal{F}_1 \cap \mathcal{F}_2 = \emptyset$ in two collaboration regions. Each region is managed by a group of agents that blindly collaborate to optimize the resources of their candidate Fog nodes without knowing the actions of other agents in the system (see Fig. 4). If the two regions share a subset of candidate Fog nodes $\mathcal{F}_1 \cap \mathcal{F}_2 = \mathcal{F}_S$, the agents of each region can still blindly collaborate to optimize the resources of their set of candidate Fog nodes and the shared set of candidate Fog nodes.*

Proof. Assuming the agents in an isolated region can efficiently manage the resources of their candidate Fog nodes by blindly collaborating without the need to observe the actions, nor the mechanism of making those actions, of other agents in their collaboration group. This assumption holds for any number of isolated regions each with their own set of candidate Fog nodes. Now, assume that a region \mathcal{R}_1 with \mathcal{F}_1 candidate Fog nodes share \mathcal{F}_S candidate Fog nodes with region \mathcal{R}_2 (see Fig. 4). Suppose there exists an agent in \mathcal{R}_2 that does not collaborate with the agents in its group leading to inefficient management of the Fog resources in \mathcal{F}_2 , including those in \mathcal{F}_S . This implies that there is a breakdown in the collaborative optimization process. However, this contradicts our initial assumption that within each region, the agents efficiently collaborate to optimize the resources of their candidate Fog nodes. Therefore, we conclude that the agents of both regions will collaborate to optimize the shared resources in \mathcal{F}_S as well as those of their own. Therefore, the lemma holds. \square

In this work, we provide empirical evidence under a realistic setup supporting the ability of our independent distributed RL agents to optimally distribute the load within a collaboration region. Each agent acts according to the current environment state, and the learned policy π . In real-world environments,

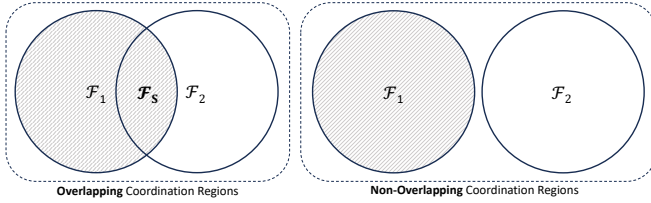


Fig. 4. Overlapping vs. non-overlapping sets of candidate Fog nodes for two coordinating regions.

it is impractical to observe the state of every candidate Fog node for every workload assignment decision due to the network delay, which is intolerable for real-time applications. Observing the state of all Fog nodes in large-scale networks necessitates waiting for the state of the last node to transmit its load information to complete the environment observation. Hence, the effect of the observation delay is impacted by the scale of the Fog system, the number of IoT devices, and the rate of workload generation. In the literature, however, observations are always assumed to be immediately available for the agent at each decision step [19], rendering those solutions impractical for real-world implementations.

To provide a practical solution with real-world constraints, we use a realistic approach to observe the number of jobs queued in each Fog node. In this approach, the agents collect observations using interval-based multi-casting protocols, i.e., sending queue information on predetermined intervals. Using the same observation for multiple decision steps will lead to sub-optimal solutions, depending on the frequency of collecting the observations. Hence, the smallest practical interval for the multi-casting protocol must be considered to transfer the queue information to all agents. In this work, for instance, Fog nodes transfer their queue information every 3 seconds, which is a typical interval for Gossip [20] multi-casting protocols.

To learn the optimal policy π^* , the agents evaluate taking action a in state s following policy π using the Q-function $Q_\pi(s, a) = \mathbb{E}[G | s, a, \pi]$. Therefore, the optimal Q-function $Q^*(s) = \max_\pi Q_\pi(s)$ cannot be less than the Q-function of any other policy, i.e., $Q_{\pi^*}(s) \geq Q_\pi(s)$. Deep Q-Learning (DQL) approximates the Q-function using a mapping ϕ of state-action pairs, allowing it to work in high-dimensional and continuous state spaces. This mapping is weighted by θ to calculate the Q-function $Q(s, a) = \theta\phi(s, a)$, which is updated according to Bellman equation: $Q(s, a) \leftarrow Q(s, a) + \alpha r + \gamma \max_{a'} Q(s', a') - Q(s, a)$.

The best action in a given state is the one that maximizes the Q-function for that state, i.e., $\pi(a | s) = \arg \max_a Q(s, a)$. Once the algorithm converges to Q^* , the optimal action is predicted using the optimal policy $\pi^*(s) = \arg \max_a Q^*(s, a) \forall s \in S$. To avoid instability and divergence during training, a random set of interactions is batched from a Replay Buffer to train the Q-function network [21]. In addition, an off-policy Double-DQL [22] balances exploration and exploitation by learning an optimal policy while using an exploratory policy for action selection. It uses two networks for the Q-function, one updates every training step to evaluate the actions, and the other updates periodically for stable action

selection.

After learning the optimal policy, we allow the agents to stop training, and use the learned models for inference only. This mitigates the need for unnecessary computations and leverages the simple arithmetic and array operations of lightweight inference models. The agents can then detect changes in the environment by measuring degradation in performance, which is used to trigger the fine-tuning process for their models to adapt to the new environment. Fine-tuning the learned models in a lifelong learning process can speed up convergence, improve data efficiency, and provide better generalization than learning from scratch [23]. In this work, for instance, the agents experience three significant surges in workload generation rates, causing three inference/fine-tuning epochs. Fine-tuning can also be used to initialize new agents by leveraging the expertise of existing trained agents in the network (see Fig. 5).

Exploiting previously learned knowledge \mathcal{I}_S from source task S to improve the learning on a related target task T requires the tasks to have a certain level of similarity [24]. Hence, the learned policy on the target environment E_T depends on the information from both source and target tasks, i.e., $\pi_\theta = \phi(\mathcal{I}_S \sim E_S, \mathcal{I}_T \sim E_T) : S^T \rightarrow A^T$. This information includes the parameters of the Q network ($\theta_T \leftarrow \theta_S$) and the x recent interactions of the replay buffer ($\mathcal{B}_T \leftarrow \text{RecentExperiences}(\mathcal{B}_S, x)$).

V. PERFORMANCE EVALUATION

This paper mainly focuses on comparing the learning of independent decision-making policies with the learning of a common policy. A common policy exists in both single-agent and MARL CTDE solutions. Hence, we evaluate our proposed fully distributed MARL approach against a common agent policy as in [2]. This highlights the advantages of training independent agents compared to a single LB agent, including autonomy, adaptability, and scalability. For instance, AP_2 in Fig. 6 can quickly learn, after a few interactions, that F_1 is not feasible to process any of its generated workloads, given its distance and limited resources. Similarly, AP_1 can quickly learn that it can use F_2 to process its compute-intensive workloads, despite its distance.

Using a common policy to learn these infeasible decisions requires more interactions than independent policies, especially in large and complex environments. A common policy explores a larger number of state-action combinations, while independent policies provide more targeted exploration for each agent by focusing on the infeasible decisions for every agent separately. Independent policies mitigate the burden of exploring vast state and action spaces, allowing for faster learning even with larger spaces. Hence, the results of this section will help show the ability of our fully independent agents to learn better distribution strategies compared to a common centralized policy.

We leverage the system parameters based on our previous contributions [18], [17], [2], which ensures consistency and relevance in our evaluation, and provides valuable insights into the effectiveness and applicability of the fully distributed

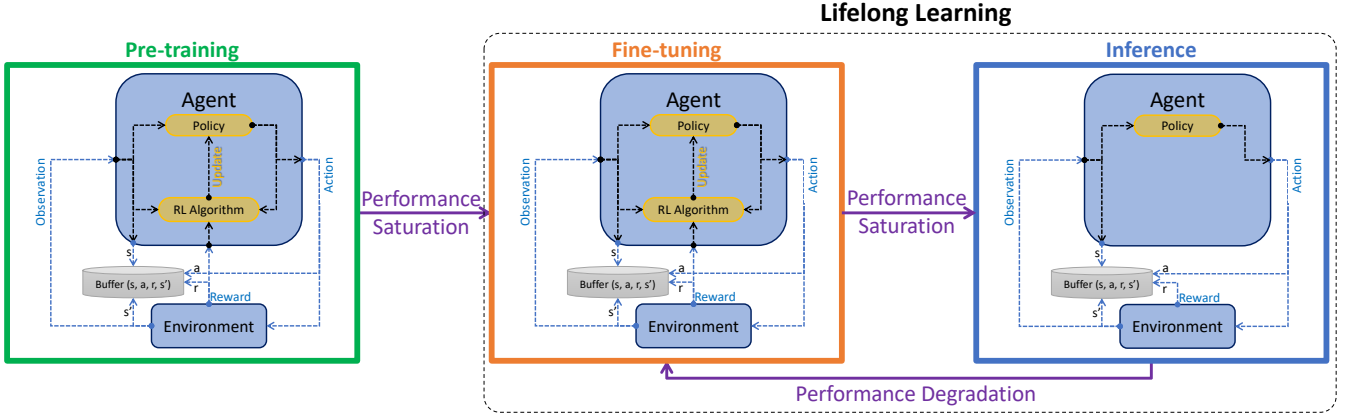


Fig. 5. Lifelong learning for RL agents.

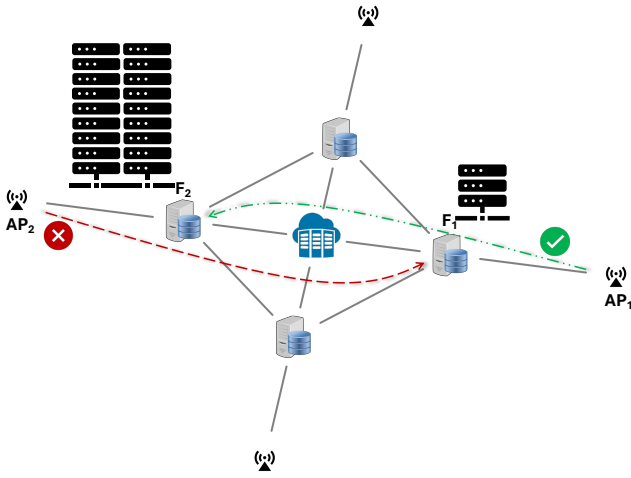


Fig. 6. Benefit of independent distributed policies.

MARL approach in real-world scenarios. We used TF-Agents [25] to implement the DDQL algorithm with the hyper-parameters in Table III. A fully independent agent is deployed in each AP with its policy model, Q-Network, and experience replay buffer without sharing learning information between the agents. The simulations run on a DELL G5 laptop with 16GB RAM and Intel Core i7-9750H (6 physical cores, 12MB Cache, running up to 4.5 GHz). The agents are trained using NVIDIA GeForce RTX 2070 GPU with Max-Q Design (8GB RAM). To simulate realistic Fog environments we used a Discrete-Event Simulator called YAFS [26].

Flat interconnected Fog topologies are generated using the Networkx library [27] as random undirected graphs resembling the Internet Autonomous System network. Nodes in the graph are then identified as Cloud, Fog nodes, or APs based on their betweenness centrality [28]. For instance, Fig. 7 shows a sample topology with a Cloud, 11 Fog nodes, and 21 APs. Fog nodes are then assigned heterogeneous compute resources, in Instructions Per Second (IPS), from evenly spaced values in the range $[10^3, 10^5]$. This is done inversely proportional to the number of directly connected APs to resemble unbalanced load distribution.

The Cloud, with 10^6 computing resources, is connected to

TABLE III
DDQL HYPER-PARAMETERS

Parameter	Values
Discount Factor γ	0.99
Decayed Epsilon-Greedy	The first 75% Training steps
Decayed Epsilon values	Linearly from 100% to 1%
Replay Buffer Type	Uniform
Maximum Buffer Capacity	1 Million trajectories of experience
Initial Buffer Population	10% of its maximum capacity
Buffer mini-Batch Size	50 samples of 2 steps each
Network Train Period	4 Decision steps
Target Update Period	2000 Decision Steps
Network Layers	Fully connected [256, 128, 64]
Network Optimizer	Adam with $2.5e^{-4}$ learning rate
Network Loss Function	Huber Loss

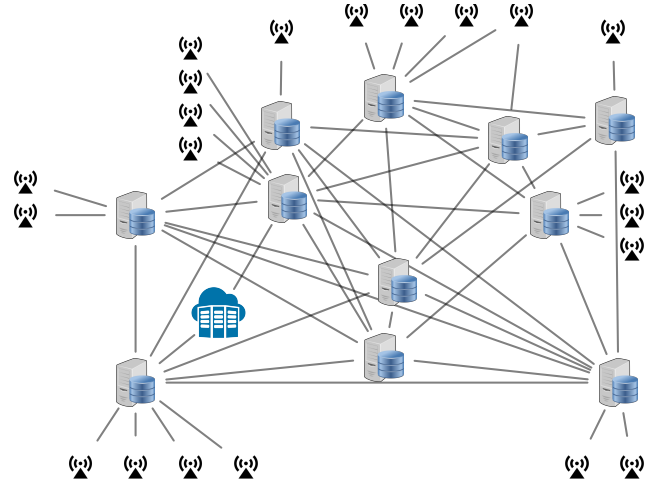


Fig. 7. Unbalanced flat Fog topology with interconnected Fog nodes.

two Fog nodes with the highest betweenness. Fog nodes are assumed closer to IoT devices with low link latency compared to the Cloud, which incurs higher delays due to longer transmission distances and additional processing layers. To simulate the physical distances of IoT-Fog, Fog-Fog, and Fog-Cloud links, the propagation delay of those links, in seconds, is drawn from a uniform distribution in the ranges $[1, 2)$, $[2, 4)$, and $[10, 20)$, respectively [7]. While their bandwidth,


in Mbps, is drawn from a uniform distribution in the ranges $[10^2, 10^3)$, $[10^3, 10^4)$, and $[10^3, 10^4)$, respectively [7]. Heavy, moderate, and light workloads require 10^4 , 10^3 , and 10^2 compute instructions, respectively. The data sizes of these workload categories are 10^3 , 10^2 , and 10^1 Bytes, respectively. These values were chosen relative to Fog and link resources to create a system with scarce resources relative to the demand.

Workloads are generated as a Poisson Point Process using exponential distributions to effectively model the stochastic nature of job arrivals in Fog computing environments [29]. We used three scales for the exponential distributions, i.e., $\beta = 100, 150, \text{ and } 200$, to evaluate the performance under various load intensities, i.e., high, medium, and low generation rates/frequencies, respectively. Without efficient load distribution, the high rate can easily create a system bottleneck with heavy workloads and the unbalanced structure of the environment. In episodes of 10K simulation steps, training starts with the low rate for 30K training steps. A training step spans four decision steps, each spanning a variable number of simulation steps, depending on the workload generation rate. After 30K training steps, the rate instantly increases to medium, and then to high, requiring the agents to adapt to this rapid change using transfer learning.


To evaluate the agents' ability to reduce the number of queued jobs in each Fog node, we use the average system waiting delay as the main performance metric. We then evaluate balance and fairness by examining the similarity in waiting times and resource utilization across Fog nodes. Finally, we evaluate the system average for end-to-end workload execution delay, which includes network latency besides Fog waiting and service times. To underscore the benefits of learning independent policies over a common decision-making policy, we compare the proposed fully Distributed RL (DRL) approach against a Centralized single-agent RL (CRL) solution. We also include four baseline methods for completeness to show the significant difference between simple and intelligent load distribution solutions. These baselines include the selection of a random Fog node for each generated workload, and a Distributed Round-Robin (DRR) mechanism, where each AP assigns each workload among Fog nodes in a circular order. We also include the selection of the nearest Fog node to each workload's AP. The final baseline is selecting the fastest Fog node for each workload based on compute requirements relative to node and link resources.

A. Performance Analysis

The results presented in this section are averaged over 10 experiment trials with different random seeds to showcase the confidence intervals across different Fog topologies generated with the random graph generator. Using confidence intervals provides a measure of the variability in the results to assess the precision and reliability of the average values obtained from multiple experiment trials, enhancing the robustness of the findings. Due to the significant performance differences between the proposed DRL approach and the simple baseline methods, we used a logarithmic scale to show the values of DRL in the figures that compare it with baselines. The

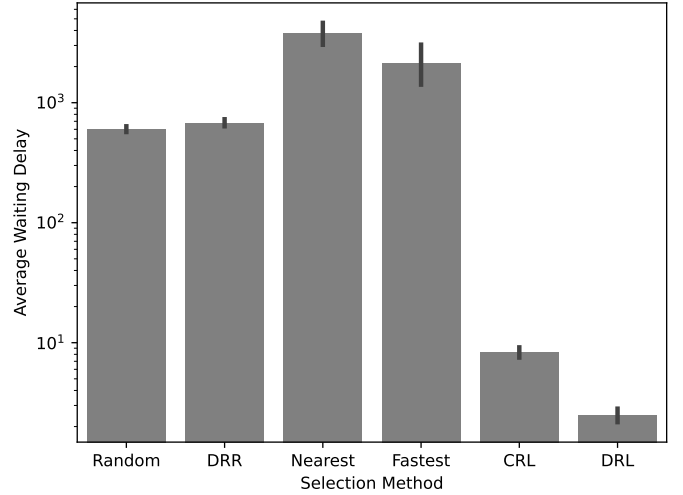

(a) DRL compared to CRL and baseline methods

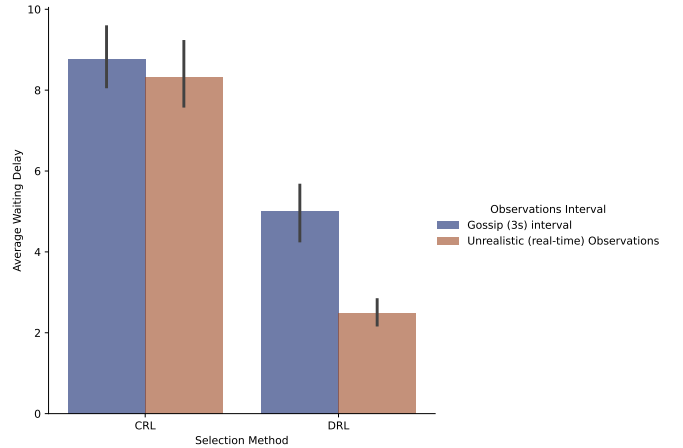

(b) Realistic vs. unrealistic observations

Fig. 8. The average system waiting delay.

results are gathered using the highest generation rate, After training on the three rates each with 30K training steps, as it is the most difficult for the agent to learn [2]. We use an evaluation episode of 100K simulation steps, i.e., $10\times$ longer than training episodes to offer a more reliable measure of RL effectiveness and generalization capability in real-world scenarios.

Starting with the average system waiting delay, i.e., the average waiting time in the queues of all Fog nodes, Fig. 8(a) illustrates the performance of RL approaches compared to the baseline methods. In our evaluations, CRL performs better in reducing the system waiting delay than traditional baseline methods. This highlights the effectiveness of leveraging RL-based interactive learning to optimize load distribution in Fog environments. Furthermore, transitioning to DRL yields notable performance improvements beyond the CRL. By distributing decision-making across APs, the fully distributed independent agents capitalize on localized information and dynamic adjustments to the actions of other agents, resulting in even lower system waiting delays.

Fig. 8(b) focuses on the performance of both centralized and distributed RL solutions with respect to the frequency


of observing the environment. It shows the performance of realistic observations using a Gossip protocol with 3 seconds interval between two consecutive actions. This is compared against the unrealistic assumption, commonly assumed in the literature, of readily available observations for every action. The figure highlights that realistic observations deliver slightly inferior performance compared to the optimal scenario where observations are unrealistically provided in real-time. This underscores the trade-off between realism and performance in RL-based load distribution solutions, where performance is directly related to the observation frequency. Despite the marginal performance degradation, realistic observation intervals align with practical constraints often encountered in real-world environments.

After evaluating the average waiting delay in the system, we show the variations in waiting delay among all Fog nodes, where lower values represent similar waiting times across the Fog nodes. Fig. 9(a) shows that RL-based solutions exhibit fewer variations than the baselines, with significantly better performance for DRL. By distributing RL decision-making, the agent in each AP manages the distribution of its workloads independently from other agents. This leads to a more effective load distribution considering more localized resources and adapting to the decisions of the other agents in the system. In contrast, CRL may exhibit higher variations in waiting time compared to DRL due to the centralized decision-making entity. The centralized agent struggles to efficiently adapt its decisions to the diverse workload demands from multiple APs across the heterogeneous Fog nodes.


Comparing DRL and CRL with respect to the frequency of observing the environment, Fig. 9(b) shows a slightly different trend when it comes to the variations in waiting delay between Fog nodes. DRL with real-time observations is the best to equalize the waiting time across all Fog nodes. Using interval-based observations, DRL still performs better than CRL but with more variability across the different trials. CRL with real-time observations, however, shows the largest variability across trials, indicating less confidence, i.e., uncertainty, on the behavior of the agents during deployment. Interestingly, CRL with interval-based observations, with slightly less equalized waiting delay across Fog nodes, has less variability across trials than real-time observations.

Fig. 10(a) shows DRL's ability to provide fair resource utilization between Fog nodes by reducing the variation in Fog resource utilization across the network. It shows significant improvement in DRL resource utilization fairness compared to CRL and other baselines. This mitigates the probability of overloading or underloading individual Fog nodes in the system. Maximizing the utilization of available resources enhances system performance by encouraging all Fog nodes to contribute equally to the overall workload processing, relative to their capacity constraints. On the other hand, mitigating overloading enhances system stability by ensuring the maximum availability of spare resources across the network, which minimizes the probability of dropping workloads in overloaded Fog nodes in case of a sudden surge in workload generation.

Fig. 10(b) shows a small degradation in DRL fairness after using realistic interval-based observations. On the other hand,

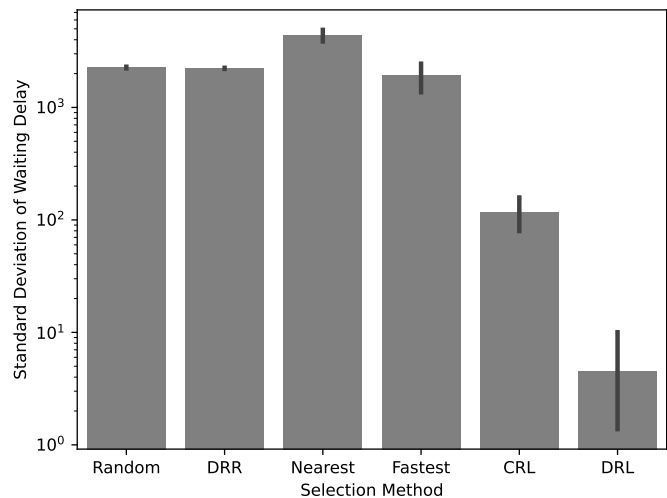

(a) DRL compared to CRL and baseline methods

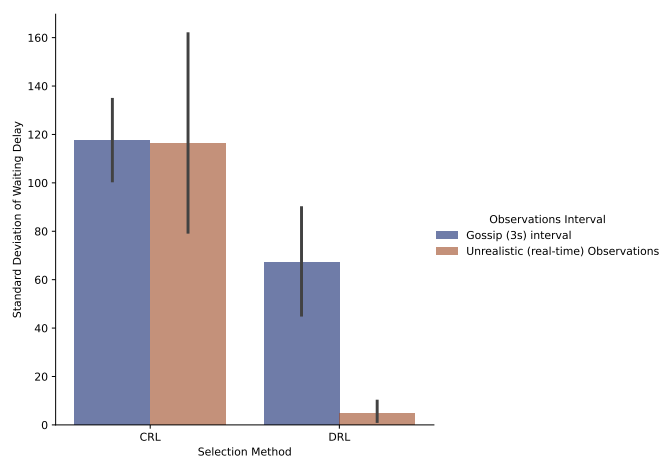


(b) Realistic vs. unrealistic observations


Fig. 9. The variations in the waiting delay between Fog nodes.

the choice between real-time and interval-based observations does not seem to have a significant difference in CRL fairness. Unlike Fig. 9(b), Fig. 10(b) shows small variability across the different trials, indicating less confidence on agents behavior. It is important to analyze agents' ability to provide fairness in resource utilization, similar waiting delay between all Fog nodes, and minimal average waiting time. However, we still need to observe the average end-to-end execution delay, including network links latency, Fog queue waiting time, and Fog service time for all generated workloads.


Fig. 11(a) shows the ability of RL-based solutions to significantly minimize, compared to baseline methods, the average end-to-end execution delay for all generated workloads in the system. This performance improvement is directly attributed to agents' ability to reduce the accumulation of workloads in the queues of Fog nodes, emphasizing the critical role of reducing the waiting delay in enhancing overall system performance. As shown earlier, there is a significant difference between DRL and CRL's ability to minimize the variations in waiting delay and resource utilization between Fog nodes. However, the total execution delay achieved by both methods is quite similar, which is again attributed to their ability to reduce the waiting

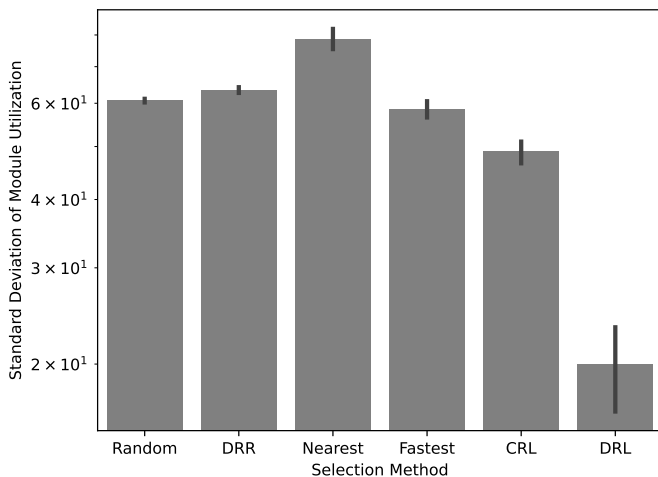

(a) DRL compared to CRL and baseline methods

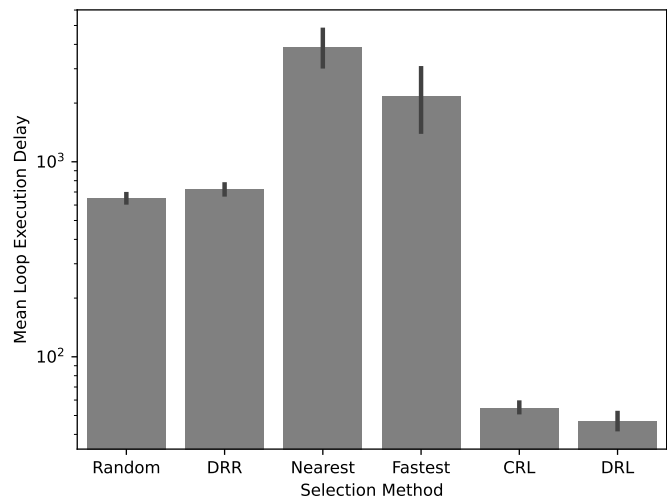


(a) DRL compared to CRL and baseline methods

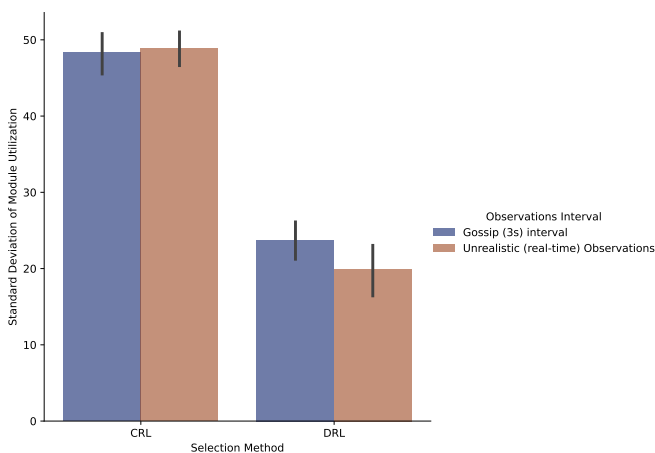

(b) Realistic vs. unrealistic observations

Fig. 10. The variations in the module utilization between Fog nodes.

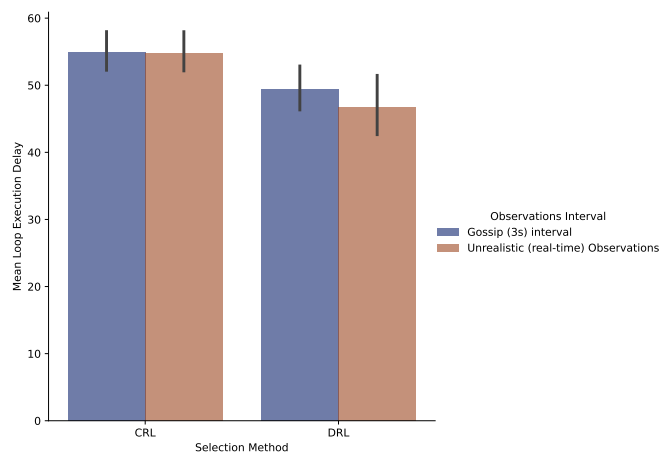

(b) Realistic vs. unrealistic observations

Fig. 11. The average total execution delay.

delay to a similar level relative to the performance of baseline methods.

The relatively small difference in total execution delay between DRL and CRL (see Fig. 11(b)) underscores the efficacy of both approaches in optimizing system performance through different load distribution strategies. However, performance difference simply amplifies with less efficient solutions over longer simulations due to the accumulation of workloads over time, leading to increased total execution delays with DRL compared to CRL. Fig. 11(b) also shows a small degradation in DRL performance using interval-based observations compared to CRL, but still performance better than CRL. The performance of CRL, on the other hand, is almost identical between real-time and interval-based observations.

In summary, the results presented in this section offer insights into the performance of our proposed fully distributed MARL solution, i.e., DRL, against the performance of a single-agent RL solution and some other baselines. The results demonstrate the superior performance of RL approaches over baseline methods, with DRL showcasing the most notable improvements, highlighting the effectiveness of distributed decision-making in optimizing workload distribution. These

improvements will amplify over longer simulations due to the accumulation of workloads over time, making such intelligent solutions the best option for real-world implementations. However, it's crucial to note that the realistic performance of such solutions highly depends on observation frequency through multi-casting protocols, such as Gossip.

VI. CONCLUSION

This paper presents a MARL fully distributed load-balancing solution that optimizes end-to-end execution time by minimizing Fog nodes' waiting delay. The agents in our design work independently, and can dynamically adapt to environment changes using transfer learning in a life-long learning process. Our findings demonstrate the effectiveness of the proposed distributed solution in minimizing waiting time while enhancing resource utilization fairness across heterogeneous fog resources. By leveraging distributed decision-making, MARL agents outperform centralized solutions and traditional baselines, leading to significant improvements in overall system performance. Furthermore, we evaluate a more realistic approach to observing the state of the environment through an interval-based multi-casting protocol. Considering

the real cost of observing the environment has never been considered before, and instead, observations are assumed to be unrealistically available in real-time for every decision to make.

Unlike centralized load-balancing solutions, using fully distributed agents allows for a global-scale solution where groups of agents can work independently in small collaboration regions. For this reason, a primary focus for future research is to provide a real-world implementation to demonstrate the scalability and effectiveness of the proposed distributed load-balancing solution at a global scale. This can involve deploying independent agents in diverse Fog environments that span across distant geographical regions and heterogeneous network infrastructures. This research direction will bridge the gap between theoretical research and practical implementation, demonstrating the practical feasibility and effectiveness of the proposed solution at a global scale. In addition, testing with a real-world implementation can uncover potential limitations and constraints that can guide future research efforts in enhancing Fog load-balancing solutions.

REFERENCES

- [1] M. Ebrahim, A. Hafid, and E. Elie, "Blockchain as privacy and security solution for smart environments: A survey," 2022.
- [2] M. Ebrahim, A. S. Hafid, and M. R. Abid, "Lifelong learning for fog load balancing: A transfer learning approach," 2023.
- [3] V. Jain and B. Kumar, "Qos-aware task offloading in fog environment using multi-agent deep reinforcement learning," *Journal of Network and Systems Management*, vol. 31, no. 1, p. 7, Oct 2022. [Online]. Available: <https://doi.org/10.1007/s10922-022-09696-y>
- [4] D. H. Abdulazeez and S. K. Askar, "Offloading mechanisms based on reinforcement learning and deep learning algorithms in the fog computing environment," *IEEE Access*, vol. 11, pp. 12 555–12 586, 2023.
- [5] Z. Gao, L. Yang, and Y. Dai, "Large-scale cooperative task offloading and resource allocation in heterogeneous mec systems via multiagent reinforcement learning," *IEEE Internet of Things Journal*, vol. 11, no. 2, pp. 2303–2321, 2024.
- [6] R. S. Sutton and A. G. Barto, *Reinforcement learning: An introduction*. MIT press, 2018.
- [7] J. Baek and G. Kaddoum, "Floodnet: Load balancing in fog networks with cooperative multiagent using actor-critic method," *IEEE Transactions on Network and Service Management*, vol. 20, no. 1, pp. 400–414, 2023.
- [8] M. Goudarzi, M. A. Rodriguez, M. Sarvi, and R. Buyya, " μ -ddrl: A qos-aware distributed deep reinforcement learning technique for service offloading in fog computing environments," *IEEE Transactions on Services Computing*, vol. 17, no. 1, pp. 47–59, 2024.
- [9] Z. Wei, B. Li, R. Zhang, X. Cheng, and L. Yang, "Many-to-many task offloading in vehicular fog computing: A multi-agent deep reinforcement learning approach," *IEEE Transactions on Mobile Computing*, vol. 23, no. 3, pp. 2107–2122, 2024.
- [10] Y. Zhang, R. Li, Y. Zhao, R. Li, Y. Wang, and Z. Zhou, "Multi-agent deep reinforcement learning for online request scheduling in edge cooperation networks," *Future Generation Computer Systems*, vol. 141, pp. 258–268, 2023. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S0167739X22003788>
- [11] Y. Lu, P. Zhang, Y. Duan, M. Guizani, J. Wang, and S. Li, "Dynamic scheduling of iov edge cloud service functions under nfv: A multi-agent reinforcement learning approach," *IEEE Transactions on Vehicular Technology*, pp. 1–12, 2023.
- [12] Y. Cui, H. Li, D. Zhang, A. Zhu, Y. Li, and H. Qiang, "Multiagent reinforcement learning-based cooperative multitype task offloading strategy for internet of vehicles in b5g/6g network," *IEEE Internet of Things Journal*, vol. 10, no. 14, pp. 12 248–12 260, 2023.
- [13] Z. Gao, L. Yang, and Y. Dai, "Fast adaptive task offloading and resource allocation via multiagent reinforcement learning in heterogeneous vehicular fog computing," *IEEE Internet of Things Journal*, vol. 10, no. 8, pp. 6818–6835, 2023.
- [14] A. Suzuki, M. Kobayashi, and E. Oki, "Multi-agent deep reinforcement learning for cooperative computing offloading and route optimization in multi cloud-edge networks," *IEEE Transactions on Network and Service Management*, vol. 20, no. 4, pp. 4416–4434, 2023.
- [15] G. Mangiaracina, P. Plebani, M. Salnitri, and M. Vitali, "Efficient data as a service in fog computing: An adaptive multi-agent based approach," *IEEE Transactions on Cloud Computing*, vol. 11, no. 3, pp. 2646–2663, 2023.
- [16] J. Yang, Q. Yuan, S. Chen, H. He, X. Jiang, and X. Tan, "Cooperative task offloading for mobile edge computing based on multi-agent deep reinforcement learning," *IEEE Transactions on Network and Service Management*, vol. 20, no. 3, pp. 3205–3219, 2023.
- [17] M. Ebrahim and A. Hafid, "Privacy-aware load balancing in fog networks: A reinforcement learning approach," *Computer Networks*, vol. 237, p. 110095, 2023. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S1389128623005406>
- [18] —, "Resilience and load balancing in fog networks: A multi-criteria decision analysis approach," *Microprocessors and Microsystems*, vol. 101, p. 104893, 2023. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S0141933123001370>
- [19] G. Dulac-Arnold, N. Levine, D. J. Mankowitz, J. Li, C. Paduraru, S. Gowal, and T. Hester, "Challenges of real-world reinforcement learning: definitions, benchmarks and analysis," *Machine Learning*, vol. 110, no. 9, pp. 2419–2468, Sep 2021. [Online]. Available: <https://doi.org/10.1007/s10994-021-05961-4>
- [20] M. Kruber, T. Pfandzelter, and D. Bernbach, "A hybrid communication approach for metadata exchange in geo-distributed fog environments," 2024.
- [21] V. Mnih, K. Kavukcuoglu, D. Silver, A. Graves, I. Antonoglou, D. Wierstra, and M. Riedmiller, "Playing atari with deep reinforcement learning," 2013.
- [22] H. van Hasselt, A. Guez, and D. Silver, "Deep reinforcement learning with double q-learning," 2015. [Online]. Available: <https://arxiv.org/abs/1509.06461>
- [23] M. E. Taylor and P. Stone, "Transfer learning for reinforcement learning domains: A survey," *Journal of Machine Learning Research*, vol. 10, no. 56, pp. 1633–1685, 2009. [Online]. Available: <http://jmlr.org/papers/v10/taylor09a.html>
- [24] M. Ebrahim, M. Al-Ayyoub, and M. A. Alsmirat, "Will transfer learning enhance imagenet classification accuracy using imagenet-pretrained models?" in *2019 10th International Conference on Information and Communication Systems (ICICS)*, 2019, pp. 211–216.
- [25] S. Guadarrama, A. Korattikara, O. Ramirez, P. Castro, E. Holly, S. Fishman, K. Wang, E. Gonina, N. Wu, E. Kokipoulou, L. Sbaiz, J. Smith, G. Bartók, J. Berent, C. Harris, V. Vanhoucke, and E. Brevdo, "TF-Agents: A library for reinforcement learning in tensorflow," <https://github.com/tensorflow/agents>, 2018, [Online; accessed 01-December-2022]. [Online]. Available: <https://github.com/tensorflow/agents>
- [26] I. Lera, C. Guerrero, and C. Juiz, "YAFS: A simulator for IoT scenarios in fog computing," *IEEE Access*, vol. 7, pp. 91 745–91 758, 2019.
- [27] A. Elmokashfi, A. Kvalbein, and C. Dovrolis, "On the scalability of bgp: The role of topology growth," *IEEE Journal on Selected Areas in Communications*, vol. 28, no. 8, pp. 1250–1261, 2010.
- [28] U. Brandes, "A faster algorithm for betweenness centrality," *The Journal of Mathematical Sociology*, vol. 25, no. 2, pp. 163–177, 2001. [Online]. Available: <https://doi.org/10.1080/0022250X.2001.9990249>
- [29] I. Lera, C. Guerrero, and C. Juiz, "Analyzing the applicability of a multi-criteria decision method in fog computing placement problem," in *2019 Fourth International Conference on Fog and Mobile Edge Computing (FMEC)*, 2019, pp. 13–20.



Maad Ebrahim is currently a Ph.D. candidate at the Department of Computer Science and Operations Research (DIRO), University of Montreal, Canada. He received his M.Sc. degree in 2019 from the Computer Science Department, Faculty of Computer and Information Technology, Jordan University of Science and Technology, Jordan. His B.Sc. degree in Computer Science and Engineering was received from the University of Aden, Yemen, in 2013. His research experience includes Computer Vision, Artificial Intelligence, Machine learning, Deep Learning,

Data Mining, and Data Analysis. His current research interests include Fog and Edge Computing technologies, IoT, Reinforcement Learning, and Blockchains.



Abdelhakim Senhaji Hafid spent several years as the Senior Research Scientist with Bell Communications Research (Bellcore), NJ, USA, working in the context of major research projects on the management of next generation networks. He was also an Assistant Professor with Western University (WU), Canada, the Research Director of Advance Communication Engineering Center (venture established by WU, Bell Canada, and Bay Networks), Canada, a Researcher with CRIM, Canada, the Visiting Scientist with GMD-Fokus, Germany, and a

Visiting Professor with the University of Evry, France. He is currently a Full Professor with the University of Montreal. He is also the Founding Director of the Network Research Laboratory and Montreal Blockchain Laboratory. He is a Research Fellow with CIRRELT, Montreal, Canada. He has extensive academic and industrial research experience in the area of the management and design of next generation networks. His current research interests include the IoT, Fog/Edge Computing, blockchain, and intelligent transport systems.