
EIDOS: EFFICIENT, IMPERCEPTIBLE ADVERSARIAL 3D POINT CLOUDS

A PREPRINT

Hanwei Zhang

Institute of Intelligent Software, Guangzhou
zhanghanwei0912@gmail.com

Luo Cheng

Institute of Software, Chinese Academy of Sciences
University of Chinese Academy of Sciences
chengluo@ios.ac.cn

Qisong He

Institute of Software, Chinese Academy of Sciences
University of Liverpool
13044207207@163.com

Wei Huang

Purple Mountain Laboratories
havelhuang@gmail.com

Renjue Li

Institute of Software, Chinese Academy of Sciences
University of Chinese Academy of Sciences
lirj19@ios.ac.cn

Ronan Sicre

LIS
ronan.sicre@lis-lab.fr

Xiaowei Huang

University of Liverpool
xiaowei.huang@liverpool.ac.uk

Holger Hermanns

Universität des Saarlandes
hermanns@cs.uni-saarland.de

Lijun Zhang*

Institute of Software, Chinese Academy of Sciences
zhanglj@ios.ac.cn.

May 24, 2024

ABSTRACT

Classification of 3D point clouds is a challenging machine learning (ML) task with important real-world applications in a spectrum from autonomous driving and robot-assisted surgery to earth observation from low orbit. As with other ML tasks, classification models are notoriously brittle in the presence of adversarial attacks. These are rooted in imperceptible changes to inputs with the effect that a seemingly well-trained model ends up misclassifying the input. This paper adds to the understanding of adversarial attacks by presenting **Eidos**, a framework providing **Efficient Imperceptible aDversarial attacks on 3D pOint cloudS**. **Eidos** supports a diverse set of imperceptibility metrics. It employs an iterative, two-step procedure to identify optimal adversarial examples, thereby enabling a runtime-imperceptibility trade-off. We provide empirical evidence relative to several popular 3D point cloud classification models and several established 3D attack methods, showing **Eidos**' superiority with respect to efficiency as well as imperceptibility.

Keywords Adversarial attack · 3d point clouds · Robustness

1 Introduction

A 3D point cloud is an important format for representing the shape of a 3D object. It captures the surface geometry of the object by means of a discrete set of data points in 3D. The points within a point cloud are generally unordered, and this has been proven challenging when trying to apply (convolutional) Neural Network (NN) technology for 3D

*Corresponding Author.

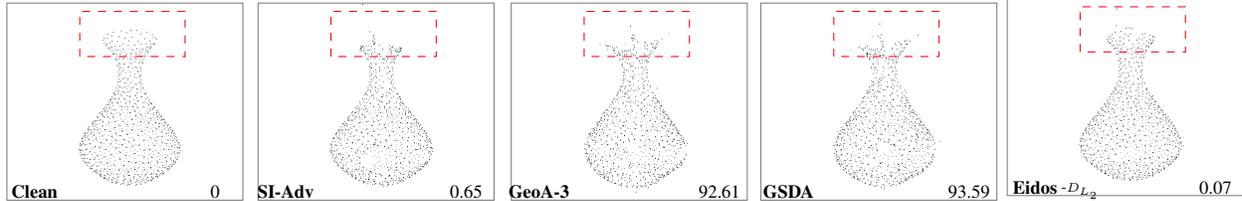


Figure 1: Visualization of adversarial point clouds. It shows the original sample and adversarial distortions generated by different attack methods. **Eidos** here is used with D_{L_2} as imperceptibility regularization term. The number displayed in the bottom right denotes the mean L_2 norm of distortions, and it is clear that **Eidos** results in better imperceptibility than **SI-Adv**, **GeoA-3**, and **GSDA**.

object recognition [Singh et al., 2019, Maturana and Scherer, 2015]. Recent advances, including PointNet [Qi et al., 2017a], PointNet++ [Qi et al., 2017b], and other works [Duan et al., 2019, Liu et al., 2019a, Yang et al., 2019a], address this challenge by capturing fine local structural information from the neighborhood of each point, leading to better performance on classification and segmentation tasks. With further advances in this direction, it can be expected that applications across “high-risk” sectors [EU, 2023] are becoming in reach, including tasks like autonomous navigation and robot-assisted surgery, where any failure may have serious consequences.

A prominent shortcoming across many advanced ML techniques – especially those based on NN technology – is their susceptibility to input distortions, meaning that small distortions of the input may induce to a misclassification by the NN. Techniques to identify such issues are often devised in an *adversarial* setting, where an adversary intentionally distorts the input slightly to induce a misclassification. For effective real-world applications, adversarial distortions need to be *imperceptible* and should be computed *efficiently*. However, recent attempts [Liu et al., 2019b, Wen et al., 2019, Zhou et al., 2020] fail to efficiently maintain imperceptibility in various aspects. As depicted in Figure 1, attacks computed by **SI-Adv** [Huang et al., 2022], **GeoA-3** [Wen et al., 2019], and also **GSDA** [Hu et al., 2022], all produce adversarial point clouds that fail to be imperceptibly different from the original (*cf.* the region inside dash-dotted boxes in Figure 1). To address these limitations, we present a novel adversarial attack framework that computes imperceptible adversarial distortion of 3D point clouds in an efficient manner. We name our method **Eidos** after Plato’s term “eidos”, which means the permanent reality that makes a thing what it is (as opposed to the particulars that are finite and subject to change). Translated to our practice, **Eidos** makes optimal adversarial 3D point cloud generation a reality.

Eidos is distinguished by its ability to work with a diverse set of imperceptibility regularization terms and to consider them altogether. For this, we formalize the adversarial attack as a constrained optimization problem, with the goal of minimizing the imperceptibility of adversarial distortion with the additional constraint of enforcing misclassification. With this formalization, we can study the relations between different regularization terms to guide the search for imperceptible adversarial distortions. Our work examines the power of the following imperceptibility regularizations: L_2 norm, Chamfer Distance (CD), Hausdorff Distance (HD), and Consistency of Local Curvature (Curv), each of which echoing distinct imperceptibility traits of adversarial distortions. As shown in Figure 1, **Eidos** finds an adversarial example with extremely small distortion when only employing the L_2 norm as an imperceptibility regularizer.

Two competing objectives make the optimization difficult. It has been observed that naively optimizing over the classification loss and imperceptibility together fails to generate adversarial distortions. Existing attacks, *e.g.* **GeoA-3** [Wen et al., 2019] use a hyper-parameter λ to control the balance between imperceptibility and misclassification. However, this may lead to failing attacks or oscillations on the boundary, and thus comes with a waste of computational resources. In contrast, **Eidos** tackles the efficiency problem by decomposing the optimization into two phases, inspired by boundary projection (BP) attacks [Zhang et al., 2020a] originally designed for 2D images. The IN phase aims at minimizing the classification loss quickly to identify adversarial examples. During the OUT phase, the search direction is determined by enforcing two conditions: minimizing imperceptibility and maintaining orthogonality to the gradient direction, thus preventing oscillations. Therefore, this two-phase optimization can find adversarial examples while minimizing the chosen imperceptibility in an efficient way. As we see in Figure 1, **Eidos** can generate more imperceptible adversarial distortions than the state of the art.

We report on an extensive empirical evaluation of our approach, demonstrating its sensitivity and effectiveness. We assess effectiveness using success probability and imperceptibility metrics, while efficiency is measured as computation time. For sensitivity, we investigate different parameters of the algorithm, including step size, the number of iterations, and the number of imperceptibility regularization terms.

Contributions Our contributions are as follows.

- We propose an efficient framework, which facilitates the incorporation of a diverse set of imperceptibility metrics. We further explore the relationship between them in depicting the imperceptibility traits of point clouds while existing works do not discuss this in detail.
- Our approach *efficiently and effectively* handles adversarial optimization with several imperceptibility regularizations, avoids the competition between classification loss and imperceptibility, and provides a better trade-off than existing works.
- Our attack achieves decent performance against models with defense and easily adapts to black-box settings.
- We provide a comprehensive and fair evaluation of **Eidos** and the state-of-the-art.

2 Problem, Background, and Related Work

2.1 Problem Formulation

Preliminaries Let $\mathcal{X} := \{\mathbf{x}_0, \dots, \mathbf{x}_n\}$ denote a set of n 3D points represented by their 3D coordinates $\mathbf{x}_i := [x_{i,x}, x_{i,y}, x_{i,z}]^\top \in \mathbb{R}^3$. A classifier $f : \mathbb{R}^{n \times 3} \rightarrow \mathbb{R}^c$ maps a point cloud \mathcal{X} to a vector $f(\mathcal{X})$ representing probabilities of c classes. The classifier prediction $\pi : \mathbb{R}^{n \times 3} \rightarrow [c] := \{1, \dots, c\}$ maps \mathcal{X} to the class label with maximum probability:

$$\pi(\mathcal{X}) := \arg \max_{k \in [c]} f(\mathcal{X})_k. \quad (1)$$

The prediction is correct if $\pi(\mathcal{X}) = t$ where $t \in [c]$ is the ground truth label.

Problem Let $\mathcal{X} \in \mathbb{R}^{n \times 3}$ be a given 3D point cloud with known ground truth label t . An adversarial example $\mathcal{Y} := \mathcal{X} + \Delta \in \mathbb{R}^{n \times 3}$ is a 3D point cloud such that:

- probability of the ground truth class is small enough to result in *misclassification*, i.e. $f(\mathcal{Y})_t < f(\mathcal{Y})_{k \in [c], k \neq t}$;
- the distortion Δ is *imperceptible*.

Imperceptibility We list well-known metrics of distortion:

1. *L_p Norm*:

$$D_{L_p}(\mathcal{X}, \mathcal{Y}) := \left(\sum_i (\mathbf{x}_i - \mathbf{y}_i)^p \right)^{\frac{1}{p}}, \quad (2)$$

where \mathbf{y}_i is the corresponding point of \mathbf{x}_i in set \mathcal{Y} . Following the assumption made in [Xiang et al., 2019] that the modification Δ is small enough, L_p , specifically L_2 , is employed as an imperceptibility metric.

2. *Chamfer Distance*

$$D_{CD}(\mathcal{X}, \mathcal{Y}) := \frac{1}{n} \sum_j \min_i \|\mathbf{x}_i - \mathbf{y}_j\|_2^2 \quad (3)$$

measures the distance between two point sets by averaging the distances of each point to its nearest neighbor from another set. This distance is popularly used in adversarial 3D points [Xiang et al., 2019, Wen et al., 2019, Huang et al., 2022] but is less effective when a small portion of outlier points exist in the 3D point clouds.

3. *Hausdorff Distance*

$$D_{HD}(\mathcal{X}, \mathcal{Y}) := \max_j \min_i \|\mathbf{x}_i - \mathbf{y}_j\|_2^2 \quad (4)$$

is a non-symmetric metric and attaches more importance to the outlier points in \mathcal{Y} .

4. *Consistency of Local Curvature* [Wen et al., 2019]

$$D_{Cuv}(\mathcal{X}, \mathcal{Y}) := \frac{1}{n} \sum_j \|\kappa(\mathbf{y}_j; \mathcal{Y}) - \kappa(\mathbf{x}_i; \mathcal{X})\|_2^2 \quad (5)$$

$$\text{subject to } \mathbf{x}_i = \arg \min_j \|\mathbf{y}_j - \mathbf{x}_i\|_2, \quad (6)$$

where $\kappa(\mathbf{x}_i; \mathcal{X})$ measures the local geometry of the local k point neighborhoods $\mathcal{N}_{\mathbf{x}_i} \subset \mathcal{X}$ of the point \mathbf{x}_i and is defined as

$$\kappa(\mathbf{x}_i, \mathcal{X}) := \frac{1}{k} \sum_{\mathbf{x}_j \in \mathcal{N}_{\mathbf{x}_i}} \left| \left\langle \frac{\mathbf{x}_j - \mathbf{x}_i}{\|\mathbf{x}_j - \mathbf{x}_i\|_2}, \mathbf{n}_{\mathbf{x}_i} \right\rangle \right|, \quad (7)$$

where $\langle \cdot, \cdot \rangle$ denotes inner product and $\mathbf{n}_{\mathbf{x}_i}$ denotes the unit normal vector to the surface at \mathbf{x}_i .

5. *KNN Smoothness* [Tsai et al., 2020]

$$D_{Smooth}(\mathcal{X}) := \frac{1}{n} \sum_i d_i \cdot \mathbb{1}[d_i > \mu + \gamma\sigma] \quad (8)$$

$$w.r.t. d_i := \frac{1}{k} \left(\sum_{\mathbf{x}_j \in \mathcal{N}_{\mathbf{x}_i}} \|\mathbf{x}_i - \mathbf{x}_j\|_2^2 \right), \quad (9)$$

where γ is a defined parameter while μ and σ are the mean and standard deviation of the distribution of distances among points, respectively. This metric encourages every point to be close to its neighbors.

2.2 Attacks

In this part, we discuss related work in generating 3D adversarial point clouds and boundary projection attacks, sharing similar principles with our method in addressing the problem.

Boundary Projection (BP) Attack [Zhang et al., 2020a] Let \mathbf{x} denote an input image of true class t and \mathbf{y} denote an adversarial example. The Boundary Projection (BP) attack generates adversarial examples by solving the optimization

$$\min_{\mathbf{y}} \|\mathbf{x} - \mathbf{y}\|_2^2 \quad (10)$$

$$\text{subject to } f(\mathbf{y})_t - \max_{k \in [c], k \neq t} f(\mathbf{y})_k < 0. \quad (11)$$

BP attack disentangles (10) and (11) into OUT case and IN case. In IN case, BP aims to find a solution satisfying (11), and searches along the gradient direction,

$$\mathbf{y}_{i+1} := \mathbf{y}_i - \alpha n(\nabla_{\mathbf{x}} \ell(f(\mathbf{y}_i), t)), \quad (12)$$

where $\ell(f(\mathbf{x}, t))$ is the negative cross-entropy loss of classifier $f(\cdot)$, $n(\cdot) := \frac{\cdot}{\|\cdot\|_2}$, and α is the step size. At initialization, $\mathbf{y}_0 := \mathbf{x}$ with fixed step size α to search adversarial examples as soon as possible. Once an adversarial solution is found, BP attack prioritizes reducing distortion with respect to (10).

Regarding (10), BP attack sets a target distortion $\epsilon = \gamma_i \|\mathbf{y}_i - \mathbf{x}\|$, where $\gamma_i < 1$ is a parameter that increases linearly with iteration i , and then searches in the tangent hyperplane of the level set of the loss at \mathbf{y}_i , along the direction that is normal to the gradient

$$\mathbf{y}_{i+1} := (\mathbf{y}_i - \mathbf{v}) \sqrt{[\epsilon^2 - r^2]_+} \quad (13)$$

$$\mathbf{v} := \mathbf{x} + r n(\nabla_{\mathbf{x}} \ell(f(\mathbf{y}_i), t)) \quad (14)$$

$$r := \langle \mathbf{y}_i - \mathbf{x}, n(\nabla_{\mathbf{x}} \ell(f(\mathbf{y}_i), t)) \rangle, \quad (15)$$

where \mathbf{v} is an auxiliary vector to follow the tangent hyperplane and $[\cdot]_+$ takes the positive value. The above process can be iterative: if the current solution \mathbf{y}_i crosses the boundary and goes back to the IN case, BP attack updates with (12) by setting $\alpha = r + \sqrt{\epsilon^2 - \|\mathbf{y}_i - \mathbf{x}\|^2 + r^2}$.

Following the principle of BP [Zhang et al., 2020a], *i.e.* searching along the gradient of misclassification and minimizing the distortion along its orthogonal directions, we incorporate multiple metrics to assess the imperceptibility of unordered 3D point clouds and introduce Gram-Schmidt (GS) process to orthonormalize the gradient of different optimization terms. Such a framework allowed exploring various imperceptibility regularizations and identifying a trade-off between efficiency and imperceptibility. Our experiments reveal that some metrics conflict with each other.

Adversarial Attacks on 3D Point Clouds Compared to 2D images, a 3D point cloud consists of a set of *unordered* points that represent the surface geometry of an object. Some measurements commonly used in 2D images, such as measuring the magnitude of distortion via L_2 norm or evaluating the photo-realistic of adversarial examples via PSNR and SSIM [Wang et al., 2004], are not faithful when evaluating the imperceptibility of distortion to 3D point clouds. Several attacks of 3D point clouds are gradient-based methods [Liu et al., 2019b, Hamdi et al., 2020, Wen et al., 2019, Tsai et al., 2020, Yang et al., 2019b, Kim et al., 2021, Shi et al., 2022], inspired by the adversarial attacks against image classifiers. For instance, Su *et al.* [Liu et al., 2019b] adapted FGSM [Goodfellow et al., 2014], I-FGSM [Kurakin et al., 2016] and JSMA [Papernot et al., 2016] by imposing constraints on the distortion for each point or the entire point cloud and enhanced clipping and gradient projection to preserve the distribution of points on the surface of an object. Building on this, MPG [Yang et al., 2019b] introduces a Momentum-Enhanced Point-wise Gradient Method. In

addition to perturbing point clouds, point addition and subtraction are proposed in the case of unordered point sets. To mislead the model, the attacker adds (removes) a limited number of synthesized points/clusters/objects to (from) a point cloud according to a saliency map [Zheng et al., 2019, Xiang et al., 2019, Wicker and Kwiatkowska, 2019] or gradient [Yang et al., 2019b]. Within this category, attacks involving the imperceptible insertion or removal of a few points, like [Zheng et al., 2018, Xiang et al., 2019, Liu et al., 2019b, Wicker and Kwiatkowska, 2019, Liu et al., 2020], are categorized as distribution attacks. Shape attacks [Liu et al., 2020], on the other hand, modify multiple points in specific areas of the point cloud. Moreover, adversarial attacks are also explored on mesh representations, for instance, mesh-attack [Zhang et al., 2021] and ϵ -ISO[Miao et al., 2022].

Imperceptible Adversarial Distortions We review several recent techniques for generating imperceptible perturbations in 3D point clouds that are resistant to adversarial attacks. Tsai *et al.* [Tsai et al., 2020] proposed an attack based on K-Nearest Neighbor (KNN) loss, while **GeoA-3** [Wen et al., 2019] introduced consistency of local curvatures as part of geometry loss. Both of them utilize the C&W [Carlini and Wagner, 2017] to find adversarial examples, which is expensive. Normal Attack [Tang et al., 2022a] incorporates both the gradient and tangent direction at each point as a form of smooth regularization. The normal-tangent attack (NTA) [Tang et al., 2022b] employs a directional controlling loss to constrain the distortion along the normal or tangent direction of the gradient. Yeung *et al.* [Kim et al., 2021] consider minimal modification with respect to the L_0 norm as the definition of imperceptibility and formalize it into L_0 -norm optimization problem. Other approaches focus on manipulating the point cloud representation itself. Graph Spectral Domain Attack (**GSDA**) [Hu et al., 2022] converts the point clouds coordinates into graph spectral domain and perturbs point clouds within that domain. Similarly, **SI-Adv** [Huang et al., 2022] regards shape-invariant as the definition of imperceptibility and performs a reversible coordinate transformation on the input point cloud to guarantee the preservation of shape. Adversarial attacks, *e.g.* **GeoA-3** and **GSDA**, producing imperceptible adversarial distortions often suffer from low time efficiency. **SI-Adv** is an efficient attack addressing imperceptibility. However, it only considers KNN smoothness and often generates outlier points. To overcome these limitations, we consider the imperceptibility regularization from [Wen et al., 2019] and provide insights into the trade-off between misclassification and imperceptibility regularization.

3 Method

Eidos tackles adversarial optimization efficiently by decomposing the optimization into two phases governed by different objectives, *i.e.* misclassification and imperceptibility. In the IN phase, we aim to find an adversarial point cloud, while in the OUT phase, we aim to optimize the imperceptibility metrics while keeping the current solution adversarial.

Algorithm 1 outlines our base principle of finding an adversarial example starting from the initial set $\mathcal{Y}_0 = \mathcal{X}$. Then, \mathcal{Y}_i is updated iteratively in the direction of the gradient until an adversarial example is found, see *Line 4-5* in Algorithm 1. This is phase IN. The loss function is the misclassification loss $\ell(f(\mathcal{Y}_i), t) := f(\mathcal{Y})_t - \max_{k \in [c], k \neq t} f(\mathcal{Y})_k$. The normalization function is defined as $n(\cdot) := \frac{1}{\|\cdot\|_2}$, and ϵ denotes the step size. In *line 6-9*, phase OUT treats the case of \mathcal{Y}_i being adversarial and aims at improving imperceptibility, which can be based on a single metric like L_p norm, while keeping the solution adversarial. We obtain the normalized direction $\hat{\mathbf{d}}$ that decreases the imperceptibility regularization, which is then projected onto the tangent hyperplane of the level set of the loss at \mathcal{Y}_i , normal to $\hat{\mathbf{g}}$.

To account for multiple metrics used to measure imperceptibility, we enhance phase OUT by optimizing different imperceptibility regularization terms *alternatingly*. In Algorithm 2, *line 7-9* calculates the normalized direction $\hat{\mathbf{d}}_i$ for a set \mathcal{D} of imperceptibility regularizations. In *line 10*, we use the Gram-Schmidt (GS) process to calculate an orthogonal set based on the gradients of misclassification and imperceptibility regularization terms, which allows us to optimize each of them independently. In *line 12-15*, our method searches along the direction that decreases imperceptibility regularization term D_j while saving the best solution with respect to the sum of all imperceptibility regularization terms. This is the core innovation of **Eidos**, together with the IN-OUT phase splitting.

4 Experiments

In this section, we first present our experimental setting, and then carry out an ablation study on coordinate transformation, imperceptibility regularization, and step size. More ablation studies on step size and the number of iterations, as well as the discussion of convergence are in the supplementary materials. We assess the performance of our method relative to **GSDA** and **SI-Adv** as the current state-of-the-art techniques regarding imperceptibility in this setting. Additionally, we compare with **GeoA-3** which incorporates the fusion of various imperceptibility metrics as a form of

Algorithm 1 Eidos - Base**Input:** \mathcal{X} : original point cloud to be attacked**Input:** t : true label, K : maximum iterations**Input:** ϵ : step size**Output:** \mathcal{Y}_K

```

1:  $\mathcal{Y}^* \leftarrow \mathcal{X} \cdot \mathbf{0}$ ,  $\mathcal{Y}_0 \leftarrow \mathcal{X}$ 
2: while  $i < K$  do
3:    $\hat{\mathbf{g}} \leftarrow \text{n}(\nabla_{\mathcal{Y}_i} \ell(f(\mathcal{Y}_i), t))$ 
4:   if  $f(\mathcal{Y}_i) == t$  then ▷ IN phase
5:      $\mathcal{Y}_{i+1} \leftarrow \mathcal{Y}_i - \epsilon \hat{\mathbf{g}}$ 
6:   else ▷ OUT phase
7:      $\hat{\mathbf{d}} \leftarrow \text{n}(\nabla_{\mathcal{Y}_i} D(\mathcal{X}, \mathcal{Y}_i))$ 
8:      $\mathbf{v} \leftarrow \hat{\mathbf{d}} - \frac{\hat{\mathbf{d}} \hat{\mathbf{g}}}{\|\hat{\mathbf{g}}\|_2} \hat{\mathbf{g}}$ 
9:      $\mathcal{Y}_{i+1} \leftarrow \mathcal{Y}_{i+1} - \epsilon \mathbf{v}$ 
10:   end if
11:   if  $D(\mathcal{X}, \mathcal{Y}_{i+1}) < D(\mathcal{X}, \mathcal{Y}^*)$  then
12:      $\mathcal{Y}^* = \mathcal{Y}_{i+1}$ 
13:   end if
14:    $i \leftarrow i + 1$ 
15: end while

```

Algorithm 2 Eidos**Input:** \mathcal{X} : original point cloud to be attacked**Input:** t : true label, K : maximum iterations**Input:** ϵ : step size**Input:** \mathcal{D} : a set of imperceptibility regularization**Output:** \mathcal{Y}_K

```

1:  $\mathcal{Y}^* \leftarrow \mathcal{X} \cdot \mathbf{0}$ ,  $\mathcal{Y}_0 \leftarrow \mathcal{X}$ 
2: while  $i < K$  do
3:    $\hat{\mathbf{g}} \leftarrow \text{n}(\nabla_{\mathcal{Y}_i} \ell(f(\mathcal{Y}_i), t))$ 
4:   if  $f(\mathcal{Y}_i) == t$  then ▷ IN phase
5:      $\mathcal{Y}_{i+1} \leftarrow \mathcal{Y}_i - \epsilon \hat{\mathbf{g}}$ 
6:   else ▷ OUT phase
7:     for  $D_j \in \mathcal{D}$  do
8:        $\hat{\mathbf{d}}_j \leftarrow \text{n}(\nabla_{\mathcal{Y}_i} D_j(\mathcal{X}, \mathcal{Y}_i))$ 
9:     end for
10:     $\{\hat{\mathbf{v}}_1, \dots, \hat{\mathbf{v}}_m\} \leftarrow GS(\{\hat{\mathbf{g}}, \hat{\mathbf{d}}_1, \dots, \hat{\mathbf{d}}_m\})$ 
11:    for  $D_j \in \mathcal{D}$  do
12:       $\mathcal{Y}_{i+1} \leftarrow \mathcal{Y}_i - \epsilon \hat{\mathbf{v}}_j$ 
13:      if  $\sum_j D_j(\mathcal{X}, \mathcal{Y}_{i+1}) < \sum_j D_j(\mathcal{X}, \mathcal{Y}^*)$  then
14:         $\mathcal{Y}^* = \mathcal{Y}_{i+1}$ 
15:      end if
16:    end for
17:  end if
18:   $i \leftarrow i + 1$ 
19: end while

```

regularization. Last but not least, we evaluate our method against three common defense techniques and test our attack in a black-box setting.

4.1 Experiments Setting

Dataset The ModelNet40 [Wu et al., 2015] dataset contains 12,311 CAD models from the 40 most common object categories in the world. There are 9,843 training objects and 2,468 testing objects. Following the previous setting [Xiang et al., 2019, Qi et al., 2017a], we uniformly sample 1,024 points from the surface of each object and re-scale them into a unit ball. For attacks, we randomly select 100 test examples from each of the 10 largest classes, *i.e.* airplane,

bed, bookshelf, bottle, chair, monitor, sofa, table, toilet, and vase, as original point clouds to generate adversarial point clouds. Given our focus on untargeted attacks, we conduct experiments with 1,000 point clouds.

Networks We take the pre-trained model of PointNet [Qi et al., 2017a]² trained with several data augmentations such as random point-dropping and rotation. We also use the pre-trained model of DGCNN [Wang et al., 2019]³ trained by Hu *et al.* To verify our approach works on various architectures, we provide a comparison on Point-transformer⁴ as well.

Attacks Following the original setting of **GeoA-3** and **GSDA**, we use Adam optimizer [Papernot et al., 2016] with a fixed learning schedule of 500 iterations. The learning rate and momentum are set as 0.01 and 0.9, respectively. For the weights of geometry-aware regularization of **GeoA-3**, we let $\lambda_1 = 0.1, \lambda_2 = 1.0, \lambda_3 = 1.0$. The penalty parameter is initialized as $\beta = 2,500$ and automatically adjusted by conducting 10 runs of binary search. We set $k = 16$ to define local point neighborhoods in **GeoA-3**. In **GSDA**, we let $k = 10$ for building the KNN graph, and let the penalty parameter $\beta = 10$ at the beginning and adjust it after 10 runs of binary search. The weights of Chamfer distance loss and Hausdorff distance loss in the regularization term are set to 5.0 and 0.5, respectively. We use the white-box version of **SI-Adv** with the step size 0.007 and maximum iterations 100. Adversarial examples are constrained by the L_∞ norm ball with 0.16 radius. For our method, we set maximum iterations as 100.

Evaluation Metrics To quantitatively compare adversarial results across different methods, we use attack the success rate P_{suc} and the imperceptibility metrics outlined in Section 2.1. We use $k = 16$ to define local point neighborhoods for D_{Curv} and D_{Smooth} and $\gamma = 1.05$ for D_{Smooth} . As evaluation metrics, we denote L_2 norm as L_2 , Chamfer distance as CD, Hausdorff distance as HD, consistency of local curvature as Curv, and KNN smoothness as Smooth. We report time in seconds, noted T, of each attack measured on a TITAN V 250W+Intel(R) Xeon(R) CPU E5-2630 v4 2.20GHz.

To compare the different attacks fairly, we follow the evaluation protocol [Zhang et al., 2020b] for operating characteristics: for $D \in [0, D_{max}]$,

$$P := \frac{1}{N} |\{\mathcal{Y} \in X_{suc} : D(\mathcal{Y}, \mathcal{X}) < D\}|, \quad (16)$$

where N_{suc} is the total number of the subset of adversarial point cloud X_{suc} that succeeded to deceive the network. This function varies from $P(0) = 0$ to $P(D_{max}) = P_{suc}$.

Table 1: **Eidos** success rate P_{suc} (%), average values of L_2 ($1e-1$), CD ($1e-4$), HD ($1e-2$), Curv ($1e-2$), Smooth ($1e-3$) and time (s) of our attack constrained by D_{L_2} with different coordinate transformation against PointNet.

METHOD	$P_{suc} \uparrow$	$L_2 \downarrow$	CD \downarrow	HD \downarrow	Curv \downarrow	Smooth \downarrow	Time \downarrow
T_{ori}	100	0.71	0.61	1.41	0.12	1.48	1.56
T_{rsi}	100	2.03	1.40	3.17	0.14	1.25	2.21
T_{gft}	100	0.49	0.47	1.05	0.12	1.55	10.28

4.2 Ablation

Before studying the impact of various imperceptibility factors, we start off by an ablation analysis on coordinate transformation and imperceptibility regularization. Specifically, coordinate transformation are central to the manner in which **SI-Adv** and **GSDA** incorporate their imperceptibility constraints. Further ablation studies then explore the impact of various parameters of our method, including coordinate transformation, imperceptibility regularization terms, step size, and the maximum number of iterations. Due to page limits, the experimental results on step size, and maximum number of iterations are in the supplement.

Influence of Coordinate Transformation To improve imperceptibility, **SI-Adv** and **GSDA** transform coordinates. To evaluate how much these coordinate transformations contribute to the final results, we carry out the attack with fixed step size 0.06 for 100 iterations with L_2 norm constraint and:

T_{ori} : without any coordinate transformation;

T_{rsi} : with the reversible shape-invariant coordinate transformation of **SI-Adv**;

²<https://github.com/shikiw/SI-Adv>

³<https://github.com/WoodwindHu/GSDA>

⁴<https://github.com/lulutang0608/Point-BERT>

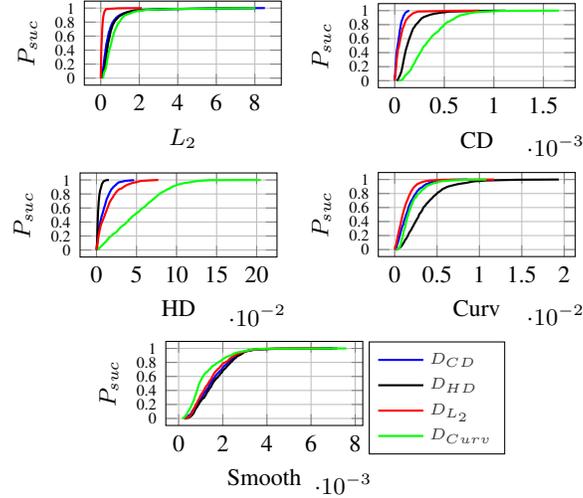


Figure 2: Operating characteristics on PointNet for our attack constrained by different imperceptibility regularization.

T_{gft} : with the Graph Fourier Transform (GFT) of **GSDA** before and after the optimization process.

Table 1 shows T_{rsi} and T_{gft} performing well only in the Smooth metric. In a nutshell, coordinate transformations are of little value for **Eidos** and thus not considered in the sequel.

Table 2: **Eidos** success rate P_{suc} (%), average values of L_2 ($1e-1$), CD ($1e-4$), HD ($1e-2$), Curv ($1e-2$), Smooth ($1e-3$) and time (s) of our attack constrained by different imperceptibility regularization with T_{ori} and T_{rsi} coordinate transformations against PointNet.

METHOD	$P_{suc} \uparrow$	$L_2 \downarrow$	CD \downarrow	HD \downarrow	Curv \downarrow	Smooth \downarrow	Time \downarrow
D_{L_2}	100	0.71	0.61	1.41	0.12	1.48	1.56
D_{CD}	100	5.07	0.37	0.93	0.16	1.56	1.84
D_{HD}	100	5.76	1.58	0.26	0.35	1.67	1.75
D_{Curv}	100	7.26	3.47	5.07	0.20	1.20	2.02

Influence of Different Imperceptibility Regularizations Initially, we examine performance by separately optimizing imperceptibility regularization terms, such as D_{L_2} , D_{CD} , D_{HD} , or D_{Curv} , in Algorithm 1 with a fixed step size of 0.06. As shown in Table 2, we find that using the imperceptibility regularization induces optimality in the corresponding metric, except for D_{Curv} that gives the optimal results for Smooth. Figure 2 shows operating characteristics for Table 2. **Eidos** with D_{L_2} generates adversarial examples with extremely small L_2 , with a few exceptions that have large L_2 (around 2). Also, examples generated with D_{L_2} often have similar CD as if using D_{CD} instead. However, a few cases with a large value increase the average value in Table 2. With D_{HD} we obtain the worst results on Curv and vice versa. The correlation between these two imperceptibility regularization terms is relatively small, and thus it is difficult to optimize both of them together.

In Table 3, we investigate the combination of different imperceptibility regularization terms with adaptive step size, following Algorithm 2. We observe that combining different imperceptibility regularization terms does not provide a dominant solution on all the metrics but provides a trade-off solution for the imperceptibility regularization we optimize for. We identify the significance of D_{L_2} in enhancing all imperceptibility metrics for adversarial distortions. Combining D_{HD} and D_{Curv} in **Eidos** yields the poorest results in L_2 , CD, and Curv, aligning with the observation in Figure 2.

Step Size and Iterations In the supplementary material, we report on the efficiency and sensitivity of our attack with respect to step size, testing six different fixed step sizes ($\epsilon \in [0.001, 0.01, 0.02, 0.03, 0.04, 0.05, 0.06, 0.1]$), as well as adaptive step size $\epsilon_{i+1} := \epsilon(1 - \gamma)$. In general, our approach turns out not to be sensitive to step size. A fixed step size works better with a single imperceptibility regularization term while adaptive step size performs better with multiple terms. We also conduct experiments with varying maximum iterations ($K \in [20, 40, \dots, 200]$). The findings indicate a correlation between convergence and the imperceptibility regularization term. Details are available in the supplement.

Table 3: **Eidos** success rate P_{suc} (%), average values of L_2 ($1e-1$), CD ($1e-4$), HD ($1e-2$), Curv ($1e-2$), Smooth ($1e-3$) and time (s) of our attack constrained by different imperceptibility regularization without coordinate transformation against PointNet.

METHOD	$P_{suc} \uparrow$	$L_2 \downarrow$	CD \downarrow	HD \downarrow	Curv \downarrow	Smooth \downarrow	Time \downarrow
D_{L_2+HD}	100	2.23	1.15	0.52	0.16	1.54	1.92
D_{L_2+Curv}	100	2.40	1.31	2.11	0.09	1.33	2.37
$D_{HD+Curv}$	100	5.83	2.22	0.99	0.17	1.45	2.58
$D_{L_2+HD+Curv}$	100	2.74	1.33	0.78	0.11	1.47	2.75
D_{all}	100	3.37	0.88	0.71	0.11	1.50	2.46

Table 4: Success rate P_{suc} (%), average values of L_2 ($1e-1$), CD ($1e-4$), HD ($1e-2$), Curv ($1e-2$), Smooth ($1e-3$) and time (s) of our attack compared with baseline attacks against three networks.

METHOD	$P_{suc} \uparrow$	$L_2 \downarrow$	CD \downarrow	HD \downarrow	Curv \downarrow	Smooth \downarrow	Time \downarrow
PointNet							
GeoA-3	97	44.86	4.81	0.73	0.36	1.73	125.48
SI-Adv	100	6.51	3.08	4.25	0.27	1.20	0.08
GSDA	97	54.47	4.70	2.65	0.51	1.54	138.73
Eidos	100	3.37	0.88	0.71	0.11	1.50	2.46
DGCNN							
GeoA-3	100	195.45	6.95	0.46	0.23	2.04	307.05
SI-Adv	100	31.14	9.17	2.95	1.02	1.72	0.49
GSDA	100	145.36	6.06	0.54	0.27	1.94	329.83
Eidos	100	23.65	4.48	0.45	0.53	1.80	6.77
Point-Transformer							
GeoA-3	61.4	47.50	5.81	0.43	0.69	1.91	267.79
SI-Adv	100.0	12.13	6.26	3.61	0.65	1.47	0.30
GSDA	61.8	57.03	5.83	2.13	0.84	1.76	291.32
Eidos	100.0	6.86	1.78	0.37	0.24	1.64	3.61

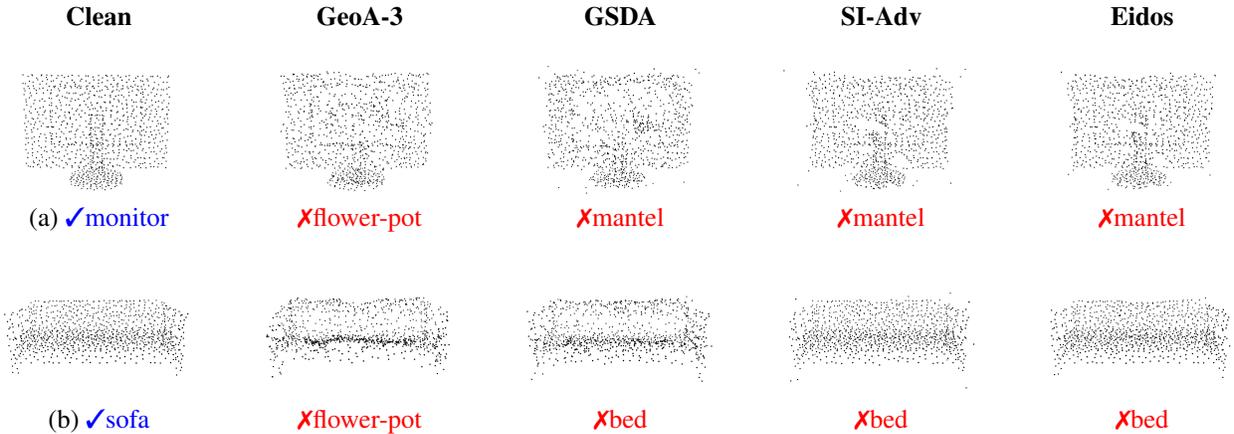


Figure 3: Visualization of adversarial distortions produced by baseline methods and **Eidos**.

4.3 Comparison

We now compare our method directly to the mentioned state-of-the-art adversarial attacks. According to Table 4, our method outperforms the baseline methods, where **Eidos** refers to the version with all the imperceptibility regularizations incorporated. In PointNet and Point-Transformer, our method performs best on all the metrics except Smooth. In DGCNN, we outperform almost all combinations of baseline method and metric. **GeoA-3** and **GSDA** use a line search to balance misclassification and imperceptibility in adversarial optimization. However, they struggle to find an optimal parameter within reasonable computation budget for Point-Transformer (500 iterations for **GSDA** while 100 iterations for **SI-Adv** and **Eidos**).

Table 5: Success rate P_{suc} (%), average values of L_2 norm ($1e-1$), Chamfer distance ($1e-4$), Hausdorff distance ($1e-2$), consistency of local curvature ($1e-2$), KNN smoothness ($1e-3$) and time (s) of our attack and the baseline attacks against PointNet with defense.

METHOD	$P_{suc} \uparrow$	$L_2 \downarrow$	CD \downarrow	HD \downarrow	Curv \downarrow	Smooth \downarrow	Time \downarrow
PointNet with SRS							
SI-Adv	77.3	8.39	4.36	3.87	0.36	1.40	8.78
Eidos	82.0	4.68	1.65	0.84	0.18	1.55	156.71
PointNet with SOR							
SI-Adv	100	17.06	7.08	3.71	0.65	1.88	0.19
Eidos	100	9.63	1.80	0.39	0.22	1.76	3.22
PointNet with DUP-Net							
SI-Adv	90.8	20.85	8.85	3.88	0.78	1.96	14.37
Eidos	76.6	12.9	2.78	0.58	0.29	1.79	98.77

Visualization We visualize the adversarial point clouds generated by different attacks in Figure 3. The adversarial distortions of **GeoA-3** and **GSDA** are perceivable due to unbalanced point distributions. **SI-Adv** seems closer to our attacks, but tends to introduce more outlier points.

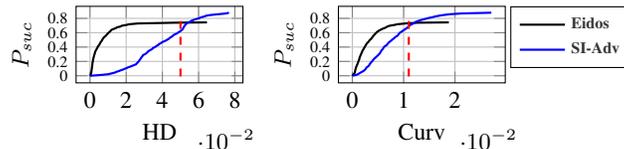


Figure 4: Operating characteristics of P_{suc} vs. HD and Curv on PointNet with DUP-Net w.r.t. Table 5.

Defenses We now study attack success rates under several state-of-the-art defense methods: Statistical Outlier Removal (SOR) [Rusu et al., 2008] with $k = 2, \alpha = 1.1$; Simple Random Sampling (SRS) [Yang et al., 2019b] with drop number 500; Denoiser and Upsampler Network (DUP-Net) [Zhou et al., 2019] with $k = 2, \alpha = 1.1$, number of points as 1024 and up-sampling rate as 4. The results are shown in Table 5, where we only compare with **SI-Adv** as that is known to outperform **GeoA-3** and **GSDA** in defense [Huang et al., 2022, Hu et al., 2022]. **Eidos** clearly generates less perceptible adversarial distortions. To attack against randomness (SRS), we enhance the attacks by forwarding 100 times and averaging the gradients, which is commonly performed on attacks on images [Athalye et al., 2018]. We see our method outperforming **SI-Adv** on SRS and SOR. With a limited distortion budget, *e.g.* left side of the red line in Figure 4, our method achieves a higher success rate. Noteworthy, our method fails on hard examples, which require large distortions that are not aligned with the imperceptibility constraints.

Black-Box Attacks Our framework aims to efficiently solve adversarial optimization with various imperceptibility regularizations. The method we compare with always uses the white-box scenario and only **SI-Adv** has a black-box version. Like **SI-Adv**, we adapt our method to the black-box scenario and compare it with **SI-Adv** and two famous query-based black-box attack algorithms, *i.e.*, **Simba** [Guo et al., 2019] and **Simba++** [Yang et al., 2020] in Table 6, where we perform better. In our experiments, we choose step size 0.32 because according to **SI-Adv**, it is the best step size for **SI-Adv**. Our method outperforms **SI-Adv** in its best parameter.

Table 6: Success rate P_{suc} (%), average values of L_2 ($1e-1$), CD ($1e-4$), HD ($1e-2$), Curv ($1e-2$), Smooth ($1e-3$) and time (s) of our attack compared with baseline attacks under black-box setting against PACov with DGCNN as a surrogate model.

METHOD	$P_{suc} \uparrow$	$L_2 \downarrow$	CD \downarrow	HD \downarrow	Curv \downarrow	Smooth \downarrow	Time \downarrow
SI-Adv	100.0	37.30	7.63	8.76	0.46	1.45	96.34
Simba	100.0	39.26	11.11	10.40	0.60	1.64	100.07
Simba++	100.0	40.89	12.40	21.86	0.57	1.68	87.11
Eidos	100.0	35.17	7.35	8.56	0.45	1.44	108.77

5 Conclusion

This paper has presented **Eidos**, a method substantially improving the efficiency and imperceptibility of attacks on 3D point cloud classification tasks. It disentangles misclassification and imperceptibility, and supports generating adversarial point clouds across a range of imperceptibility metrics.

The empirical results show that **Eidos** clearly outperforms the state-of-the-art baseline methods that aim for imperceptibility. Interestingly, **Eidos** with the D_{L_2} metric often is efficient in improving across all the imperceptibility metrics. Further, our experiments on the defense model implicitly show that adversarial examples with small magnitudes are easy to defend against by using randomization.

References

- Rahul Dev Singh, Ajay Mittal, and Rajesh K Bhatia. 3d convolutional neural network for object recognition: a review. *Multimedia Tools and Applications*, 78:15951–15995, 2019.
- Daniel Maturana and Sebastian Scherer. Voxnet: A 3d convolutional neural network for real-time object recognition. In *2015 IEEE/RSJ international conference on intelligent robots and systems (IROS)*, pages 922–928. IEEE, 2015.
- Charles R Qi, Hao Su, Kaichun Mo, and Leonidas J Guibas. Pointnet: Deep learning on point sets for 3d classification and segmentation. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 652–660, 2017a.
- Charles Ruizhongtai Qi, Li Yi, Hao Su, and Leonidas J Guibas. Pointnet++: Deep hierarchical feature learning on point sets in a metric space. *Advances in neural information processing systems*, 30, 2017b.
- Yueqi Duan, Yu Zheng, Jiwen Lu, Jie Zhou, and Qi Tian. Structural relational reasoning of point clouds. In *2019 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 949–958, 2019. doi:10.1109/CVPR.2019.00104.
- Yongcheng Liu, Bin Fan, Gaofeng Meng, Jiwen Lu, Shiming Xiang, and Chunhong Pan. Densepoint: Learning densely contextual representation for efficient point cloud processing. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 5239–5248, 2019a.
- Jiancheng Yang, Qiang Zhang, Bingbing Ni, Linguo Li, Jinxian Liu, Mengdie Zhou, and Qi Tian. Modeling point clouds with self-attention and gumbel subset sampling. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 3323–3332, 2019a.
- EU. The artificial intelligence act, 2023. [Online] <https://artificialintelligenceact.eu>.
- Daniel Liu, Ronald Yu, and Hao Su. Extending adversarial attacks and defenses to deep 3d point cloud classifiers. In *2019 IEEE International Conference on Image Processing (ICIP)*, pages 2279–2283. IEEE, 2019b.
- Yuxin Wen, Jiehong Lin, Ke Chen, CL Chen, and Kui Jia. Geometry-aware generation of adversarial point clouds. *arXiv preprint arXiv:1912.11171*, 2019.
- Hang Zhou, Dongdong Chen, Jing Liao, Kejiang Chen, Xiaoyi Dong, Kunlin Liu, Weiming Zhang, Gang Hua, and Nenghai Yu. Lg-gan: Label guided adversarial network for flexible targeted attack of point cloud based deep networks. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 10356–10365, 2020.
- Qidong Huang, Xiaoyi Dong, Dongdong Chen, Hang Zhou, Weiming Zhang, and Nenghai Yu. Shape-invariant 3d adversarial point clouds. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 15335–15344, 2022.
- Qianjiang Hu, Daizong Liu, and Wei Hu. Exploring the devil in graph spectral domain for 3d point cloud attacks. *arXiv preprint arXiv:2202.07261*, 2022.

- Hanwei Zhang, Yannis Avrithis, Teddy Furon, and Laurent Amsaleg. Walking on the edge: Fast, low-distortion adversarial examples. *IEEE Transactions on Information Forensics and Security*, 16:701–713, 2020a.
- Chong Xiang, Charles R Qi, and Bo Li. Generating 3d adversarial point clouds. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 9136–9144, 2019.
- Tzungyu Tsai, Kaichen Yang, Tsung-Yi Ho, and Yier Jin. Robust adversarial objects against deep learning models. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 34, pages 954–962, 2020.
- Zhou Wang, Alan C Bovik, Hamid R Sheikh, and Eero P Simoncelli. Image quality assessment: from error visibility to structural similarity. *IEEE transactions on image processing*, 13(4):600–612, 2004.
- Abdullah Hamdi, Sara Rojas, Ali Thabet, and Bernard Ghanem. Advpc: Transferable adversarial perturbations on 3d point clouds. In *Computer Vision—ECCV 2020: 16th European Conference, Glasgow, UK, August 23–28, 2020, Proceedings, Part XII 16*, pages 241–257. Springer, 2020.
- Jiancheng Yang, Qiang Zhang, Rongyao Fang, Bingbing Ni, Jinxian Liu, and Qi Tian. Adversarial attack and defense on point sets. *arXiv preprint arXiv:1902.10899*, 2019b.
- Jaeyeon Kim, Binh-Son Hua, Thanh Nguyen, and Sai-Kit Yeung. Minimal adversarial examples for deep learning on 3d point clouds. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 7797–7806, 2021.
- Zhenbo Shi, Zhi Chen, Zhenbo Xu, Wei Yang, Zhidong Yu, and Liusheng Huang. Shape prior guided attack: Sparser perturbations on 3d point clouds. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 36, pages 8277–8285, 2022.
- Ian J Goodfellow, Jonathon Shlens, and Christian Szegedy. Explaining and harnessing adversarial examples. *arXiv:1412.6572*, 2014.
- Alexey Kurakin, Ian Goodfellow, and Samy Bengio. Adversarial examples in the physical world. *arXiv:1607.02533*, 2016.
- Nicolas Papernot, Patrick McDaniel, Somesh Jha, Matt Fredrikson, Z Berkay Celik, and Ananthram Swami. The limitations of deep learning in adversarial settings. In *2016 IEEE European symposium on security and privacy (EuroS&P)*, pages 372–387. IEEE, 2016.
- Tianhang Zheng, Changyou Chen, Junsong Yuan, Bo Li, and Kui Ren. Pointcloud saliency maps. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 1598–1606, 2019.
- Matthew Wicker and Marta Kwiatkowska. Robustness of 3d deep learning in an adversarial setting. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 11767–11775, 2019.
- Tianhang Zheng, Changyou Chen, Kui Ren, et al. Learning saliency maps for adversarial point-cloud generation. *arXiv preprint arXiv:1812.01687*, 2018.
- Daniel Liu, Ronald Yu, and Hao Su. Adversarial shape perturbations on 3d point clouds. In *Computer Vision—ECCV 2020 Workshops: Glasgow, UK, August 23–28, 2020, Proceedings, Part I 16*, pages 88–104. Springer, 2020.
- Jinlai Zhang, Lyujie Chen, Binbin Liu, Bo Ouyang, Qizhi Xie, Jihong Zhu, Weiming Li, and Yanmei Meng. 3d adversarial attacks beyond point cloud. *arXiv preprint arXiv:2104.12146*, 2021.
- Yibo Miao, Yinpeng Dong, Jun Zhu, and Xiao-Shan Gao. Isometric 3d adversarial examples in the physical world. *arXiv preprint arXiv:2210.15291*, 2022.
- Nicholas Carlini and David Wagner. Towards evaluating the robustness of neural networks. In *2017 IEEE Symposium on Security and Privacy (SP)*, pages 39–57. Ieee, 2017.
- Keke Tang, Yawen Shi, Jianpeng Wu, Weilong Peng, Asad Khan, Peican Zhu, and Zhaoquan Gu. Normalattack: Curvature-aware shape deformation along normals for imperceptible point cloud attack. *Security and Communication Networks*, 2022, 2022a.
- Keke Tang, Yawen Shi, Tianrui Lou, Weilong Peng, Xu He, Peican Zhu, Zhaoquan Gu, and Zhihong Tian. Rethinking perturbation directions for imperceptible adversarial attacks on point clouds. *IEEE Internet of Things Journal*, 2022b.
- Zhirong Wu, Shuran Song, Aditya Khosla, Fisher Yu, Linguang Zhang, Xiaoou Tang, and Jianxiong Xiao. 3d shapenets: A deep representation for volumetric shapes. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 1912–1920, 2015.
- Yue Wang, Yongbin Sun, Ziwei Liu, Sanjay E Sarma, Michael M Bronstein, and Justin M Solomon. Dynamic graph cnn for learning on point clouds. *Acm Transactions On Graphics (tog)*, 38(5):1–12, 2019.
- Hanwei Zhang, Yannis Avrithis, Teddy Furon, and Laurent Amsaleg. Smooth adversarial examples. *EURASIP Journal on Information Security*, 2020(1):1–12, 2020b.

- Radu Bogdan Rusu, Zoltan Csaba Marton, Nico Blodow, Mihai Dolha, and Michael Beetz. Towards 3d point cloud based object maps for household environments. *Robotics and Autonomous Systems*, 56(11):927–941, 2008.
- Hang Zhou, Kejiang Chen, Weiming Zhang, Han Fang, Wenbo Zhou, and Nenghai Yu. Dup-net: Denoiser and upsampler network for 3d adversarial point clouds defense. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 1961–1970, 2019.
- Anish Athalye, Nicholas Carlini, and David Wagner. Obfuscated gradients give a false sense of security: Circumventing defenses to adversarial examples. In *International conference on machine learning*, pages 274–283. PMLR, 2018.
- Chuan Guo, Jacob Gardner, Yurong You, Andrew Gordon Wilson, and Kilian Weinberger. Simple black-box adversarial attacks. In *International Conference on Machine Learning*, pages 2484–2493. PMLR, 2019.
- Jiancheng Yang, Yangzhou Jiang, Xiaoyang Huang, Bingbing Ni, and Chenglong Zhao. Learning black-box attackers with transferable priors and query feedback. *Advances in Neural Information Processing Systems*, 33:12288–12299, 2020.