

Highlights

Tracking Dynamical Transitions using Link Density of Recurrence Networks

Rinku Jacob,R. Misra,K P Harikrishnan,G Ambika

- Link Density (LD) of Recurrence Networks computed from data is shown as an effective measure to track dynamical transitions
- Its efficiency in detecting transitions is illustrated in the context of bifurcation transitions and dynamical transitions under slowly varying parameter for the Rössler system.
- It requires minimal computational resources, and it is effective even with short datasets and hence offers an efficient method for analysing large datasets
- The standard deviation of LD is shown to indicate transitions between periodic and chaotic states.

Tracking Dynamical Transitions using Link Density of Recurrence Networks

Rinku Jacob^{a,*}, R. Misra^b, K P Harikrishnan^{c,d} and G Ambika^e

^aRajagiri School of Engineering and Technology, Rajagiri Valley, Kakkanad, 682039, India

^bInter-University Centre for Astronomy and Astrophysics, Pune, 411007, India

^cRamalayam, Chittoor Road, Cochin, 682011, India

^dPreviously at: The Department of Physics, The Cochin College, Cochin, 682002, India

^eIndian Institute of Science Education and Research, Thiruvananthapuram, 695551, India

ARTICLE INFO

Keywords:

Dynamical transitions
Bifurcations
Recurrence networks
Link Density

ABSTRACT

We present Link Density (LD) computed from the Recurrence Network (RN) of a time series data as an effective measure that can detect dynamical transitions in a system. We illustrate its use using time series from the standard Rössler system in the period doubling transitions and the transition to chaos. Moreover, we find that the standard deviation of LD can be more effective in highlighting the transition points. We also consider the variations in data when the parameter of the system is varying due to internal or intrinsic perturbations but at a time scale much slower than that of the system dynamics. In this case also, the measure LD and its standard deviation correctly detect transition points in the underlying dynamics of the system. The computation of LD requires minimal computing resources and time, and works well with short datasets. Hence, we propose this measure as a tool to track transitions in dynamics from data, facilitating quicker and more effective analysis of large number of data sets.

1. Introduction

Understanding and predicting the dynamical behavior of complex systems is an important area of research across several scientific and engineering domains. Central to this endeavor is the concept of the variation of the control parameters of the system, which critically influences a system's state and evolution. The changes in these parameters can happen naturally, due to external influences or due to random fluctuations. However, such changes can cause transitions in the dynamics of the system, resulting in sudden or slow but significant qualitative changes in dynamics, like the transition from regular dynamics to chaos^{1;2}. It is important but challenging to track under which conditions the state of a system loses stability and transit to different dynamics. Most often dynamical transitions in complex systems are to be understood by analyzing observational or measured data or time series. Then identifying a proper measure that can effectively detect changes in dynamics is essential for proper analysis and prediction. The accurate detection of such changes can influence theoretical and practical outcomes in fields ranging from climate science^{3;4} to bioinformatics⁵. Moreover, anticipating transitions or other significant changes in system dynamics is often very crucial in diverse fields from economics⁶ to epidemiology⁷. In all these cases, the challenge lies in accurately and swiftly measuring the variability of data, particularly when data sets are limited. It is crucial for making timely and effective

predictions and for understanding of the system's dynamics and its response to varying control parameters.

The methods of nonlinear time series analysis provide many tools for studying the characteristic features of complex dynamical systems from their time series. In this context, the recurrence measures based on the quantification of the recurrence pattern of trajectory points in the phase space reconstructed from data are widely used. Among them, recurrence plot measures computed using Recurrence Quantification Analysis (RQA), provide a package to analyse the dynamical state and its transitions^{8;9}. Thus the measure Lacunarity, is shown to identify changes in the dynamics¹⁰ and studies in thermoacoustic systems underscore the effectiveness of RQA as early warning signals to predict critical shifts from chaotic to limit cycle states¹¹. Further, the introduction of bootstrap techniques to the RQA process has enhanced the reliability of these methods by providing statistical confidence, essential for validating the detected changes^{5;12;13}.

The method of RQA is closely followed by measures from recurrence networks. Recurrence networks (RNs) transform time series data from dynamical systems into complex network structures by utilizing the concept of recurrence, a fundamental characteristic of bounded systems¹⁴. In actual practice, the recurrence matrix from the time series is used to get the adjacency matrix of the recurrence network, which links different points that are close neighbours in the reconstructed phase space. Thus the recurrence networks derived from the time series fully characterize the geometric properties of the phase space of the underlying dynamical system¹⁵. Since any transition in dynamical states results in changes in the recurrence structure, it can be detected from consequent changes in the recurrence network measures.

*Corresponding author

✉ rinku.jacob.vallanat@gmail.com (R. Jacob); rmisra@iucaa.in (R. Misra); kp.hk05@gmail.com (K.P. Harikrishnan); g.ambika@iisertvm.ac.in (G. Ambika)

ORCID(s):

The advantages of recurrence network measures in identifying dynamical structures are clearly demonstrated in a few cases like transitions in logistic map¹⁶ with changing control parameter and a real-world paleo climatic time series³. Recently this has been applied in detecting dynamical transitions during human speech production¹⁷, stock market dynamics¹⁸, and in a turbulent combustor¹⁹. Additionally, RN measures are known to work well with shorter datasets²⁰. Some of the recent trends in this direction are higher dimensional recurrence networks²¹ and directed recurrence networks^{22;23}.

In this study, we present the potential of recurrence network measures in the detection of dynamical transitions from data or time series. We consider the data from the Rössler system, with its well-documented transitions, and compute the related recurrence network measures to identify which ones are most sensitive to dynamical transitions and can be easily computed with short datasets. This study extends the previous research by using network measures to investigate how changes in control parameter affect the system's dynamics. Our study in this direction indicates that among the recurrence network measures, Link Density (*LD*) that can capture the properties of the phase space density of the underlying dynamics can be most effective as it quantifies the heterogeneity and variations in the distribution of points in phase space. Additionally, we try to see if this network measure can effectively track the dynamics of the system when parameters change slowly over an extended time. This search serves as a preliminary step towards understanding the dynamical transitions in real systems where parameters can change due to various types of perturbations or external influences.

2. Network measures from data

The nature of dynamics underlying data and its variations are vital in the study of complex systems. To estimate the relative efficiency of different approaches in this context, we take Rössler system as the model in our study. It is a relatively simple model that can exhibit a broad spectrum of behaviors, from regular, predictable patterns to chaotic, unpredictable dynamics, based on the values of its parameters. Its dynamics follows the set of equations:

$$\begin{aligned}\frac{dx}{dt} &= -y - z, \\ \frac{dy}{dt} &= x + ay, \\ \frac{dz}{dt} &= b + z(x - c).\end{aligned}\quad (1)$$

We keep $a = b = 0.2$ and vary the parameter c , to generate data corresponding to various possible dynamical states and explore the system's dynamics by analysing the data. The construction of a recurrence network (RN) from data of size (N_T) starts with the time delay embedding of the scalar time series $s(1), s(2), \dots, s(N_T)$ into an M -dimensional space^{24;25}. This embedding process, essential

for reconstructing the system's trajectory in its phase space, needs selecting an appropriate time delay τ , which is taken as $1/e$ of the maximum value of autocorrelation function²⁰ in this work. As part of pre-processing, the time series is initially transformed into a uniform deviate before the time delay embedding. This transformation rescales the size of the embedded trajectory into a M -dimensional unit cube $[0, 1]^M$ ²⁰. In this study, we deal with data from Rössler system and hence M is taken as its actual dimension 3.

The embedding results in $N = N_T - (M - 1)\tau$ state vectors that collectively represent the trajectory. The proximity and local density of points on the trajectory are mapped into the structure of the recurrence network. For this, each point on the trajectory is treated as a node and a pair of nodes i and j are connected if their Euclidean distance in the reconstructed phase space is less than or equal to a specified recurrence threshold ϵ . This procedure generates the recurrence matrix R , with $R_{i,j} = 1$ indicating a connection between nodes i and j , and $R_{i,j} = 0$ otherwise. The adjacency matrix A , which represents the RN, is derived from R by excluding self-loops, thus, $A \equiv R - I$, where I is the identity matrix. By this construction, A is a binary symmetric matrix, reflecting the RN's nature as an unweighted and undirected network. The appropriate value of ϵ is chosen as that at which we get a single network²⁰. This is ensured by monitoring the second smallest eigenvalue λ_2 of the Laplacian matrix $L = D - A$, where D is the diagonal degree matrix. When λ_2 moves from negative to zero, it signifies that all nodes are part of a single connected network^{26;20}. A common range of threshold ϵ applicable to all-time series for a given embedding dimension M is established in an earlier work²⁰. When analysing many data sets, ϵ is then chosen as the minimum value within this range. For an embedding dimension of $M = 3$, this minimum threshold is found to be 0.1, which is adopted as the value of ϵ for the RN construction in our analysis.

In our study, we focus on three significant network measures²⁷: Link Density (*LD*), average Clustering Coefficient (*CC*), and Characteristic Path Length (*CPL*). Our study indicates that *CC* and *CPL* show less pronounced variations near dynamical transitions compared to *LD* (and hence not included here). The preference for *LD* is also driven by its practical advantages, particularly its suitability for real-time applications and in scenarios with limited data availability. Calculating *LD*, which quantifies actual links relative to potential links within the network, is notably faster than computing *CC* and *CPL*, making it an efficient choice for monitoring dynamics in response to variations in control parameter. The *LD* is calculated using the equation²⁷,

$$LD = \frac{\sum_{i=1}^N \sum_{j=1}^N A_{ij}}{N(N-1)}, \quad (2)$$

where A is the adjacency matrix, N is the total number of nodes in the network.

3. Bifurcation Transitions

We first apply the network measure LD , to study the bifurcation transitions in the Rössler system. The time series data required for this is generated from the Rössler equation (1) with parameters a and b set to 0.2, while varying the third control parameter c from 0.5 to 100 in increments of 0.1. The bifurcations and transitions in the dynamics for this range of c values can be identified from the bifurcation diagram plotted by direct calculations using the system's equations in Fig. 1a. For each value of c , the time series of length 50,000 is generated with a chosen set of initial values ($x_0 = 0.2, y_0 = 0.2, z_0 = 0.2$). After removing 5000 transient points, the data is divided into 15 sets, each comprising $N = 3000$ points. Each set is embedded in a 3-dimensional space and the recurrence pattern in the reconstructed trajectory is captured in its adjacency matrix. The LD is then calculated for each set, and the average of these values represents the average LD for that particular c . The average LD value thus computed, is plotted against the control parameter c , in Fig. 1b.

By comparing with the bifurcation diagram in Fig. 1a, we observe that LD drops down suddenly at the first period-doubling bifurcation and is decreasing further at subsequent bifurcations till chaos is reached. Then at every periodic window, it goes up again indicating a transition from chaos to periodicity. For values of $c > 50$, there is an increase in LD till periodicity is reached. From direct numerical simulations of equation(1) we find that beyond $c=50$, the dynamics is intermittently periodic cycles and for $c > 80$, the system settles to a periodic 1- cycle. We also show the value of LD for purely periodic sine wave data, in the blue dotted line on top and that for pure stochastic Gaussian data in the black dotted line below for comparison. The deviations in values that lie between these lines indicate the ranges of LD between these limiting cases.

Additionally, we observe an interesting result that, not only do the mean values of LD decrease in the chaotic regime but they also show an increase in the standard deviation(STD) of LD for each value of control parameter c within the same range. This reflects the increase in the differences in LD values derived from different segments of data for the same c value. We understand this as coming from the variations in the distribution of points on different parts of the chaotic trajectory and hence variations in their proximity patterns in the recurrences. We find LD is a good measure that can capture these variations and thus characterise the increased complexity in the geometry of the chaotic trajectory underlying the data. We also report the STD in LD can serve as a more effective measure to indicate transitions in dynamics between periodic and chaotic states.

We present the results of similar computations in Fig. 1b, zooming into a narrower range in c within which the main transitions occur, highlighting the average LD values at the transition points. The critical values of c at which transitions happen are indicated as insets, some of the values like $c = 2.8286, 3.834, 4.1235, \text{ and } 4.20408$ are reported earlier²⁸,

while others shown are from our analysis of the trajectories and their bifurcations.

From the analysis presented, it is clear that the average LD exhibits higher values during the limit cycle phases of the Rössler system and progressively decreases as bifurcations occur. This trend indicates that during stable, periodic behaviors or limit cycles, the system's network structure is more interconnected, due to the regular and close recurrence of points in phase space. Moreover, the standard deviation (STD) of LD remains low, suggesting consistent network connectivity coming from a uniform distribution of points over the trajectory. As the system transitions through bifurcations towards chaos, the average LD diminishes, signifying a decrease in overall network connectivity that arise from irregular arrangements of points. Then the STD of LD increases, indicating increased variability in network structure coming from nonuniform distribution of points over the trajectory. These variations are seen clearly in Fig. 2b and Fig. 2c.

4. Dynamic transitions under slowly varying parameter

In this section, we consider the impact of slowly varying parameter on the system's behavior, particularly in inducing transitions. In real systems, it is possible that the parameters change due to external influences or internal variations. Then the time scale at which the parameter varies and that of the system's inherent dynamics can be different. This difference often plays a crucial role in the onset of transitions in the system²⁹. We consider one such situation in the dynamics of the Rössler system, where the control parameter changes over a time-scale that is much longer than the system's dynamical time-scale^{29;30}.

For modeling the slowly varying parameter c , we choose its time-dependence as $c(t)$ given by

$$c(t) = c_1 + \left(\frac{c_2 - c_1}{T} \right) \cdot (T_0 + t) \quad (3)$$

Here, c_1 and c_2 represent parameter values included covering the different dynamical states of the system. In our computations, we fix $T = 300,000$, $T_0 = 1,000$, and increment t by 0.05. This would then mean that while the system dynamics is advanced in time steps of 0.05, the change in parameter in the same time step will be $\approx 10^{-7}$ times slower. Initially, we generate a dataset of 10,000 data points using c_1 , discard the first 5,000 points to eliminate transients, and then generate 300,000 points as c varies based on $c(t)$ as given in equation (3). We do a sliding window analysis of 3000 points per window with a slide of 10 on the remaining data points. For each window after proper embedding, the recurrence network is generated and the LD computed. The average values of LD from 1000 consecutive windows and their standard deviations are then used in the analysis. This method thus tracks the variation of LD over time as the system and parameter evolve at differing time scales and assesses its sensitivity to transitions in the system.

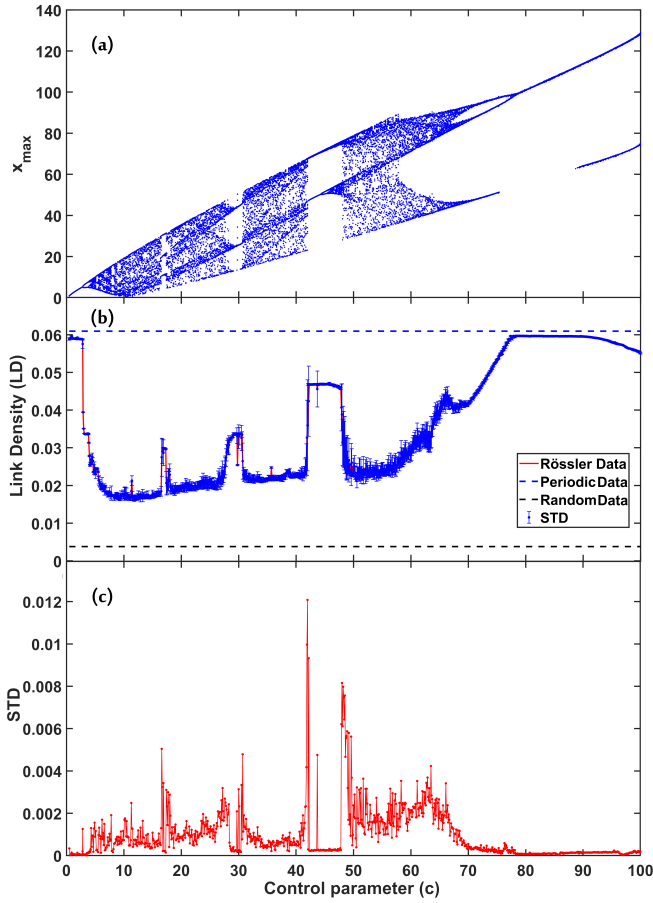


Figure 1: Characterization of the transitions in the dynamics of the Rössler system derived from the time series (a) Bifurcation diagram showing the transitions between different dynamical states as parameter c is varied within a range from 0.5 to 100, keeping $a = b = 0.2$. (b) Variations in average LD for the same range of c values. The error bars indicate the standard deviation of LD for each c value. For comparison, the value of LD from purely periodic data is shown by a blue dotted line and that of pure Gaussian white noise by a black dotted line. (c) Variations of the standard deviations of LD values show an increase within the chaotic region hence effectively indicating points of transitions in dynamical states.

We present the results of this analysis for two ranges of c values, the transition from a limit cycle to period two cycle through period doubling for $c_1 = 2.8$ to $c_2 = 2.88$ in Fig.3a, and transition point from chaos to periodic and then back to chaos from $c_1 = 4.2$ to $c_2 = 4.5$ in Fig.3b. The parameter values shown correspond to the midpoint of 1000 windows used in averaging. It is clear from Fig.3a, that there is a dip in average LD and an increase in STD of LD , as c value reaches 2.838. From our earlier analysis, we can say that this would correspond to the period-doubling transition point.

The values of average LD are less in Fig. 3b compared to the values in Fig. 3a, which indicates a state of chaos in Fig. 3b. Also, the variations in the STD of LD show more pronounced variations that indicate the region of chaos and the presence of periodic windows inside the chaotic region.

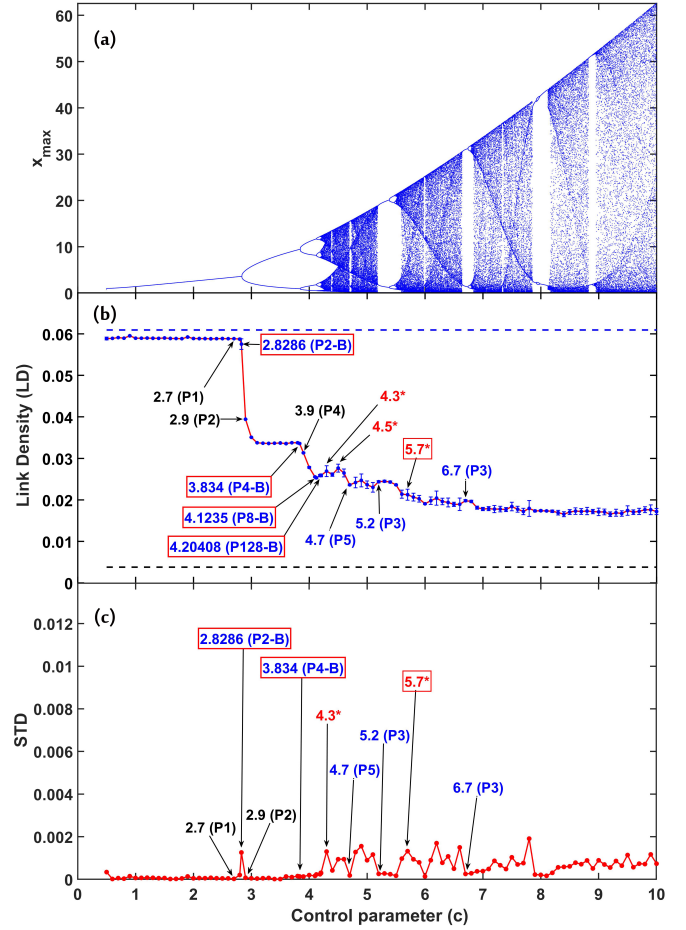


Figure 2: Transitions in the dynamics of the Rössler system for the parameter c in the range from $c = 0.5$ to 10 with $a = b = 0.2$. (a) Bifurcation diagram indicating the period-doubling bifurcations to chaos and transitions to periodic windows within the chaotic region. (b) Average LD for the same range of parameter c and (c) Standard deviations in the LD values corresponding to the average values in (b). The critical values of c at which transitions happen are indicated as insets, values associated with periodic dynamics are shown in black with cycle numbers in brackets and those for chaos in red with * above c value. The bifurcation points are shown in blue B after cycle numbers.

Thus, we see clear indications of transitions to chaos and transitions to periodic windows inside the chaotic region that happens in the system's dynamics due to slowly varying parameter c .

5. Summary and Results

In this study, we present a simple and efficient method to track dynamical transitions that happen in systems due to changes in their parameter values. We consider the changes in parameter made externally as well as the parameter changing slowly as the system evolves. Taking the specific case of Rössler system, we illustrate how the recurrence network measure, LD , computed from time series data, can effectively detect the transition points in the system in both these

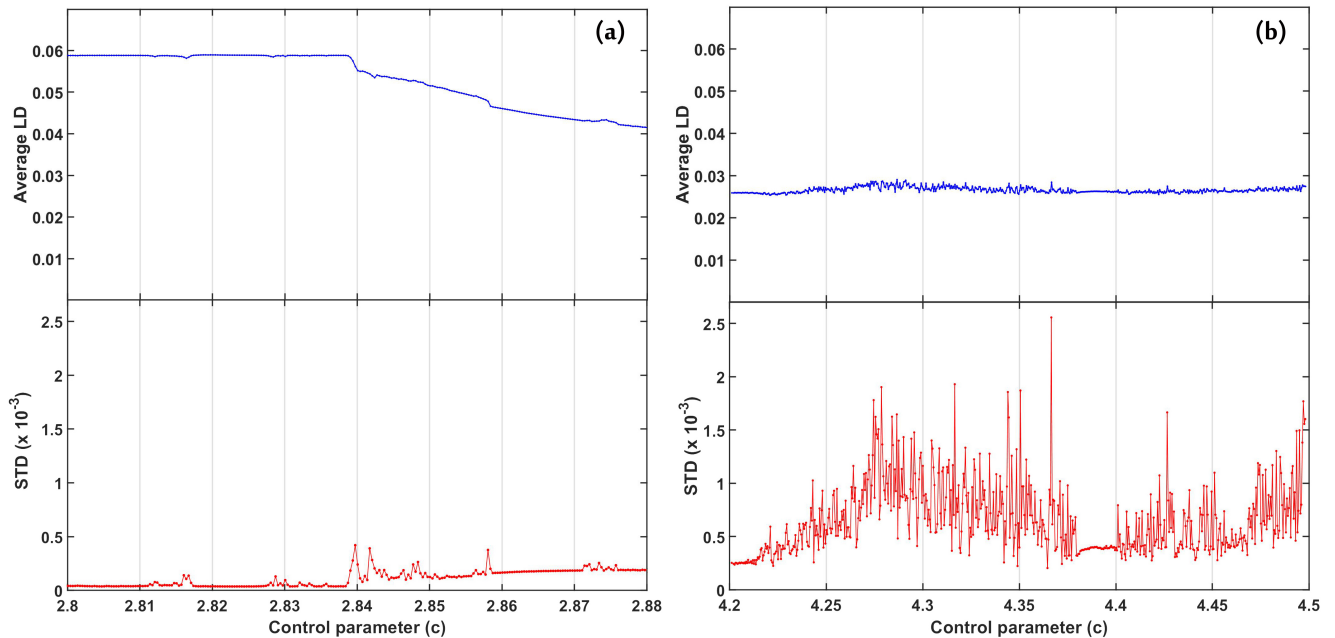


Figure 3: Average LD and its standard deviation computed using sliding window analysis on data generated from Rössler system with slowly varying parameter c in the range (a) from $c = 2.8$ to 2.88 and (b) from $c = 4.2$ to 4.5. The average is over 1000 consecutive windows and the values of c shown correspond to their midpoint.

cases. By generating the time series corresponding to the bifurcation scenario in Rössler system, and computing the LD from its recurrence network, we observe that LD decreases suddenly at the first period-doubling bifurcation, followed by a further decrease at subsequent bifurcations till chaos is reached. Near every periodic window, we find increases again indicating a transition from chaos to periodicity. This underscores the potential of LD as a primary indicator for understanding and identifying the system's underlying dynamical transitions.

We rely on recurrence network measures in this context since they capture the pattern of neighbourhood relationships in the phase space structure of a dynamical system. Especially, we find the measure LD shows good performance in detecting dynamical transitions since it quantifies the geometric pattern of trajectory points. It is computationally easy to get this measure from reconstructed phase space from data or time series of the system and is robust even with small data sets. Moreover, when the dynamics is chaotic, due to the nonuniform distribution of points on the trajectory, the proximity of points changes locally. Then the values of LD computed from data show increased standard deviation about the average value. Therefore, we propose the STD of LD as an effective measure that can detect the points of transitions between periodic and chaotic dynamical states.

We also compute these measures, LD and STD of LD for the particular situation when the parameter is varying due to internal or intrinsic perturbations but very slowly compared to the system dynamics. In this case also, we find the variations in LD and STD of LD can detect transition points in the system. The technique can be applied to a

real-world complex system where a relevant quantity is being continuously monitored. The Link Density can then be computed in real-time and be used to track the dynamical transitions that the system is undergoing, which in turn may provide an early-warning signal. Moreover, the method adopted in this study can be easily integrated with machine learning for efficient analysis of transitions from data sets of complex systems.

6. Acknowledgment

RJ and KPH acknowledge the computing facilities at Inter-University Centre for Astronomy and Astrophysics (IUCAA), Pune. RJ acknowledges the HPC facility at Rajagiri School of Engineering and Technology (RSET).

References

- [1] S. H. Strogatz, *Nonlinear dynamics and chaos: with applications to physics, biology, chemistry, and engineering*, CRC Press, 2018.
- [2] E. Ott, *Chaos in dynamical systems*, Cambridge University Press, 2002.
- [3] J. F. Donges, R. V. Donner, K. Rehfeld, N. Marwan, M. H. Trauth, J. Kurths, Identification of dynamical transitions in marine palaeoclimate records by recurrence network analysis, *Nonlinear Processes in Geophysics* 18 (2011) 545–562.
- [4] M. Collins, et al., *Long-term climate change: projections, commitments and irreversibility*, Cambridge University Press, 2013.
- [5] W. I. Karain, Detecting transitions in protein dynamics using a recurrence quantification analysis based bootstrap method, *BMC Bioinformatics* 18 (2017) 1–13.
- [6] R. J. Shiller, *Irrational exuberance: Revised and expanded third edition*, In: *Irrational exuberance*, Princeton University Press, 2015.
- [7] R. M. Anderson, R. M. May, *Infectious diseases of humans: dynamics and control*, Oxford University Press, 1991.

- [8] N. Marwan, M. C. Romano, M. Thiel, J. Kurths, Recurrence plots for the analysis of complex systems, *Physics Reports* 438 (2007) 237–329.
- [9] N. Marwan, S. Schinkel, J. Kurths, Recurrence plots 25 years later—Gaining confidence in dynamical transitions, *Europhysics Letters* 101 (2013) 20007.
- [10] T. Braun, V. R. Unni, R. I. Sujith, J. Kurths, N. Marwan, Detection of dynamical regime transitions with lacunarity as a multiscale recurrence quantification measure, *Nonlinear Dynamics* 104 (2021) 3955–3973.
- [11] I. Pavithran, V. R. Unni, R. I. Sujith, Critical transitions and their early warning signals in thermoacoustic systems, *The European Physical Journal Special Topics* (2021) 1–22.
- [12] N. Marwan, S. Schinkel, J. Kurths, Significance for a recurrence based transition analysis, In: *Proceedings of the 2008 International Symposium on Nonlinear Theory and its Applications NOLTA08*, Budapest, Hungary, 2008, pp. 412–415.
- [13] E. G. Souza, R. L. Viana, S. R. Lopes, Using recurrences to characterize the hyperchaos-chaos transition, *Physical Review E* 78 (2008) 066206.
- [14] J.-P. Eckmann, S. O. Kamphorst, D. Ruelle, Recurrence plots of dynamical systems, *World Scientific Series on Nonlinear Science Series A* 16 (1995) 441–446.
- [15] R. V. Donner, Y. Zou, J. F. Donges, N. Marwan, J. Kurths, Recurrence networks—A novel paradigm for nonlinear time series analysis, *New Journal of Physics* 12 (2010) 033025.
- [16] N. Marwan, J. F. Donges, Y. Zou, R. V. Donner, J. Kurths, Complex network approach for recurrence analysis of time series, *Physics Letters A* 373 (2009) 4246–4254.
- [17] G. J. Lal, E. A. Gopalakrishnan, D. Govind, A Recurrence Network Approach for Characterization and Detection of Dynamical Transitions During Human Speech Production, *Circuits, Systems, and Signal Processing* 41 (2022) 6975–6998.
- [18] M. Krishnadas, K. P. Harikrishnan, G. Ambika, Recurrence measures and transitions in stock market dynamics, *Physica A: Statistical Mechanics and Its Applications* 608 (2022) 128240.
- [19] K. Kawano, H. Gotoda, Y. Nabae, Y. Ohmichi, S. Matsuyama, Complex-network analysis of high-frequency combustion instability in a model single-element rocket engine combustor, *Journal of Fluid Mechanics* 959 (2023) A1.
- [20] R. Jacob, K. P. Harikrishnan, R. Misra, G. Ambika, Uniform framework for the recurrence-network analysis of chaotic time series, *Physical Review E* 93 (2016) 012202.
- [21] G. Yang, D. Xu, H. Zhang, A new recurrence-network-based time series analysis approach for characterizing system dynamics, *Entropy* 21 (2019) 45.
- [22] R. Delage, T. Nakata, Directed recurrence networks, *Chaos: An Interdisciplinary Journal of Nonlinear Science* 33 (2023) 11.
- [23] D. Zhao, X. Ling, X. Zhang, H. Peng, M. Zhong, C. Qian, W. Wang, Robustness of directed higher-order networks, *Chaos: An Interdisciplinary Journal of Nonlinear Science* 33 (2023) 8.
- [24] G. Ambika, K. P. Harikrishnan, Methods of nonlinear time series analysis and applications: A review, *Dynamics and Control of Energy Systems* (2020) 9–27.
- [25] E. Tan, S. Algar, D. Corrêa, M. Small, T. Stemler, D. Walker, Selecting embedding delays: An overview of embedding techniques and a new method using persistent homology, *Chaos: An Interdisciplinary Journal of Nonlinear Science* 33 (2023) 3.
- [26] D. Eroglu, N. Marwan, S. Prasad, J. Kurths, Finding recurrence networks' threshold adaptively for a specific time series, *Nonlinear Processes in Geophysics* 21 (2014) 1085–1092.
- [27] J. F. Donges, J. Heitzig, R. V. Donner, J. Kurths, Analytical framework for recurrence network analysis of time series, *Physical Review E* 85 (2012) 046105.
- [28] H. K. Sarmah, T. K. Baishya, M. Ch, Period Doubling Bifurcation and Feigenbaum Universality in Rössler system, *Journal of Global Research in Mathematical Archives* 1 (2013) 9.
- [29] J. C. Tzou, M. J. Ward, T. Kolokolnikov, Slowly varying control parameters, delayed bifurcations, and the stability of spikes in reaction–diffusion systems, *Physica D: Nonlinear Phenomena* 290 (2015) 24–43.
- [30] J. Cantisán, S. Yanchuk, J. M. Seoane, M. A. F. Sanjuán, J. Kurths, Rate and memory effects in bifurcation-induced tipping, *Physical Review E* 108 (2023) 024203.