
NETWORK ANALYTICS FOR ANTI-MONEY LAUNDERING – A SYSTEMATIC LITERATURE REVIEW AND EXPERIMENTAL EVALUATION

A PREPRINT

Bruno Deprez*
KU Leuven
University of Antwerp

Toon Vanderschueren
KU Leuven
University of Antwerp

Bart Baesens
KU Leuven
University of Southampton

Tim Verdonck
University of Antwerp
KU Leuven

Wouter Verbeke
KU Leuven

June 3, 2024

ABSTRACT

Money laundering presents a pervasive challenge, burdening society by financing illegal activities. To more effectively combat and detect money laundering, the use of network information is increasingly being explored, exploiting that money laundering necessarily involves interconnected parties. This has led to a surge in literature on network analytics (NA) for anti-money laundering (AML). The literature, however, is fragmented and a comprehensive overview of existing work is missing. This results in limited understanding of the methods that may be applied and their comparative detection power. Therefore, this paper presents an extensive and systematic review of the literature. We identify and analyse 97 papers in the *Web of Science* and *Scopus* databases, resulting in a taxonomy of approaches following the fraud analytics framework of Bockel-Rickermann et al. [17]. Moreover, this paper presents a comprehensive experimental framework to evaluate and compare the performance of prominent NA methods in a uniform setup. The framework is applied on the publicly available Elliptic data set and implements manual feature engineering, random walk-based methods, and deep learning GNNs. We conclude from the results that network analytics increases the predictive power of the AML model with graph neural networks giving the best results. An open source implementation of the experimental framework is provided to facilitate researchers and practitioners to extend upon these results and experiment on proprietary data. As such, we aim to promote a standardized approach towards the analysis and evaluation of network analytics for AML.

Keywords Fraud Analytics · Anti-Money Laundering · Network Analytics · Literature Review

1 Introduction

Money laundering is the process of concealing illegally obtained funds by passing them through a complex sequence of transactions. Laundered money can then be used in the legitimate financial system to fund and facilitate criminal activities, such as drug trafficking, corruption, and terrorism [70]. Yearly, around 2% to 5% of global GDP is laundered worldwide, amounting to USD 2 trillion, as estimated by the United Nations Office on Drugs and Crime (UNODC) [116]. This illegally obtained money needs to enter the financial system at some point [70]. Therefore, legislative bodies have put stringent rules on financial institutions, requiring them to have safeguards in place and to report suspicious transactions/activities to the Financial Intelligence Unit (FIU). Despite record fines and mounting pressure by regulators, money laundering represents a growing problem [123]. Anti-money laundering practices are largely ineffective [33], with Europol estimating only 1.1% of criminal profits in the EU being confiscated [35].

*Corresponding author: bruno.deprez@kuleuven.be

Recently, there has been increasing attention to leverage network information for anti-money laundering (AML) efforts, seeking to exploit the fact that money laundering typically involves transactions between interconnected parties. Money laundering generally requires three main steps [116, 70]. The first is *placement*, where dirty money is integrated into the financial system. The second is *layering*, where money is transferred and mixed to obscure its illegal origin. The third is *integration*, where the laundered money is integrated into wider circulation by doing seemingly legitimate purchases. Since these steps all involve multiple parties, the adoption of network analytics holds promising potential [12].

The increasing attention has resulted in a growing body of literature covering network analytics for anti-money laundering. However, the swift expansion of the field has simultaneously resulted in a lack of a comprehensive overview. Most literature reviews on financial fraud barely discuss anti-money laundering using network analytics [91, 69, 39, 53]. Therefore, as a first step, this paper aims to supplement the literature by providing a systematic literature review of network analytics (NA) for anti-money laundering. To this end, we constructed queries in an iterative way to identify relevant papers from Web of Science (WOS) and Scopus, resulting in 97 papers.

The papers were analysed according to different dimensions. First, we looked at the evolution of the number of published papers over time. Second, each paper was classified according to five categories; publication data, the applied learning method, the evaluation metrics used, the main objective, and the kind of data used. We identify an increasing focus on crypto currencies. Our work compares the differences between those papers and the research covering *classic* financial transactions. Third, the top-cited work is reviewed via the framework introduced in [17].

Our literature review and subsequent analysis reveals that multiple supervised, unsupervised and visualisation methods have been developed and applied. Nevertheless, due to the literature being fragmented and these methods mostly addressing only a part of the AML problem, there is limited insight into how different methods compare and which work best. Furthermore, most state-of-the-art network analytics methods have not yet found main-stream adoption for anti-money laundering. Therefore, this work provides a comprehensive experiment, evaluating the most prominent methods.

In summary, our main contributions are four-fold:

- We provide an extensive and critical systematic literature review on network analytics for anti-money laundering, to gain both comprehensive and deep insight;
- We apply additional network analytics methods to anti-money laundering;
- We conduct a comprehensive experimental evaluation of the key methods found in the literature on the open-source Elliptic [1, 122] data set;
- We implement methods in a uniform manner and facilitate replication of the presented results by providing public access to the code at https://github.com/B-Deprez/AML_Network, aiming to promote a standardized approach towards analysing the use of NA for AML and to encourage further research on network analytics for anti-money laundering.

This paper is structured as follows. We present the methodology for the structured literature review in Section 2, whereas Section 3 presents the results of the review. Section 4 describes the set-up of the empirical evaluation, whereas the results are presented in Section 5. Finally, overall conclusions are presented in Section 6.

2 Literature Review

In this section, we present our methodology for conducting a comprehensive review of the literature on NA for AML. First, we establish the scope of the review, as well as the queries that are used and the processing of retrieved papers. Then, we provide the results.

2.1 Methodology

We iteratively defined a broad search using different queries for finding the relevant papers. We considered both *network* and *graph* as two near-synonyms used by researchers [8, 16, 47]. Additionally, we included papers using *analytics* and/or *analysis*. Finally, the term *anti-money laundering* is not broad enough, since methods might try to, e.g., “detect money launderers”. Therefore, we used the following queries:

- “graph analy*” AND “money launder*”
- “network analy*” AND “money launder*”

These queries are used to search for papers on WoS and Scopus, since these databases have a very high combined degree of completeness, and both are well respected for usage in research [88, 17]. This search is limited to papers published before 2023. Publishing year 2023 and later are, at the time of writing, too recent to judge the acceptance and appreciation by the research community, and hence the paper’s overall quality.

We first perform a title and abstract scan to decide upon the final set of papers. Second, papers are filtered using a full text scan. We exclude, among others, those dealing with law, or those not applying network analytics to anti-money laundering. A few papers were retrieved that only briefly mentioned money laundering in their abstract/introduction, but did not deal with AML as part of the research.

Once the final selection of relevant papers is obtained, we carefully analyse and classify them according to five categories; publication data, the applied machine learning methods, the evaluation metrics, the main objective, and the kind of data. These categories have sub-categories to obtain meaningful classifications; in Table 1. This classification is used to have a structured analysis and capture the main trends when presenting the results in Section 2.2 and discussing the literature in Section 3.

Category	Sub-Category	Definition
<i>Publication Data</i>	Title	The full title of the paper
	Journal/Conference	Where the paper is published
	Year	The year of publication
	Review Paper	Indicating if it is a review paper
	Bitcoin/Crypto	Indicating if it deals with crypto currency
<i>Learning Method</i>	Supervised	Application of supervised method
	Unsupervised	Application of unsupervised method
	Semi-Supervised	Application of semi-supervised method
	Mixed	Methods presented across different learning methods
	Visualisation	Application of visualisation method
<i>Evaluation Metric</i>	Accuracy	Accuracy
	Precision	The precision
	Recall	The recall
	F1	The F1 or micro-F1 score
	TPR	The true positive rate
	FPR	The false positive rate
	AUC-ROC	The area under the ROC curve
	AUC-PR	The area under the precision-recall curve
Time	The execution time	
<i>Objective</i>	Client classification	Detection of suspicious entities
	Transaction classification	Detection of suspicious transactions
	Community detection	Detection of suspicious groups of clients
	Flow/Chain detection	Detection of suspicious combination of transactions
<i>Data</i>	Proprietary	Usage of confidential data
	Open-source	Usage of freely available data
	Synthetic	Usage of synthetically generated data

Table 1: **Paper categorisation.** The (sub-)categories with explanation for the classification of the literature.

This work provides both a comprehensive and in-depth review of the literature. The comprehensive review discusses the general trends, based on the categories in Table 1, for all papers in scope. The in-depth review discusses the top-cited paper in more detail to get insights into the current state-of-the-art. This state-of-the-art contains the top-10% cited per year, and the top-10% cited overall, according to Google Scholar. The absolute number of papers are determined by rounding up the obtained number of papers; $\lceil 0.10 \cdot n \rceil$, with n the total number of papers. This provides a view on the research that has been well received.

As part of the in-depth analysis, we discuss the scope of all review papers selected. These give an additional overarching view of the literature. Additionally, this allows us to identify gaps in those reviews, showing how our work complements and extends the existing literature.

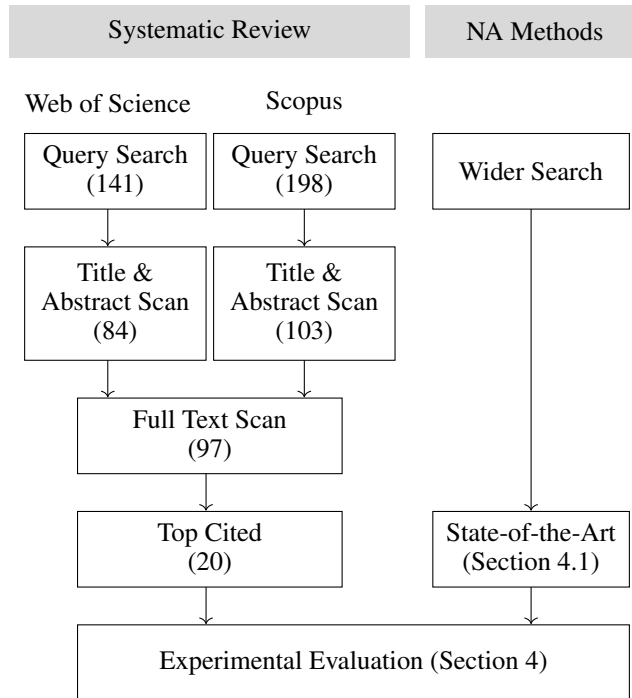


Figure 1: **Review overview.** The search and filtering method with the number of remaining papers between brackets.

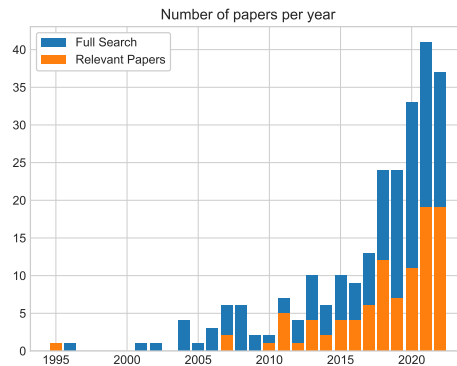


Figure 2: **Research Output.** The number of papers incorporated in the full query and after filtering per year.

2.2 Results

The initial number of papers for all queries is summarised in Figure 1. The first numbers are presented for WoS and Scopus separately, meaning that duplicates are present. These papers were filtered, as described in the previous section, and duplicate papers were removed, resulting in 97 papers, 11 of which are review papers. Table 1 gives the overview, using the classification from Table 1. Since the scope of the review papers is broader than for individual papers, no category-specific information is given.

Figure 2 shows the evolution of the number of papers before and after filtering. An increasing trend in research output is observed. Similar figures are provided in B where the results are presented per category from Table 1. These category-specific figures are compiled without the review papers. Next to these plots, Table 2 summarises the journals and conference proceedings, including only the venues having more than one publication.

We see in Table 1 that 26 papers specifically deal with crypto currencies. Therefore, C represents crypto-related research separately, since the setting of AML is different from *normal* financial transactions. This is also visible in the presented plots.

Journal/Conference Title	Number
Journal of Money Laundering Control	6
International Conference on Advances in Social Network Analysis and Mining, ASONAM	3
CEUR Workshop Proceedings	2
IEEE International Conference on Data Mining Workshops	2
IEEE International Conference on Big Data (Big Data)	2
Journal of Physics: Conference Series	2
EPJ Data Science	2
Information Sciences	2
International Conference on Machine Learning Technologies	2
IEEE Access	2

Table 2: **Venues.** Journals/conferences that have two or more publications in scope of this review.

Finally, D contains the results for a top percentage of papers. The resulting 20 papers are presented in Table 3, where we indicate if the paper is a review and/or crypto-related paper. The distribution among the categories is in line with the overall literature. Additionally, 25% of these papers are on crypto currency, which is similar to the 26.5% seen in the full scope.

3 Discussion on the Literature

3.1 Full Scope of Papers

Figure 2 shows an increasing interest in the literature in applying network analytics for anti-money laundering, especially after 2010, with an average increase in output of 61% year-on-year for the papers in scope.

The methods proposed in the papers are supervised, unsupervised, semi-supervised and visualisations. The most popular method is unsupervised learning, followed by supervised learning and visualisations, as shown in Figure 1. This may be due to money laundering being very uncommon, resulting in highly skewed data sets with very few labelled observations. In addition, criminals try to evade detection by changing tactics. The performance of (supervised) models trained on historical data can therefore decrease over time [17].

Additionally, we remark that most supervised methods could be classified as semi-supervised. Since not all money laundering transactions are detected, there are cases in the *legitimate* data that are actually money laundering. However, we follow the classification as represented in the papers, not using our personal interpretation of the problem.

We identified multiple objectives of the methods for anti-money laundering. Figure 2 shows that the objective is most often detecting suspicious clients, followed by detecting suspicious transactions, money flows and communities. Client classification combines payments made over a period of time and the person’s characteristics. This seems better for detecting money laundering, since it is often done over a longer period, with the aim to make the individual transaction appear normal. Therefore, models trained on a series of transactions, leveraging an individual’s behaviour, might obtain higher performance. Figure 2 shows that methods for crypto-currency are most often introduced for suspicious transaction detection. Due to the pseudo-anonymity, it is much harder to know which wallets belong to one person [140, 133], making it less feasible to build profiles.

In recent years, more studies have been done on flow/chain detection, tracking payments over multiple steps/people. Although this requires more computing power, it more closely resembles reality, since money laundering is done over multiple steps [116, 70]. Hence, methods leveraging these different steps and actors are becoming more widely used.

The most popular metrics to evaluate the methods are the recall, $F1$ -score, precision and time, as shown in Figure 3. We see that training/prediction time was a popular method in earlier studies, but relatively fewer papers use time in more recent work, which might be a consequence of the increase in computing power. Additionally, the popularity of the precision, recall and $F1$ -score is a recent and increasing trend in the literature.

We remark two surprising results in our analysis. First, only one paper used the area under the precision-recall curve (AUC-PR). Due to the high label imbalanced, this metric is shown to be more appropriate than the area under the ROC curve (AUC-ROC) for evaluating performance [3, 94]. Therefore, we would expect it to be more widely used. Second, some papers solely reported accuracy [29, 129, 45, 131]. Given the class imbalance and the dependence on a threshold, accuracy however fails in providing an appropriate assessment of performance.

Finally, Figure 4 shows the data used. Most data sets are open-source, although proprietary data is also used in almost 50% of the papers. Only a minority of papers report their findings using synthetic data. There is, however, a major difference between crypto- and other research. Looking at Figure 1a, we see that crypto-research is almost exclusively

done via open-source data. This results from the blockchain’s freely accessible distributed ledger [122]. On the other hand, *classic* transaction data cannot be shared, due to privacy reasons, resulting in half the data sets being proprietary. Following this last remark, one would expect to have (almost) no research done on open-source data sets, for non-crypto-payments. Figure 1a shows that almost 30% of non-crypto related papers use open-source data. These papers can be categorised in four groups:

- Methods that are evaluated on non-financial network data, whether or not next to proprietary/synthetic money laundering data: [139, 93, 84, 99]
- Methods evaluated on government data, assumed to be open-source: [27, 58, 119, 13, 79]
- Methods constructed to analyse leaked documents/scandals, e.g., the Panama papers: [63, 64, 76, 4, 124, 55, 24]
- Other: [89, 15, 19]

For the *Other* category, we have the following. The data in [89] is said to be publicly available, without giving any more information. The data in [15] is scraped from Hack Forums. The data in [19] is a Kaggle data set that is based on synthetic data. We categorise this data set open-source, since it is made publicly available.

3.2 Review Papers

We identified 11 review papers in scope for our literature review. These are analysed first to illustrate how our work complements and extends the existing literature.

The research in [91, 68, 75] focuses on financial fraud in general, resulting in less emphasis on anti-money laundering or graph learning. The authors of [91] construct a framework to classify financial fraud, but only one paper on money laundering was included, which was also the only paper on network analytics. The authors in [68] give a high-level overview of the general difficulties of machine learning solutions for fighting financial crime. They noted that network-based methods have a lot of potential to process many transactions handled by financial institutions. The paper is closer to a discussion paper than to a systematic literature review. The scope of the review in [75] is limited. It deals with both credit card fraud and money laundering, but only incorporates visualisation methods used for outlier detection.

Other review papers deal specifically with AML [69, 104, 39]. The work in [69] is most similar to ours. The authors give an overview of the methods applied in the literature, but their main topic is interpretability. Hence, their focus is less on the overall AML literature. The review in [104] discusses the different methods applied to AML. It touches upon different network methods, but it is not a systematic literature review. The framework constructed in [39] again deals with a wider array of methods, with the authors concluding that network analytics is the most promising. However, the number of papers on network analytics for AML in [39] is limited.

The work in [44] looks at the effects of money laundering policies, by measuring the change in network features when a major AML law is introduced. It analyses cluster size and the degree, closeness and betweenness centrality. Hence, the scope of [44] is different, since we focus on enhancing anti-money laundering using network features.

A significant number of review papers deal with crypto currency related money laundering [59, 26, 6, 53]. The work in [59] describes challenges in detecting money laundering on the blockchain. As a result, the scope is smaller, with a total of 45 unique references in the paper. These different challenges are partially addressed in [6, 53]. The experiment in [6] compares different supervised machine learning methods, with the statistics of the ego-network of the different nodes in the Bitcoin transaction network (Elliptic data set [1, 122]) as features.

Other papers cover a specific money laundering method and propose tailor-made solutions. The review in [53] discusses the application of anomaly detection, based on crime-specific transaction patterns. The paper also covers Ponzi schemes and blackmail campaigns. Their scope is more limited, with a total of 33 references in the paper. In the same line, the research in [26] gives an overview of different characteristics of financial crime, and uses these to construct knowledge graphs for building legal cases.

Compared to the literature reviews presented above and to the best of our knowledge, this paper is novel in multiple ways.

- This is the first systematic literature review on network analytics methods specifically for anti-money laundering;
- This work will be the first to construct an experimental evaluation comparing multiple different network analytics methods against each other on real-life money laundering data;

Reference	Title	Year	Citations	Review	Crypto
[91]	The application of data mining techniques in financial fraud detection: A classification framework and an academic review of literature	2011	1307	✓	
[38]	Using social network analysis to prevent money laundering	2017	200		
[23]	WireVis: Visualization of Categorical, Time-Varying Data From Financial Transactions	2007	171		
[105]	Financial Crimes Enforcement Network AI System (FAIS) Identifying Potential Money Laundering from Reports of Large Cash Transactions	1995	152		
[31]	The application of social network analysis algorithms in a system supporting money laundering detection	2015	141		
[80]	Visualizing Dynamic Bitcoin Transaction Patterns	2016	122		✓
[39]	A framework for data mining-based anti-money laundering research	2007	106	✓	
[125]	Detecting Mixing Services via Mining Bitcoin Transaction Network With Hybrid Motifs	2021	94		✓
[79]	Using friends for money: the positional importance of money-launderers in organized crime	2013	66		
[139]	A Local Algorithm for Structure-Preserving Graph Cut	2017	63		
[72]	FlowScope: Spotting Money Laundering Based on Graphs	2020	54		
[59]	Illicit Bitcoin transactions: challenges in getting to the who, what, when and where	2018	47	✓	✓
[97]	EGRET: Extortion Graph Exploration Techniques in the Bitcoin Network	2018	38		✓
[69]	Deep Learning and Explainable Artificial Intelligence Techniques Applied for Detecting Money Laundering—A Critical Review	2021	38	✓	
[138]	No Smurfs: Revealing Fraud Chains in Mobile Money Transfers	2014	32		
[15]	Mapping the underground: Supervised discovery of cybercrime supply chains	2019	24		
[93]	Covertness Centrality in Networks	2012	20		
[24]	Event-based approach to money laundering data analysis and visualization	2010	12		
[44]	The effect of anti-money laundering policies: an empirical network analysis	2022	11	✓	
[140]	Behavior-Aware Account De-Anonymization on Ethereum Interaction Graph	2022	7		✓

Table 3: **Top-cited papers.** Summary of the top-cited papers, with indication of whether it is a review and/or crypto-related.

- Our scope is not limited to a particular network method. Our review deals with supervised, unsupervised as well as visualisation methods. It is also not limited in the methods used for featurizing the network. It covers the full spectrum from centrality measures to deep learning and graph neural network;
- We incorporate papers dealing with money laundering in financial institutions as well as crypto currency.

3.3 Top Cited Papers

A final step in our discussion is an in-depth analysis of the top-cited papers. These papers are well received by the scientific community, meaning that the methods that are applied in these papers are likely to be of high quality. To this end, we select the 10% most cited papers per year, and complement these with the 10% most cited papers overall (see Section 2.1). This results in 20 papers as enlisted in Table 3.

The results show that five out of 11 review papers are selected. This is to be expected, since review papers have a higher likelihood of being cited [30]. Additionally, five papers deal with crypto-related money laundering, indicating the strong research interest in these payment methods. Two causes that explain the growing interest are mentioned in literature. On the one hand, crypto currencies are widely used by criminals because of the absence of regulation [37] and the anonymity it provides [59, 122]. On the other hand, a full history of ownership and transactions is available on the blockchain for each *coin*, facilitating the discovery of transaction flows and patterns in payment networks [59, 122].

Process Step	Sub-Steps	References
Pre-processing	Sampling	[38]
	Exploration	[38],[23],[80], [79]
	Missing Value Treatment	[38]
	Outlier Detection and Treatment	-
	Categorization, standardization & segmentation	[31], [15]
	Feature Engineering	[38], [31], [93],[140], [138]
	Variable Selection	-
Processing	Unsupervised Learning	[23], [105], [31], [79], [139], [72], [97], [93], [24],[138]
	Supervised Learning	[38], [15]
	Semi-Supervised Learning	[125]
	Hybrid Learning	[140]
Post-processing	Statistical Evaluation	[38], [125], [139], [72], [15], [140], [138]
	Interpretation	[31], [125], [15], [140]
	Economical Evaluation	[138]
	Implementation	[31], [80], [139], [72], [93],[140], [138]

Table 4: **Processing.** Papers per method cluster, based on [17].

The papers are classified according to the framework presented in [17] based on the processing steps and challenges presented. Table 4 summarises the papers over the different processing steps. The most prevalent pre-processing steps are feature engineering and exploration. The feature engineering is done to enhance GNN models and define different risk profiles. We see in the literature that this is either based on neighbourhood and centrality metrics [38, 31, 93] or on the aggregation of local (node-specific) information [140, 138]. When looking at exploration, some of the research is done on how to construct meaningful visualisations [23, 80], while other papers rely on clustering the nodes as additional support for their findings [79, 38].

Most papers apply unsupervised learning in their processing step. This often involves detection of suspicious flows of transactions [139, 72, 97]. Another important part of the literature uses centrality metrics to define specific roles for entities in the network [31, 79, 93]. Finally, unsupervised learning methods can involve creating heuristics to define outlying behaviour [105, 23, 24, 138].

For the post-processing step, most research covers statistical evaluation, implementation and interpretation. The statistical evaluation is used to have a quantitative evaluation of the performance of the method. All research on the implementation looks at the efficiency of the methods. It deals solely with computation time and scalability. To have interpretations in the post-processing step, all papers mentioned use specific interpretable features.

Table 5 summarises the papers according to the challenges identified in [17]. It only contains those challenges that were mentioned in the literature. The main challenge is data availability, followed by unlabeled data. Due to privacy issues, only a limited number of anonymised data is available. Additionally, since transaction data sets are often huge and resources are limited, it is hard to provide all instances with a label. This is the main obstacle for the construction of a real general benchmark. On the other hand, few papers mention feature construction, real-time execution, or verification latency as a challenge. The latter two are important when detecting transaction fraud, where decisions need to be made within seconds [118, 117]. For anti-money laundering, however, the investigation is always done after the fact, based on a longer history of transactions [70]. Hence, it is less reliant on execution time.

Next to challenges in [17], we introduce four additional challenges observed in the anti-money laundering literature. We view this as an extension of the framework since these challenges can be important to fraud research in general.

- **Bias in data** affects the performance of the model and can be present in different ways. First, there could be bias in the missing values [79]. Second, when using synthetic data, there could be *detection bias* [138] present, when the synthetic data includes specific patterns that the model is trained to look for.
- **Generalisation** is mainly used in two ways. One way refers to the ability for methods specifically developed for anti-money laundering to be used for other fraud domains as well [140]. Another and important use of the term refers to the fact that methods need to generalise to unseen data [46], often referred to as *inductive* methods (compared to *transductive* ones).
- **Robustness** of a method is important since money laundering can be seen as an adversarial attack [72], as perpetrators try to avoid detection by the methods.

	Challenge	Papers
Original	Automation	[105], [24], [140]
	Class Imbalance	[125], [15]
	Concept Drift	[38], [15]
	Data Availability	[38], [23], [125], [79], [93], [138]
	Feature Construction	[93]
	Noisy Data	[105], [125], [79]
	Stream Data	[105], [80], [140]
	Real-Time Execution	[38]
	Scalability	[139], [93], [140]
	Unlabeled Data	[105], [125], [15], [140]
New	Verification Latency	[138]
	Bias in data	[79], [138]
	Generalisation	[140]
	Robustness	[72]
	Anonymity	[80], [125], [15]

 Table 5: **Challenge** Papers per fraud detection challenge, based on [17].

Paper	Nodes	Edges
[38]	Factoring companies	Economic sector geographical data transaction amount tacit link (same owners/resources)
[23]	People	Transactions
[105]	Accounts	Connections
[31]	People, businesses, accounts and location	Transactions (via bank statements)
[80]	People (via court register)	Transactions (via bank statements)
[80]	Transactions, inputs and outputs	Input/output part of same transaction, inputs that belong to the same address
[125]	Address	Transactions
[125]	Address and transactions	If they are related
[79]	People (from police reports)	Co-appearance in the report (family, client-lawyer etc.)
[139]	All items of interest (bank account, name, email, address, phone number)	Link bank account to other items
[72]	Bank accounts	Transfers
[97]	Bitcoin wallet address	Transactions
[93]	-	-
[24]	People	Relations
[140]	Accounts	Transactions
[138]	mWallets	Transactions

 Table 6: **Network Construction.** Summary of the construction of the network.

- **Anonymity** of the account data gives rise to two main challenges. First, the identity of the account holder is unknown in crypto data sets, which makes it almost impossible to know if different accounts - also called wallets - belong to the same person [125]. Second, financial institution have all customer data, but due to privacy reasons, researchers cannot publish these. Hence, published articles avoid using Personally Identifiable Information all together [15].

Since this paper discusses network learning, an additional summary of the construction of the networks is given in Table 6. Most of the papers use homogeneous networks where transactions form the edges between accounts.

Next, we summarise the trends observed in the literature on network analytics for anti-money laundering. Here, the papers are split into three broad categories; unsupervised learning, (semi-)supervised learning and visualisation methods.

Unsupervised learning can be divided into two main streams. The first stream assigns and identifies specific roles of actors in a criminal network, based on police reports covering past criminal cases [79, 31]. The second stream introduces methods to track money flows through the network [139, 72, 97]. It is important to integrate these transaction chains, since money laundering is a process involving multiple steps and actors [70]. Next to these two main streams, the remaining paper [93] introduces a new covertness measure.

The above methods often rely on the application of centrality metrics, e.g. degree and betweenness centrality, which are combined and interpreted in different ways, leading to tailor-made solutions for specific sub-problems of anti-money laundering methods. Although detecting money laundering is in principle trying to find anomalous behaviour, very few studies deal with (unsupervised) anomaly detection [77, 99, 32].

(Semi-)Supervised learning methods deal with different aspects of money-laundering. Their strength often lies in a combination of (1) the methods used and (2) how the network is constructed, tailored to the problem at hand. The obtained network features are put into downstream machine learning tasks to classify clients/transactions. However, to the best of our knowledge. Promising methods are often based on deep learning [140], but these are mostly black boxes. To maintain interpretability, network metrics are recalculated for multiple networks, each representing a specific aspect of the data, to extract predictive features [38, 125]. However, research on the interpretability of deep network representation methods, as mentioned in [69], is still scarce.

Visualisation of transaction networks also gets a strong focus in the literature [105, 27, 23, 24, 80]. The general idea is to support the experts in performing their investigations. This is either done by having an overview of the flow of money over different transactions [80, 23] or by finding specific relations among the persons involved [105, 27, 24]. Hence, these methods are mostly intended to be used after suspicion has been raised. None of them include evaluation metrics to test their strength as money laundering detection methods.

3.4 Further Considerations

We have seen that the network analytics often relies on simple centrality measures [31, 93, 44]. The application of more complex network representation methods [117, 20] has not found mainstream adoption yet. Hence, for the construction of the experiment, we do an additional study to identify popular methods in the network analytics literature. This allows us to apply state-of-the-art network methods from other domains. On the other hand, it allows us to analyse which methods work well for money laundering and study why others might be less suited.

In this paper, the experiments are constructed for supervised learning methods. Supervised methods can easily be compared, since they can be applied to any labelled network data set. Most supervised learning methods in the literature employ standard network metrics as features. These will form the basis of our experiment, and will be supplemented with more advanced deep learning methods. The experiment will not include unsupervised learning. These are often tailor made for specific problems in money laundering, e.g., assigning roles or finding specific flow patterns. Therefore, they are not easily comparable. Further research can construct a framework to compare unsupervised learning methods on networks. However, this is outside the scope of this work.

A major challenge identified is the availability of data. Thus, a key objective of this work is to provide a comprehensive set-up incorporating multiple state-of-the-art methods. In the next section, we present our set-up and an example using an open-source data set. The accompanying code enables researchers to quickly run experiments on their own data with minimal adjustments, promoting uniform analysis across different data sets. We hope this framework will support and expand future research.

4 Experimental Set-Up

In the previous section, we reported that most papers use centrality measures in their experiments, while only few incorporate recent advances in deep learning. To the best of our knowledge, a benchmark study comparing the state-of-the-art network learning methods for anti-money laundering is still missing. This gap motivates us to carry out an extensive experimental evaluation of the most prominent methods for AML. This section describes the experimental framework that is used, including data (Section 4.2), model specification (Section 4.1), hyperparameter tuning (Section 4.3) and performance metrics (Section 4.4).

4.1 Model Specification

To set up the experimental evaluation, we start from the wider literature on network representation. Extensive overviews are given in [20, 52, 47], classifying the methods according to their input, output, and embedding technique. A sub-branch of representation learning applies deep learning methods [141, 127]. Based on these papers, we select the methods that are most prominently used. The data set has labels at node level, our experiments will be set up as supervised node classification. We refined the selection by considering the fact that, for AML, transaction data contains networks with millions of nodes and edges, making scalability an important selection criterion. Table 7 provides an overview of the methods selected. They are grouped into three categories [20, 52, 47]: manual feature engineering,

Category	Features	Definition
Manual feature engineering	Density	[12]: Number of edges in the egonet relative to the maximal number possible.
	Centrality measures PageRank	Closeness, betweenness and eigenvector centrality. [95]: Score indicating the importance of a node.
Shallow representation learning	DeepWalk Node2vec	[96]: Random walk through the network. Embedding via word2vec. [48]: Truncated random walks (breadth-first vs. depth-first). Embedding via word2vec.
Deep representation learning	GCN GraphSAGE GAT GIN	[65]: Graph convolutional network [52]: Aggregation based on fixed-size sample of neighbours [120]: Graph attention network [132]: Graph isomorphism network

Table 7: **Network Analytics Methods.** The methods used to generate network features for the experimental evaluation.

shallow representation learning and deep representation learning. These methods will be tested against a baseline model that only includes the intrinsic features, denoted by IF.

Manual feature engineering is the first category of methods and includes both local and global metrics. The first is the density of the ego-network. A node’s ego-network consists of said node, its direct neighbours and all connections between the neighbours. The density is the relative number of connection in this ego-network compared to the theoretical maximum. Summary statistics, i.e., minimum, mean and maximum values, of the density of the node’s neighbours are also included.

A second type of manual features are centrality metrics, quantifying the global position of the node in the network [90]. The most popular centrality metrics are the betweenness, closeness and eigenvector centrality. The betweenness quantifies the number of shortest paths between any two nodes in the network passing through a given node. The closeness measures how close a node is to all other nodes, and is the inverse of the average distance to the other nodes. The eigenvector centrality is high for nodes that are connected (but are not necessarily themselves) to important nodes in the network. The importance of the node itself can be quantified using the PageRank [95].

Next to the manual feature engineering, automatic network features are constructed using network embedding methods [52, 47, 20]. Although there are many different methods to construct a network embedding [20], we focus on those based on deep learning, often called network representation learning [117, 118]. Network representation learning comprise the second and third category of features in Table 7.

Shallow network representation learning can be viewed as an “embedding lookup” [52, 118]. Our experimental set-up will use different methods based on random walks. DeepWalk [96] was the first method to try to give nodes that are close in the network, i.e., that co-occur on short random walks, a similar embedding. A random walk is seen as a sentence of words, which can be embedded into a Euclidean latent space using NLP methods, often via skip-gram [86].

Node2vec [48] extends the capabilities of the random walks by introducing two additional hyperparameters, p and q , resulting in the option to either use breadth-first or depth-first sampling. The method samples each node according to the following unnormalized transition probability, α , at node v :

$$\alpha(c_{i+1} = x \mid c_i = v, c_{i-1} = t) = \begin{cases} \frac{1}{p} & \text{if } d_{tx} = 0 \\ 1 & \text{if } d_{tx} = 1 \\ \frac{1}{q} & \text{if } d_{tx} = 2 \end{cases},$$

where d_{tx} denotes the distance between node t and x . These probabilities are only defined when there is a link from v to x . Otherwise, it is set to 0. Depending on the values of p and q , the embedding focuses more on capturing either homophily or structural equivalence [48].

Deep network representation learning adapts deep learning methods to be directly applicable to networks. This paper applies different graph neural network (GNN) architectures. The first graph neural network framework was introduced in [103, 102] and is based on recurrent neural networks. The idea is that the network defines how nodes can propagate information to each other. This propagation step is iterated until a state of convergence. As noted in [52], the initial message passing idea is mostly used for sub-network embedding calculation.

The most popular methods for node embedding calculation are graph convolutional networks (GCNs), based on convolutional neural networks [65]. It relies on neighbourhood aggregation to update the embedding as follows:

$$H^{(l+1)} = \sigma \left(\tilde{D}^{-1/2} \tilde{A} \tilde{D}^{-1/2} H^{(l)} W^{(l)} \right),$$

with $H^{(l)}$ the embedding at step l , σ a non-linear (activation) function, $\tilde{A} = A + I$ the adjacency matrix with self-loops added, the diagonal matrix $\tilde{D}_{ii} = \sum_j \tilde{A}_{ij}$, and $W^{(l)}$ the learnable weights in layer l . This means that the node embedding for the individual node is updated via

$$h_i^{(l+1)} = \sigma \left(\sum_{j \in \tilde{\mathcal{N}}_i} \frac{1}{\sqrt{\deg(i)\deg(j)}} W^{(l)} h_j^{(l)} \right).$$

Neighbour aggregation has seen multiple extensions, two of which this paper will evaluate. The first is GraphSAGE [52], which samples a fixed number of neighbours for each node, to make the calculations scalable to large graphs. First, the representations of the sampled neighbours are aggregated, with the authors proposing the mean, LSTM and pooling aggregators [52]. Then, the aggregated neighbourhood representation is concatenated with the node's representation. Finally, the representation is updated using the weights and activation function. For a given node v , this is calculated as:

$$\begin{aligned} h_{\mathcal{N}_v}^{(l)} &= \text{AGGREGATE}_l \left(\{h_u^{(l-1)}, \forall u \in \mathcal{N}_v\} \right) \\ h_v^{(l)} &= \sigma \left(W^{(l)} \cdot \left[h_v^{(l-1)} \parallel h_{\mathcal{N}_v}^{(l)} \right] \right), \end{aligned}$$

where \parallel represents the concatenation operator.

The second extension is graph attention network (GAT) [120], which adds attention mechanism when learning the representations. Our work uses the modified version of the extension mechanism, introduced to fix the static attention problem [18]:

$$\begin{aligned} e_{ij} &= a^T \text{LeakyReLU} \left(W^{(l)} \left[h_v^{(l-1)} \parallel h_{\mathcal{N}_v}^{(l)} \right] \right) \\ \alpha_{ij} &= \text{softmax}_j(e_{ij}) \\ h_i^{(l)} &= \sigma \left(\sum_{j \in \tilde{\mathcal{N}}_i} \alpha_{ij} W^{(l)} h_j^{(l-1)} \right) \end{aligned}$$

The above formulas apply one attention mechanism. As mentioned in [120], having multiple mechanisms - also called heads - at the same step can improve stability. We will follow the method in [120], where the intermediate steps concatenate the results over the heads, while the final layer averages the results.

A final graph neural network method selected in this paper is the Graph Isomorphism Network (GIN) [132]. The authors used the Weisfeiler-Lehman graph isomorphism test to define the necessary conditions a GNN must satisfy to achieve maximal discriminative power. This discriminative power is denoted by how well the training data is fitted.

Using the universal approximation theorem [57, 56], GIN updates the representation using a multilayer perceptron (MLP).

$$h_v^{(l)} = \text{MLP}^{(l)} \left(\left(1 + \epsilon^{(l)} \right) h_v^{(l-1)} + \sum_{j \in \mathcal{N}_i} h_j^{(l-1)} \right)$$

Although this increases the risk of overfitting, the authors show that GIN has satisfactory generalisation capabilities. The main problem with other GNNs is that they tend to underfit the data [132]. We include GIN because recent research showed its potential to outperform other GNN architectures [34, 113].

There are some key differences between the three categories presented in Table 7. As mentioned before, the manual features need to be specifically defined, while representation learning tries to find meaningful embeddings automatically. Another difference concerns the node-specific or intrinsic features. The manual features and those from shallow representations are added to the intrinsic features, which are used in a down-stream classifier (as illustrated in Figure 3). The GNNs, on the other hand, directly incorporate the intrinsic features. As a result, the embeddings are directly learned using the intrinsic features and the classification task. Hence, shallow representation learning is closer to unsupervised learning, only based on the network topology, while deep representation learning are supervised learning methods.

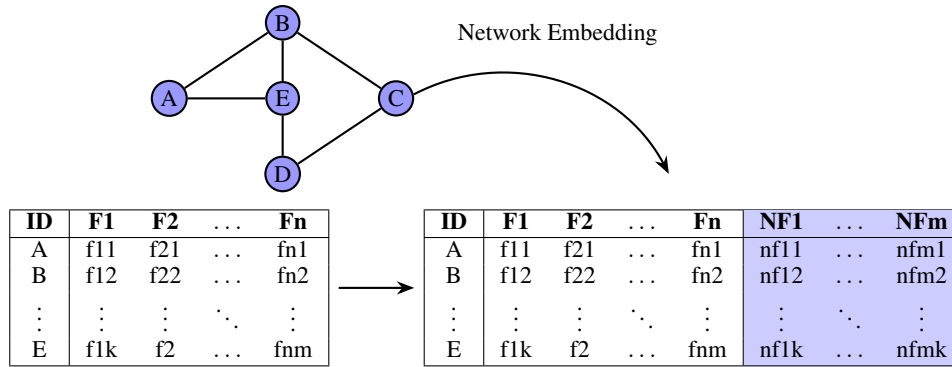


Figure 3: **Illustration feature engineering.** For the feature engineering and shallow representation methods, the obtained network features/embedding is added to the intrinsic ones.

Different decoders are used for the final classification task. A deep neural network with two hidden layers, each of dimension ten is used for the manual features and shallow representation methods. For the graph neural networks, the GNN layers are followed by a single linear layer for making predictions.

One of the objectives of this research is to provide the code for all methods in a clean and simple way and make these methods easily accessible to researchers and practitioners. The methods are implemented in Python. The manual features are constructed using NetworkX [50] and NetworKit [9], and the representation learning is implemented in PyTorch Geometric [36]. The code is made available on GitHub².

4.2 Data

We use the Elliptic data set [1, 122], which contains Bitcoin transactions for 49 time steps each being around two weeks long. The network has 203 769 nodes and 234 355 edges. The nodes correspond to transactions, and an edge represents that the output of one transaction is the input of the next. Additionally, the data set contains 166 pre-calculated features. These are split into 94 transaction-specific, or local, features and 72 aggregated features, summarizing the local features of a node’s neighbours.

The Elliptic data set has only numerical features, which have already been standardised. The local features will be used for all methods. However, since the deep representation learning methods aggregate the neighbourhood information, including the node features, we do not include the aggregated features for these. This was also addressed by the authors [122], stating that graph neural networks are better to address the heterogeneity of the neighbourhoods than the aggregated features.

Around 33% of transactions are labelled, of which 4 545 are illicit and 42 019 are licit. Hence, the classification problem is imbalanced with around 11% of labelled nodes, or 2% of all nodes labelled *illicit*. We note that an illicit label does not automatically mean that the transaction is used to launder money. However, criminals will try to obscure the source of these illicit funds, so we believe that it is still informative.

We use the copy of the Elliptic data set included in the Pytorch Geometric library [2, 36]. We split the periods into a train (period 1-30), validation (period 31-40) and test set (period 41-49). Only nodes having a label are used for performance evaluation. Transactions with label 2 (unknown) are included for the construction of the network, but they do not contribute to training and loss calculation [65, 135, 122].

4.3 Hyperparameter Tuning

Most methods are highly dependent on their hyperparameters. Hence, finding those that give the best performance is crucial. However, it is not feasible to tune these using a grid search. As the methods often have multiple hyperparameters, the number of combinations increases exponentially. Transaction networks are very large, which results in a relative long training time for each individual combination of hyperparameters. Therefore, we tune the hyperparameters efficiently via Optuna [5], whereby we give a range of possible values to select from. We relied on optuna’s default TPESampler sampler. After these trials, the combination is retained that maximises the AUC-PR on the validation set. The ranges

²https://github.com/B-Deprez/AML_Network

Hyperparameter	Tuning Range	Model (hyperparameter value)
α : random jump parameter	[0.1, 0.9]	PageRank (0.593)
Number of walks per node	[1, 3] $\cap \mathbb{N}$	DeepWalk (2), node2vec (1)
Walk length	[3, 10] $\cap \mathbb{N}$	Deepwalk (3), node2vec (9)
Word2vec context window size	[2, 10] $\cap \mathbb{N}$	DeepWalk (2), node2vec (5)
Latent dimension	[2, 64] $\cap \mathbb{N}$	DeepWalk (5), node2vec (47)
Latent dimension	[32, 128] $\cap \mathbb{N}$	GCN (87), GraphSAGE (77), GAT (104), GIN (98)
p : return parameter	[0.5, 2]	node2vec (1.17)
q : in-out parameter	[0.5, 2]	node2vec (1.60)
Number of negative samples	[1, 5] $\cap \mathbb{N}$	DeepWalk (1), node2vec (1)
GNN hidden dimensions	[64, 256] $\cap \mathbb{N}$	GCN (217), GraphSAGE (192), GAT (N/A), GIN (N/A)
GNN layers	[1, 3] $\cap \mathbb{N}$	GCN (3), GraphSAGE (1), GAT (1), GIN (1)
Number of neighbourhood samples	[2, 5] $\cap \mathbb{N}$	GraphSAGE (2)
Learning rate	[0.01, 0.1]	IF (0.0163), Manual (0.0166), DeepWalk (0.0554), node2vec (0.0159), GCN (0.0864), GraphSAGE (0.0690), GAT (0.0487), GIN (0.0452)
Aggregator	{min, mean, max}	GraphSAGE (max)
Number of heads	[1, 5] $\cap \mathbb{N}$	GAT (1)
Dropout rate	[0, 0.5]	GCN (0.057), GraphSAGE (0.345), GAT (0.471), GIN (0.384)
Number of layers decoder	[1, 3] $\cap \mathbb{N}$	IF (1), Manual (1)
Hidden dimension decoder	[5, 20] $\cap \mathbb{N}$	IF (5), Manual (6)
Number of epochs decoder	[5, 500] $\cap \mathbb{N}$	IF (497)
Number of epochs decoder	[5, 100] $\cap \mathbb{N}$	Manual (64), DeepWalk (80), node2vec (93)
Number of epochs	[5, 500] $\cap \mathbb{N}$	DeepWalk (176), node2vec (222), GCN (174), GraphSAGE (494), GAT (282), GIN (42)

Table 8: **Hyperparameter tuning.** The overview of the hyperparameter values. The tuned hyperparameter value is added between parentheses next to the name of the model.

are summarised in Table 8. These are based on the ones often used in the literature. A model only based on the intrinsic features (IF) is included. The number of trials is set to 50 for DeepWalk and node2vec, and 100 for the GNNs.

The decoders used for classification all have a fixed architecture (Section 4.1). For the GNNs, the training of the decoder weights happens simultaneously as the other weights during training. For the manual and shallow representation features, the decoder/classifier needs to be trained afterwards. The only hyperparameter tuned is the number of epochs. The results are presented in parentheses in Table 8.

4.4 Performance Metrics

We tackle money laundering as a binary classification problem. We adopt the most popular performance metrics from the literature, namely the precision, recall and F1-score (Section 3.1). A threshold is needed for the output of the model to classify an instance as a money launderer. Since investigation resources are limited [118], the thresholds will typically be set relatively high, e.g., by classifying the top 0.1%, 1% or 10% of scores as money laundering. This is supplemented by a threshold equal to the relative prevalence of money laundering in the data set. Here, we take 11%, since we are only considering labelled nodes in the training and testing.

The selection of these thresholds is ad-hoc, and can influence the conclusions. Therefore, we also include threshold-independent metrics. The most popular one for binary classification is the area under the ROC curve (AUC-ROC). The ROC curve plots the true positive rate against the false positive rate. However, since the distribution of labels is highly imbalanced, the false positive rate can be insensitive to changes in the number of false positive examples [3]. The area under the precision-recall curve (AUC-PR) is better suited to compare these models [3, 94]. This also adds to the literature, since we showed in Section 3.1 that few papers base their conclusions on the AUC-PR.

These metrics are not calculated once, but multiple times on the test set to get a grip on the variance of the results. This variance is determined by inserting randomness in the observations in the test set as follows. The manual network features and shallow representation embeddings result in classic tabular features (cf. Figure 3). For these, we apply a bootstrap method, where a new test set is constructed of the same size as the original, but where the observations are sampled from the original test set with replacement. This is slightly different for the deep representation methods. In the implementation, test masks are used. Therefore, we initialise new test masks by randomly selecting half the test masks from the original ones.

Methods	Elliptic	
	AUC-ROC	AUC-PR
Intrinsic features	0.7632 ± 0.0131	0.5628 ± 0.0216
Egonet features	0.8217 ± 0.0100	0.5417 ± 0.0210
Deepwalk-NI	0.4500 ± 0.0114	0.0488 ± 0.0014
Deepwalk	0.7425 ± 0.0122	0.5474 ± 0.0192
Node2vec-NI	0.5263 ± 0.0108	0.0594 ± 0.0024
Node2vec	0.7600 ± 0.0125	0.5553 ± 0.0188
GCN	0.8329 ± 0.0099	0.5946 ± 0.0184
GraphSAGE	0.8279 ± 0.0005	0.6312 ± 0.0009
GAT	0.8102 ± 0.0111	0.5886 ± 0.0193
GIN	0.8089 ± 0.0111	0.5517 ± 0.0212

Table 9: **Threshold-independent metrics:** AUC-ROC and AUC-PR values over the different methods for the Elliptic data set, based on the test set. The standard deviation is also reported.

Methods	Precision	Elliptic	
		Recall	F1-score
Intrinsic features	0.9621 ± 0.0185	0.1702 ± 0.0035	0.2892 ± 0.0059
Egonet features	0.9155 ± 0.0273	0.1620 ± 0.0049	0.2752 ± 0.0083
Deepwalk-NI	0.0426 ± 0.0198	0.0075 ± 0.0035	0.0128 ± 0.0060
Deepwalk	0.9733 ± 0.0159	0.1721 ± 0.0031	0.2925 ± 0.0051
Node2vec-NI	0.0159 ± 0.0122	0.0028 ± 0.0022	0.0048 ± 0.0037
Node2vec	0.9694 ± 0.0166	0.1715 ± 0.0032	0.2914 ± 0.0053
GCN	1.0000 ± 0.0007	0.2213 ± 0.0162	0.3621 ± 0.0217
GraphSAGE	1.0000 ± 0.0000	0.1765 ± 0.0007	0.3001 ± 0.0010
GAT	0.9693 ± 0.0171	0.1711 ± 0.0073	0.2909 ± 0.0108
GIN	0.9895 ± 0.0098	0.1746 ± 0.0069	0.2968 ± 0.0100

Table 10: **Threshold-dependent metrics:** Precision, recall and F1-score values for the top 1% scores over the different methods for the Elliptic data set, based on the test set. The standard deviation is also reported.

5 Results and Discussion

The results for the threshold-independent metrics, i.e., AUC-ROC and AUC-PR, on the test set are shown in Table 9, including the standard deviation calculated as described in Section 4.4. Additionally, the threshold-dependent results, i.e., precision, recall and F1-score, are given Table 10 for the top-1% results. To analyse the sensitivity to the threshold, the metrics are calculated when classifying the top 0.1%, 10% and $p\%$ of scores as money laundering, with $p\%$ indicating the relative prevalence of the money laundering label in the training data set. The results for these three thresholds are included in E (in Figure 1, 2 and 3, respectively).

For the threshold-independent metrics, we focus on the AUC-PR, since this is more appropriate for high class imbalance. The models with intrinsic and those with egonet features give already good results. The suspicious transactions can be detected quite well using these “simpler” features. Nevertheless, the more advanced GNNs seem to bring additional predictive power. We see that GraphSAGE performs best, with GCN and GAT the second and third best models, respectively. For the threshold-depending metrics, the classic GCN is performing best on the smaller percentages, while GraphSAGE is best for the larger percentages. The additional value for GNNs in terms of precision, recall and F1 is much higher. This additional discriminatory power is important when resources to investigate transactions are limited. The relatively poor performance of GIN compared to the other GNNs is surprising.

In Table 10, we have added the results from models trained only on the embedding from the shallow representation learners, indicated with “NI” (**no** intrinsic features). We observe a significant performance drop in both AUC-ROC and AUC-PR due to the transductive nature of shallow representation methods. In the Elliptic data set, each time step features a distinct network, resulting in disparate embeddings. These embeddings represent distinct latent space coordinates, rendering them unsuitable for consistent insights across different parts of the data. Thus, we conclude that shallow representation is inadequate for addressing the dynamic challenge of detecting money laundering.

6 Conclusion

In this paper, we present the results of a systematic literature review of the literature on network analytics for anti-money laundering and of an experimental evaluation of the state-of-the-art. The systematic literature review resulted in a selection of 97 papers within-scope. To gain both comprehensive and deep insight, we analysed the global characteristics of these 97 papers, and carried out a more detailed analysis as well of the top-10% cited papers.

We find that a large part of the literature concerns methods that are specifically tailored to solving just a small part of the money laundering puzzle. This might indicate a latent consensus that one should not aim at developing a single, overarching model for detecting money laundering. Instead, one may benefit from operating multiple and complementary models in parallel, each detecting different money laundering patterns. Additionally, most methods find patterns that are indicative for money laundering by relying on centrality metrics and other manually engineered features. The choice for these methods seems mostly motivated by the lack of interpretability of more complex network representation methods.

To extend upon the existing body of knowledge, we implemented an extensive experimental evaluation to compare the methods as proposed in literature. These were complemented by testing a series of alternative approaches. From the results, we can conclude that, although manually constructed network features give fairly good results, GNNs generally perform best. In terms of performance, a trade-off is to be made between predictive power and interpretability. Whereas manually engineered features are highly interpretable, they are time-consuming to conceive, implement and maintain. Alternatively, GNNs automatically extract predictive patterns from the data, but these patterns are hard to extract and interpret from the resulting black box models.

Based on the results of our work, we suggest the following topics for future research. For unsupervised learning, future research can focus on building a framework to compare different pattern matching methods. From the literature, it is also apparent that a comparative study for unsupervised AML methods is missing. Additionally, more research efforts could be invested in deep learning methods for unsupervised AML.

For network visualisation, future work should focus on quantifying the usefulness of visualisations in helping investigators detect new patterns and money laundering cases. This can be extended into a comparative study that looks at the strengths and weaknesses of different visualisations.

Finally, in line with the conclusions of [69], work on the interpretation of GNNs in AML is still lacking. Future work should focus on applying known and novel methods on money laundering networks. This can help in uncovering previously unknown network structures used to launder money.

CRediT authorship contribution statement

Bruno Deprez: Conceptualization, Methodology, Data curation, Software, Formal analysis, Writing – original draft. **Toon Vanderschueren:** Conceptualization, Writing – review & editing. **Wouter Verbeke:** Conceptualization, Writing – review & editing. **Bart Baesens:** Conceptualization, Writing – review & editing. **Tim Verdonck:** Conceptualization, Writing – review & editing.

Declaration of Competing Interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

Acknowledgments

This work was supported by the Research Foundation – Flanders (FWO research project 1SHEN24N) and by the BNP Paribas Fortis Chair in Fraud Analytics.

References

- [1] Elliptic. www.elliptic.co, . Accessed: 2024-01-31.
- [2] Source code for torch_geometric.datasets.elliptic. https://pytorch-geometric.readthedocs.io/en/latest/_modules/torch_geometric/datasets/elliptic.html, . Accessed: 2024-01-31.
- [3] The relationship between precision-recall and roc curves. In *Proceedings of the 23rd International Conference on Machine Learning, ICML '06*, page 233–240, Pittsburgh, Pennsylvania, USA, 2006. ISBN 1595933832. doi:10.1145/1143844.1143874. URL <https://doi.org/10.1145/1143844.1143874>.
- [4] Florian Adriaens, Cigdem Aslay, Tijn De Bie, Aristides Gionis, and Jeffrey Lijffijt. Discovering interesting cycles in directed graphs. In *Proceedings of the 28th ACM International Conference on Information and Knowledge Management*, pages 1191–1200, 2019.

- [5] Takuya Akiba, Shotaro Sano, Toshihiko Yanase, Takeru Ohta, and Masanori Koyama. Optuna: A next-generation hyperparameter optimization framework. In *Proceedings of the 25th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, 2019.
- [6] Ismail Alarab, Simant Prakoonwit, and Mohamed Ikbal Nacer. Comparative analysis using supervised learning methods for anti-money laundering in bitcoin. In *Proceedings of the 2020 5th International Conference on Machine Learning Technologies, ICMLT '20*, page 11–17, Beijing, China, 2020. Association for Computing Machinery. ISBN 9781450377645. doi:10.1145/3409073.3409078. URL <https://doi.org/10.1145/3409073.3409078>.
- [7] Ismail Alarab, Simant Prakoonwit, and Mohamed Ikbal Nacer. Competence of graph convolutional networks for anti-money laundering in bitcoin blockchain. In *Proceedings of the 2020 5th International Conference on Machine Learning Technologies, ICMLT '20*, page 23–27, Beijing, China, 2020. Association for Computing Machinery. ISBN 9781450377645. doi:10.1145/3409073.3409080. URL <https://doi.org/10.1145/3409073.3409080>.
- [8] Réka Albert and Albert-László Barabási. Statistical mechanics of complex networks. *Rev. Mod. Phys.*, 74:47–97, Jan 2002. doi:10.1103/RevModPhys.74.47. URL <https://link.aps.org/doi/10.1103/RevModPhys.74.47>.
- [9] Eugenio Angriman, Alexander van der Grinten, Michael Hamann, Henning Meyerhenke, and Manuel Penzschuck. *Algorithms for Large-Scale Network Analysis and the NetworkKit Toolkit*, pages 3–20. Springer Nature Switzerland, Cham, 2022. ISBN 978-3-031-21534-6. doi:10.1007/978-3-031-21534-6_1. URL https://doi.org/10.1007/978-3-031-21534-6_1.
- [10] Henrique S Assumpção, Fabrício Souza, Leandro Lacerda Campos, Vinícius T de Castro Pires, Paulo M Laurentys de Almeida, and Fabricio Murai. Delator: Money laundering detection via multi-task learning on large transaction graphs. In *2022 IEEE International Conference on Big Data (Big Data)*, pages 709–714. IEEE, 2022. doi:10.1109/BigData55660.2022.10021010.
- [11] LAa Badalov, SDa Belov, and ISa Kadochnikov. Checking foreign counterparty companies using big data. In *CEUR Workshop Proceedings*, volume 2267, pages 523–527, 2018.
- [12] Bart Baesens, Veronique Van Vlasselaer, and Wouter Verbeke. *Fraud analytics using descriptive, predictive, and social network techniques: a guide to data science for fraud detection*. John Wiley & Sons, Inc, 2015. ISBN 9781119133124. doi:10.1002/9781119146841.
- [13] Ashwin Bahulkar, N Orkun Baycik, Thomas Sharkey, Yeming Shen, Boleslaw Szymanski, and William Wallace. Integrative analytics for detecting and disrupting transnational interdependent criminal smuggling, money, and money-laundering networks. In *2018 IEEE International Symposium on Technologies for Homeland Security (HST)*, pages 1–6. IEEE, 2018. doi:10.1109/THS.2018.8574121.
- [14] Luigi Bellomarini, Davide Magnanimi, Markus Nissl, and Emanuel Sallinger. Neither in the programs nor in the data: Mining the hidden financial knowledge with knowledge graphs and reasoning. In *Mining Data for Financial Applications: 5th ECML PKDD Workshop, MIDAS 2020, Ghent, Belgium, September 18, 2020, Revised Selected Papers 5*, pages 119–134. Springer, 2021.
- [15] Rasika Bhalerao, Maxwell Aliapoulios, Iliia Shumailov, Sadia Afroz, and Damon McCoy. Mapping the underground: Supervised discovery of cybercrime supply chains. In *2019 APWG Symposium on Electronic Crime Research (eCrime)*, pages 1–16. IEEE, 2019. doi:10.1109/eCrime47957.2019.9037582.
- [16] S. Boccaletti, V. Latora, Y. Moreno, M. Chavez, and D.-U. Hwang. Complex networks: Structure and dynamics. *Physics Reports*, 424(4):175–308, 2006. ISSN 0370-1573. doi:<https://doi.org/10.1016/j.physrep.2005.10.009>. URL <https://www.sciencedirect.com/science/article/pii/S037015730500462X>.
- [17] Christopher Bockel-Rickermann, Tim Verdonck, and Wouter Verbeke. Fraud analytics: A decade of research: Organizing challenges and solutions in the field. *Expert Systems with Applications*, 232:120605, 2023. ISSN 0957-4174. doi:<https://doi.org/10.1016/j.eswa.2023.120605>. URL <https://www.sciencedirect.com/science/article/pii/S0957417423011077>.
- [18] Shaked Brody, Uri Alon, and Eran Yahav. How attentive are graph attention networks? *CoRR*, abs/2105.14491, 2021. URL <https://arxiv.org/abs/2105.14491>.
- [19] Mehmet ÇAĞLAYAN and Şerif BAHTİYAR. Money laundering detection with node2vec. *Gazi University Journal of Science*, 35(3):854–873, 2022.
- [20] Hongyun Cai, Vincent W Zheng, and Kevin Chen-Chuan Chang. A comprehensive survey of graph embedding: Problems, techniques, and applications. *IEEE transactions on knowledge and data engineering*, 30(9):1616–1637, 2018. doi:10.1109/TKDE.2018.2807452.

- [21] Ramiro Daniel Camino, Radu State, Leandro Montero, and Petko Valtchev. Finding suspicious activities in financial transactions and distributed ledgers. In *2017 IEEE International Conference on Data Mining Workshops (ICDMW)*, pages 787–796. IEEE, 2017. doi:10.1109/ICDMW.2017.109.
- [22] Mário Cardoso, Pedro Saleiro, and Pedro Bizarro. Laundrograph: Self-supervised graph representation learning for anti-money laundering. In *Proceedings of the Third ACM International Conference on AI in Finance, ICAIF '22*, pages 130–138, New York, NY, USA, 2022. Association for Computing Machinery. ISBN 9781450393768. doi:10.1145/3533271.3561727. URL <https://doi.org/10.1145/3533271.3561727>.
- [23] Remco Chang, Mohammad Ghoniem, Robert Kosara, William Ribarsky, Jing Yang, Evan Suma, Caroline Ziemkiewicz, Daniel Kern, and Agus Sudjianto. Wirevis: Visualization of categorical, time-varying data from financial transactions. In *2007 IEEE symposium on visual analytics science and technology*, pages 155–162. IEEE, 2007. doi:10.1109/VAST.2007.4389009.
- [24] Tat-Man Cheong and Yain-Whar Si. Event-based approach to money laundering data analysis and visualization. In *Proceedings of the 3rd International Symposium on Visual Information Communication, VINCI '10*, Beijing, China, 2010. Association for Computing Machinery. ISBN 9781450304368. doi:10.1145/1865841.1865869. URL <https://doi.org/10.1145/1865841.1865869>.
- [25] Mariusz Chmielewski and Piotr Stkapor. Money laundering analytics based on contextual analysis. application of problem solving ontologies in financial fraud identification and recognition. In *Information Systems Architecture and Technology: Proceedings of 37th International Conference on Information Systems Architecture and Technology—ISAT 2016—Part I*, pages 29–39. Springer, 2017.
- [26] Min-Yuh Day. Artificial intelligence for knowledge graphs of cryptocurrency anti-money laundering in fintech. In *Proceedings of the 2021 IEEE/ACM International Conference on Advances in Social Networks Analysis and Mining, ASONAM '21*, page 439–446, Virtual Event, Netherlands, 2022. Association for Computing Machinery. ISBN 9781450391283. doi:10.1145/3487351.3488415. URL <https://doi.org/10.1145/3487351.3488415>.
- [27] Walter Didimo, Giuseppe Liotta, Fabrizio Montecchiani, and Pietro Palladino. An advanced network visualization system for financial crime detection. In *2011 IEEE Pacific visualization symposium*, pages 203–210. IEEE, 2011. doi:10.1109/PACIFICVIS.2011.5742391.
- [28] Walter Didimo, Giuseppe Liotta, and Fabrizio Montecchiani. Vis4aui: Visual analysis of banking activity networks. In *Proceedings of the International Conference on Computer Graphics Theory and Applications and International Conference on Information Visualization Theory and Applications - Volume 1: IVAPP, (VISIGRAPP 2012)*, pages 799–802. INSTICC, SciTePress, 2012. ISBN 978-989-8565-02-0. doi:10.5220/0003933407990802.
- [29] Walter Didimo, Luca Grilli, Giuseppe Liotta, Fabrizio Montecchiani, and Daniele Pagliuca. Visual querying and analysis of temporal fiscal networks. *Information Sciences*, 505:406–421, 2019. ISSN 0020-0255. doi:<https://doi.org/10.1016/j.ins.2019.07.097>. URL <https://www.sciencedirect.com/science/article/pii/S0020025519307182>.
- [30] Peng Dong, Marie Loh, and Adrian Mondry. The "impact factor" revisited. *Biomedical Digital Libraries*, 2(1):7, 2005. doi:10.1186/1742-5581-2-7. URL <https://doi.org/10.1186/1742-5581-2-7>.
- [31] Rafał Drezewski, Jan Sepielak, and Wojciech Filipkowski. The application of social network analysis algorithms in a system supporting money laundering detection. *Information Sciences*, 295:18–32, 2015. ISSN 0020-0255. doi:<https://doi.org/10.1016/j.ins.2014.10.015>. URL <https://www.sciencedirect.com/science/article/pii/S0020025514009979>.
- [32] Bogdan Dumitrescu, Andra Băltoiu, and Ștefania Budulan. Anomaly detection in graphs of bank transactions for anti money laundering applications. *IEEE Access*, 10:47699–47714, 2022. doi:10.1109/ACCESS.2022.3170467.
- [33] The Economist. Losing the war, April 2021. URL <https://www.economist.com/finance-and-economics/2021/04/12/the-war-against-money-laundering-is-being-lost>.
- [34] Béni Egressy, Luc von Niederhäusern, Jovan Blanusa, Erik Altman, Roger Wattenhofer, and Kubilay Atasü. Provably powerful graph neural networks for directed multigraphs, 2024.
- [35] Europol. Does crime still pay? criminal asset recovery in the eu, 2016.
- [36] Matthias Fey and Jan E. Lenssen. Fast graph representation learning with PyTorch Geometric. In *ICLR Workshop on Representation Learning on Graphs and Manifolds*, 2019.
- [37] Emily Fletcher, Charles Larkin, and Shaen Corbet. Countering money laundering and terrorist financing: A case for bitcoin regulation. *Research in International Business and Finance*, 56:101387, 2021. ISSN 0275-5319. doi:<https://doi.org/10.1016/j.ribaf.2021.101387>. URL <https://www.sciencedirect.com/science/article/pii/S0275531921000088>.

- [38] Andrea Fronzetti Colladon and Elisa Remondi. Using social network analysis to prevent money laundering. *Expert Systems with Applications*, 67:49–58, 2017. ISSN 0957-4174. doi:<https://doi.org/10.1016/j.eswa.2016.09.029>. URL <https://www.sciencedirect.com/science/article/pii/S0957417416305139>.
- [39] Zengan Gao and Mao Ye. A framework for data mining-based anti-money laundering research. *Journal of Money Laundering Control*, 10(2):170–179, 2007. doi:10.1108/13685200710746875. URL <https://doi.org/10.1108/13685200710746875>.
- [40] Ignacio González García and Alfonso Mateos. Use of social network analysis for tax control in Spain. *Hacienda Pública Española*, (239):159–197, 2021.
- [41] Olmer Garcia-Bedoya, Oscar Granados, and José Cardozo Burgos. Ai against money laundering networks: the colombian case. *Journal of Money Laundering Control*, 24(1):49–62, 2021.
- [42] Javier Garcia-Bernardo, Joost Witteman, and Marilou Vlaanderen. Uncovering the size of the illegal corporate service provider industry in the Netherlands: a network approach. *EPJ Data Science*, 11(1):23, 2022.
- [43] Ayshan Gasanova, Alexander N Medvedev, Evgeny I Komotskiy, Kamen B Spasov, and Igor N Sachkov. On the use of data mining methods for money laundering detection based on financial transactions information. In *AIP Conference Proceedings*, volume 2040, page 050021. AIP Publishing LLC, 2018.
- [44] Peter Gerbrands, Brigitte Unger, Michael Getzner, and Joras Ferwerda. The effect of anti-money laundering policies: an empirical network analysis. *EPJ Data Science*, 11(1):15, 2022.
- [45] Yanan Gong, Kam-Pui Chow, Hing-Fung Ting, and Siu-Ming Yiu. Analyzing the error rates of bitcoin clustering heuristics. In *Advances in Digital Forensics XVIII: 18th IFIP WG 11.9 International Conference, Virtual Event, January 3–4, 2022, Revised Selected Papers*, pages 187–205. Springer, 2022.
- [46] Ian Goodfellow, Yoshua Bengio, and Aaron Courville. *Deep learning*. MIT press, 2016.
- [47] Palash Goyal and Emilio Ferrara. Graph embedding techniques, applications, and performance: A survey. *Knowledge-Based Systems*, 151:78–94, 2018. ISSN 0950-7051. doi:<https://doi.org/10.1016/j.knosys.2018.03.022>. URL <https://www.sciencedirect.com/science/article/pii/S0950705118301540>.
- [48] Aditya Grover and Jure Leskovec. node2vec: Scalable feature learning for networks. In *Proceedings of the 22nd ACM SIGKDD International Conference on Knowledge Discovery and Data Mining, KDD '16*, page 855–864, San Francisco, California, USA, 2016. Association for Computing Machinery. ISBN 9781450342322. doi:10.1145/2939672.2939754. URL <https://doi.org/10.1145/2939672.2939754>.
- [49] Andrea Gulino, Stefano Ceri, Georg Gottlob, Emanuel Sallinger, and Luigi Bellomarini. Distributed company control in company shareholding graphs. In *2021 IEEE 37th International Conference on Data Engineering (ICDE)*, pages 2637–2648. IEEE, 2021. doi:10.1109/ICDE51399.2021.00294.
- [50] Aric A. Hagberg, Daniel A. Schult, and Pieter J. Swart. Exploring network structure, dynamics, and function using networkx. In Gaël Varoquaux, Travis Vaught, and Jarrod Millman, editors, *Proceedings of the 7th Python in Science Conference*, pages 11 – 15, Pasadena, CA USA, 2008.
- [51] Oussama H Hamid. Breaking through opacity: A context-aware data-driven conceptual design for a predictive anti money laundering system. In *2017 9th IEEE-GCC conference and exhibition (GCCCE)*, pages 1–9. IEEE, 2017. doi:10.1109/IEEEGCC.2017.8448084.
- [52] Will Hamilton, Zhitao Ying, and Jure Leskovec. Inductive representation learning on large graphs. 30, 2017. URL https://proceedings.neurips.cc/paper_files/paper/2017/file/5dd9db5e033da9c6fb5ba83c7a7e9-Paper.pdf.
- [53] HuaLong Han, YuPeng Chen, ChenYing Guo, and Yin Zhang. Blockchain abnormal transaction behavior analysis: a survey. In *Blockchain and Trustworthy Systems: Third International Conference, BlockSys 2021, Guangzhou, China, August 5–6, 2021, Revised Selected Papers 3*, pages 57–69. Springer, 2021.
- [54] Jing He, Jiao Tian, Yuanyuan Wu, Xinyi Cia, Kai Zhang, Mengjiao Guo, Hui Zheng, Junfeng Wu, and Yimu Ji. An efficient solution to detect common topologies in money launderings based on coupling and connection. *IEEE Intelligent Systems*, 36(1):64–74, 2021. doi:10.1109/MIS.2021.3057590.
- [55] Tamer Hossam Helmy, Mohamed Zaki, Tarek Salah, and Khaled Badran. Design of a monitor for detecting money laundering and terrorist financing. *Journal of Theoretical & Applied Information Technology*, 85(3), 2016.
- [56] Kurt Hornik. Approximation capabilities of multilayer feedforward networks. *Neural Networks*, 4(2):251–257, 1991. ISSN 0893-6080. doi:[https://doi.org/10.1016/0893-6080\(91\)90009-T](https://doi.org/10.1016/0893-6080(91)90009-T). URL <https://www.sciencedirect.com/science/article/pii/089360809190009T>.

- [57] Kurt Hornik, Maxwell Stinchcombe, and Halbert White. Multilayer feedforward networks are universal approximators. *Neural Networks*, 2(5):359–366, 1989. ISSN 0893-6080. doi:[https://doi.org/10.1016/0893-6080\(89\)90020-8](https://doi.org/10.1016/0893-6080(89)90020-8). URL <https://www.sciencedirect.com/science/article/pii/0893608089900208>.
- [58] Maryam Imanpour, Stephanie Rosenkranz, Bastian Westbrock, Brigitte Unger, and Joras Ferwerda. A microeconomic foundation for optimal money laundering policies. *International Review of Law and Economics*, 60:105856, 2019. ISSN 0144-8188. doi:<https://doi.org/10.1016/j.irl.2019.105856>. URL <https://www.sciencedirect.com/science/article/pii/S0144818818302643>.
- [59] Angela SM Irwin and Adam B Turner. Illicit bitcoin transactions: challenges in getting to the who, what, when and where. *Journal of money laundering control*, 21(3):297–313, 2018. URL <https://doi.org/10.1108/JMLC-07-2017-0031>.
- [60] Chengxiang Jin, Jie Jin, Jiajun Zhou, Jiajing Wu, and Qi Xuan. Heterogeneous feature augmentation for ponzi detection in ethereum. *IEEE Transactions on Circuits and Systems II: Express Briefs*, 69(9):3919–3923, 2022. doi:10.1109/TCSII.2022.3177898.
- [61] Hai Jin, Chenchen Li, Jiang Xiao, Teng Zhang, Xiaohai Dai, and Bo Li. Detecting arbitrage on ethereum through feature fusion and positive-unlabeled learning. *IEEE Journal on Selected Areas in Communications*, 40(12):3660–3671, 2022. doi:10.1109/JSAC.2022.3213335.
- [62] Yaqin Jin and Zhenxin Qu. Research on anti-money laundering hierarchical model. In *2018 IEEE 9th International Conference on Software Engineering and Service Science (ICSESS)*, pages 406–411. IEEE, 2018. doi:10.1109/ICSESS.2018.8663895.
- [63] Mikel Joaristi, Edoardo Serra, and Francesca Spezzano. Inferring bad entities through the panama papers network. In *2018 IEEE/ACM International Conference on Advances in Social Networks Analysis and Mining (ASONAM)*, pages 767–773. IEEE, 2018. doi:10.1109/ASONAM.2018.8508497.
- [64] Mikel Joaristi, Edoardo Serra, and Francesca Spezzano. Detecting suspicious entities in offshore leaks networks. *Social Network Analysis and Mining*, 9:1–15, 2019.
- [65] Thomas N. Kipf and Max Welling. Semi-supervised classification with graph convolutional networks, 2017.
- [66] Jerzy Korczak and Walter Łuszczczyk. Visual exploration of cash flow chains. In *2011 Federated Conference on Computer Science and Information Systems (FedCSIS)*, pages 41–46. IEEE, 2011.
- [67] Aditya Kurniawan, Muhammad Yusuf Handeu, Bayu Alvian, and Ade Andriani Renouw. Information system for depicting relations between banking customer with risk: Study case in indonesia. In *2015 3rd International Conference on Information and Communication Technology (ICoICT)*, pages 125–128. IEEE, 2015. doi:10.1109/ICoICT.2015.7231409.
- [68] Eren Kurshan and Hongda Shen. Graph computing for financial crime and fraud detection: Trends, challenges and outlook. *International Journal of Semantic Computing*, 14(04):565–589, 2020.
- [69] Dattatray Vishnu Kute, Biswajeet Pradhan, Nagesh Shukla, and Abdullah Alamri. Deep learning and explainable artificial intelligence techniques applied for detecting money laundering—a critical review. *IEEE Access*, 9:82300–82317, 2021. doi:10.1109/ACCESS.2021.3086230.
- [70] Michael Levi and Peter Reuter. Money laundering. *Crime and justice*, 34(1):289–375, 2006. doi:10.1086/501508.
- [71] An Li, Zhongshuai Wang, Minghao Yu, and Di Chen. Blockchain abnormal transaction detection method based on weighted sampling neighborhood nodes. In *2022 3rd International Conference on Big Data, Artificial Intelligence and Internet of Things Engineering (ICBAIE)*, pages 746–752. IEEE, 2022. doi:10.1109/ICBAIE56435.2022.9985815.
- [72] Xiangfeng Li, Shenghua Liu, Zifeng Li, Xiaotian Han, Chuan Shi, Bryan Hooi, He Huang, and Xueqi Cheng. Flowscope: Spotting money laundering based on graphs. *Proceedings of the AAAI Conference on Artificial Intelligence*, 34(04):4731–4738, 2020. doi:10.1609/aaai.v34i04.5906. URL <https://ojs.aaai.org/index.php/AAAI/article/view/5906>.
- [73] Ziyu Li, Yanmei Zhang, Qian Wang, and Shiping Chen. Transactional network analysis and money laundering behavior identification of central bank digital currency of china. *Journal of Social Computing*, 3(3):219–230, 2022. doi:10.23919/JSC.2022.0011.
- [74] Xuan Liu, Jia Li, Zhigao Chen, and Pengzhu Zhang. Research on financial super-network model based on variational inequalities. In Michael J. Shaw, Dongsong Zhang, and Wei T. Yue, editors, *E-Life: Web-Enabled Convergence of Commerce, Work, and Social Life*, pages 66–76. Berlin, Heidelberg, 2012. Springer Berlin Heidelberg. ISBN 978-3-642-29873-8.

- [75] Mark E. Lokanan. Financial fraud detection: the use of visualization techniques in credit card fraud and money laundering domains. *Journal of Money Laundering Control*, 26(3):436–444, 2023. doi:10.1108/JMLC-04-2022-0058. URL <https://doi.org/10.1108/JMLC-04-2022-0058>.
- [76] Prithheega Magalingam, Stephen Davis, and Asha Rao. Using shortest path to discover criminal community. *Digital Investigation*, 15:1–17, 2015. ISSN 1742-2876. doi:<https://doi.org/10.1016/j.diin.2015.08.002>. URL <https://www.sciencedirect.com/science/article/pii/S1742287615000894>. Special Issue: Big Data and Intelligent Data Analysis.
- [77] Shamil Magomedov, Sergei Pavelyev, Irina Ivanova, Alexey Dobrotvorsky, Marina Khrestina, and Timur Yusubaliyev. Anomaly detection with machine learning and graph databases in fraud management. *International Journal of Advanced Computer Science and Applications*, 9(11), 2018.
- [78] Maryam Mahootiha, Alireza Hashemi Golpayegani, and Babak Sadeghian. Designing a new method for detecting money laundering based on social network analysis. In *2021 26th International Computer Conference, Computer Society of Iran (CSICC)*, pages 1–7. IEEE, 2021. doi:10.1109/CSICC52343.2021.9420621.
- [79] Aili Malm and Gisela Bichler. Using friends for money: the positional importance of money-launderers in organized crime. *Trends in Organized Crime*, 16:365–381, 2013. doi:10.1007/s12117-013-9205-5. URL <https://doi.org/10.1007/s12117-013-9205-5>.
- [80] Dan McGinn, David Birch, David Akroyd, Miguel Molina-Solana, Yike Guo, and William J Knottenbelt. Visualizing dynamic bitcoin transaction patterns. *Big data*, 4(2):109–119, 2016. doi:10.1089/big.2015.0056.
- [81] Murad Mehmet and Duminda Wijesekera. Data analytics to detect evolving money laundering. In *STIDS*, pages 71–78, 2013.
- [82] Murad Mehmet and Duminda Wijesekera. Using dynamic risk estimation & social network analysis to detect money laundering evolution. In *2013 IEEE International Conference on Technologies for Homeland Security (HST)*, pages 310–315. IEEE, 2013. doi:10.1109/THS.2013.6699020.
- [83] Murad Mehmet, Murat Güneştaş, and Duminda Wijesekera. Dynamic risk model of money laundering. In *Risk Assessment and Risk-Driven Testing: First International Workshop, RISK 2013, Held in Conjunction with ICTSS 2013, Istanbul, Turkey, November 12, 2013. Revised Selected Papers 1*, pages 3–20. Springer, 2014.
- [84] Giovanni Micale, Alfredo Pulvirenti, Alfredo Ferro, Rosalba Giugno, and Dennis Shasha. Fast methods for finding significant motifs on labelled multi-relational networks. *Journal of Complex Networks*, 7(6):817–837, 03 2019. ISSN 2051-1329. doi:10.1093/comnet/cnz008. URL <https://doi.org/10.1093/comnet/cnz008>.
- [85] Krzysztof Michalak and Jerzy Korczak. Graph mining approach to suspicious transaction detection. In *2011 Federated conference on computer science and information systems (FedCSIS)*, pages 69–75. IEEE, 2011.
- [86] Tomas Mikolov, Kai Chen, Greg Corrado, and Jeffrey Dean. Efficient estimation of word representations in vector space, 2013.
- [87] Anuraj Mohan, Karthika P. V., Parvathi Sankar, K. Maya Manohar, and Amala Peter. Improving anti-money laundering in bitcoin using evolving graph convolutions and deep neural decision forest. *Data Technologies and Applications*, 57(3):313–329, 2023. doi:10.1108/DTA-06-2021-0167. URL <https://doi.org/10.1108/DTA-06-2021-0167>.
- [88] Philippe Mongeon and Adèle Paul-Hus. The journal coverage of web of science and scopus: a comparative analysis. *Scientometrics*, 106(1):213–228, 2016. doi:10.1007/s11192-015-1765-5. URL <https://doi.org/10.1007/s11192-015-1765-5>.
- [89] M Nandhini and Bikram Bikash Das. An assessment and methodology for fraud detection in online social network. In *2016 Second International Conference on Science Technology Engineering and Management (ICONSTEM)*, pages 104–108. IEEE, 2016. doi:10.1109/ICONSTEM.2016.7560932.
- [90] Mark Newman. *Networks: An Introduction*. Oxford University Press, 03 2010. ISBN 9780199206650. doi:10.1093/acprof:oso/9780199206650.001.0001. URL <https://doi.org/10.1093/acprof:oso/9780199206650.001.0001>.
- [91] E.W.T. Ngai, Yong Hu, Y.H. Wong, Yijun Chen, and Xin Sun. The application of data mining techniques in financial fraud detection: A classification framework and an academic review of literature. *Decision Support Systems*, 50(3):559–569, 2011. ISSN 0167-9236. doi:<https://doi.org/10.1016/j.dss.2010.08.006>. URL <https://www.sciencedirect.com/science/article/pii/S0167923610001302>. On quantitative methods for detection of financial fraud.
- [92] Normah Omar, Ismail bin Mohamed, Zuraidah Mohd Sanusi, and Hendi Yogi Prabowo. Understanding social network analysis (sna) in fraud detection. In *Proceedings of the International Congress on Interdisciplinary Behaviour and Social Sciences*, pages 543–548, 2014.

- [93] Michael Ovelgönne, Chanhun Kang, Anshul Sawant, and VS Subrahmanian. Covertness centrality in networks. In *2012 IEEE/ACM International Conference on Advances in Social Networks Analysis and Mining*, pages 863–870. IEEE, 2012. doi:10.1109/ASONAM.2012.156.
- [94] Brice Ozenne, Fabien Subtil, and Delphine Maucourt-Boulch. The precision–recall curve overcame the optimism of the receiver operating characteristic curve in rare diseases. *Journal of clinical epidemiology*, 68(8):855–859, 2015.
- [95] Lawrence Page, Sergey Brin, Rajeev Motwani, and Terry Winograd. The pagerank citation ranking: Bringing order to the web. Technical report, Stanford InfoLab, 1999.
- [96] Bryan Perozzi, Rami Al-Rfou, and Steven Skiena. Deepwalk: online learning of social representations. In *Proceedings of the 20th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining, KDD '14*, page 701–710, New York, New York, USA, 2014. Association for Computing Machinery. ISBN 9781450329569. doi:10.1145/2623330.2623732. URL <https://doi.org/10.1145/2623330.2623732>.
- [97] Silivanxay Phetsouvanh, Frédérique Oggier, and Anwitaman Datta. Egret: Extortion graph exploration techniques in the bitcoin network. In *2018 IEEE International conference on data mining workshops (ICDMW)*, pages 244–251. IEEE, 2018. doi:10.1109/ICDMW.2018.00043.
- [98] Kirill Plaksiy, Andrey Nikiforov, and Natalia Miloslavskaya. Applying big data technologies to detect cases of money laundering and counter financing of terrorism. In *2018 6th International Conference on Future Internet of Things and Cloud Workshops (FiCloudW)*, pages 70–77. IEEE, 2018.
- [99] Mario Alfonso Prado-Romero and Andrés Gago-Alonso. Community feature selection for anomaly detection in attributed graphs. In *Progress in Pattern Recognition, Image Analysis, Computer Vision, and Applications: 21st Iberoamerican Congress, CIARP 2016, Lima, Peru, November 8–11, 2016, Proceedings 21*, pages 109–116. Springer, 2017.
- [100] M Mazhar Rathore, Sushil Chaurasia, and Dharendra Shukla. Mixers detection in bitcoin network: a step towards detecting money laundering in crypto-currencies. In *2022 IEEE International Conference on Big Data (Big Data)*, pages 5775–5782. IEEE, 2022. doi:10.1109/BigData55660.2022.10020982.
- [101] Piergiorgio Ricci. How economic freedom reflects on the bitcoin transaction network. *Journal of Industrial and Business Economics*, 47(1):133–161, 2020.
- [102] Franco Scarselli, Sweah Liang Yong, Marco Gori, Markus Hagenbuchner, Ah Chung Tsoi, and Marco Maggini. Graph neural networks for ranking web pages. In *The 2005 IEEE/WIC/ACM International Conference on Web Intelligence (WI'05)*, pages 666–672. IEEE, 2005. doi:10.1109/WI.2005.67.
- [103] Franco Scarselli, Marco Gori, Ah Chung Tsoi, Markus Hagenbuchner, and Gabriele Monfardini. The graph neural network model. *IEEE transactions on neural networks*, 20(1):61–80, 2008. doi:10.1109/TNN.2008.2005605.
- [104] A Semenov, D Doropheev, A Mazeev, and T Yusubaliev. Survey of common design approaches in aml software development. In *CEUR Workshop Proceedings*, pages 1–9, 2017.
- [105] Ted E Senator, Henry G Goldberg, Jerry Wooton, Matthew A Cottini, AF Umar Khan, Christina D Klinger, Winston M Llamas, Michael P Marrone, and Raphael WH Wong. Financial crimes enforcement network ai system (fais) identifying potential money laundering from reports of large cash transactions. *AI magazine*, 16(4): 21–21, 1995. doi:10.1609/aimag.v16i4.1169.
- [106] Abdul K Shaikh and Amril Nazir. A model for identifying relationships of suspicious customers in money laundering using social network functions. In *Proceedings of the world congress on engineering*, volume 1, pages 4–7, 2018.
- [107] Abdul Khaliq Shaikh, Malik Al-Shamli, and Amril Nazir. Designing a relational model to identify relationships between suspicious customers in anti-money laundering (aml) using social network analysis (sna). *Journal of Big Data*, 8:1–22, 2021.
- [108] Yeming Shen, Thomas C. Sharkey, Boleslaw K. Szymanski, and William (Al) Wallace. Interdicting interdependent contraband smuggling, money and money laundering networks. *Socio-Economic Planning Sciences*, 78:101068, 2021. ISSN 0038-0121. doi:<https://doi.org/10.1016/j.seps.2021.101068>. URL <https://www.sciencedirect.com/science/article/pii/S0038012121000604>.
- [109] Rafael Sousa Lima, André Luiz Marques Serrano, Joshua Onome Imoniana, and César Medeiros Cupertino. Identifying financial patterns of money laundering with social network analysis: A brazilian case study. *Journal of Money Laundering Control*, 25(1):118–134, 2022.
- [110] Michele Starnini, Charalampos E Tsourakakis, Maryam Zamanipour, André Panisson, Walter Allasia, Marco Fornasiero, Laura Li Puma, Valeria Ricci, Silvia Ronchiadin, Angela Ugrinoska, et al. Smurf-based anti-money

- laundering in time-evolving transaction networks. In *Machine Learning and Knowledge Discovery in Databases. Applied Data Science Track: European Conference, ECML PKDD 2021, Bilbao, Spain, September 13–17, 2021, Proceedings, Part IV 21*, pages 171–186. Springer, 2021.
- [111] Kai Sun, Kun Meng, and Ziqiang Zheng. Game-bc: A graph attention model for exploring bitcoin crime. In *2022 6th International Symposium on Computer Science and Intelligent Control (ISCSIC)*, pages 342–346. IEEE, 2022. doi:10.1109/ISCSIC57216.2022.00077.
- [112] Jeyakumar Samantha Tharani, Eugene Yougarajah Andrew Charles, Zhé Hóu, Marimuthu Palaniswami, and Vallipuram Muthukkumarasamy. Graph based visualisation techniques for analysis of blockchain transactions. In *2021 IEEE 46th Conference on Local Computer Networks (LCN)*, pages 427–430. IEEE, 2021. doi:10.1109/LCN52139.2021.9524878.
- [113] Elena Tiukhova, Emiliano Penalzoa, María Óskarsdóttir, Bart Baesens, Monique Snoeck, and Cristián Bravo. Inflect-dgmn: Influencer prediction with dynamic graph neural networks, 2023.
- [114] Adam B Turner, Stephen McCombie, and Allon J Uhlmann. A target-centric intelligence approach to wannacry 2.0. *Journal of Money Laundering Control*, 22(4):646–665, 2019.
- [115] Adam B Turner, Stephen McCombie, and Allon J Uhlmann. Discerning payment patterns in bitcoin from ransomware attacks. *Journal of Money Laundering Control*, 23(3):545–589, 2020.
- [116] United Nations Office on Drugs and Crime. Money laundering. <https://www.unodc.org/unodc/en/money-laundering/overview.html>. Accessed: 2023-04-07.
- [117] Rafaël Van Belle, Sandra Mitrović, and Jochen De Weerd. Representation learning in graphs for credit card fraud detection. In *Mining Data for Financial Applications: 4th ECML PKDD Workshop, MIDAS 2019, Würzburg, Germany, September 16, 2019, Revised Selected Papers 4*, pages 32–46. Springer, 2020.
- [118] Rafaël Van Belle, Bart Baesens, and Jochen De Weerd. Catchm: A novel network-based credit card fraud detection method using node representation learning. *Decision Support Systems*, 164:113866, 2023. ISSN 0167-9236. doi:<https://doi.org/10.1016/j.dss.2022.113866>. URL <https://www.sciencedirect.com/science/article/pii/S0167923622001373>.
- [119] Rafael B Velasco, Igor Carpanese, Ruben Interian, Octavio CG Paulo Neto, and Celso C Ribeiro. A decision support system for fraud detection in public procurement. *International Transactions in Operational Research*, 28(1):27–47, 2021.
- [120] Petar Veličković, Guillem Cucurull, Arantxa Casanova, Adriana Romero, Pietro Liò, and Yoshua Bengio. Graph attention networks, 2018.
- [121] Zhonglin Wang, Niu Guiqian, Zhou Yan, and Yaqiong Mu. Detection mechanism of money laundering based on random walk and skip-grim model. In *2022 IEEE 5th International Conference on Electronic Information and Communication Technology (ICEICT)*, pages 444–448. IEEE, 2022. doi:10.1109/ICEICT55736.2022.9909113.
- [122] Mark Weber, Giacomo Domeniconi, Jie Chen, Daniel Karl I. Weidele, Claudio Bellei, Tom Robinson, and Charles E. Leiserson. Anti-money laundering in bitcoin: Experimenting with graph convolutional networks for financial forensics, 2019.
- [123] Ollie A Williams. Watchdogs hit money launderers with record fines, Aug 2021. URL <https://www.forbes.com/sites/oliverwilliams1/2021/08/26/money-laundering-thrived-during-covid-pandemic/>.
- [124] Donald Winiecki, Katherine Kappelman, Bryant Hay, Mikel Joaristi, Edoardo Serra, and Francesca Spezzano. Validating bad entity ranking in the panama papers via open-source intelligence. In *2020 IEEE/ACM International Conference on Advances in Social Networks Analysis and Mining (ASONAM)*, pages 752–759. IEEE, 2020. doi:10.1109/ASONAM49781.2020.9381389.
- [125] Jiajing Wu, Jieli Liu, Weili Chen, Huawei Huang, Zibin Zheng, and Yan Zhang. Detecting mixing services via mining bitcoin transaction network with hybrid motifs. *IEEE Transactions on Systems, Man, and Cybernetics: Systems*, 52(4):2237–2249, 2021.
- [126] Lei Wu, Yufeng Hu, Yajin Zhou, Haoyu Wang, Xiapu Luo, Zhi Wang, Fan Zhang, and Kui Ren. Towards understanding and demystifying bitcoin mixing services. In *Proceedings of the Web Conference 2021, WWW '21*, page 33–44, Ljubljana, Slovenia, 2021. ISBN 9781450383127. doi:10.1145/3442381.3449880. URL <https://doi.org/10.1145/3442381.3449880>.
- [127] Zonghan Wu, Shirui Pan, Fengwen Chen, Guodong Long, Chengqi Zhang, and S Yu Philip. A comprehensive survey on graph neural networks. *IEEE transactions on neural networks and learning systems*, 32(1):4–24, 2020. doi:10.1109/TNNLS.2020.2978386.

- [128] Pingfan Xia, Zhiwei Ni, Hongwang Xiao, Xuhui Zhu, and Peng Peng. A novel spatiotemporal prediction approach based on graph convolution neural networks and long short-term memory for money laundering fraud. *Arabian Journal for Science and Engineering*, 47(2):1921–1937, 2022. doi:10.1007/s13369-021-06116-2. URL <https://doi.org/10.1007/s13369-021-06116-2>.
- [129] Zhao Xiao, Yuelei Li, and Kang Zhang. Visual analysis of risks in peer-to-peer lending market. *Personal and Ubiquitous Computing*, 22:825–838, 2018.
- [130] Jianying Xiong and Wen Xiao. Identification of key nodes in abnormal fund trading network based on improved pagerank algorithm. *Journal of Physics: Conference Series*, 1774(1):012001, jan 2021. doi:10.1088/1742-6596/1774/1/012001. URL <https://dx.doi.org/10.1088/1742-6596/1774/1/012001>.
- [131] Jianying Xiong and Haifeng Zhong. Identification of money laundering accounts based on weighted capital flow network. *Journal of Physics: Conference Series*, 1629(1):012023, sep 2020. doi:10.1088/1742-6596/1629/1/012023. URL <https://dx.doi.org/10.1088/1742-6596/1629/1/012023>.
- [132] Keyulu Xu, Weihua Hu, Jure Leskovec, and Stefanie Jegelka. How powerful are graph neural networks?, 2019.
- [133] Xie Xueshuo, Wang Jiming, Ye Junyi, Fang Yaozheng, Lu Ye, Li Tao, and Wang Guiling. Awap: Adaptive weighted attribute propagation enhanced community detection model for bitcoin de-anonymization. *Applied Soft Computing*, 109:107507, 2021. ISSN 1568-4946. doi:<https://doi.org/10.1016/j.asoc.2021.107507>. URL <https://www.sciencedirect.com/science/article/pii/S1568494621004300>.
- [134] Qingqing Yang, Yuexin Xiang, Wenmao Liu, and Wei Ren. An illicit bitcoin address analysis scheme based on subgraph evolution. In *2022 IEEE 24th Int Conf on High Performance Computing & Communications; 8th Int Conf on Data Science & Systems; 20th Int Conf on Smart City; 8th Int Conf on Dependability in Sensor, Cloud & Big Data Systems & Application (HPCC/DSS/SmartCity/DependSys)*, pages 679–686. IEEE, 2022. doi:10.1109/HPCC-DSS-SmartCity-DependSys57074.2022.00116.
- [135] Zhilin Yang, William Cohen, and Ruslan Salakhudinov. Revisiting semi-supervised learning with graph embeddings. In Maria Florina Balcan and Kilian Q. Weinberger, editors, *Proceedings of The 33rd International Conference on Machine Learning*, volume 48 of *Proceedings of Machine Learning Research*, pages 40–48, New York, New York, USA, 20–22 Jun 2016. PMLR. URL <https://proceedings.mlr.press/v48/yanga16.html>.
- [136] Yahan Yu, Yixuan Xu, Jian Wang, Zhenxing Li, and Bin Cao. Anti-money laundering risk identification of financial institutions based on aspect-level graph neural networks. In *2022 IEEE 22nd International Conference on Software Quality, Reliability, and Security Companion (QRS-C)*, pages 542–546. IEEE, 2022. doi:10.1109/QRS-C57518.2022.00086.
- [137] Shilei Zhang, Toyotaro Suzumura, and Li Zhang. Dyngraphtrans: Dynamic graph embedding via modified universal transformer networks for financial transaction data. In *2021 IEEE International Conference on Smart Data Services (SMDS)*, pages 184–191. IEEE, 2021. doi:10.1109/SMDS53860.2021.00032.
- [138] Maria Zhdanova, Jürgen Repp, Roland Rieke, Chrystel Gaber, and Baptiste Hemery. No smurfs: Revealing fraud chains in mobile money transfers. In *2014 Ninth International Conference on Availability, Reliability and Security*, pages 11–20. IEEE, 2014. doi:10.1109/ARES.2014.10.
- [139] Dawei Zhou, Si Zhang, Mehmet Yigit Yildirim, Scott Alcorn, Hanghang Tong, Hasan Davulcu, and Jingrui He. A local algorithm for structure-preserving graph cut. In *Proceedings of the 23rd ACM SIGKDD International Conference on Knowledge Discovery and Data Mining, KDD '17*, page 655–664, Halifax, NS, Canada, 2017. ISBN 9781450348874. doi:10.1145/3097983.3098015. URL <https://doi.org/10.1145/3097983.3098015>.
- [140] Jiajun Zhou, Chenkai Hu, Jianlei Chi, Jiajing Wu, Meng Shen, and Qi Xuan. Behavior-aware account de-anonymization on ethereum interaction graph. *IEEE Transactions on Information Forensics and Security*, 17: 3433–3448, 2022. doi:10.1109/ASONAM.2012.156.
- [141] Jie Zhou, Ganqu Cui, Shengding Hu, Zhengyan Zhang, Cheng Yang, Zhiyuan Liu, Lifeng Wang, Changcheng Li, and Maosong Sun. Graph neural networks: A review of methods and applications. *AI Open*, 1:57–81, 2020. ISSN 2666-6510. doi:<https://doi.org/10.1016/j.aiopen.2021.01.001>. URL <https://www.sciencedirect.com/science/article/pii/S2666651021000012>.
- [142] Yadong Zhou, Ximi Wang, Junjie Zhang, Peng Zhang, Lili Liu, Huan Jin, and Hongbo Jin. Analyzing and detecting money-laundering accounts in online social networks. *IEEE Network*, 32(3):115–121, 2017. doi:10.1109/MNET.2017.1700213.

A Literature Overview

Reference	Publication Data		Learning Method					Evaluation Metric							Objective				Data					
	Year	Review Paper	Bitcoin/Crypto	Supervised	Unsupervised	Semi-Supervised	Mixed	Visualisation	Accuracy	Precision	Recall	F1	TPR	FPR	AUC-ROC	AUC-PR	Time	Client Classification	Transaction Classification	Community Detection	Flow/Chain Detection	Proprietary	Open-Source	Synthetic
[31]	2015	x	x	x	✓	x	x	x	x	x	x	x	x	x	x	x	✓	✓	x	x	x	✓	x	x
[91]	2011	✓	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x
[79]	2013	x	x	x	✓	x	x	x	x	x	x	x	x	x	x	x	✓	✓	x	x	x	✓	x	x
[38]	2017	x	x	✓	x	x	x	x	x	x	x	x	x	x	x	x	✓	✓	x	x	x	✓	x	x
[139]	2017	x	x	x	✓	x	x	x	x	x	x	x	x	x	x	x	✓	✓	✓	x	x	✓	✓	✓
[27]	2011	x	x	x	✓	x	x	x	x	x	x	x	x	x	x	x	✓	✓	✓	x	x	✓	✓	x
[80]	2016	x	✓	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	✓	✓	x
[105]	1995	x	x	x	✓	x	x	x	x	x	x	x	x	x	x	x	x	✓	✓	x	x	✓	x	x
[125]	2021	x	✓	x	x	✓	x	x	x	x	x	✓	✓	x	x	x	x	x	x	✓	x	✓	✓	x
[39]	2007	✓	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	✓	✓	x
[63]	2018	x	x	✓	x	x	x	x	x	✓	x	x	x	x	x	x	✓	x	x	x	x	x	✓	x
[59]	2018	✓	✓	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	✓	x
[85]	2011	x	x	x	✓	x	x	x	x	x	x	x	x	x	x	x	x	✓	x	x	x	✓	x	x
[126]	2021	x	✓	✓	x	x	x	x	x	x	✓	x	x	x	x	x	x	✓	✓	x	x	✓	✓	x
[72]	2020	x	x	x	✓	x	x	x	x	x	✓	x	x	x	x	x	x	✓	✓	x	✓	✓	x	✓
[97]	2018	x	✓	x	✓	x	x	x	x	x	x	x	x	x	x	x	✓	✓	x	✓	x	✓	✓	x
[142]	2017	x	x	✓	x	x	x	x	x	x	✓	x	x	✓	✓	x	✓	✓	x	x	x	✓	✓	x
[29]	2019	x	x	x	x	x	x	✓	x	x	x	x	x	x	x	x	✓	✓	x	x	✓	x	x	
[64]	2019	x	x	✓	x	x	x	x	x	✓	x	x	x	✓	x	x	✓	✓	x	x	x	✓	✓	x
[21]	2017	x	✓	x	✓	x	x	x	x	x	x	x	x	x	x	x	✓	✓	x	x	x	✓	✓	x
[119]	2021	x	x	x	✓	x	x	x	x	x	x	x	x	x	x	x	✓	✓	x	x	x	✓	✓	x
[89]	2016	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	✓	✓	x
[138]	2014	x	x	x	✓	x	x	x	x	✓	✓	x	x	x	x	x	x	✓	✓	x	✓	x	✓	✓
[58]	2019	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	✓	✓	x
[114]	2019	x	✓	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	✓	x	✓	x	✓	x
[93]	2012	x	x	x	✓	x	x	x	x	x	x	x	x	x	x	x	✓	✓	x	x	x	✓	✓	x
[76]	2015	x	x	x	✓	x	x	x	x	x	x	x	x	x	x	x	✓	✓	✓	x	x	✓	✓	x
[55]	2016	x	x	x	✓	x	x	x	x	x	x	x	x	x	x	x	✓	✓	x	x	x	✓	✓	x
[133]	2021	x	✓	x	x	x	✓	x	✓	✓	x	x	x	x	x	x	✓	✓	✓	x	x	✓	✓	x
[98]	2018	x	x	x	✓	x	x	x	x	x	x	x	x	x	x	x	✓	✓	x	x	x	✓	✓	x
[41]	2021	x	x	x	✓	x	x	x	x	x	x	x	x	x	x	x	✓	✓	✓	✓	x	✓	✓	x
[82]	2013	x	x	✓	x	x	x	x	x	x	x	x	x	x	x	x	x	✓	✓	x	x	✓	✓	x
[128]	2021	x	✓	✓	x	x	x	x	x	✓	✓	✓	x	x	x	x	x	✓	✓	x	x	✓	✓	x
[69]	2021	✓	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x
[78]	2021	x	x	✓	x	x	x	x	x	✓	✓	✓	x	x	x	x	✓	✓	x	x	x	x	✓	✓
[107]	2021	x	x	x	✓	x	x	x	x	x	x	x	x	x	x	x	x	x	✓	x	✓	x	✓	x
[115]	2020	x	✓	x	✓	x	x	✓	x	x	x	x	x	x	x	x	x	x	✓	x	✓	x	✓	x
[101]	2020	x	✓	✓	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	✓	✓	x
[13]	2018	x	x	x	✓	x	x	x	x	x	x	x	x	x	x	x	x	✓	✓	x	x	✓	✓	x
[25]	2017	x	x	x	x	x	✓	x	x	x	x	x	x	x	x	x	✓	✓	x	x	x	✓	✓	x
[140]	2022	x	✓	x	x	x	✓	x	x	x	✓	x	x	x	x	x	✓	✓	x	x	x	✓	✓	x
[43]	2018	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	✓	✓	x	x	x	✓	✓	x
[77]	2018	x	x	x	✓	x	x	x	x	✓	✓	✓	x	x	✓	x	x	✓	✓	✓	x	✓	✓	x
[112]	2021	x	✓	x	x	x	✓	x	x	x	x	x	x	x	x	x	x	✓	✓	✓	✓	x	✓	x
[62]	2018	x	x	x	x	✓	✓	x	x	x	x	x	x	x	x	x	x	✓	✓	✓	x	x	✓	✓
[83]	2014	x	x	✓	x	x	x	x	x	x	x	x	✓	x	x	x	✓	✓	x	x	x	✓	✓	x
[129]	2018	x	x	x	✓	x	x	✓	✓	x	x	x	x	x	x	x	✓	✓	✓	✓	x	✓	✓	x
[87]	2022	x	✓	✓	x	x	x	x	x	✓	✓	✓	x	x	x	x	x	✓	✓	x	x	✓	✓	x
[6]	2020	✓	✓	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x
[108]	2021	x	x	x	✓	x	x	x	x	x	x	x	x	x	x	x	x	x	✓	x	x	✓	x	✓
[99]	2017	x	x	x	✓	x	x	x	x	x	x	x	x	✓	x	✓	✓	✓	x	x	x	✓	✓	x
[137]	2021	x	x	x	✓	x	x	x	x	✓	x	x	✓	x	x	x	✓	✓	x	x	x	✓	✓	x
[42]	2022	x	x	x	x	✓	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	✓	✓	x
[54]	2021	x	x	x	✓	x	x	x	x	x	x	x	x	x	x	x	✓	✓	x	x	x	✓	✓	x
[84]	2019	x	x	✓	x	x	x	x	x	✓	x	x	x	x	x	✓	x	x	✓	x	x	✓	✓	✓
[15]	2019	x	x	✓	x	x	x	x	x	✓	✓	✓	x	x	x	x	✓	✓	x	✓	x	✓	✓	x
[92]	2014	x	x	✓	x	x	x	x	x	x	x	x	x	x	x	x	✓	✓	x	x	x	✓	✓	x
[124]	2020	x	x	✓	x	x	x	x	x	x	x	x	x	✓	x	x	✓	✓	x	x	x	✓	✓	x
[110]	2021	x	x	x	✓	x	x	x	x	x	x	x	x	x	x	x	x	✓	✓	✓	x	✓	✓	x
[51]	2017	x	x	x	✓	x	x	x	x	x	x	x	x	x	x	x	x	✓	✓	x	x	✓	✓	x
[49]	2021	x	x	x	✓	x	x	x	x	x	x	x	x	x	x	x	✓	✓	x	x	x	✓	✓	x
[4]	2019	x	x	x	✓	x	x	x	x	x	x	x	x	x	x	x	✓	✓	x	x	✓	✓	✓	x

Reference	Publication Data		Learning Method					Evaluation Metric							Objective				Data					
	Year	Review Paper	Bitcoin/Crypto	Supervised	Unsupervised	Semi-Supervised	Mixed	Visualisation	Accuracy	Precision	Recall	F1	TPR	FPR	AUC-ROC	AUC-PR	Time	Client Classification	Transaction Classification	Community Detection	Flow/Chain Detection	Proprietary	Open-Source	Synthetic
[23]	2007	x	x	x	✓	x	x	✓	x	x	x	x	x	x	x	x	x	✓	x	x	x	✓	x	x
[68]	2020	✓	x	x	✓	x	x	x	x	x	x	✓	x	x	x	x	x	x	x	✓	x	x	✓	x
[60]	2022	x	✓	x	✓	x	x	x	x	x	x	x	x	x	x	x	x	x	✓	x	x	x	✓	x
[14]	2021	x	x	x	✓	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x
[109]	2022	x	x	x	✓	x	x	✓	x	x	x	x	x	x	x	x	x	✓	x	x	✓	✓	x	x
[19]	2022	x	x	✓	x	x	x	x	x	x	x	✓	✓	x	x	x	x	x	✓	x	x	x	✓	x
[61]	2022	x	✓	x	x	✓	x	x	x	✓	✓	✓	x	x	x	x	x	✓	x	x	x	x	✓	x
[67]	2015	x	x	x	x	x	x	✓	x	x	x	x	x	x	x	x	x	x	✓	x	x	✓	x	x
[111]	2022	x	✓	✓	x	x	x	x	x	✓	✓	✓	x	x	x	x	x	x	✓	x	x	x	✓	x
[44]	2022	✓	x	x	✓	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	✓	x
[32]	2022	x	x	x	✓	x	x	x	x	x	x	✓	x	✓	x	x	x	✓	x	x	x	✓	x	x
[136]	2022	x	x	x	✓	x	x	x	✓	x	✓	x	x	x	x	x	x	x	✓	x	x	✓	x	x
[40]	2021	x	x	x	✓	x	x	x	x	x	x	x	x	x	x	x	x	x	x	✓	x	x	✓	x
[121]	2022	x	x	✓	x	x	x	x	x	x	x	x	x	✓	x	✓	x	✓	x	x	✓	x	x	x
[45]	2022	x	✓	x	✓	x	x	x	✓	x	✓	✓	x	x	x	x	x	x	✓	x	x	x	✓	✓
[73]	2022	x	✓	x	x	✓	x	x	x	✓	✓	✓	x	x	x	x	x	x	✓	x	x	x	✓	x
[71]	2022	x	✓	✓	x	x	x	x	x	✓	✓	✓	x	x	x	x	x	x	✓	x	x	x	✓	x
[10]	2022	x	x	✓	x	x	x	x	x	x	x	✓	x	x	✓	✓	x	✓	x	x	✓	x	x	x
[104]	2017	✓	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x
[28]	2012	x	x	x	x	x	x	✓	x	x	x	x	x	x	x	x	x	✓	x	x	x	x	x	x
[22]	2022	x	x	x	✓	x	x	x	x	x	x	x	x	✓	x	x	x	x	✓	x	x	✓	x	x
[26]	2021	✓	✓	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x
[7]	2020	x	✓	✓	x	x	x	x	✓	✓	✓	✓	x	x	x	x	x	x	✓	x	x	x	✓	x
[11]	2018	x	x	x	x	x	x	✓	x	x	x	x	x	x	x	x	x	✓	x	x	x	x	x	x
[66]	2011	x	x	x	x	x	x	✓	x	x	x	x	x	x	x	x	x	x	x	✓	✓	x	x	x
[75]	2022	✓	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x
[100]	2022	x	✓	✓	x	x	x	x	✓	✓	✓	x	✓	✓	x	x	x	✓	x	x	x	x	✓	x
[74]	2012	x	x	x	✓	x	x	x	x	x	x	x	x	x	x	x	x	x	✓	x	x	x	x	x
[131]	2020	x	x	✓	x	x	x	x	✓	x	x	x	x	x	x	x	x	x	✓	x	x	✓	x	x
[106]	2018	x	x	✓	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x
[134]	2022	x	✓	✓	✓	x	x	x	✓	✓	✓	✓	x	x	x	x	x	✓	x	x	x	x	✓	x
[130]	2021	x	x	x	✓	x	x	x	x	x	x	x	x	x	x	x	x	x	✓	x	x	✓	x	x
[81]	2013	x	x	✓	x	x	x	x	x	x	x	x	x	x	x	x	✓	x	✓	x	x	x	x	✓
[24]	2010	x	x	x	✓	x	x	x	x	x	x	x	x	x	x	x	x	✓	x	x	x	x	✓	x
[53]	2021	✓	✓	x	✓	x	x	✓	x	x	x	x	x	x	x	x	x	✓	x	x	x	x	✓	x

Table 1: **Literature classification.** Classification of the papers according to different categories: publication data, learning method, evaluation metric, objective, and data.

B Analysis of Categories of Full Scope of Papers

In this part of the appendix, the figures are given that summarise the full scope of this literature review.

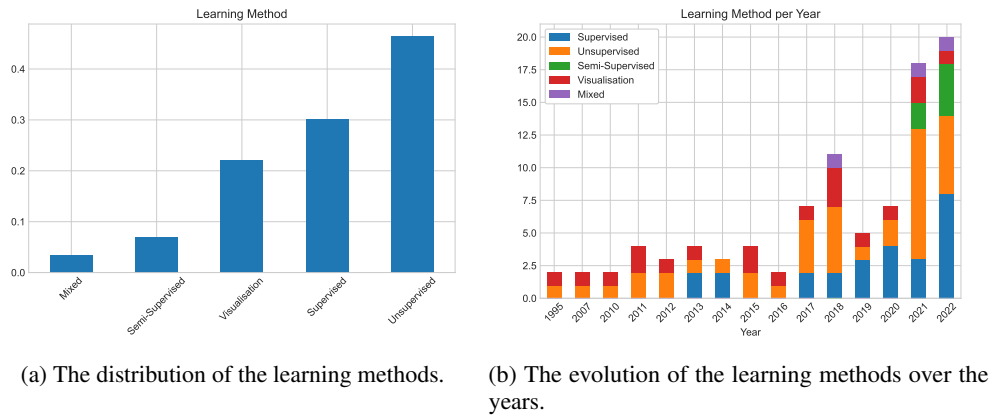


Figure 1: The learning methods.



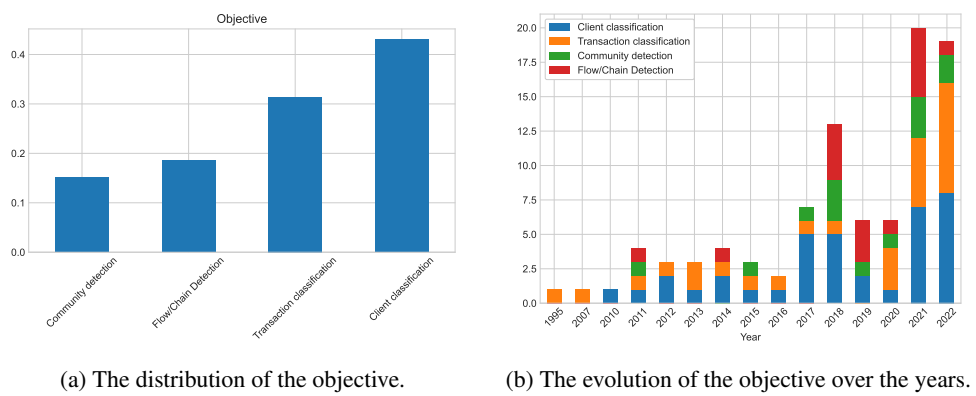


Figure 2: The objective of the method.

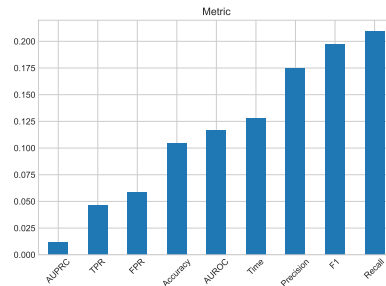


(a) The distribution of the evaluation metrics.

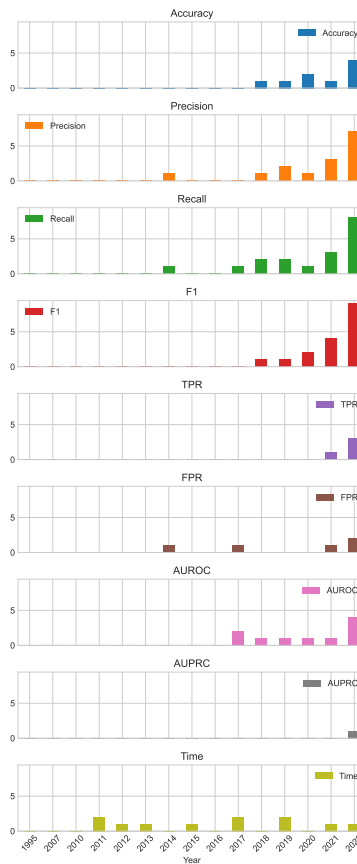


(b) The evolution of the evaluation metrics over the years. Since there are many metrics, the graphs are split.

Figure 3: The evaluation metrics.

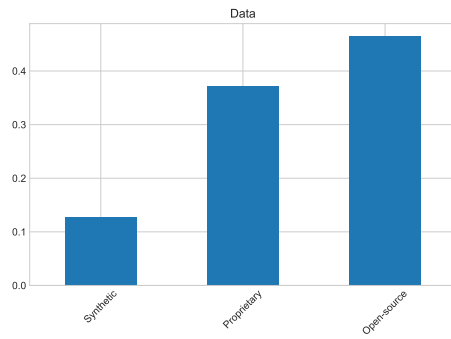

(a) The distribution of the nature of the data.

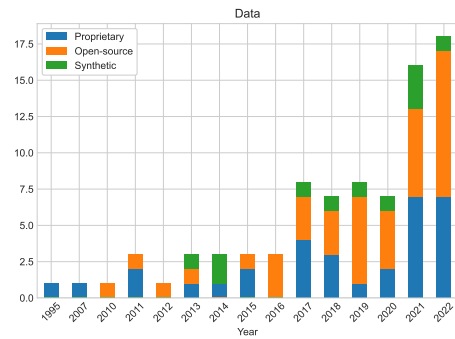


(b) The evolution of the nature of the data over the years.


Figure 4: The nature of the data.

C Analysis of Categories between Crypto and Non-Crypto Papers

This part of the appendix gives the plots in which we compare the difference in nature of the crypto-literature compared non-crypto-related research.

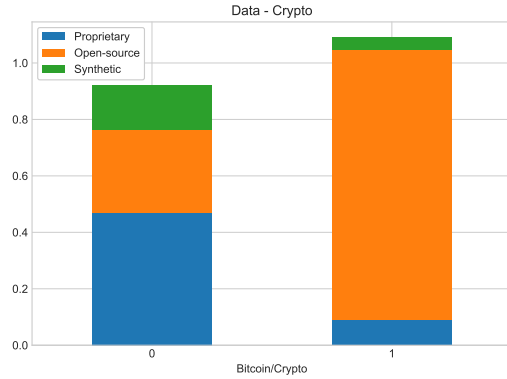

(a) The data for papers dealing with crypto currencies (1) and those that do not (0).

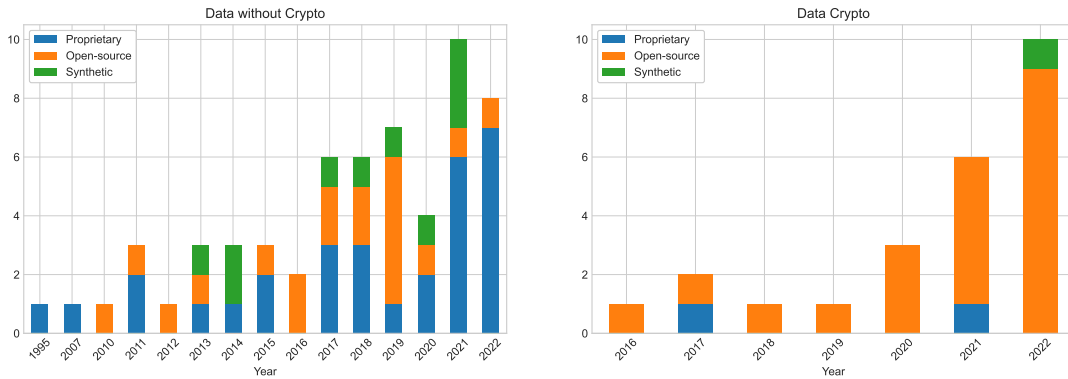

(b) The evolution of the data over the years for papers not covering crypto currencies.

(c) The evolution of the data over the years for papers covering crypto currencies.

Figure 1: Evolution of the data.

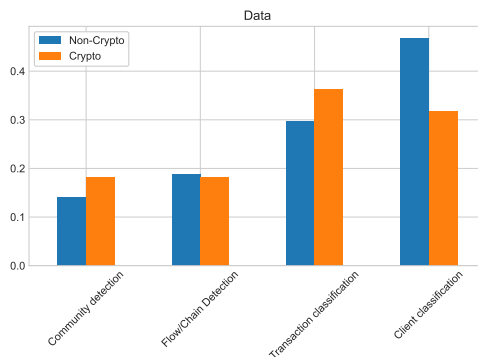


Figure 2: The distribution of the objective of the papers.

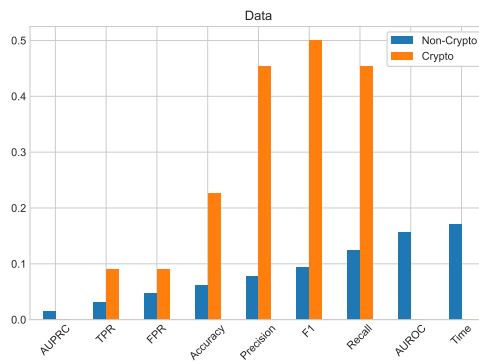


Figure 3: The distribution of the evaluation metrics used.

D The Top-Cited Papers

In this part of the appendix, we give the figures that summarise the top-cited papers.

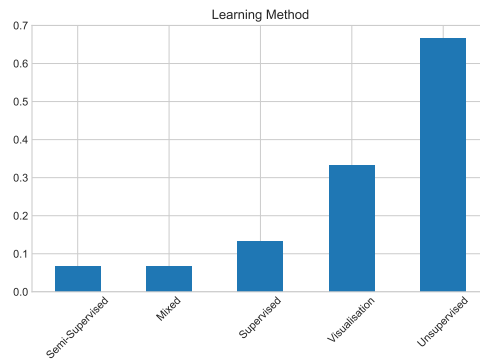


Figure 4: The methods for the top-cited papers.

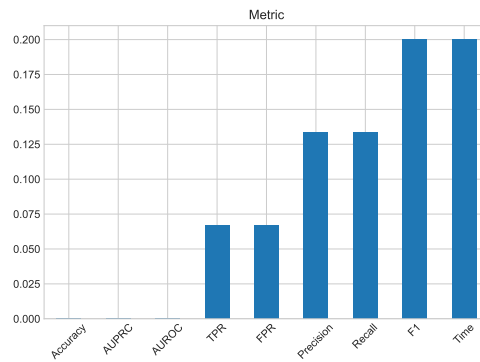


Figure 5: The performance metrics for the top-cited papers.

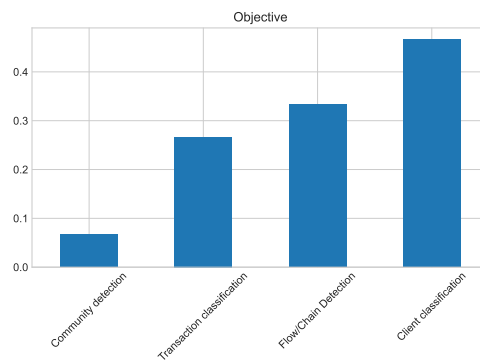


Figure 6: The objective of the top-cited papers.

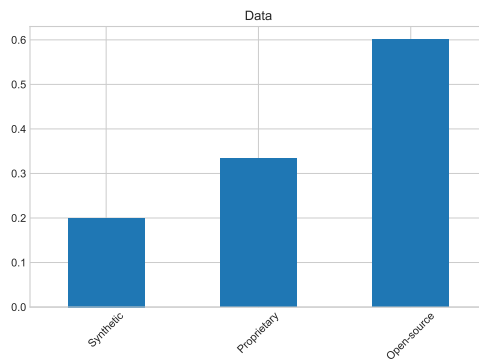


Figure 7: The nature of the data of the top-cited papers.

Methods	Precision	Recall	F1-score
Intrinsic features	0.6846 ± 0.1629	0.0135 ± 0.0034	0.0265 ± 0.0066
Egonet features	0.6107 ± 0.1723	0.0120 ± 0.0035	0.0236 ± 0.0069
Deepwalk	0.9989 ± 0.0133	0.0196 ± 0.0012	0.0384 ± 0.0023
Node2vec	1.0000 ± 0.0000	0.0196 ± 0.0012	0.0385 ± 0.0023
GCN	1.0000 ± 0.0000	0.2212 ± 0.0163	0.3620 ± 0.0219
GraphSAGE	1.0000 ± 0.0000	0.0314 ± 0.0000	0.0610 ± 0.0000
GAT	0.9992 ± 0.0114	0.0198 ± 0.0018	0.0388 ± 0.0035
GIN	0.9151 ± 0.0826	0.0175 ± 0.0019	0.0344 ± 0.0037

Table 1: **Threshold-dependent metrics:** Precision, recall and F1-score values for the top 0.1% scores over the different methods for the Elliptic data set, based on the test set. The standard deviation is also reported.

Methods	Precision	Recall	F1-score
Intrinsic features	0.3449 ± 0.0113	0.6070 ± 0.0198	0.4398 ± 0.0144
Egonet features	0.3276 ± 0.0105	0.5767 ± 0.0185	0.4179 ± 0.0134
Deepwalk	0.3040 ± 0.0108	0.5352 ± 0.0191	0.3878 ± 0.0138
Node2vec	0.3102 ± 0.0107	0.5460 ± 0.0188	0.3956 ± 0.0136
GCN	0.3374 ± 0.0160	0.5941 ± 0.0187	0.4303 ± 0.0164
GraphSAGE	0.3469 ± 0.0004	0.6104 ± 0.0006	0.4424 ± 0.0005
GAT	0.3270 ± 0.0169	0.5761 ± 0.0186	0.4170 ± 0.0172
GIN	0.3216 ± 0.0162	0.5666 ± 0.0194	0.4102 ± 0.0169

Table 2: **Threshold-dependent metrics:** Precision, recall and F1-score values for the top 10% scores over the different methods for the Elliptic data set, based on the test set. The standard deviation is also reported.

E Results Threshold-Dependent Metrics

In this part of the appendix, we give the precision, recall and F1-scores for the models using different thresholds. The thresholds are set such that the observations with the top 0.1%, 10% and $p\%$ of scores are classified as money laundering, where $p\%$ is equal to the relative occurrence of the labels.

Methods	Precision	Recall	F1-score
Intrinsic features	0.3139 ± 0.0100	0.6103 ± 0.0194	0.4146 ± 0.0132
Egonet features	0.2991 ± 0.0098	0.5815 ± 0.0190	0.3950 ± 0.0129
Deepwalk	0.2775 ± 0.0098	0.5394 ± 0.0190	0.3664 ± 0.0129
Node2vec	0.2850 ± 0.0095	0.5541 ± 0.0185	0.3764 ± 0.0126
GCN	0.3109 ± 0.0145	0.6040 ± 0.0185	0.4104 ± 0.0154
GraphSAGE	0.3147 ± 0.0000	0.6116 ± 0.0000	0.4156 ± 0.0000
GAT	0.2992 ± 0.0154	0.5817 ± 0.0186	0.3950 ± 0.0164
GIN	0.2941 ± 0.0150	0.5718 ± 0.0197	0.3883 ± 0.0164

Table 3: **Threshold-dependent metrics:** Precision, recall and F1-score values for the top $p = 2\%$ scores over the different methods for the Elliptic data set, based on the test set. The standard deviation is also reported.