

# Generative AI for Deep Reinforcement Learning: Framework, Analysis, and Use Cases

Geng Sun, Wenwen Xie, Dusit Niyato, *Fellow, IEEE*, Fang Mei, Jiawen Kang, Hongyang Du, Shiwen Mao, *Fellow, IEEE*

**Abstract**—As a form of artificial intelligence (AI) technology based on interactive learning, deep reinforcement learning (DRL) has been widely applied across various fields and has achieved remarkable accomplishments. However, DRL faces certain limitations, including low sample efficiency and poor generalization. Therefore, we present how to leverage generative AI (GAI) to address these issues above and enhance the performance of DRL algorithms in this paper. We first introduce several classic GAI and DRL algorithms and demonstrate the applications of GAI-enhanced DRL algorithms. Then, we discuss how to use GAI to improve DRL algorithms from the data and policy perspectives. Subsequently, we introduce a framework that demonstrates an actual and novel integration of GAI with DRL, *i.e.*, GAI-enhanced DRL. Additionally, we provide a case study of the framework on UAV-assisted integrated near-field/far-field communication to validate the performance of the proposed framework. Moreover, we present several future directions. Finally, the related code is available at: <https://xiewenwen22.github.io/GAI-enhanced-DRL>.

**Index Terms**—Generative AI, Deep reinforcement learning, near-filed communication, optimization.

## I. INTRODUCTION

Deep Reinforcement Learning (DRL) is a transformative approach in the field of Artificial Intelligence (AI) that offers promising solutions to complex decision-making problems in various domains. DRL incorporates the principles of deep learning and reinforcement learning, where the introduction of neural networks has made DRL be capable of efficiently dealing with high-dimensional state and action spaces. Additionally, a DRL agent is able to learn directly from raw inputs without the need for artificial features and iteratively refine their strategies through trial-and-error interactions with an environment. This breakthrough capability has led to the extensive applications of DRL across diverse domains such as controlling robotic systems in dynamic environments.

Despite its remarkable achievements, traditional DRL algorithms suffer from certain limitations. One of the main challenges is the low sample efficiency for training deep

neural networks in reinforcement learning environments. As the process of learning optimal policies often requires long and extensive interaction with an environment, data collection for DRL may be costly or impractical in the real world. Moreover, DRL models typically exhibit limited generalization capabilities, making it difficult to extend learned policies to unseen environments or tasks.

Fortunately, Generative AI (GAI) can offer a promising solution to the challenges faced by DRL. Unlike discriminative AI, which aims to learn boundaries between different data categories, GAI can learn the distribution of data to capture its latent structure. Therefore, GAI is widely used in content analysis and creation domains. For example, ChatGPT<sup>1</sup> has revolutionized human-computer interaction by leveraging large language models (LLMs). Additionally, the recently introduced video generation model Sora<sup>2</sup> has sparked a trend in the field of video generation. The widespread adoption of GAI can be attributed to several key advantages over other AI methods.

- **High-quality Data Generation Ability:** GAI can generate new credible data samples by learning the distribution of the data, which helps to solve the problem of data scarcity.
- **Feature Extraction Ability:** GAI can extract useful features or representations from raw data by learning the distribution and latent structure of the data, which helps to improve the data analysis ability.
- **Generalization Ability:** GAI can effectively apply the knowledge and representations learned from one task to other tasks, which accelerates the learning process and improves the performance in new environments.

Benefiting from the aforementioned advantages, GAI can be utilized to enhance DRL algorithms due to higher sample efficiency, stronger generalization capabilities, and robustness to environmental changes. For instance, a DRL agent may struggle in some specific environments, where the agent is not allowed to engage in extensive trial-and-error interactions within the environment. In this case, GAI can learn from limited training data to generate synthetic data for DRL training, which contributes to alleviating data scarcity and accelerating the learning process. Additionally, GAI can provide potential representations of data, which helps a DRL agent explore the environment more efficiently and generalize a policy better to unknown states. Therefore, the introduction of GAI brings new opportunities to DRL.

G. Sun is with the College of Computer Science and Technology, Jilin University, Changchun 130012, China, and also with the College of Computing and Data Science, Nanyang Technological University, Singapore 639798 (e-mail: sungeng@jlu.edu.cn).

W. Xie and F. Mei are with the College of Computer Science and Technology, Jilin University, Changchun 130012, China (e-mail: xieww22@jlu.edu.cn, meifang@jlu.edu.cn).

D. Niyato and H. Du are with the College of Computing and Data Science, Nanyang Technological University, Singapore 639798 (e-mail: dniyato@ntu.edu.sg, hongyang001@e.ntu.edu.sg).

J. Kang is with the School of Automation, Guangdong University of Technology, Guangzhou 510006, China (e-mail: kavinkang@gdut.edu.cn).

S. Mao with the Department of Electrical and Computer Engineering, Auburn University, Auburn 36830, USA (e-mail: smao@ieee.org).

<sup>1</sup><https://openai.com/index/chatgpt>.

<sup>2</sup><https://openai.com/index/sora>.

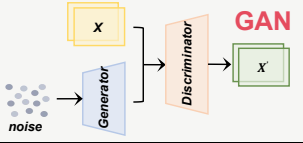
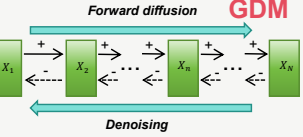
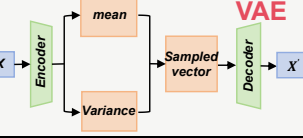
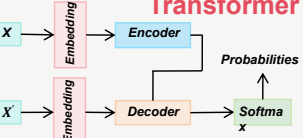
Model	Components	Pros and Cons	Applications	Capabilities to improve DRL
	<ul style="list-style-type: none"> <li>◆ <b>Generator</b> : Generate fake data that is similar to real data</li> <li>◆ <b>Discriminator</b> : Judge the authenticity of data</li> </ul>	<ul style="list-style-type: none"> <li>✓ Generate high-quality and realistic data samples</li> <li>✓ Don't require a large amount of annotated data</li> <li>✗ Mode collapse</li> </ul>	<ul style="list-style-type: none"> <li>➢ Video generation</li> <li>➢ Image restoration</li> <li>➢ Virtual reality</li> <li>➢ Super resolution</li> </ul>	<p><b>Generative Capability:</b> GAI can facilitate the generation of diverse data samples for DRL, which can effectively mitigate the challenge of data scarcity, particularly in certain specific scenarios where obtaining sufficient real-world data is difficult or expensive.</p> <p><b>Exploratory Capability:</b> GAI can be used to enhance the policy network of DRL, which can help DRL explore the environment more comprehensively and make more informed and effective decisions.</p> <p><b>Extraction Capability:</b> GAI can extract useful features to provide DRL with richer and more informative input data, which helps to reduce the learning difficulty of DRL in high-dimensional scenarios. As such, This process can enhance the efficiency of the learning process.</p> <p><b>Adaptability:</b> GAI can learn shared features and patterns across different tasks and transfer this knowledge to new tasks in DRL, which can improve the learning efficiency.</p>
	<ul style="list-style-type: none"> <li>◆ <b>Forward</b> : Gradually inject noise into input</li> <li>◆ <b>Denoising</b> : Remove noise to approach real distribution</li> </ul>	<ul style="list-style-type: none"> <li>✓ Easy to understand and implement</li> <li>✓ Capture true distribution</li> <li>✓ Enhanced denoising</li> <li>✗ Long inference time</li> </ul>	<ul style="list-style-type: none"> <li>➢ Image denoising</li> <li>➢ Image generation</li> <li>➢ Data augmentation</li> <li>➢ Provide high quality solutions for problem</li> </ul>	
	<ul style="list-style-type: none"> <li>◆ <b>Encoder</b> : Encode the input data into a latent space representation</li> <li>◆ <b>Decoder</b> : Decode the latent space</li> </ul>	<ul style="list-style-type: none"> <li>✓ Learning the latent space of data</li> <li>✓ Suitable for denoising and reconstruction</li> <li>✗ Training instability</li> </ul>	<ul style="list-style-type: none"> <li>➢ Speech synthesis</li> <li>➢ Image reconstruction</li> <li>➢ Unsupervised learning</li> <li>➢ Feature learning</li> <li>➢ Dimension reduction</li> </ul>	
	<ul style="list-style-type: none"> <li>◆ <b>Encoder</b> : Encode the input to capture semantic information</li> <li>◆ <b>Decoder</b> : Convert the hidden representation to the target sequence</li> </ul>	<ul style="list-style-type: none"> <li>✓ Parallel processing of input sequences</li> <li>✓ Highly interpretable</li> <li>✓ Efficient multi-modal interaction</li> <li>✗ High computational cost</li> </ul>	<ul style="list-style-type: none"> <li>➢ Machine translation</li> <li>➢ Text generation</li> <li>➢ Language modeling</li> <li>➢ Speech recognition</li> <li>➢ Sentiment analysis</li> </ul>	

Fig. 1. Summary of typical GAI models.

The combination of GAI and DRL is not straightforward and faces certain key issues. Specifically, GAI contains a variety of models that adept in solving different problems. Therefore, how to select an appropriate GAI model and integrate it with a specific DRL algorithm to solve certain problems is important and challenging. This is because the process involves the need for extensive studies and experimental validation of the compatibility between different models and algorithms to unleash full potential of GAI and DRL.

Motivated by this, we attempt to propose a comprehensive tutorial. *To the best of our knowledge, this is the first work to systematically demonstrate the use of GAI to enhance DRL.* The contributions can be summarized as follows:

- We present the principles of important and widely used GAI models and DRL algorithms. Then we briefly describe several applications of DRL enhanced with GAI.
- We explore different integrations of GAI in DRL, focusing on how DRL can be enhanced from a data and strategy perspective.
- We propose a novel framework for DRL enhancement by GAI. In addition, we construct a case study to demonstrate the effectiveness of the proposed framework.

## II. OVERVIEW OF GAI AND DRL

In this section, we introduce the basics of GAI and DRL.

### A. GAI Models

The rapid development of GAI relies on several promising techniques, and we focus on the most commonly used Generative Adversarial Network (GAN), Generative Diffusion Model (GDM), Variational Autoencode (VAE), and Transformer. We

summarize the technical details of GAI models and their comparison in Fig 1.

- **GAN:** GAN is a deep learning model composed of a generator and a discriminator. The former aims to generate samples similar to real data, while the latter attempts to distinguish between samples generated by the generator and real data. By adversarially training these two networks, the credibility of generated samples is gradually enhanced. The applications of GAN include image generation and style transfer.
- **GDM:** The training of GDM consists of forward process and reverse process. Specifically, GDM destructs training data by gradually adding Gaussian noise in the forward process, then reverses this process to generate the desired data from the noise, which simulates the evolution of the data. The applications of GDM include image restoration and solving optimization problems.
- **VAE:** VAE consists of an encoder and a decoder. The former maps input data to a probability distribution in the latent space, while the latter reconstructs samples from the latent space into the original data. Clearly, the higher the similarity between the original and reconstructed samples, the higher the model accuracy. VAE is widely applied in fields such as image generation and feature learning.
- **Transformer:** Transformer is a deep learning model based on the self-attention mechanism, consisting of an encoder and a decoder. Specifically, the principle of the Transformer is to capture the dependencies between different positions in a sequence through self-attention mechanism, while enhancing representational ability of the model through multi-head attention mechanism. Transformer is widely used in the field of natural language processing,

TABLE I  
THE ANALYSIS OF DIFFERENT DRL ALGORITHMS.

DRL Algorithm	Analysis			Applications boosted by GAI
	Policy	Key Features	Pros & Cons	
DQN	Off-policy	Estimating Q-function using DNN and handle discrete action space	<ul style="list-style-type: none"> <li>✓ Simple to implement</li> <li>✓ Good generality</li> <li>× Training instability</li> </ul>	<p><b>Signal Processing:</b> GAI is utilized to extract crucial information carried by multimodal signal data.</p> <p><b>Wireless Communications:</b> GAI can generate data to reduce the overhead of interacting with the real world.</p> <p><b>Edge-based AIGC Service:</b> GAI can be used to generate scheduling policy to improve the effectiveness of AIGC service.</p> <p><b>Sensor Networks:</b> GAI is utilized to improve the decision-making ability of DRL in cognitive internet of things network.</p>
DDPG	Off-policy	Deterministic policy gradient method	<ul style="list-style-type: none"> <li>✓ Good stability</li> <li>× Poor convergence</li> </ul>	
TD3	Off-policy	Dual-Q network and delayed policy network updates	<ul style="list-style-type: none"> <li>✓ Improved training stability</li> <li>✓ Reduced overfitting</li> <li>× Hyperparameter sensitivity</li> </ul>	
PPO	On-policy	Limiting the magnitude of policy network updates	<ul style="list-style-type: none"> <li>✓ High stability</li> <li>✓ High training efficiency</li> <li>× Low sample efficiency</li> </ul>	
SAC	Off-policy	Entropy regularization terms and dual-policy networks	<ul style="list-style-type: none"> <li>✓ Explore action space more fully</li> <li>✓ Insensitive to parameters</li> <li>× High training complexity</li> </ul>	

such as machine translation, language modeling.

### B. DRL Algorithms

Reinforcement Learning (RL) is a machine learning method that aims to enable an agent to maximize cumulative rewards through trial-and-error learning during their interaction with the environment. Specifically, the agent learns to make optimal decisions in a given environment based on the state and feedback rewards of the environment. Note that traditional RL algorithms use tables to estimate the Q-function that helps the agent to improve policy. However, it is clearly not suitable for high-dimensional and large state and action spaces. As such, DRL combining deep neural networks (DNN) and RL has been proposed, where DNN is used as an approximator of the Q-function. We summarize several representative DRL algorithms, namely, deep Q-network (DQN), deep deterministic policy gradient (DDPG), twin delayed deep deterministic policy gradient (TD3), proximal policy optimization (PPO), and soft actor-critic (SAC). The details of the DRL algorithms above are shown in Table I.

Considering the ability of DRL to handle dynamic problems and find optimal solutions in the absence of information, it has achieved remarkable results in data communications and networking. However, DRL still has some limitations that may be mitigated by GAI:

- *Sample Inefficiency:* DRL typically requires an extensive interaction with the environment to learn effective policy. In this case, GAI (e.g., GAN) can help generate synthetic data to augment training dataset, which improves sample efficiency [1].
- *Challenges in Complex Environment:* A DRL agent may fall into local optima or struggle to explore large and complex environments efficiently. In this instance, GAI (e.g., VAE) enables the agent to analyze the underlying data distribution and perform feature extraction, which helps to accurately model the environment and improve the stability of training process [2].

- *Instability and Low Learning Efficiency:* DRL may suffer from instability and balance of exploration-exploitation trade-off. In this situation, GAI (e.g., GDM) can be used to improve the policy network of DRL, which helps to enhance the stability of exploration [3].

### C. Applications of GAI-enhanced DRL

Thanks to the excellent generative and analytical capabilities of GAI, it has been widely applied to enhance DRL in various fields. We have summarized typical applications.

- *Signal Processing:* Training an agent to solve control tasks directly from multimodal signals has been shown to be difficult. In [4], a framework combining Transformer and DRL is proposed, where Transformer is used for feature extraction of multimodal data, which can better integrate important information carried by different signals to assist the agent in making more accurate decisions.
- *Wireless Communications:* GAI can be utilized to ameliorate the problem of high training cost and low sample efficiency against DRL in wireless environments. In [5], the authors proposed a GAN-based auxiliary training mechanism that reduces the overhead of interacting with the real-world by generating environment states for offline training.
- *Edge-based AIGC Service:* GAI combined with DRL is utilized to provide edge-based AIGC services. For example, the authors in [3] proposed a diffusion model based approach to generate optimal AIGC service provider selection decisions and combined it with SAC algorithm to improve the efficiency and effectiveness of the algorithm.
- *Sensor Networks:* GAI can be utilized to improve the accuracy of DRL decision making for cognitive internet of things network. In [6], GAI is employed to enhance the value network of DRL by improving the stability and accuracy of action value estimation through adversarial training, thereby enhancing the decision-making performance of DRL.

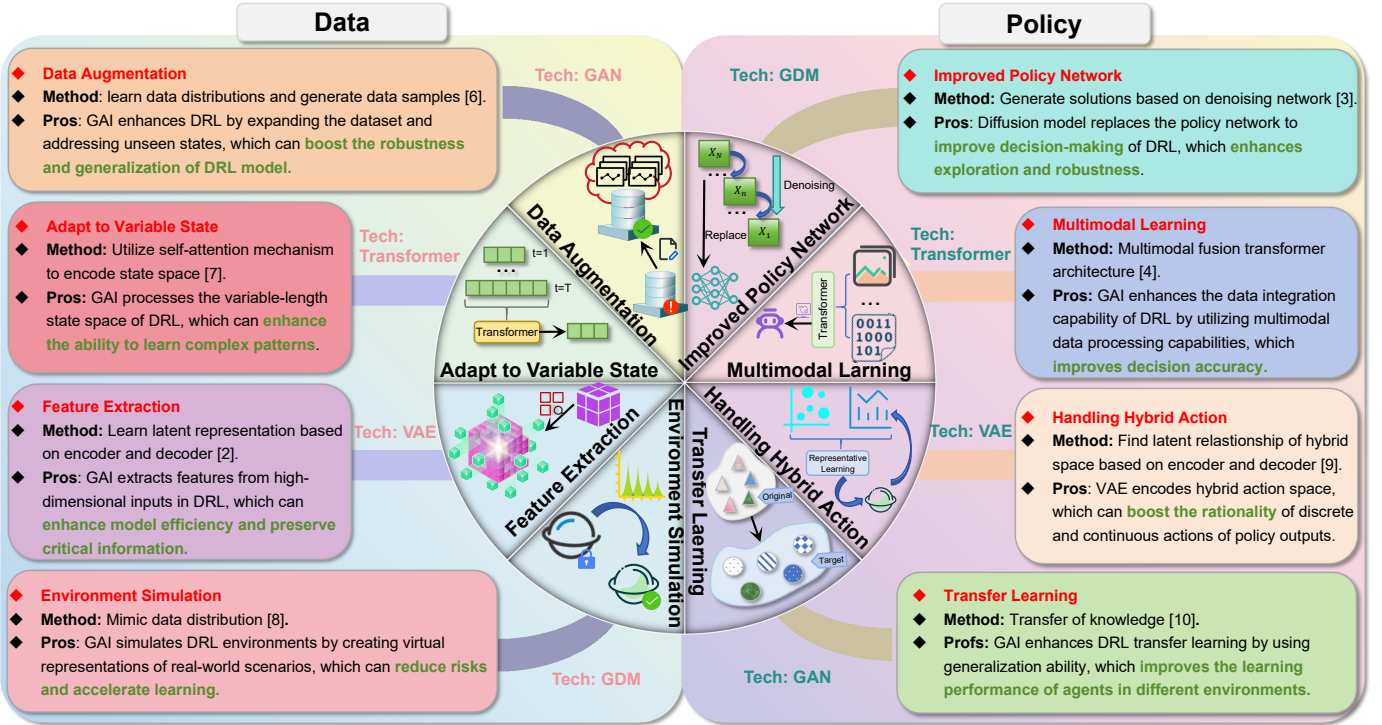


Fig. 2. Summary of data and policy performance improved by GAI in DRL. GAI can be used to improve the data performance of DRL through data augmentation, handling variable state spaces, extracting features, and simulating environments. Moreover, GAI can enhance the policy performance of DRL by improving the policy network, learning from multimodal data, handling hybrid actions, and transferring knowledge across different tasks.

**Lesson Learned:** From the above analysis of the algorithms and applications, we observe that GAI models can effectively address the limitations of DRL. Specifically, the data generation capability of GAN contributes to tackling the data scarcity issue in certain scenarios. VAE can be employed for extracting features of high-dimensional data. Moreover, the exploration capability of GDM can be utilized to enhance the policy network of DRL, thereby improving the quality and stability of decision-making. The proficiency of Transformers in handling multimodal and variable-length data expands the scope of applications for DRL.

### III. GAI-ENHANCED DRL

In this section, we introduce how GAI can improve DRL from the data and policy perspective. The summary of improvements are shown in Fig. 2.

#### A. From Data Perspective

Based on aforementioned unique features, GAI can effectively address the data-related challenges to improve the convergence speed and solution accuracy of DRL.

1) *Data Augmentation:* In most DRL training processes, agents sample experiences stored in an experience replay buffer randomly or in a specific way (e.g., prioritized experience replay) and utilize these experiences to update neural networks for better performance. Simultaneously, it is challenging for agents to output high-quality actions based on unobserved states or with limited data in such training approach. Adopting GAI to augment data can be a solution.

For example, in [7], the authors proposed a GAN-powered multi agent DDPG (MADDPG) framework for joint optimizing terminal-cooperative caching and offloading for virtual reality tasks. Specifically, given high costs and privacy risk issues associated with collecting data from multiple users in a decentralized network, GANs are used to learn the distribution of real data and generate appropriate data for each agent based on the state. Then, each agent inputs the corresponding state samples generated by GAN into the actor-critic network and stores the resulting experiences in the experience buffer for sharing, which augments the agent with limited samples of real virtual reality data. Numerical results indicate a 5.32% enhancement in energy efficiency for GAN-MADDPG compared with MADDPG trained on a real environment, with similar performance in terms of task completion latency.

2) *Adaptation to variable state:* DRL with a standard deep neural network typically deals with fixed-length state spaces, which makes it challenging to handle problems with variable-length state spaces. However, in certain scenarios such as edge computing and task offloading, dynamic state spaces are relatively common, which limits the applicability of DRL in such contexts. Note that GAI is excellent in dealing with variable-length inputs, especially Transformer. A Transformer-based multi-agent DRL framework for scalable multi-unmanned aerial vehicle (UAV) area coverage was proposed [8]. In such a scenario, a deep neural network based on a fixed-dimension multilayer perceptron (MLP) is no longer applicable. This is because when the number of UAVs varies, some dimensions of the state space are blank, which may lead to neural network errors. In this case, Transformer

is adopted to encode the state space and assign different weights to deal with variable input dimensions through a self-attention mechanism, which can mitigate the effect of blank states on decision making. Meanwhile, there is a large amount of heterogeneous information in multi-UAV scenarios, where the importance of this information varies. The self-attention mechanism can dynamically learn the importance of different positions in the input sequence, which empowers the agent to extract most relevant information. Experimental results show that Transformer-based DDPG achieves the best network performance. Compared with the expert coverage-first algorithm, the Transformer-based DDPG algorithm improves the average coverage score by 39.7% and the fairness index by 45.3%.

3) *Feature Extraction*: When dealing with high-dimensional data, DRL requires a significant amount of resources and time. Therefore, it is important for DRL to reduce the dimension of data without losing important information. Fortunately, GAI can analyze the latent relationships in data and perform feature extraction. Therefore, GAI can be used to process input data of DRL to alleviate the limitations of DRL when facing high-dimensional data. For instance, in [2], the authors proposed an environment perception framework for autonomous driving, where VAE is combined with SAC to focus on uninterrupted and reasonably safe autonomous driving. Specifically, VAE is used to process input driving environment images for feature extraction, which improves sample efficiency and facilitates learning processes with fewer samples but higher robustness. Simulation results on the DonKey simulator demonstrate the VAE-SAC method enables an autonomous vehicle to remain on track for the maximum time in a given timeframe. Note that although both VAE and Transformer can be used to handle the state space of an agent, their focuses are different. VAE [2] primarily aims at improving sample efficiency by extracting features to reduce the dimensionality of inputs. Conversely, Transformer [8] is not used explicitly for dimensionality reduction, and its main purpose is to handle variable-length state spaces through focusing on important parts of the input sequence.

4) *Environment Simulation*: Agent-environment interaction is a crucial aspect of DRL training processes. However, in certain scenarios, an agent are not allowed to perform trial-and-error training in real environments. Therefore, considering that GAI is able to learn and model data distribution, it can be harnessed to simulate the environment of DRL. For example, the authors in [9] proposed a primary-user-friendly dynamic spectrum anti-jamming framework. Note that it is inevitable for a second user (SU) to interfere the primary user (PU) even DRL is used by the SU to optimize spectrum access, which is undesirable in overlay cognitive radio network. Therefore, a GAN-based virtual environment (VE) is utilized to accurately simulate the spectrum environment. Subsequently, a channel decision network (CDN) based on DRL learns an optimal spectrum access strategy in VE through offline training. Experimental results show that the proposed framework converges much faster than the scheme that trains CDNs in the spectrum environment from scratch.

**Lesson Learned**: From the studies above, we summarize the uses of GAI to improve DRL from the data perspective as follows.

- *Data Generation*: Given the powerful ability to mimic data distributions and generate credible data samples, GAI can be used to expand training datasets and anticipate unknown situations [7], [9].
- *Data Processing*: GAN can be used to process dynamic data and high-dimensional data with unique analyzing and learning capabilities [2], [8].

## B. From Policy Perspective

By fully leveraging its ability to extract latent patterns and adapt to various data types, GAI can enhance the decision-making capability of DRL, enabling it to tackle complex tasks more efficiently and flexibly.

1) *Improved Policy Network*: The structure of a DRL policy network can affect quality of the output action. Currently, GAI has been used to enhance DRL policy network, especially in diffusion model. In [3], the authors proposed a diffusion model-based SAC algorithm to generate an optimal AIGC service provider (ASP) selection decision for better and broader AIGC services in wireless networks. Specifically, the diffusion model is utilized to replace the policy network of SAC to generate action distributions based on observed states. It is worth noting that optimization problems in wireless networks usually are difficult to achieve optimal solutions. Thus, only the reverse process of the diffusion model is employed to construct the policy network for SAC. Extensive experimental results demonstrate the effectiveness of the proposed diffusion model-based algorithm, which outperforms seven representative DRL algorithms (e.g., PPO) in both the ASP selection problem and various standard control tasks.

2) *Multimodal Learning*: DRL is typically limited to handling a single type of data, which restricts its applicability. The GAI's ability of processing multimodal data can be employed to enhance DRL. In [4], the authors proposed a Transformer-based DDPG to solve autonomous vehicle decision problem in complex scenarios. Multimodal Transformer is utilized to handle different types of data, i.e., LiDAR point cloud and images. Then, DDPG is employed to complete the subsequent autonomous driving decision-making task based on the extracted features. The experimental results indicate that the DDPG based on multimodal Transformer achieves higher rewards than DDPG that uses only images, which suggests that multimodal Transformer plays a significant role in extracting key multi-modal features.

3) *Handling hybrid action*: DRL is typically used to deal with hybrid action spaces containing both discrete and continuous actions, especially for optimization problems involving scheduling. Current common practices either approximate the hybrid space by discretization or relax it into a continuous set. However, continuous actions and discrete actions typically interact with each other in general, while the aforementioned discretization or relaxation methods ignore this intrinsic relationship and leads to information loss. In this case, GAI constructs latent space representations and analyze

TABLE II  
THE USE OF GAI FOR VARIOUS DRL ALGORITHMS

GAI DRL	GAI Models				Analysis
	Transformer	GDM	GAN	VAE	
DQN	<ul style="list-style-type: none"> <li>Introduce the transformer structure into policy neural networks.</li> </ul>	<ul style="list-style-type: none"> <li>Model in-support trajectory sequences.</li> </ul>	<ul style="list-style-type: none"> <li>Apply the GAN structure to actor and critic networks [10].</li> </ul>	<ul style="list-style-type: none"> <li>Capture the low dimensional latent states for facilitating DQN agent learning.</li> </ul>	<p><b>Potential Benefits:</b></p> <p>1) <b>Expressiveness:</b> GAI is able to learn complex sample distributions well, which enables it to be integrated into the policy network of DRL for decision-making.</p> <p>2) <b>Sample Quality:</b> GAI has strong imitation and generation abilities, allowing it to generate highly credible new samples based on existing samples to expand the training dataset of DRL.</p> <p>3) <b>Flexibility:</b> The ability of GAI to model diverse behaviors is particularly useful in DRL, where the agent needs to adapt to a variety of situations and tasks.</p>
DDPG	<ul style="list-style-type: none"> <li>Process multimodal data [4].</li> <li>Handle variable state space [8].</li> </ul>	<ul style="list-style-type: none"> <li>Introduce the GDM structure into policy networks [11].</li> </ul>	<ul style="list-style-type: none"> <li>Generate complete dataset including not appeared states [7].</li> </ul>	<ul style="list-style-type: none"> <li>Provide the extracted feature state as input for policy network [2].</li> </ul>	
TD3	<ul style="list-style-type: none"> <li>Introduce transformer module to the actor network.</li> </ul>	<ul style="list-style-type: none"> <li>Approximate actions by noise networks to improve the speed of training.</li> </ul>	<ul style="list-style-type: none"> <li>Generate environment states for offline training of TD3 agent [5].</li> </ul>	<ul style="list-style-type: none"> <li>Provide the latent representation of continuous-discrete hybrid action space [12].</li> </ul>	
PPO	<ul style="list-style-type: none"> <li>Employ transformer structure as the police network.</li> </ul>	<ul style="list-style-type: none"> <li>Generate samples.</li> </ul>	<ul style="list-style-type: none"> <li>Generate new training data based on historical data [1].</li> </ul>	<ul style="list-style-type: none"> <li>Encode input video to reduce the state dimension.</li> </ul>	
SAC	<ul style="list-style-type: none"> <li>Extract latent features.</li> <li>Encode historical information and hybrid space.</li> </ul>	<ul style="list-style-type: none"> <li>Apply GDM structure to policy network [3].</li> <li>Simulate expert behavior to generate optimal policy.</li> </ul>	<ul style="list-style-type: none"> <li>Provide a simulated environment for SAC agent.</li> </ul>	<ul style="list-style-type: none"> <li>Map high-dimensional states into the latent vectors [13].</li> <li>Encode tasks and infer tasks.</li> </ul>	

the dependencies of hybrid action space. The authors in [12] proposed a novel VAE-based DRL framework called HyAR. The main idea of the proposed framework is to construct a unified and decodable representation space for the original discrete-continuous hybrid action, in which the agent learns a latent strategy. Then, the selected latent action is decoded back into the original hybrid action space to interact with the environment. The results show that HyAR has advantages over the baseline (*e.g.*, PADDPG), especially in high-dimensional action space.

4) *Transfer Learning:* One of the major dilemmas of DRL is that if the structure of network states change dramatically, we have to reformulate the problem and retrain the model from scratch. Fortunately, GAI can be used for knowledge transfer, which can alleviate the limitations. For example, in [14], the authors proposed a diffusion model-based transfer learning method to solve the limited data problem in image generation tasks. The proposed method trains a diffusion model with an adversarial noise selection and a similarity-guided strategy, which improves the efficiency of the transfer learning process. Extensive experiments in the context of few-shot image generation tasks demonstrate that the proposed transfer learning method is not only efficient but also excels in terms of image quality and diversity. Inspired by this work, we can adopt GAI model (*e.g.*, diffusion model and GAN) to design transfer learning for DRL.

**Lesson Learned:** We find that the GAI approaches to improve policy performance can be summarized into two aspects:

- **Independent Strategy:** GAI can be regarded as an independent strategy to preprocess the inputs of DRL, which can enhance the training efficiency of DRL [4].

- **Integrated Strategy:** GAI can be integrated into DRL architecture to enhance the solution capability of DRL [3].

### C. Discussion

From the applications shown in Table II, we can find that integrating GAI into DRL can significantly improve the performance of DRL, which can be summarized as follows:

- **Improved Data Diversity:** The generative and learning capability of GAI can increase the diversity of training data for DRL to alleviate the data scarcity problem in certain particular scenarios, which can improve the speed of DRL training. In addition, the multimodal data processing capability of GAI greatly broadens the application scope of DRL.
- **Enhanced Analysis Ability:** Some GAI models, such as VAEs, are particularly effective for high-dimensional data, as it can eliminate the influence of redundant information and enhance the speed of DRL training.
- **Improved Decision Ability:** The reverse process of the diffusion model is well-suited to the policy networks of DRL, where multi-round iterations and denoising processes help agents explore better actions. Additionally, GAI has inspired the implementation of transfer learning in DRL to facilitate interactions across similar domains

## IV. CASE STUDY: GAI-ENHANCED DRL IN NEAR-FILED COMMUNICATION

In this section, we first propose a novel framework for GAI-enhanced DRL. We then introduce a case study to demonstrate effectiveness of the proposed framework.

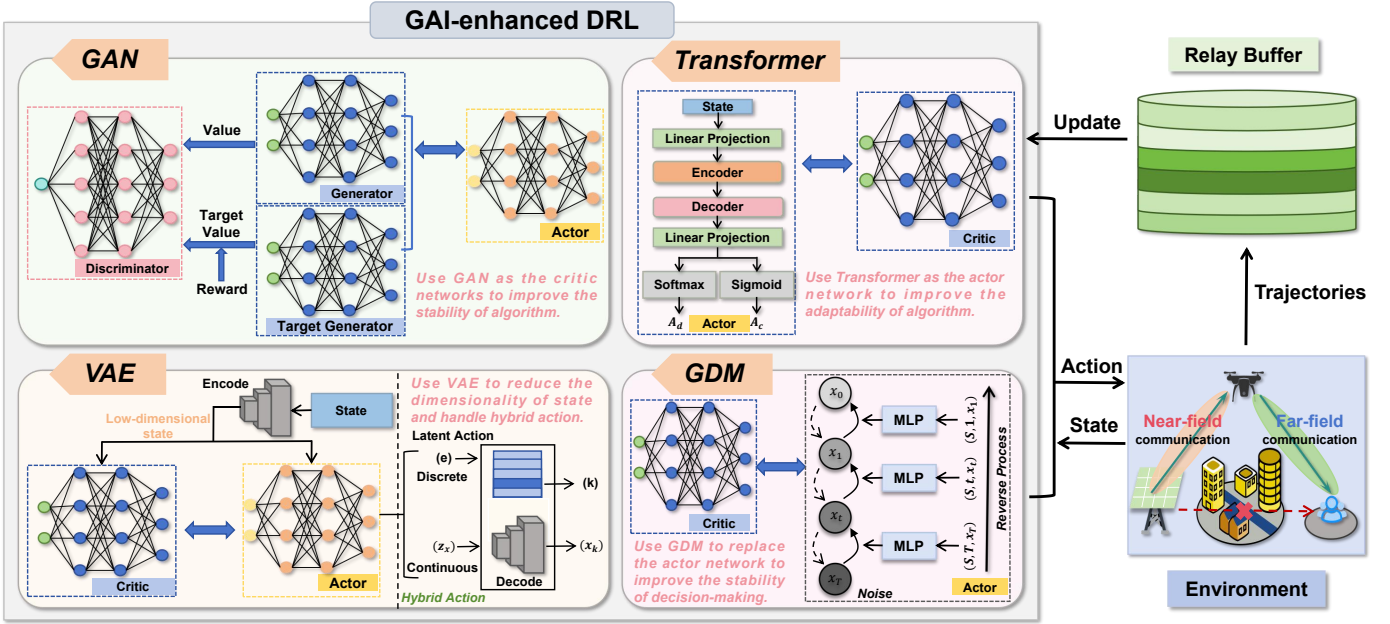


Fig. 3. Proposed Framework of GAI-enhanced DRL on UAV-assisted integrated near-field/far-field communication. The generators of GAN are used as critic and target critic network. VAE is used to reduce the dimensionality of high-dimensional input and process the hybrid action space. The attention mechanism of Transformer is used to enhance the actor network. The reverse process of GDM is used to replace the actor network.

#### A. Proposed Framework

As shown in Fig. 3, we investigate an integration of various GAI models into DRL algorithms to enhance the performance in different ways.

1) *GAN-enhanced DRL*: We enhance the critic network of DRL by using GAN. Specifically, the generator network outputs estimated action values, while the target generator network obtains the target action values. The discriminator network attempts to minimize the distance between the estimated action values and the target action values calculated by the Bellman operator. Introducing adversarial learning mechanism inherent in GAN to approximate the action-value distribution avoids the negative impact of randomness on rewards, which enhances the stability of DRL.

2) *VAE-enhanced DRL*: We use VAE to reduce the dimensionality of the high-dimensional state space to reduce the computational complexity issue in DRL. In this case, we train the VAE with data and use the decoder to extract representations of the state space, which are then used as inputs for the actor and critic networks. Additionally, VAE can construct a latent representation space for continuous parameters conditioned on state and embedding of discrete actions to handle hybrid actions. This method enables more efficient policy learning and action selection in complex high-dimensional environments.

3) *Transformer-enhanced DRL*: We enhance the actor network of DRL by using Transformer. Specifically, we replace the Multi-Layer Perceptron (MLP) with a network based on the attention mechanism of Transformer to analyze the current state in the environment. This approach helps to capture important information more efficiently by dynamically focusing on relevant parts of the input data.

4) *GDM-enhanced DRL*: We improve the policy network of DRL by employing the reverse process of GDM. Specifically, we treat the policy network as a denoiser, progressively adding denoising noise to the initial Gaussian noise to recover or discover the optimal actions. GDM effectively captures the dependencies between state and action spaces, aiding the agent in selecting appropriate actions based on the observed states.

#### B. Scenario Description

Large-scale antenna array has demonstrated an important enhancement in the spectrum efficiency of wireless systems. It is noteworthy that with the significant increase in carrier frequency and the number of antennas, the well-known Rayleigh distance expands to tens or even hundreds of meters. In this context, near-field communication becomes more prominent [15]. Unlike traditional far-field communication where the electromagnetic field is simply modeled by plane waves, the electromagnetic field in near-field communication needs to be accurately modeled by spherical waves. Therefore, we can exploit this unique channel characteristic to achieve flexible beamforming, concentrating the beam energy at specific spatial locations rather than focusing it in a specific direction as in traditional far-field communication. The characteristic above provides near-field communication with distinct advantages in improving signal quality, especially in densely populated urban areas.

In the case study, we considered a UAV-assisted ground communication, where the UAV serves as a relay to transmit data from a base station (BS) equipped with a large-scale antenna array to the distant ground user. Here, the UAV is deployed and located in the near-field region of BS while the ground users are in the far-field region of the UAV. In this case, we aim to maximize the transmission rate and minimize

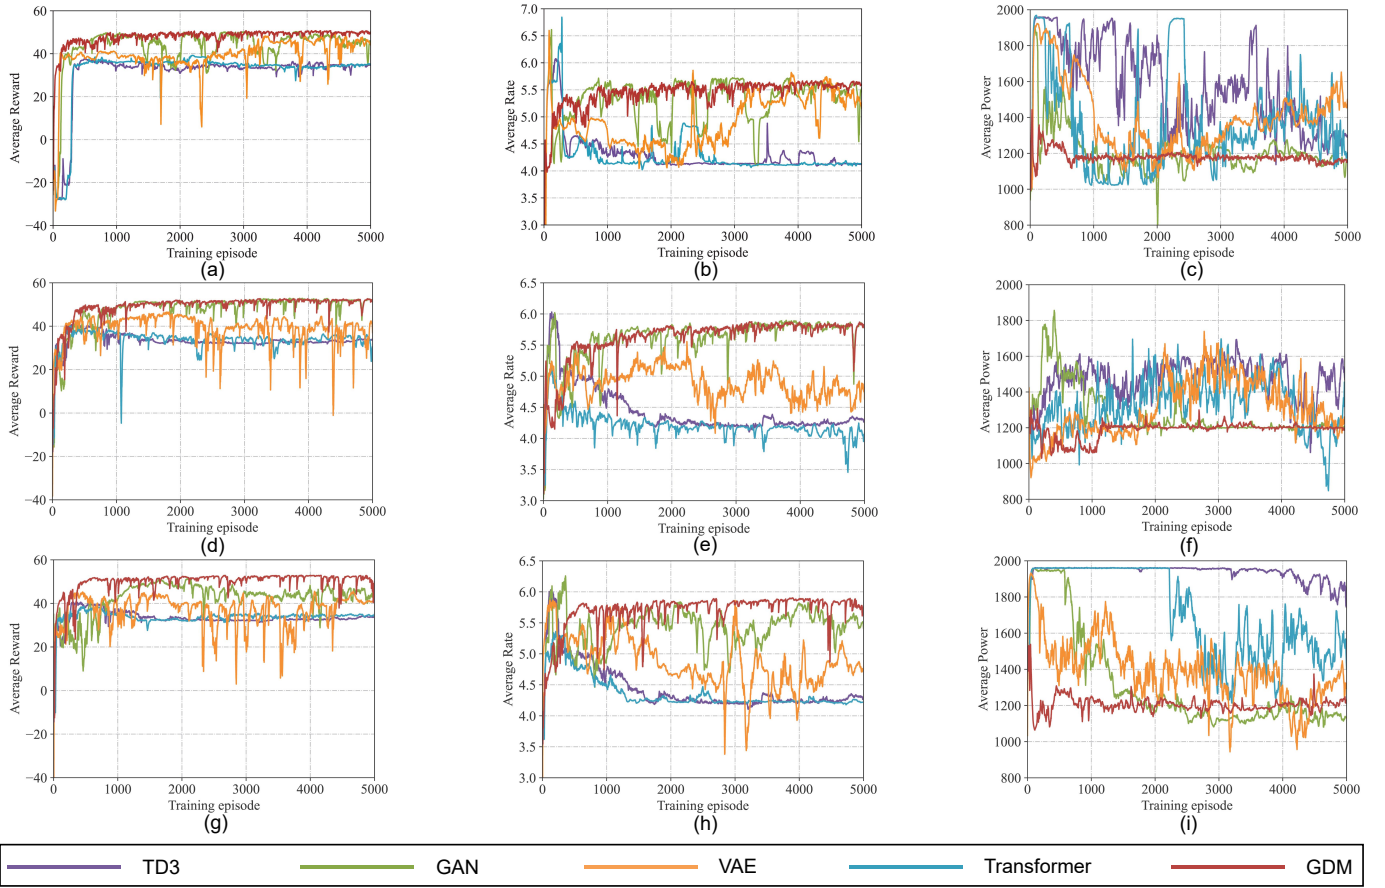


Fig. 4. The convergence performance of case study. The convergence curves of GAI-enhanced DRL methods in continuous action space for reward, transmission rate and power consumption are shown in (a), (b) and (c), respectively. The convergence curves of reward, transmission rate and power consumption in discrete space are presented in (d), (e) and (f), respectively. The convergence curves for reward, transmission rate, and power consumption in discrete space are displayed in (g), (h), and (i), respectively.

the power consumption by jointly optimizing the trajectory of the UAV and the power allocation of BS and UAV.

### C. Result Analysis

To investigate an impact of different types of action spaces, we constructed three experiments to explore the performance of GAI-enhanced DRL in continuous action space (*i.e.*, continuous UAV trajectory design and power allocation), discrete action space (*i.e.*, way-point discrete UAV trajectory design and power allocation), and hybrid action spaces (*i.e.*, discrete UAV trajectory design and continuous power allocation).

1) *Continuous Action Space*: Figs. 4 (a), (b) and (c) show the convergence curves of reward, transmission rate and power consumption in continuous action space, respectively. As an improved version of DDPG, TD3 significantly enhances policy stability and performance through the use of twin Q-networks and delayed policy updates. Therefore, in our case study, we select TD3 as the foundational DRL algorithm. We can observe that the GAN-enhanced TD3 algorithm shows significant improvements over the original TD3 algorithm, and this improvement is due to the novel adversarial training of the critic and target critic networks, which enhances the process of state-action value estimation. However, it is unable to effectively learn the constraints on power within

the continuous solution space, resulting in penalties that cause fluctuations in the reward. Furthermore, we observe that VAE improves the performance of the TD3 algorithm, which is attributed to the capability of VAE to reduce the dimensionality of the high-dimensional state space. However, the process of transforming the high-dimensional state space into a low-dimensional latent space results in instability. Additionally, we find that the Transformer-enhanced TD3 algorithm barely improves the performance of the original TD3 algorithm. This may be because Transformer is better suited for handling long sequence problems, which may not align well with the current optimization problem. In addition, we observe that GDM-enhanced-TD3 achieves the best reward values and transmission rates compared to other algorithms. This is because GDM can accurately capture the underlying data distribution, providing a more effective representation of the environment. Moreover, the unique structure of GDM, which involves a diffusion process, offers a more stable and efficient learning process.

2) *Discrete Action Space*: In this case, the convergence curves of reward, transmission rate and power consumption in the discrete action space are shown in Figs. 4 (d), (e) and (f), respectively. Unlike its performance in continuous action space, GAN-enhanced GAI demonstrates superior conver-



gence speed and quality in all of metrics above. This is because the discrete action space we designed inherently satisfies the power constraints of the optimization problem, eliminating the need for GAN to learn these constraints. However, this also indirectly highlights the weakness of GAN in learning constraint conditions directly related to optimization variables. Additionally, the convergence curves of VAE-enhanced GAI in discrete space are relatively unstable. This could be due to the fact that in discrete action spaces, the decision boundaries are usually more complex and require precise state information to make correct action choices. However, the latent space obtained after dimensionality reduction by the VAE model may not provide sufficiently accurate information to correctly distinguish different discrete actions, leading to decision biases. Moreover, we observe from the figure that the GDM-based algorithm still achieves the excellent performance, which indicates that it can handle discrete actions well.

3) *Hybrid Action Space*: Figs. 4 (g), (h) and (i) show the convergence curves of reward, transmission rate and power consumption in hybrid action space, respectively. We can observe that the GDM-enhanced TD3 is optimal in terms of the convergence speed and stability on the hybrid action space, and it converges to the best values with regard to reward, transmission rate, and power consumption. In the hybrid action space, the discrete and continuous actions are not independent, and different discrete actions correspond to different optimal continuous actions [12]. Therefore, to make the best hybrid action decisions, it is essential to explore the latent relationships between discrete and continuous actions. Evidently, the strong capability of GDM in learning the underlying data relationships enhances the accuracy and stability of TD3 decisions, enabling GDM-enhanced TD3 to achieve outstanding performance in the hybrid action space. The comparison above is limited due to the space constraint. More extensive investigation would be needed from other perspectives and system settings.

## V. FUTURE DIRECTIONS

In this section, we present some future directions for GAI-enhanced DRL.

### A. Efficiency Enhancement of GAI-enhanced DRL

Although improving performance significantly, the introduction of GAI models inevitably increases the computational complexity of the original DRL algorithms, which clearly leads to a need for more computational resources and longer training times. Therefore, enhancing the computational efficiency of GAI-enhanced DRL algorithms is crucial. In this case, utilizing GAI to generate more efficient exploration strategies to reduce the number of training samples might be a feasible approach.

### B. GAI-assisted Reward Design

As a key component of DRL, the quality of reward function design significantly impacts the performance of DRL. However, reward functions are usually manually set, and

finding an appropriate reward function often requires multiple trials. Therefore, GAI can be used to design complex reward functions, improving accuracy and reducing the workload of manual design. Alternatively, inverse reinforcement learning can be considered to define the reward functions.

### C. GAI-improved Transfer Learning

If the network architecture of DRL changes, we would have to retrain DRL from scratch, which results in a waste of computational resources. It is worth noting that GAI can apply knowledge learned from one task to another related task, thereby accelerating the learning process or improving performance. Therefore, leveraging GAI for knowledge transfer in DRL is a very promising direction.

## VI. CONCLUSION

In this paper, we systematically introduced how GAI can be applied to DRL to improve the performance. Specifically, we first introduced the basic principles of several GAI models and DRL algorithms. Subsequently, we discussed how GAI enhances DRL algorithms from both the data and policy perspectives. Then, we proposed a framework to explore the improvement of DRL algorithm by four typical GAI models, namely GAN, GDM, VAE, and Transformer. Moreover, we constructed a case study on near-field communication to validate the effectiveness of GAI-enhanced DRL. Experimental results demonstrated that GDM shows the most significant enhancement for DRL. Finally, we introduced three future directions to advance the wider application of GAI in DRL.

## REFERENCES

- [1] W. Shi, D. Zhang, X. Han, X. Wang, T. Pu, and W. Chen, "Coordinated operation of active distribution network, networked microgrids, and electric vehicle: A multi-agent PPO optimization method," *CSEE Journal of Power and Energy Systems*, 2023.
- [2] A. Gupta, A. S. Khwaja, A. Anpalagan, L. Guan, and B. Venkatesh, "Policy-gradient and actor-critic based state representation learning for safe driving of autonomous vehicles," *Sensors*, vol. 20, no. 21, p. 5991, 2020.
- [3] H. Du, Z. Li, D. Niyato, J. Kang, Z. Xiong, H. Huang, and S. Mao, "Diffusion-based reinforcement learning for edge-enabled ai-generated content services," *IEEE Trans. Mob. Comput.*, 2024.
- [4] W. Fu, Y. Li, Z. Ye, and Q. Liu, "Decision making for autonomous driving via multimodal transformer and deep reinforcement learning\*," in *IEEE/ACM AAAI Conference on Artificial Intelligence*, 2022, pp. 481–486.
- [5] Y. Li, L. Feng, Y. Yang, and W. Li, "GAN-powered heterogeneous multi-agent reinforcement learning for UAV-assisted task offloading," *Ad Hoc Networks*, vol. 153, p. 103341, 2024.
- [6] R. Lin, H. Qiu, J. Wang, Z. Zhang, L. Wu, and F. Shu, "Physical-layer security enhancement in energy-harvesting-based cognitive internet of things: A gan-powered deep reinforcement learning approach," *IEEE Internet Things J.*, vol. 11, no. 3, pp. 4899–4913, 2024.
- [7] Y. Yang, L. Feng, Y. Sun, Y. Li, F. Zhou, W. Li, and S. Wang, "Decentralized cooperative caching and offloading for virtual reality task based on GAN-powered multi-agent reinforcement learning," *IEEE Trans. Serv. Comput.*, vol. 17, no. 1, pp. 291–305, 2024.
- [8] D. Chen, Q. Qi, Q. Fu, J. Wang, J. Liao, and Z. Han, "Transformer-based reinforcement learning for scalable multi-UAV area coverage," *IEEE Transactions on Intelligent Transportation Systems*, 2024.
- [9] H. Han, Y. Xu, Z. Jin, W. Li, X. Chen, G. Fang, and Y. Xu, "Primary-user-friendly dynamic spectrum anti-jamming access: A GAN-enhanced deep reinforcement learning approach," *IEEE Wirel. Commun. Lett.*, vol. 11, no. 2, pp. 258–262, 2022.

- [10] Y. Hua, R. Li, Z. Zhao, X. Chen, and H. Zhang, "GAN-powered deep distributional reinforcement learning for resource management in network slicing," *IEEE J. Sel. Areas Commun.*, vol. 38, no. 2, pp. 334–349, 2020.
- [11] H. Du, R. Zhang, Y. Liu, J. Wang, Y. Lin, Z. Li, D. Niyato, J. Kang, Z. Xiong, S. Cui, B. Ai, H. Zhou, and D. I. Kim, "Beyond deep reinforcement learning: A tutorial on generative diffusion models in network optimization," *arXiv preprint arXiv:2308.05384*, 2023.
- [12] B. Li, H. Tang, Y. Zheng, J. Hao, P. Li, Z. Wang, Z. Meng, and L. Wang, "Hyar: Addressing discrete-continuous action reinforcement learning via hybrid action representation," in *ICLR*, 2022.
- [13] D. Yarats, A. Zhang, I. Kostrikov, B. Amos, J. Pineau, and R. Fergus, "Improving sample efficiency in model-free reinforcement learning from images," in *AAAI*, 2021, pp. 10 674–10 681.
- [14] X. Wang, B. Lin, D. Liu, and C. Xu, "Efficient transfer learning in diffusion models via adversarial noise," *arXiv preprint arXiv: 2308.11948*, 2023.
- [15] C. Wu, C. You, Y. Liu, L. Chen, and S. Shi, "Two-stage hierarchical beam training for near-field communications," *IEEE Trans. Veh. Technol.*, vol. 73, no. 2, pp. 2032–2044, 2024.