

Matroid Bayesian Online Selection

Ian DeHaan^{*} and Kanstantsin Pashkovich^{**}

Department of Combinatorics and Optimization, University of Waterloo, Canada
{ijdehaan, kpashkovich}@uwaterloo.ca

Abstract. We study a class of Bayesian online selection problems with matroid constraints. Consider a vendor who has several items to sell, with the set of sold items being subject to some structural constraints, e.g., the set of sold items should be independent with respect to some matroid. Each item has an offer value drawn independently from a known distribution. Given distribution information for each item, the vendor wishes to maximize their expected revenue by carefully choosing which offers to accept as they arrive.

Such problems have been studied extensively when the vendor’s revenue is compared with the offline optimum, referred to as the “prophet”. In this setting, a tight 2-competitive algorithm is known when the vendor is limited to selling independent sets from a matroid [26]. We turn our attention to the online optimum, or “philosopher”, and ask how well the vendor can do with polynomial-time computation, compared to a vendor with unlimited computation but with the same limited distribution information about offers.

We show that when the underlying constraints are laminar and the arrival of buyers follows a natural “left-to-right” order, there is a Polynomial-Time Approximation Scheme for maximizing the vendor’s revenue. We also show that such a result is impossible for the related case when the underlying constraints correspond to a graphic matroid. In particular, it is PSPACE-hard to approximate the philosopher’s expected revenue to some fixed constant $\alpha < 1$; moreover, this cannot be alleviated by requirements on the arrival order in the case of graphic matroids.

arXiv:2406.00224v1 [cs.GT] 31 May 2024

^{*} Supported by an NSERC Canada Graduate Scholarship.

^{**} Supported by NSERC Discovery Grants Program RGPIN-2020-04346.

Table of Contents

Matroid Bayesian Online Selection	1
<i>Ian DeHaan and Kanstantsin Pashkovich</i>	
1 Introduction	3
1.1 Our Results	3
1.2 Our Techniques	4
1.3 Further Related Work	6
2 Problem Definition and Preliminaries	7
3 Left-to-Right Laminar Bayesian Selection	7
3.1 Warm-Up: QPTAS	8
3.2 Linear Programming Formulation and Rounding Algorithm	8
3.3 Analysis	10
3.4 Extending to Arrivals “Close” to Left-To-Right	15
4 Graphic Bayesian Selection	16
4.1 Hardness for Graphic Bayesian Selection	16
4.2 No PTAS-Compatible Distribution-Agnostic Order	19
A Proofs from Section 3	22
B Proofs from Section 4	22
C Laminar Instance with Bad Concentration	24

1 Introduction

In this paper, we study the problem of Bayesian online selection subject to structural constraints given by matroids. Let us consider a scenario where a vendor posts and updates prices in order to maximize their profit subject to structural constraints. This type of problems is omnipresent in our everyday life. Consider vendors, e.g., big e-commerce platforms or independent crafters, who sell items by posting prices. In order to maximize their profits, vendors usually calculate prices taking into account partial information about potential buyers and the constraints on inventory, transportation networks, legal regulations, etc.

One of the most prominent examples of this setting is the *single-item prophet inequality problem* [27]. In this problem, the vendor is selling one item, for which they observe a sequence of offers. The offers correspond to random variables v_1, v_2, \dots, v_n drawn independently from distributions known to the vendor. At each timestamp t , the vendor may choose to stop by selling their item and gaining the value v_t , or the vendor may choose to discard this offer and continue. The *prophet* in this problem represents a person who knows the realizations of all offers v_1, v_2, \dots, v_n ahead of time. Moreover, the expected gain of the vendor is evaluated using the maximum gain of the prophet as a benchmark. In this scenario, the vendor can do at least half as well as the prophet and no better [27, 36]. This result generalizes to the setting of *matroid prophet inequalities*, in which the vendor is selling items from a matroid, and is limited to selling an independent set in this matroid [26].

The classical prophet inequality problems make the vendor compete with the prophet, where only the prophet knows the realizations of v_1, v_2, \dots, v_n ahead of time. Clearly, such a competition between the vendor and the prophet is very unfair. Indeed, in many cases the advantage of knowing all realizations cannot be alleviated through any efforts of the vendor. So let us change the benchmark and introduce the *philosopher*. The philosopher does not know the realizations of v_1, v_2, \dots, v_n but has unlimited computational power. The central question for our work is as follows. *How well can a vendor limited to polynomial time computation compete with the philosopher, where both know only the distributions of v_1, v_2, \dots, v_n but the latter has unlimited computational power?* Answering this question, we provide both positive and negative results for the ability of the vendor.

1.1 Our Results

In the single-item case, the vendor can achieve the same profit as the philosopher. Indeed, in this case the vendor can set a straightforward dynamic program that computes the optimal strategy.

Gupta posed the question of whether the vendor can achieve the same gain as the philosopher in the matroid setting, and more specifically in the graphic and laminar matroid settings [22]. We answer this question in the negative for graphic matroids. We show that for graphic matroids, it is PSPACE-hard for the vendor to approximate the expected gain of the philosopher up to some fixed constant. Moreover, for the graphic matroids there is no arrival order which “substantially increases competitiveness” of the vendor.

On the positive side, we provide a Polynomial-Time Approximation Scheme (PTAS) for all laminar matroids with “left-to-right” arrival orders, in which elements from each constraint arrive consecutively. Furthermore, the provided PTAS also hold for arrival orders that are “close” to “left-to-right” orders, i.e., to orders where each element is contained only in constantly many bins on which the arrival order is not “left-to-right.” We note that our policy relies on the “left-to-right” order only in the analysis. We leave it as an open question to determine whether there are substantially different requirements that guarantee our policy to lead to a PTAS.

The defined order is called *left-to-right* because when the laminar matroid is drawn with all elements on one horizontal line, the elements can be arranged in order from left to right if and only if they are in a “left-to-right” ordering. These orderings are exactly those orderings that are obtained when the tree corresponding to the laminar family is explored with depth-first-search.

Let us provide an example of a Bayesian selection problem with a “left-to-right” arrival order. Consider a situation where items correspond to clients, and the vendor knows clients’ arrival order and distributions for their offers. Let the parameter p represent some crucial resource and so determine restrictions on the number of clients the vendor can serve. In particular, let there be several critical thresholds p_1, p_2, \dots for p and limits $\gamma_1, \gamma_2, \dots$. For each i , if the value of p drops below p_i at some timestamp then we can serve at most γ_i clients between this timestamp and the next timestamp when the value of p is again at least p_i . In Figure 1, one

can see the example of how the parameter p changes over time and the corresponding laminar family. We note that the arrival order in the “production constrained Bayesian selection” from [5] corresponds to the case when p is a resource that is being delivered to us over time, see Figure 2, plus one additional global constraint.

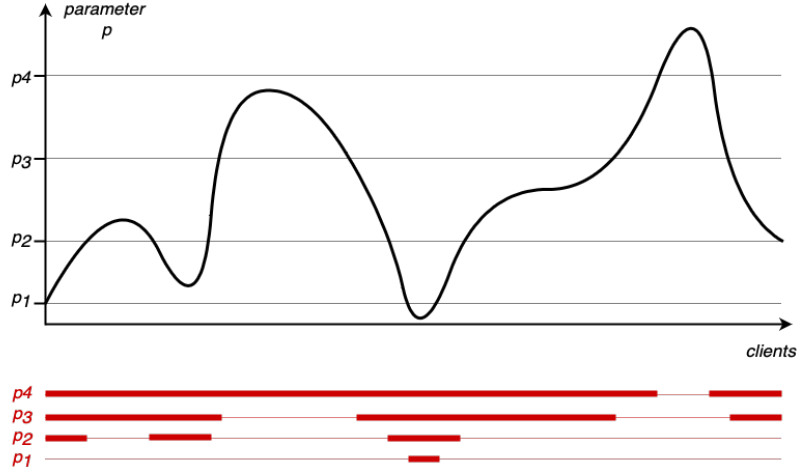


Fig. 1. Here, the horizontal axis is associated with clients and so with the timestamps, since their arrivals provide a measure for time. The vertical axis is associated with the value of the parameter p . The critical thresholds p_1 , p_2 , p_3 and p_4 for the value of p are depicted on the vertical axis. Below the picture of the graph, one can find the illustration for the corresponding laminar matroid. In particular, the picture below contains an interval for each critical threshold and the timestamps, when the value of p drops below the threshold and the next timestamp when the value of p reaches the value of the threshold.

Our PTAS holds for more general matroid Bayesian selection problems than the ones described above. We can handle the cases where the limits $\gamma_1, \gamma_2, \dots$ are functions of timestamps when the value of p drops below p_i . Moreover, we allow the arrival order to be more complicated than just “left-to-right”. One can imagine that the vendor runs several services in parallel, which mostly depend on different resources, however each type of service depends on at most a constant number of resources that are needed also for other types of service. In this situation, as long as the dependence on the “overarching” resources leads to a laminar matroid, our policy provides a PTAS for the arising Bayesian selection problem.

Thus our results provide a generalization and extension of the previous results for laminar matroids. The study of laminar Bayesian selection problems was initiated by Anari et al. [5]. They gave a PTAS for the special cases of bounded-depth laminar matroids and production constrained selection. Note that both of these special cases have required structure on the laminar family, with production constrained selection also having a special arrival order. In contrast, our results do not impose any requirements on the structure of the laminar matroids, but only on the arrival order.

1.2 Our Techniques

PTAS for Left-to-Right Laminar Bayesian Selection We capture the optimal online policy for left-to-right laminar Bayesian selection with an exponential-sized linear program introduced in [5]. While this linear program is too large to solve efficiently, we create a polynomial-sized relaxation by partitioning bins into “big” and “small” based on their capacities. For each maximal “small” bin, we require the constraints from the exponential-sized linear program to hold exactly. But for each “big” bin, we only require its capacity constraints to “hold in expectation.”

We show that by solving the linear program, we can efficiently obtain an online policy that is feasible for all “small” bins and has total expected gain equal to the optimal value of the linear program. In fact, the obtained online policies are optimal for the maximal “small” bins subject to changes in the value distributions.

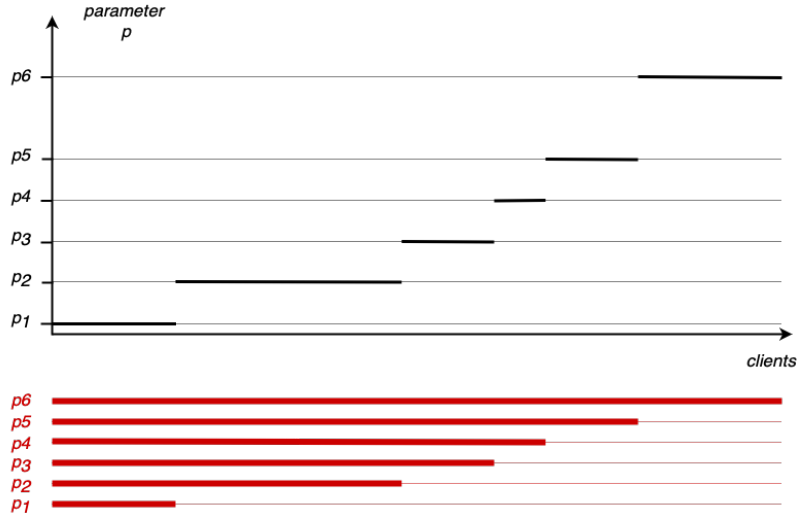


Fig. 2. Here the legend of the figure is the same as in Figure 1. The structure of the function for the parameter p corresponds to the situation when p represents a resource that is being delivered over time, and is spent only on servicing clients. In this scenario, the vendor can serve only a certain number of clients until the next delivery of the resource.

The argumentation about the above online policies goes generally along the lines of the analysis in [5]. One of our main technical contributions is showing that, with some pre-processing on capacities, “big” bins are unlikely to be violated by the obtained policies, see Lemma 4. To show this, we need concentration bounds on the number of items selected from each maximal “small” bin. The fact that the obtained policies act optimally on the maximal “small” bins does not guarantee us that selections of items are negatively correlated, see Figure 3, and not even that the selection of an item is negatively correlated with the number of items selected before it, see Figure 4. Thus, we cannot rely on the analysis from [5] and have to develop new tools. Nevertheless, we are able to show a more “global” version of negative dependence; we show that the number of items selected from each small bin is concentrated closely around the mean. Roughly speaking, we obtain this by showing that the selection of an item has a limited impact on the expected number of the items selected after it, see Lemma 7. This gives us the building blocks needed for Chernoff type results, see Lemma 3, which we use to bound the probability of “big” bins being violated in Lemma 4.

These concentration results are only possible for restricted arrival orders. We show in Theorem 1 that there exist laminar Bayesian online selection instances where the number of elements selected by the optimal policy is anti-concentrated. Due to the constructions done in the proof of Theorem 1, straightforward counting arguments show that given natural numbers r and $n \in \Omega(r^2)$, for a randomly chosen laminar matroid over n elements with rank r and a randomly chosen order, asymptotically almost surely one can choose value distributions and capacities such that the resulting instance exhibits anti-concentration for the number of elements selected by the optimal policy. This is a significant roadblock on the way to giving a good approximation for laminar Bayesian online selection problems with no restriction on arrival order. Most known results for problems of this type first break the problem into smaller pieces, solve the philosopher’s problem optimally on each part, and then use some concentration result to show that combining the solution for these parts is unlikely to produce infeasible solutions for the global problem. Without strong concentration on the number of elements selected by the philosopher, this framework cannot work - further new ideas are needed to tackle the general problem.

Hardness of Graphic Matroid Bayesian Selection To obtain PSPACE-hardness result for approximating Bayesian online selection for graphic matroids, we reduce from Stochastic MAX2SAT (MAX-S2SAT). The arrival order of edges is organized in three phases. In the first phase, the optimal policy for the constructed instance would need to make decisions that are equivalent to assigning the variables in MAX-S2SAT True and False values. In the second phase and the third phase, the optimal policy would make greedy decisions, with

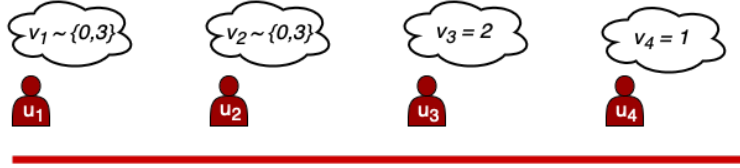


Fig. 3. Here, the vendor receives four clients u_1, u_2, u_3 and u_4 in the corresponding order, but can serve at most 2 clients. The distributions for the offers are as in the figure, e.g., u_2 offers 3 with probability 0.5 and otherwise offers 0, u_4 always offers 1. Let $X_i, i = 1, \dots, 4$ be the event (and the corresponding indicator variable) that u_i was served by the optimal online policy. We have $\Pr[X_3] = 3/4$, $\Pr[X_4] = 1/4$ while $\Pr[X_3 \wedge X_4] = 1/4$. Thus, we have $\text{Cov}(X_3, X_4) = 1/16$.

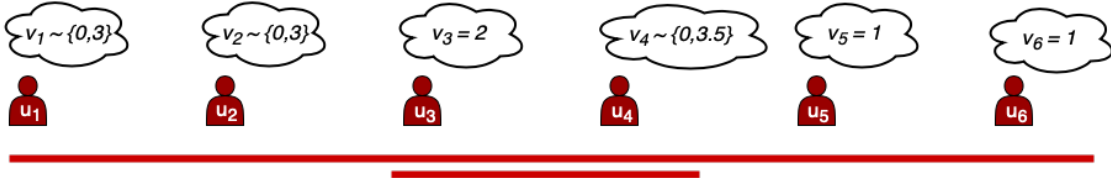


Fig. 4. Here, the vendor receives six clients u_1, \dots, u_6 in the corresponding order, but can serve at most 3 clients. Moreover, among u_3 and u_4 the vendor can serve at most one client. The distributions for the offers are as on the figure, e.g. u_2 makes offer 3 with probability 0.5 and otherwise makes offer 0, u_5 always offers 1. Let $X_i, i = 1, \dots, 6$ be the event (and the corresponding indicator variable) that u_i was served by the optimal online policy. We have $\Pr[X_1] = \Pr[X_2] = 1/2$, $\Pr[X_3] = 1/4$, $\Pr[X_4] = 3/8$, $\Pr[X_1 \wedge X_4] = \Pr[X_2 \wedge X_4] = 1/4$ and $\Pr[X_3 \wedge X_4] = 0$. Thus, we have $\text{Cov}(X_1 + X_2 + X_3, X_4) = 1/32$.

expected payoff depending on the choices made in the first phase. Having shown that the behaviour of the optimal policy indeed follows the above rules, the expected gain of any such policy would be equal to the expected number of satisfied clauses plus a fixed term and a negligible error term. Our analysis to estimate the expected gain follows the lines of the work [31] on stochastic online matching. Later, we show that for graphic matroids, there are no orders like left-to-right orderings for laminar matroids. In particular, without knowing value distributions we cannot associate an arrival order to each graphic matroid such that the resulting class of instances admits a PTAS. To obtain this result, we show that we can embed our hardness instance into a sufficiently large complete graph for any arrival order on that complete graph.

1.3 Further Related Work

Study of prophet inequalities was initiated by [27] in which they considered adaptive algorithms for the single-item setting. Several years later, a simple single-threshold $\frac{1}{2}$ -competitive algorithm was given in [36]. In the decades following, many variants of the classic prophet inequality problem have been considered. We give a brief snapshot of work on variants related to this paper, and recommend reading surveys on the area for a more complete picture [28, 25, 11].

In recent years, there has been much work dedicated to the study of prophet inequalities under combinatorial constraints. Beginning with uniform matroid constraints [23, 3], there has been exploration of general matroid constraints [26], knapsack constraints [17], matching constraints [4, 21, 16], downwards-closed constraints [34, 33], and many more. Many other variations of the classic prophet inequality problem have been studied extensively. Some examples include settings where the arrival order of elements is random [14, 15, 12, 7], where every element has its value drawn independently from the same distribution, [1, 10, 24], single sample prophet inequalities [35, 6], and non-adaptive prophet inequalities [9, 32].

Our work is far from the first to consider approximation of the online optimum for Bayesian online selection problems. Online stochastic weighted bipartite matching has been extensively studied in the last several years, with a series of improved approximation factors given in [31, 8, 29]. In a variant of the single-item prophet inequality problem where the order of elements is unknown and uniformly random, there is a Polynomial-Time Approximation Scheme [13]. [2] shows that even in the single-item prophet inequality

problem, it is NP-hard to select the best order to observe elements in. Additional approximations on the online optimum in stochastic and Bayesian online selection problems have been given in a variety of settings [19, 37, 18, 20].

During the preparation of our paper, we became aware also of an unpublished PSPACE-hardness result for graphic Bayesian online selection obtained independently by another group [38].

2 Problem Definition and Preliminaries

In this paper, we consider structural constraints defined by matroids. Each matroid \mathcal{M} is defined by a ground set U and a collection of subsets of U , which are called *independent sets*.

In this paper, we work with two types of matroids: laminar and graphic. We say that a matroid \mathcal{M} over a ground set U is *laminar* if there is some laminar family of sets \mathcal{L} over U and a capacity function $c : \mathcal{L} \rightarrow \mathbb{N}$ such that a set I is independent if and only if $|I \cap A| \leq c(A)$ for all $A \in \mathcal{L}$. In this case, we write $\mathcal{M} = (U, \mathcal{L}, c)$. Given a laminar matroid $\mathcal{M} = (U, \mathcal{L}, c)$, we call the sets in \mathcal{L} *bins*. The *depth* of a bin $A \in \mathcal{L}$ is defined as $|\{B : A \subseteq B, B \in \mathcal{L}\}|$. We say that a matroid \mathcal{M} over a ground set $U := E$ is *graphic* if there is some graph $G = (V, E)$ such that a set $I \subseteq E$ is independent if and only if (V, I) has no cycles. For further reading about matroids and their properties, we refer to [30].

From now on, we refer to the vendor as a *gambler* and to the items as *elements*. In the matroid Bayesian online selection problem, the gambler is given the matroid \mathcal{M} over a ground set $U = \{u_1, \dots, u_n\}$, an arrival order of the elements in U , and for each element $u_i \in U$, a distribution F_i for its value v_i . Over the course of the game, the gambler maintains an independent set I which starts as the empty set. The set I consists of all elements selected by the gambler at the given timestamp.

Elements arrive one by one in the given order. When u_i arrives, the value $v_i \sim F_i$ is drawn from its distribution independently from values of other elements and presented to the gambler. The gambler may then choose to either select the element as long as independence is maintained, updating $I \leftarrow I \cup \{u_i\}$ and gaining the associated value v_i , or reject the element, gaining no value. This decision is final and may not be changed later in the game.

The goal of the gambler is to gain as much value as possible over the course of the game. Let $OPT_{\mathcal{M}}$ indicate the maximum expected gain that the gambler can achieve for the instance \mathcal{M} . Here, we abuse notation and associate the matroid Bayesian selection instance to the underlying matroid \mathcal{M} when the value distributions and arrival order are not relevant or are clear from the context.

The LAMINAR MATROID BAYESIAN SELECTION (LMBS) problem is the matroid Bayesian online selection problem restricted to laminar matroids. The GRAPHIC MATROID BAYESIAN SELECTION (GMBS) problem is the matroid Bayesian online selection problem restricted to graphic matroids.

3 Left-to-Right Laminar Bayesian Selection

In this section, we show that the laminar Bayesian online selection problem with certain types of arrival orders admits a PTAS.

Definition 1. *Given a laminar matroid $\mathcal{M} = (U, \mathcal{L}, c)$ and an ordering u_1, u_2, \dots, u_n of the elements U , we say that this is a left-to-right ordering if the following condition holds:*

For every bin $A \in \mathcal{L}$ of the laminar family, if $u_i, u_j \in A$ for $i < j$, then for every $k \in [i, j]$, we must have $u_k \in A$.

In other words, the left-to-right ordering captures the rule that once elements from some bin start to arrive, they must not stop until they have all arrived. We say that an LMBS instance has a *left-to-right arrival order* (or equivalently it is a *left-to-right LMBS instance*) if the elements arrive according to a left-to-right ordering.

In this section, we assume that each distribution in the input is atomic. Moreover, each distribution is given to us explicitly as the list of values and the corresponding probabilities. This allows us to efficiently represent all distributions and to perform computations on them in polynomial time.

3.1 Warm-Up: QPTAS

To design a QPTAS and PTAS, we rely on the concept of states. A *state* has an entry for each considered bin A in \mathcal{L} , and this entry equals $c(A)$ minus the number of currently selected elements from A . Informally, a state represents the remaining capacities of the bins under consideration.

In an LMBS instance, given a timestamp let us call a bin A *active* if at least one element of A already arrived and there are still some elements of A left to arrive. The next lemma is based on the fact that in an LMBS instance, we only need to keep track of states for active bins.

Lemma 1. *Let $\mathcal{M} = (U, \mathcal{L}, c)$ be a left-to-right LMBS instance with depth at most L . Then the optimal gain and an optimal policy of the gambler in \mathcal{M} can be computed in $n^{\mathcal{O}(L)}$ time.*

Proof. The computation can be done with a dynamic programming algorithm. At each timestamp, we keep track of states for currently active bins. The left-to-right ordering guarantees that at each timestamp we have at most L active bins. Since $c(A)$ is at most n for all $A \in \mathcal{L}$, we have that the total number of possible states is at most $n^{\mathcal{O}(L)}$.

Corollary 1. *The optimal gain and an optimal policy of the gambler in a constant-depth left-to-right LMBS instance can be computed in polynomial time.*

Lemma 2. *Let $\mathcal{M} = (U, \mathcal{L}, c)$ be an LMBS instance and α be in $(0, 1)$. We can, in polynomial time, construct an LMBS instance $\mathcal{M}' = (U, \mathcal{L}', c')$ such that:*

- $\mathcal{L}' \subseteq \mathcal{L}$
- for all $A, B \in \mathcal{L}'$ with $A \subsetneq B$, we have

$$c'(A) \leq \lceil \alpha \cdot c'(B) \rceil \tag{SEP}$$

- all independent sets in \mathcal{M}' are also independent in \mathcal{M}
- $\alpha \cdot \text{OPT}_{\mathcal{M}} \leq \text{OPT}_{\mathcal{M}'} \leq \text{OPT}_{\mathcal{M}}$
- if \mathcal{M} is a left-to-right instance then \mathcal{M}' is also a left-to-right instance.

Proof (Proof of Lemma 2). For the construction, let us start with empty \mathcal{L}' and process the bins in \mathcal{L} in a non-increasing order of their cardinality.

Let $A \in \mathcal{L}$ be the currently processed bin. If A is not contained in any other bins from \mathcal{L}' , add A to \mathcal{L}' and set $c'(A) := c(A)$. Otherwise, let $B \in \mathcal{L}'$ be the inclusion-wise minimal bin in \mathcal{L}' containing A . If $c(A) \geq c'(B)$, we move to the next unprocessed bin from \mathcal{L} . Otherwise, we add A to \mathcal{L}' and set $c'(A) := \min\{c(A), \lceil \alpha \cdot c'(B) \rceil\}$. This transformation yields the desired separation property (SEP).

Note that any independent set in \mathcal{M}' is also independent in \mathcal{M} . Indeed, if A is in \mathcal{L}' then we have $c'(A) \leq c(A)$. If A is in $\mathcal{L} \setminus \mathcal{L}'$ then $c(A) \leq c'(B)$ where $B \in \mathcal{L}'$ is the inclusion-wise minimal bin in \mathcal{L}' containing A . So, we have $\text{OPT}_{\mathcal{M}'} \leq \text{OPT}_{\mathcal{M}}$. Finally, to get $\text{OPT}_{\mathcal{M}'} \geq \alpha \cdot \text{OPT}_{\mathcal{M}}$, note that for every bin $A \in \mathcal{L}'$, we have that $c'(A) \geq \alpha \cdot c(A)$.

Corollary 2. *There is a QPTAS for left-to-right LMBS.*

Proof. Given a left-to-right LMBS instance \mathcal{M} , we can use Lemma 2 with $\alpha = 1 - \epsilon$ to get an instance \mathcal{M}' . By (SEP) with $\alpha = 1 - \epsilon$, the depth of \mathcal{M}' is $\mathcal{O}(\log_{1/(1-\epsilon)}(n))$. Now we can use Lemma 1 to compute the optimal gain and policy for \mathcal{M}' in $n^{\mathcal{O}(\log_{1/(1-\epsilon)}(n))}$ time. By Lemma 2, we obtain a $(1 - \epsilon)$ -approximation to the optimal gambler's gain for \mathcal{M} .

3.2 Linear Programming Formulation and Rounding Algorithm

A naive dynamic programming algorithm for LMBS can be written as in the proof of Lemma 1. However, the number of considered states makes this approach not viable. To circumvent this, we build on a linear programming formulation from [5]. The linear program from [5] encodes dynamic programming ideas as in Lemma 1. Their linear program allows us to construct a relaxation by decomposing a given instance of LMBS into tractable parts and concentrating on optimal policies for each of these tractable parts. For the sake of completeness, we present the linear program and relevant results from [5] in this section.

Small and Big Bins To decompose an instance of LMBS into tractable parts, we partition \mathcal{L} into “big” and “small” bins based on their capacities. If a bin is small, we use a linear program based on dynamic programming to guarantee its “feasibility.” If a bin is big, we enforce that its “feasibility” is guaranteed in expectation.

Consider a threshold $K \in \mathbb{N}$. Call a bin $A \in \mathcal{L}$ *big* if $c(A) \geq K$, and *small* otherwise. Let $\mathcal{B} \subseteq \mathcal{L}$ indicate the set of big bins and $\mathcal{S} \subseteq \mathcal{L}$ indicate the set of inclusion-wise maximal small bins.

Without loss of generality, we assume that each element of U is contained in some small bin. If we have an element not contained in any small bin, then we can add a bin containing only this element. So, we can assume that \mathcal{S} partitions U .

Feasibility on Small Bins Let us consider a maximal small bin $B \in \mathcal{S}$. Let $\mathcal{L}^B = \{B' \in \mathcal{L} : B' \subseteq B\}$ be the set of bins contained in B . To capture states with respect to B at each timestamp, we use $\mathcal{S}^B \subseteq \mathbb{Z}^{\mathcal{L}^B}$ to indicate the set of feasible states. Again, each vector $\vec{s} \in \mathcal{S}^B$ has an entry for every $A \in \mathcal{L}^B$ which represents $c(A)$ minus the number of selected elements from A . Note that $|\mathcal{S}^B|$ is at most $n^{\mathcal{O}(c(B))}$ because no more than $c(B)$ elements can be selected from B by an online policy.

Let $\vec{d}_t \in \{0, 1\}^{\mathcal{L}^B}$ be the indicator vector for the bins in \mathcal{L}^B containing the element u_t . Let us define the set of *forbidden neighboring states*

$$\partial\mathcal{S}^B := \{\vec{f} \in \mathbb{Z}^{\mathcal{L}^B} \setminus \mathcal{S}^B : \text{there are } u_t \in B \text{ and } \vec{s} \in \mathcal{S}^B \text{ such that } \vec{s} = \vec{f} + \vec{d}_t\}.$$

In other words, $\partial\mathcal{S}^B$ is the set of all states that can be reached by an online policy immediately after violating feasibility.

We use *allocation variables* $\mathcal{X}_t(\vec{s}, v)$, which represent the probability that the gambler accepts the t th item u_t and the state upon its arrival is \vec{s} , conditioned on v being the realized value of v_t . We then use $\mathcal{X}_t(v)$ to represent the conditional probability that we accept u_t , conditioned on v being the realized value of v_t . The *state variables* $\mathcal{Y}_t(\vec{s})$ represent the probability that the gambler is at state \vec{s} upon the arrival of u_t .

Now we introduce a polytope \mathcal{P}^B to capture transitions between states through an application of an online policy on the bin B . The polytope \mathcal{P}^B is defined by the following constraints:

$$\begin{aligned} \mathcal{X}_t(v) &= \sum_{\vec{s} \in \mathcal{S}^B} \mathcal{X}_t(\vec{s}, v) && \forall v, u_t \in B \\ 0 &\leq \mathcal{X}_t(\vec{s}, v) \leq \mathcal{Y}_t(\vec{s}) && \forall v, \vec{s} \in \mathcal{S}^B, u_t \in B \\ \mathcal{Y}_{t+1}(\vec{s}) &= \mathcal{Y}_t(\vec{s}) - \mathbb{E}_{v_t}[\mathcal{X}_t(\vec{s}, v_t)] + \mathbb{E}_{v_t}[\mathcal{X}_t(\vec{s} + \vec{d}_t, v_t)] && \forall \vec{s} \in \mathcal{S}^B, u_t, u_{t+1} \in B \\ \mathcal{Y}_{t_0}([c(A)]_{A \in \mathcal{L}^B}) &= 1 && t_0 = \min\{t : u_t \in B\} \\ \mathcal{Y}_t(\vec{s}) &= 0 && \forall \vec{s} \in \partial\mathcal{S}^B, u_t \in B. \end{aligned}$$

One can see that any online policy for the restriction of \mathcal{M} on B induces a feasible point in \mathcal{P}^B . Let us show that the opposite also holds.

Proposition 1 (Proposition 2.1 from [5]). *Given a bin $B \in \mathcal{S}$ and a point $\{\mathcal{X}_t(\vec{s}, v), \mathcal{X}_t(v), \mathcal{Y}_t(\vec{s})\} \in \mathcal{P}^B$, there is an online policy for the restriction of \mathcal{M} on B which guarantees the expected gambler’s gain to be $\sum_{u_t \in B} \mathbb{E}_{v_t}[v_t \cdot \mathcal{X}_t(v_t)]$ and the expected number of selected elements to be $\sum_{u_t \in B} \mathbb{E}_{v_t}[\mathcal{X}_t(v_t)]$. Moreover, this policy can be found in polynomial time.*

Proof. Let us outline the desired policy. Let us assume that the gambler is at the state \vec{s} at the timestamp t and v is the realized value of v_t . If $\mathcal{Y}_t(\vec{s})$ is nonzero, the gambler accepts the element u_t with probability $\mathcal{X}_t(\vec{s}, v)/\mathcal{Y}_t(\vec{s})$. Otherwise, the gambler rejects the element u_t . It is straightforward to see that this policy is feasible and guarantees the required gain and the expected number of selected elements.

Feasibility on Big Bins For each maximal small bin $B \in \mathcal{S}$, we introduce a variable \mathcal{N}_B to represent an upper bound on the expected number of elements selected from B . Using these variables we construct our

final linear program.

$$\begin{aligned}
& \text{maximize} && \sum_{t=1}^n \mathbb{E}_{v_t} [v_t \cdot \mathcal{X}_t(v_t)] && (LP) \\
& \text{subject to} && \sum_{A \in \mathcal{S}: A \subseteq B} \mathcal{N}_A \leq c(B) && \forall B \in \mathcal{B} \\
& && \sum_{u_t \in B} \mathbb{E}_{v_t} [\mathcal{X}_t(v_t)] \leq \mathcal{N}_B && \forall B \in \mathcal{S} \\
& && \{\mathcal{X}_t(\vec{s}, v), \mathcal{X}_t(v), \mathcal{Y}_t(\vec{s})\} \in \mathcal{P}^B && \forall B \in \mathcal{S}
\end{aligned}$$

Note that in (LP) the first type of constraints are global ex-ante constraints. They enforce the “feasibility” of big bins in expectation. The second type of constraints enforces that for each $B \in \mathcal{S}$ the variable \mathcal{N}_B is a correct upper bound on the expected number of selected elements. Finally, the third type of constraints guarantees “feasibility” on all small bins. One can see that any online policy induces a feasible solution for (LP) .

Algorithm Now we are ready to state the algorithm. We pre-processes an input LMBS instance as in Lemma 2 to guarantee the separation property (SEP) with $\alpha = (1 - \epsilon)$. After that we divide the bins into small and big as in Section 3.2. We decrease the capacities for big bins in order to introduce “slack” for our online policy to satisfy their constraints. The capacities of small bins are satisfied by our online policy due to the constraints in the linear program (LP) .

ALGORITHM 1: $\text{ALG}(\mathcal{M} = (U, \mathcal{L}, c), K, \epsilon)$

- 1 Obtain $\mathcal{M}' = (U, \mathcal{L}', c')$ from $\mathcal{M} = (U, \mathcal{L}, c)$ as in Lemma 2 based on $\alpha = (1 - \epsilon)$;
 - 2 Compute maximal small bins \mathcal{S} and big bins \mathcal{B} for \mathcal{M}' as in Section 3.2 based on K ;
 - 3 Obtain $\mathcal{M}'' = (U, \mathcal{L}', c'')$ from $\mathcal{M}' = (U, \mathcal{L}', c')$ by setting $c''(B) := (1 - \epsilon) \cdot c'(B)$ for $B \in \mathcal{B}$; and $c''(B) := c'(B)$ for $B \in \mathcal{L}' \setminus \mathcal{B}$;
 - 4 Compute the optimal solution $\{\mathcal{X}_t^*(\vec{s}, v_t), \mathcal{X}_t^*(v_t), \mathcal{Y}_t^*(\vec{s}), \mathcal{N}_A^*\}$ for the linear program (LP) with respect to \mathcal{M}'' ;
 - 5 Extract an online policy from $\{\mathcal{X}_t^*(\vec{s}, v_t), \mathcal{X}_t^*(v_t), \mathcal{Y}_t^*(\vec{s})\}$ for each $B \in \mathcal{S}$ as in Proposition 1 ;
 - 6 Independently run the obtained online policies on $B \in \mathcal{S}$. Select an element as long as the obtained policy suggests to select it and the selection is feasible with respect to \mathcal{M}' .
-

3.3 Analysis

In this section, we estimate the approximation guarantees achieved by Algorithm 1 with respect to an optimal online policy.

From now on, we assume for simplicity that each distribution is non-atomic. This simplifies the analysis of the optimal online policy, because for non-atomic distributions the optimal online policy is both unique and deterministic. A similar analysis applies to atomic distributions - the randomness in optimal online policies can be accounted for by considering small dispersals of the values in each distribution. As the dispersals grow smaller, the behavior of the optimal online policy for the non-atomic case becomes the behavior of the optimal online policy for the atomic case.

Losses from Discarding Elements in Step 6 of Algorithm 1 The key challenge of analyzing Algorithm 1 is to estimate the expected value of elements that were not selected in Step 6 due to the feasibility restrictions of \mathcal{M}' . Lemma 4 shows that each element has a rather small probability of being not selected due to the feasibility restrictions of \mathcal{M}' . To show this, we first need the following technical result about the concentration on the number of elements chosen in each small bin. We defer its proof to Section 3.3.

Lemma 3. *Given a maximal small bin $B \in \mathcal{S}$ and an element $u_t \in B$, let X_t be the event that the online policies computed in Step 5 of Algorithm 1 suggest to select u_t . Then, for every $\alpha > 0$ we have that*

$$\mathbb{E}[e^{\alpha \cdot X_B}] \leq e^{(e^\alpha - 1) \cdot \mathbb{E}[X_B]},$$

where $X_B := \sum_{u_t \in B} X_t$.

We note that Lemma 3 crucially relies on the “left-to-right” arrival order assumption. If this assumption is dropped, instances with essentially worst-possible concentration can be constructed.

Theorem 1. *For any $r \geq 1$ and $\epsilon > 0$, there exists an instance of laminar Bayesian online selection $\mathcal{M} = (U, \mathcal{L}, c)$ with $\text{rank}(\mathcal{M}) = r$ and $|U| \leq (r + 1)^2$ such that*

$$\Pr[|OPT(\mathcal{M})| = 0], \quad \Pr[|OPT(\mathcal{M})| = r] \in \left[\frac{1}{2} - \epsilon, \frac{1}{2} + \epsilon\right],$$

where $OPT(\mathcal{M}) \subseteq U$ is a random variable denoting the items selected by an optimal algorithm.

We provide the proof of Theorem 1 in appendix.

Lemma 4. *In left-to-right LMBS, for each $u_t \in U$, the probability that upon the arrival of u_t the online policies computed in Step 5 suggest to select u_t but it is not feasible with respect to \mathcal{M}' is at most $3/(K \cdot \epsilon^3)$.*

Proof. For each item $u_i \in U$, let X_i be the event that the online policies computed in Step 5 suggest to select u_i . Given a bin $B \in \mathcal{L}'$, let $X_B := \sum_{u_i \in B} X_i$.

By the design of Algorithm 1, for every small bin $B \in \mathcal{S}$, the sum $\sum_{u_i \in B} X_i$ is always at most $c'(B)$. Now, consider any big bin $B \in \mathcal{B}$ with $u_t \in B$. Let us bound the probability that X_B exceeds $c'(B)$. First, we note that $\mathbb{E}[X_B] \leq (1 - \epsilon) \cdot c'(B)$ due to the structure of (LP) in Step 4 and $c''(B) \leq (1 - \epsilon) \cdot c'(B)$. By Lemma 3, we have strong bounds on the concentration of X_A for every maximal small bin $A \in \mathcal{S}$ with $A \subseteq B$. For every $\alpha > 0$, we have $\mathbb{E}[e^{\alpha X_A}] \leq e^{(e^\alpha - 1) \cdot \mathbb{E}[X_A]}$.

Note that the suggestions of online policies from Step 5 on different maximal small bins $A \in \mathcal{S}$ are independent. Since we assumed that every element is contained in some maximal small bin we have that

$$\mathbb{E}[e^{\alpha X_B}] = \mathbb{E}[e^{\alpha \sum_{A \in \mathcal{S}, A \subseteq B} X_A}] = \prod_{A \in \mathcal{S}, A \subseteq B} \mathbb{E}[e^{\alpha X_A}] \leq e^{(e^\alpha - 1) \cdot \sum_{A \in \mathcal{S}, A \subseteq B} \mathbb{E}[X_A]} \leq e^{(e^\alpha - 1) \cdot (1 - \epsilon) \cdot c'(B)}.$$

Hence, by Chernoff type estimation we have

$$\Pr[X_B > c'(B)] \leq e^{(e^\alpha - 1) \cdot (1 - \epsilon) \cdot c'(B)} / e^{\alpha \cdot c'(B)} = e^{((e^\alpha - 1)(1 - \epsilon) - \alpha) \cdot c'(B)}$$

and by selecting $\alpha = \ln(1 + \epsilon)$ and by $\ln(1 + \epsilon) \geq \epsilon/(1 + \epsilon/2)$

$$\Pr[X_B > c'(B)] \leq e^{(\epsilon \cdot (1 - \epsilon) - \ln(1 + \epsilon)) \cdot c'(B)} \leq e^{-\frac{\epsilon^2}{(2 + \epsilon)} \cdot c'(B)}.$$

Recall that for any two big bins $B, B' \in \mathcal{B}$ such that $B \subsetneq B'$ we have $c'(B) \leq (1 - \epsilon) \cdot c'(B')$. Recall also that for any big bin $B \in \mathcal{B}$ we have $c'(B) \geq K$. Thus, using our previous estimates we have

$$\sum_{\substack{B \in \mathcal{B} \\ u_i \in B}} \Pr[X_B > c'(B)] \leq \sum_{j=1}^{\infty} e^{-\frac{\epsilon^2}{(2 + \epsilon)} \cdot K / (1 - \epsilon)^j} \leq \sum_{j=1}^{\infty} \frac{2 + \epsilon}{K \cdot \epsilon^2} (1 - \epsilon)^j \leq \frac{3}{K \cdot \epsilon^3},$$

finishing the proof.

Losses from Transformations in Steps 1-3 of Algorithm 1 There are two steps in Algorithm 1 where we transform the original LMBS problem: Step 1 and Step 3. The next lemma captures how the optimal gain changes between these transformations. We are also interested in the gain estimations obtained through (LP) . So, let us define $LP_{\mathcal{M}'}$ and $LP_{\mathcal{M}''}$ to indicate the optimal objective values of (LP) with respect to \mathcal{M}' and \mathcal{M}'' , respectively.

Lemma 5. *In Algorithm 1, the following inequality holds*

$$LP_{\mathcal{M}''} \geq (1 - \epsilon)^2 \cdot OPT_{\mathcal{M}}.$$

Proof. By Lemma 2, we have

$$OPT_{\mathcal{M}'} \geq (1 - \epsilon) \cdot OPT_{\mathcal{M}}.$$

By definition of (LP) we have $LP_{\mathcal{M}'} \geq OPT_{\mathcal{M}'}$. To finish the proof, note that any feasible point in the polytope (LP) for \mathcal{M}' becomes feasible in (LP) for \mathcal{M}'' through a multiplication by a factor of $(1 - \epsilon)$. Thus, we obtain $LP_{\mathcal{M}''} \geq (1 - \epsilon) \cdot LP_{\mathcal{M}'}$.

Characterizations of Policies in Step 5 of Algorithm 1 To estimate the performance of Step 6 in Algorithm 1, we need first to understand the nature of the online policies obtained in Step 5. The following lemma shows that they are optimal online policies subject to “shifting” values of elements. We defer the proof of Lemma 6 to the appendix.

Lemma 6. *Let $B \in \mathcal{S}$ be a maximal small bin. Then there exists λ^* such that the online policy for B computed in Step 5 is an optimal online policy for B with values of u_t , $t \in B$ being $v_t - \lambda^*$.*

Properties of Optimal Online Policies on Left-to-Right LMBS Now that we know that the online policies computed in Step 5 are optimal online policies for some left-to-right LMBS, let us understand the gains and behaviour of such optimal online policies. To study an optimal policy for a left-to-right LMBS instance $\widetilde{\mathcal{M}} = (\widetilde{U}, \widetilde{\mathcal{L}}, \widetilde{c})$, let us consider the natural dynamic program for finding such policies. For simplicity, each considered state consists of the current timestamp t and the set $S \subseteq \widetilde{U}$ of currently selected elements. Let $D_t(S)$ indicate the expected gain of the optimal pricing policy from items $\widetilde{u}_t, \widetilde{u}_{t+1}, \dots, \widetilde{u}_n$ given that we have currently selected items $S \subseteq \{\widetilde{u}_1, \dots, \widetilde{u}_{t-1}\}$. These values of $D_t(S)$ can be defined using a dynamic programming approach as follows

$$D_t(S) := \begin{cases} D_{t+1}(S) & \text{if } S \cup \{\widetilde{u}_t\} \text{ is infeasible for } \widetilde{\mathcal{M}} \\ \mathbb{E}_{\widetilde{v}_t} [\max(D_{t+1}(S), D_{t+1}(S \cup \{\widetilde{u}_t\}) + \widetilde{v}_t)] & \text{otherwise} \end{cases}$$

together with

$$D_{n+1}(S) := 0.$$

Hence, in the case that an optimal online policy reached the state given by $S \subseteq \widetilde{U}$ and t , then this optimal policy selects an element \widetilde{u}_t with value \widetilde{v}_t if and only if $S \cup \{\widetilde{u}_t\}$ is feasible and

$$\widetilde{v}_t \geq D_{t+1}(S) - D_{t+1}(S \cup \{\widetilde{u}_t\}).$$

In other words, $D_{t+1}(S) - D_{t+1}(S \cup \{\widetilde{u}_t\})$ is the threshold value at which the optimal online policy selects \widetilde{u}_t .

The following lemma shows that slight changes in the current state set S lead only to slight changes in the number of elements selected by the optimal policy in the future.

Lemma 7. *Let $\widetilde{\mathcal{M}} = (\widetilde{U}, \widetilde{\mathcal{L}}, \widetilde{c})$ be a left-to-right LMBS instance with ordering of elements $\widetilde{u}_1, \widetilde{u}_2, \dots, \widetilde{u}_n$. Consider the selections done by an optimal online policy when the policy encounters a fixed realization of values $\widetilde{v}_2, \widetilde{v}_3, \dots, \widetilde{v}_n$. For this fixed realization, let μ_0 and μ_1 be the number of elements selected by an optimal online policy from $\{\widetilde{u}_2, \dots, \widetilde{u}_n\}$ starting at $t = 2$ with S being \emptyset and $\{\widetilde{u}_1\}$, respectively. Then we have that*

$$\mu_1 \leq \mu_0 \leq \mu_1 + 1.$$

To show Lemma 7, we first need the following lemma.

Lemma 8. *Let $\widetilde{\mathcal{M}} = (\widetilde{U}, \widetilde{\mathcal{L}}, \widetilde{c})$ be a left-to-right LMBS instance with ordering of elements $\widetilde{u}_1, \dots, \widetilde{u}_n$. Let $S, I, I' \subseteq \{\widetilde{u}_1, \dots, \widetilde{u}_{t-1}\}$ be pairwise disjoint sets. Let $I \cup I'$ be the set $\{i_1, i_2, \dots, i_k\}$, where i_1, i_2, \dots, i_k is the arrival order of elements from $I \cup I'$. Let us define two subsets of $I \cup I'$ using the parity of their indices*

$$I_{\text{odd}} := \{i_1, i_3, \dots\} \quad \text{and} \quad I_{\text{even}} := \{i_2, i_4, \dots\}.$$

If $S \cup I, S \cup I', S \cup I_{\text{odd}}$, and $S \cup I_{\text{even}}$ are feasible with respect to $\widetilde{\mathcal{M}}$ then we have

$$D_t(S \cup I) + D_t(S \cup I') \leq D_t(S \cup I_{\text{odd}}) + D_t(S \cup I_{\text{even}}), \tag{1}$$

for all t .

Proof. We show (1) by induction on t . When $t = n + 1$, the statement is true as $D_{n+1}(S) = 0$ for all $S \subseteq U$. Suppose that (1) holds for $t + 1$.

It is crucial for us to understand the thresholds that the value v_t of u_t should “pass” in order to be selected given that the current state is S' . These thresholds have the following structure.

$$T_t(S') := \begin{cases} D_{t+1}(S') - D_{t+1}(S' \cup \{u_t\}) & \text{if } S' \cup \{u_t\} \text{ is feasible for } \widetilde{M} \\ +\infty & \text{otherwise.} \end{cases}$$

Let us fix the value of \tilde{v}_t and define the following values for $S' \subseteq \{\tilde{u}_1, \dots, \tilde{u}_{t-1}\}$.

$$F_t(S') := \begin{cases} D_{t+1}(S') & \text{if } S' \cup \{\tilde{u}_t\} \text{ is infeasible for } \widetilde{M} \\ \max(D_{t+1}(S'), D_{t+1}(S' \cup \{\tilde{u}_t\}) + \tilde{v}_t) & \text{otherwise} \end{cases}$$

Instead of showing (1), we show that the following inequality holds

$$F_t(S \cup I) + F_t(S \cup I') \leq F_t(S \cup I_{\text{odd}}) + F_t(S \cup I_{\text{even}}). \quad (2)$$

By linearity and by the definition of $D_t(\cdot)$, the inequality (2) implies the inequality (1). We consider three cases based on the behaviour of \tilde{v}_t with respect to the thresholds $T_t(S \cup I)$ and $T_t(S \cup I')$.

Case $\tilde{v}_t < T_t(S \cup I)$ and $\tilde{v}_t < T_t(S \cup I')$. Then \tilde{u}_t is selected at neither of these states, so we have that

$$F_t(S \cup I) + F_t(S \cup I') = D_{t+1}(S \cup I) + D_{t+1}(S \cup I'),$$

and by the definition of $D_t(\cdot)$ and $F_t(\cdot)$ we have

$$F_t(S \cup I_{\text{odd}}) + F_t(S \cup I_{\text{even}}) \geq D_{t+1}(S \cup I_{\text{odd}}) + D_{t+1}(S \cup I_{\text{even}}),$$

proving that the inductive step is valid.

Case $\tilde{v}_t \geq T_t(S \cup I)$ and $\tilde{v}_t \geq T_t(S \cup I')$. Then \tilde{u}_t is accepted at both of these states, so we have that

$$F_t(S \cup I) + F_t(S \cup I') = D_{t+1}(S \cup I \cup \{\tilde{u}_t\}) + D_{t+1}(S \cup I' \cup \{\tilde{u}_t\}) + 2\tilde{v}_t,$$

Note, that for every bin $B \in \widetilde{\mathcal{L}}$ due to the left-to-right arrival order and the definition of I_{odd} and I_{even} we have that the elements from B in $I_{\text{odd}} \cup I_{\text{even}}$ are evenly distributed:

$$|B \cap I_{\text{even}}| - 1 \leq |B \cap I_{\text{odd}}| \leq |B \cap I_{\text{even}}| + 1.$$

This implies that

$$\max\{|B \cap I_{\text{odd}}|, |B \cap I_{\text{even}}|\} \leq \max\{|B \cap I|, |B \cap I'|\}.$$

Thus, since both sets $S \cup I \cup \{\tilde{u}_t\}$ and $S \cup I' \cup \{\tilde{u}_t\}$ are feasible with respect to \widetilde{M} , the sets $S \cup I_{\text{odd}} \cup \{\tilde{u}_t\}$ and $S \cup I_{\text{even}} \cup \{\tilde{u}_t\}$ are feasible with respect to \widetilde{M} . So by the inductive hypothesis and definition of $D_t(\cdot)$ and $F_t(\cdot)$, we have

$$\begin{aligned} F_t(S \cup I_{\text{odd}}) + F_t(S \cup I_{\text{even}}) &\geq D_{t+1}(S \cup \{\tilde{u}_t\} \cup I_{\text{odd}}) + D_{t+1}(S \cup \{\tilde{u}_t\} \cup I_{\text{even}}) + 2\tilde{v}_t \\ &\geq D_{t+1}(S \cup \{\tilde{u}_t\} \cup I) + D_{t+1}(S \cup \{\tilde{u}_t\} \cup I') + 2\tilde{v}_t \\ &= F_t(S \cup I) + F_t(S \cup I'). \end{aligned}$$

Case when exactly one of $\tilde{v}_t \geq T_t(S \cup I)$ or $\tilde{v}_t \geq T_t(S \cup I')$ holds. Suppose without loss of generality that $\tilde{v}_t \geq T_t(S \cup I)$ holds. We have two cases depending on the parity of k in the statement of the lemma. Let us suppose further that k is even; the case when k is odd is completely analogous. Analogously to the above cases, both $S \cup I_{\text{odd}} \cup \{\tilde{u}_t\}$ and $S \cup I_{\text{even}}$ are feasible with respect to \widetilde{M} and we obtain

$$F_t(S \cup I_{\text{odd}}) + F_t(S \cup I_{\text{even}}) \geq F_t(S \cup I) + F_t(S \cup I').$$

Proof (Proof of Lemma 7). Let J and J' be the elements selected by the optimal online policy starting at $t = 2$ with $S = \emptyset$ and $S = \{\tilde{u}_1\}$, respectively. Let $S := J \cap J'$, $I := J \setminus J'$ and $I' := J' \setminus J$ and let $I_{\text{odd}}, I_{\text{even}}$ be defined as in Lemma 7.

To prove the statement of the lemma we show that the following properties hold

$$\begin{aligned} I'_t &:= I' \cap \{\tilde{u}_1, \dots, \tilde{u}_t\} = I_{\text{odd}} \cap \{\tilde{u}_1, \dots, \tilde{u}_t\} \\ I_t &:= I \cap \{\tilde{u}_1, \dots, \tilde{u}_t\} = I_{\text{even}} \cap \{\tilde{u}_1, \dots, \tilde{u}_t\} \end{aligned} \quad (\text{ALT})$$

for all $t = 1, \dots, n$. The property (ALT) shows that the behaviour of the optimal online policies ‘‘alternates’’ starting from $S = \emptyset$ and $S = \{\tilde{u}_1\}$ after the first timestamp. Thus, (ALT) immediately implies the statement of the lemma.

Let us prove the statement by induction on t . For $t = 1$ the statement is trivial. Let us assume that (ALT) holds for the timestamp $t - 1$ and let us prove that it holds also for t . We have two possible cases: $|I'_{t-1}| = |I_{t-1}| + 1$ and $|I'_{t-1}| = |I_{t-1}|$. Let us consider only the case $|I'_{t-1}| = |I_{t-1}| + 1$ as the other case is completely analogous.

Let S_{t-1} be defined as $S \cap \{\tilde{u}_1, \dots, \tilde{u}_{t-1}\}$. Consider the sets $S_{t-1} \cup I_{t-1} \cup \{\tilde{u}_t\}$ and $S_{t-1} \cup I'_{t-1} \cup \{\tilde{u}_t\}$. Note that with respect to \widetilde{M} they are either both infeasible, only the latter is infeasible, or they are both feasible. For the inductive step, the only non trivial case is when they are both feasible with respect to \widetilde{M} . The threshold for selecting \tilde{u}_t in the case that the current state corresponds to $S_{t-1} \cup I_{t-1}$ is

$$D_{t+1}(S_{t-1} \cup I_{t-1}) - D_{t+1}(S_{t-1} \cup I_{t-1} \cup \{\tilde{u}_t\})$$

and in the case that the current state corresponds to $S_{t-1} \cup I'_{t-1}$, the threshold is

$$D_{t+1}(S_{t-1} \cup I'_{t-1}) - D_{t+1}(S_{t-1} \cup I'_{t-1} \cup \{\tilde{u}_t\}).$$

By Lemma 7 and by (ALT) for the timestamp $t - 1$, we have

$$D_{t+1}(S_{t-1} \cup I_{t-1} \cup \{\tilde{u}_t\}) + D_{t+1}(S_{t-1} \cup I'_{t-1}) \geq D_{t+1}(S_{t-1} \cup I'_{t-1} \cup \{\tilde{u}_t\}) + D_{t+1}(S_{t-1} \cup I_{t-1}).$$

Thus the threshold for selecting \tilde{u}_t , when the current state corresponds to $S_{t-1} \cup I_{t-1}$, is not larger than the same threshold when the current state corresponds to $S_{t-1} \cup I'_{t-1}$. Thus, \tilde{u}_t has passed both thresholds or only the threshold corresponding to $S_{t-1} \cup I_{t-1}$, showing (ALT) for the timestamp t . In both cases, (ALT) holds for the timestamp t .

Results to Prove Concentration To show Lemma 4, we first need to show that the number of elements selected from each maximal small bin is very likely to be close to the expected number of elements it is supposed to select. The next lemma is the key result for proving Lemma 4, since it allows us to do an estimation of Chernoff’s type in Lemma 4. The proof of it heavily relies on Lemma 7. Lemma 3 allows us to obtain several estimates for the number of elements suggested to be selected from B in Step 5 as if the suggestions for elements were negatively correlated.

Proof (Proof of Lemma 3). In the proof, we use only the fact that the online policies computed in Step 5 are optimal online policies for B . Thus, these online policies have to satisfy Lemma 7. We show the claim by induction on the total number k of elements in the bin B . The statement trivially holds when $k = 0$. Suppose that the statement is true for all instances with $k - 1$ elements. Abusing the notation, let u_1 be the first element in B to arrive. Define $\mu := \mathbb{E}[\sum_{u_t \in B} X_t]$, $\mu_1 := \mathbb{E}[\sum_{u_t \in B, t \neq 1} X_t \mid X_1 = 1]$, $\mu_0 := \mathbb{E}[\sum_{u_t \in B, t \neq 1} X_t \mid X_1 = 0]$ and $p_1 = \mathbf{Pr}[X_1 = 1]$, $p_0 = \mathbf{Pr}[X_1 = 0]$.

By the inductive hypothesis, we have

$$\begin{aligned} \mathbb{E}[e^{\alpha X_B}] &= p_1 \cdot e^\alpha \cdot \mathbb{E}[e^{\sum_{i=2}^n \alpha X_i} \mid X_1 = 1] + p_0 \cdot \mathbb{E}[e^{\sum_{i=2}^n \alpha X_i} \mid X_1 = 0] \\ &\leq p_1 \cdot e^\alpha \cdot e^{(e^\alpha - 1) \cdot \mu_1} + p_0 \cdot e^{(e^\alpha - 1) \cdot \mu_0}. \end{aligned}$$

Consider the following program where μ is considered a constant, while p_0 , p_1 , μ_0 , and μ_1 are considered variables.

$$\begin{aligned} &\text{maximize} && p_1 \cdot e^\alpha \cdot e^{(e^\alpha - 1) \cdot \mu_1} + p_0 \cdot e^{(e^\alpha - 1) \cdot \mu_0} \\ &\text{subject to} && p_0 + p_1 = 1, \quad 0 \leq p_0 \leq 1 \\ &&& p_1 \cdot \mu_1 + p_1 + p_0 \cdot \mu_0 = \mu, \quad \mu_1 \leq \mu_0 \leq \mu_1 + 1 \end{aligned}$$

Note that the last inequality holds due to Lemma 7. To prove the current lemma, we show that the objective value of this program is bounded from above by $e^{(e^\alpha-1)\cdot\mu}$. Let $p_0^*, p_1^*, \mu_0^*, \mu_1^*$ be a feasible solution of this program.

Case $p_1^* = 1$. Then we must have that $\mu = \mu_1^* + 1$, and so the objective value of such a solution becomes $e^\alpha \cdot e^{(e^\alpha-1)\cdot(\mu-1)} \leq e^{(e^\alpha-1)\cdot\mu}$, where the inequality follows from $\alpha \leq e^{\alpha-1}$.

Case $p_1^* = 0$. Then the objective value of such a solution is exactly $e^{(e^\alpha-1)\cdot\mu}$.

Case $p_1^* \in (0, 1)$. We obtain the following equation $\mu_1^* = (\mu - \mu_0^* p_0^* - p_1^*)/p_1^*$. From now on we can consider p_0^*, p_1^* as constants, and so the program now corresponds to an optimization over a single variable μ_0^* , and further, the objective function is convex in this variable. Therefore, it suffices to check that μ_0^* on the boundary of the arising feasibility region corresponds to an objective value that is at most $e^{(e^\alpha-1)\cdot\mu}$.

If $\mu_1^* + 1 = \mu_0^*$, then $\mu_0^* = \mu$, and the objective value is

$$p_1^* \cdot e^\alpha \cdot e^{(e^\alpha-1)\cdot(\mu-1)} + p_0^* \cdot e^{(e^\alpha-1)\cdot\mu} \leq p_1^* \cdot e^{(e^\alpha-1)\cdot\mu} + p_0^* \cdot e^{(e^\alpha-1)\cdot\mu} = e^{(e^\alpha-1)\cdot\mu},$$

where as before, we use the inequality $\alpha \leq e^{\alpha-1}$.

If $\mu_1^* = \mu_0^*$, then $\mu_1^* + p_1^* = \mu$, and the objective value is

$$e^{(e^\alpha-1)\cdot(\mu-p_1^*)} \cdot (p_1^* \cdot e^\alpha + p_0^*) \leq e^{(e^\alpha-1)\cdot\mu},$$

using the fact that $p_1^* \cdot e^\alpha + p_0^* = p_1^* \cdot e^\alpha + (1 - p_1^*) \leq e^{(e^\alpha-1)\cdot p_1^*}$.

Putting Everything Together

Theorem 2. *Algorithm 1 is a PTAS for left-to-right LMBS instances when $K = \epsilon^{-4}$.*

Proof. First, note that the set of elements selected by Algorithm 1 is independent with respect to \mathcal{M}' , and so by Lemma 2 is independent with respect to \mathcal{M} .

The online policies that are extracted in Step 5 of Algorithm 1 correspond to running online policies independently on maximal small bins. When run on maximal small bins independently, these online policies guarantee the gain $LP_{\mathcal{M}''}$, which is at least $(1 - \epsilon)^2 \cdot OPT_{\mathcal{M}}$ by Lemma 5.

However, in Step 6 the online policies from Step 5 can fail to select some of the elements only because of the feasibility constraints. By Lemma 4 and since $K = \epsilon^{-4}$, for each $u_t \in U$ the probability that upon the arrival of u_t the online policies suggest to select u_t but it is not feasible is at most 3ϵ . Thus, the expected gain obtained by Algorithm 1 is at least $(1 - 3\epsilon)LP_{\mathcal{M}''}$, and so at least $(1 - \epsilon)^2(1 - 3\epsilon) \cdot OPT_{\mathcal{M}}$.

3.4 Extending to Arrivals ‘‘Close’’ to Left-To-Right

In this section, we extend the results for left-to-right LMBS instances to LMBS instances that are ‘‘close’’ to being left-to-right. Let $\mathcal{M} = (U, \mathcal{L}, c)$ be an LMBS instance and $B \in \mathcal{L}$ a bin. We say that B is a *left-to-right bin* if the instance \mathcal{M} restricted to B is a left-to-right LMBS instance.

We are able to extend the results because we do not need every bin in laminar matroid to be left-to-right. For our analysis to go through, it is enough for every maximal small bin to be left-to-right. Given the above observation, we obtain the following theorem by using a modified definition of small and big bins, which is inspired by [5].

Theorem 3. *Let $L \in \mathbb{N}$ be a constant. There is a PTAS for LMBS instances where every element lies in at most L bins that are not left-to-right.*

Proof (Proof Sketch). In [5], a PTAS is given for constant-depth LMBS instances. For their algorithm, they have a different definition of ‘‘small’’ and ‘‘big’’ bins. In Algorithm 1 we use one threshold $K = \epsilon^{-4}$ for all bins: a bin A is big for our Algorithm 1 if $c(A) \geq K$. In [5], there are several thresholds: a bin A is ‘‘big’’ for them if $c(A) \geq 1/\delta^{L-d}$, where $\delta = \epsilon^2/\log(1/\epsilon)$, d is the depth of A , and L is the depth of the whole matroid. The benefit of the approach from [5] is that for any ‘‘big’’ bin B and maximal ‘‘small’’ bin $A \subseteq B$, we have a separation between $c(A)$ and $c(B)$, in particular we have $c(A) \leq \delta \cdot c(B)$. This large separation in capacities removes the need to analyze the concentration for the number of elements selected from A . In

particular, there is no need for A to be a left-to-right bin. Constant depth is needed to bound the capacity of any maximal “small” bin by a constant $1/\delta^L$ in order to explicitly solve the corresponding dynamic program.

To generalize this to our setting, we use the following thresholds to define “big” and “small” bins. If the depth d of a bin A satisfies $d \leq L$, then we set the threshold for A to be $\epsilon^{-4}/\delta^{L-d}$. Otherwise, we set the threshold for A to be ϵ^{-4} . If a maximal “small” bin is identified before depth L , then it will necessarily have the factor of δ separation with any “big” bins containing it. Otherwise, we know that the identified maximal “small” bin is a left-to-right bin.

Corollary 3 (Theorem 3.5 from [5]). *There is a PTAS for constant-depth LMBS instances.*

The production constrained Bayesian selection problem from [5] consists of LMBS instances in which all bins except the largest are left-to-right, plus some additional structure. This gives us the following corollary with $L = 1$.

Corollary 4 (Theorem 2.3 from [5]). *There is a PTAS for production constrained Bayesian selection.*

4 Graphic Bayesian Selection

LMBS can be viewed as a special case of the more general Matroid Bayesian Online Selection problem, where instead of a laminar matroid, we are given any matroid \mathcal{M} . Gupta questioned in 2017 whether the best strategy for Matroid Bayesian Online Selection is computationally hard to find [22]. We answer this question in the affirmative, even for the special case of graphic matroids.

Theorem 4. *There is an absolute constant $\alpha \in (0, 1)$ such that it is PSPACE-hard to approximate Graphic Matroid Bayesian Selection (GMBS) to a factor of α .*

Note that we can compute the optimal strategy for GMBS in polynomial space with a simple brute-force recursive algorithm, so GMBS is in fact PSPACE-complete.

Also note that Theorem 4 says it is PSPACE-hard to approximate the *expected value* of an optimal strategy. This does not immediately imply that it is PSPACE-hard to act according to an approximate optimal strategy, but the proof of Theorem 4 shows this as well.

Definition 2. *We say that a class of matroids \mathcal{M} admits a PTAS-compatible distribution-agnostic order if there exists an order $\sigma(\mathcal{M})$ for every matroid $\mathcal{M} \in \mathcal{M}$ such that there is a Polynomial-Time Approximation Scheme for instances of Matroid Bayesian Online Selection with matroids from \mathcal{M} and arrival orders given by σ .*

We show the following result by demonstrating that the hardness construction of Theorem 4 can be embedded in any arrival order of sufficiently large complete graphs.

Theorem 5. *The set of graphic matroids does not admit a PTAS-compatible distribution-agnostic order unless PSPACE = P.*

As a corollary of Theorem 2, we have that the set of laminar matroids admits a PTAS-compatible distribution-agnostic order by taking $\sigma(\mathcal{M})$ to be any left-to-right ordering on \mathcal{M} . Theorem 5 provides a separation between graphic and laminar matroids.

4.1 Hardness for Graphic Bayesian Selection

PSPACE-Hard Problem: MAX-S2SAT To prove Theorem 4, we first need some results about Stochastic Max 2SAT.

Definition 3. *In the Stochastic Max 2SAT problem, henceforth referred to as MAX-S2SAT, the input is a 2CNF formula ϕ over an ordered list of variables (x_1, x_2, \dots, x_n) , where n is even and for every $i = 1, \dots, n-1$, either x_i or x_{i+1} is contained in some clause of ϕ . We choose a value of **True** or **False** for x_1 . Then, nature sets x_2 to either **True** or **False** with a probability of 0.5. We then get to choose the value of x_3 , nature sets the value of x_4 to either **True** or **False**, and so on. Our goal is to maximize the expected number of satisfied clauses in ϕ after all the variables have been assigned a value. A variable is called a random variable if it is set by nature, and is called deterministic otherwise.*

The following lemma is crucial for our reduction, since it provides a problem to reduce from. The proof of Lemma 9 follows relatively directly from the analogous result for MAX-3SAT [31] and is included in the appendix.

Lemma 9. *There exist absolute constants $k \in \mathbb{N}$ and $\alpha \in (0, 1)$ so that it is PSPACE-hard to compute an α -approximation for a MAX-S2SAT instance ϕ satisfying the requirement that each variable appears in at most k clauses of ϕ .*

Reduction from MAX-S2SAT to GMBS Now, we can state our reduction from MAX-S2SAT to GMBS. Let ϕ be an instance of MAX-S2SAT as in Lemma 9 with variables (x_1, x_2, \dots, x_n) and constant k . Let m indicate the number of clauses in ϕ . We construct an instance \mathcal{I}_ϕ of GMBS as follows.

The vertex set in the graph for \mathcal{I}_ϕ consists of a single central vertex w and two vertices for each variable x_i , $i = 1, \dots, n$ in ϕ . We label the vertices for the variable x_i , $i = 1, \dots, n$ as x_i and $\neg x_i$

$$V := \{w\} \cup \{x_i, \neg x_i : 1 \leq i \leq n\}.$$

The edges of \mathcal{I}_ϕ arrive in three distinct phases and have distinct value distributions. Before specifying \mathcal{I}_ϕ in full detail, let us explain the intuition behind the construction. The first phase simulates the selection of truth values for variables in the same order as they appear in ϕ . The second phase accounts for the number of clauses satisfied by the value selection of phase one. For this, the edges in the second phase correspond to clauses and attain very high values with very small probability, so that multiple clause edges attaining value is very unlikely. The third phase guarantees that for each variable at most one truth value is selected in the first phase by the optimal online policy.

First Phase. Respecting the order of variables as in ϕ , two edges wx_i and $w\neg x_i$ arrive for each variable x_i , $i = 1, \dots, n$. The edge wx_i arrives immediately before $w\neg x_i$. If x_i is a deterministic variable, both edges wx_i and $w\neg x_i$ have deterministic value 1. If x_i is a random variable x_i , the edge wx_i has value 2 with probability 0.5 and value 0 otherwise; the edge $w\neg x_i$ has deterministic value 1.

Second Phase. An edge $\neg \ell_1 \neg \ell_2$ arrives for each clause $(\ell_1 \vee \ell_2)$ in ϕ . Each such edge has value $m^4/2k$ with probability m^{-4} , and value 0 otherwise. For each clause (ℓ) in ϕ , i.e., for each clause with a single literal, an edge $w\neg \ell$ arrives with the same value distribution.

Third Phase. An edge $x_i \neg x_i$ arrives for each variable x_i , $i = 1, \dots, n$. The edge $x_i \neg x_i$ has deterministic value 2.

Note that within the first phase, the order of arrivals is important. In contrast, the order of edge arrivals within the second or third phase can be arbitrary.

Optimal Online Policy for \mathcal{I}_ϕ Let $OPT_{on}(\phi)$ refer to the expected value of the optimal online algorithm for MAX-S2SAT on ϕ . Let ALG_{opt} denote an optimal algorithm for GMBS. We can assume that ALG_{opt} selects only arrived edges. We say that an edge *arrived* if the value of the edge is nonzero. We defer the proof of next two lemmas to the appendix.

Lemma 10. *Algorithm ALG_{opt} selects exactly one of wx_i , $w\neg x_i$ for each variable x_i .*

The following lemma shows that ALG_{opt} respects the random choice that nature made for the truth value of each random variable.

Lemma 11. *For a random variable x_i , algorithm ALG_{opt} selects wx_i if and only if wx_i arrives.*

The following lemma shows that the optimal online policy ALG_{opt} for \mathcal{I}_ϕ behaves greedily after the first phase. This can be seen as the value of arrived edges is non-increasing after phase 1, so it is always optimal to select an arrived edge due to the greedy selection property of matroids.

Lemma 12. *After the first phase, ALG_{opt} selects every edge that arrives and can be selected without introducing a cycle.*

Remark 1. Note that the proofs of the above lemmas, i.e. Lemma 10, Lemma 11 and Lemma 12, can be adopted to any online policy ALG_{apprx} that attempts to maximize the expected total value of the selected elements but is limited to polynomial time computations. Indeed, the proofs of Lemma 10, Lemma 11 and Lemma 12 show that if ALG_{apprx} does not follow the rules outlined in these lemmas, one can compute an alternative online policy \mathcal{A} that satisfies all the outlined rules and runs in polynomial time and achieves a strictly better expected total value of the selected items.

Gains for \mathcal{I}_ϕ Let us consider the gains that are achieved by ALG_{opt} and can be achieved by an online policy ALG_{aprx} that runs in polynomial time and tries to maximize the expected total value of the selected elements. Due to the results in the previous section we can assume that both ALG_{opt} and ALG_{aprx} follow the rules below:

1. exactly one of $wx_i, w\neg x_i$ is selected for each variable x_i
2. wx_i is selected for a random variable x_i if and only if wx_i arrives
3. after the first phase, every edge is selected whenever the edge arrives and can be selected without introducing a cycle.

Lemma 13. *Let \mathcal{A} be an online policy that follows rules (1), (2) and (3). Let $P_{\mathcal{A}}(\mathcal{I}_\phi)$ be the probability that a randomly selected clause in ϕ is satisfied if the **True** and **False** values for $x_i, i = 1, \dots, n$ were assigned according to the edges selected by \mathcal{A} in the first phase. In particular, we assign x_i the value **True** if \mathcal{A} selects wx_i , and we assign **False** otherwise. Then, we have*

$$\mathcal{A}(\mathcal{I}_\phi) = 1.25n + 2n \cdot (1 - m^{-4})^m + \left(2n + P_{\mathcal{A}}(\mathcal{I}_\phi) \cdot \left(\frac{m^4}{2k} - 2\right)\right) \cdot m \cdot m^{-4} \cdot (1 - m^{-4})^{m-1} + \delta_{\mathcal{A}},$$

where $\delta_{\mathcal{A}}$ is a number in $[0, 2m^{-1}]$.

Clearly, $P_{\mathcal{A}}(\mathcal{I}_\phi)$ in Lemma 13 is the number of clauses satisfied by such an assignment divided by the total number of clauses, i.e. by m . We defer the proof of Lemma 13 to the appendix.

Putting Everything Together Let us define $\gamma := (1 - m^{-4})^{m-1}$ and notice that the limit of γ as m goes to infinity equals 1. Recall that k is an absolute constant. Thus, considering the expected gain of an online policy, we can conclude that when \mathcal{A} is ALG_{opt} , the value of $P_{\mathcal{A}}$ is $OPT_{on}(\phi)/m$. Let us now rewrite the expected gain of the optimal policy ALG_{opt} as follows

$$\underbrace{1.25n + 2n \cdot \gamma + 2n \cdot m^{-3} \cdot \gamma + \delta_{ALG_{opt}}}_{=: Q'} + \underbrace{OPT_{on}(\phi) \cdot \left(\frac{m^4}{2k} - 2\right) \cdot m^{-4} \cdot \gamma}_{=: Q}.$$

Let us define Q and Q' as above and define $\beta := 54k/\gamma$.

Lemma 14 (Fact 2.1 from [31]). *Let $Q, Q' \geq 0$ be positive quantities, such that $\frac{Q'}{Q} \leq \beta$, and let $\alpha \in (0, 1)$. Then, an $(\frac{\alpha + \beta}{1 + \beta})$ -approximation to $Q + Q'$ yields an α -approximation to Q .*

To use Fact 14, we need to show that $Q'/Q \leq \beta$. Notice that $n \leq 4m$ because no consecutive pair of variables is missing from all clauses. Also, $OPT_{on}(\phi) \geq \frac{m}{2}$ because we can achieve $\frac{m}{2}$ satisfied clauses with a random variable assignment. So we obtain $n \leq 8 \cdot OPT_{on}(\phi)$. Thus we have

$$Q' \leq 3.25n + 0.25 + \delta_{ALG_{opt}} \leq 26 \cdot OPT_{on}(\phi) + 0.5 \leq 27 \cdot OPT_{on}(\phi)$$

for sufficiently large m . Now we have that

$$Q'/Q \leq (27 \cdot OPT_{on}(\phi)) / (0.25 \cdot \gamma \cdot OPT_{on}(\phi)/k) = \beta$$

for sufficiently large m . Also, since k is an absolute constant, we have that $\beta = 108k/\gamma$ can be seen as a constant. So, we can apply Fact 14 and find that an $\alpha' := \frac{\alpha + 108k/\gamma}{1 + 108k/\gamma}$ approximation for **GMBS** gives an α approximation for **MAX-S2SAT**. Thus, by Lemma 9 there is some constant $\alpha' \in (0, 1)$ such that it is **PSPACE-hard** to approximate **GMBS** to a factor of α' .

4.2 No PTAS-Compatible Distribution-Agnostic Order

Let us show that for a graphic matroid on a complete graph there is no PTAS-compatible distribution-agnostic order. Let us be given a complete graph $G = (V, E)$ with $|V| = 3n + 2m + 1$, where n is even, and let us be given some arrival order for E . Let us show how one can construct a reduction for MAX-S2SAT analogously to Section 4.1.

Edges for Third Phase. In the reverse order of arrival, greedily construct a matching $A := \{a_1, \dots, a_n\}$ such that $|A| = n$. Each edge in A has deterministic value 2.

Edges for Second Phase. In the reverse order of arrival, after constructing A , greedily keep adding edges to $B := \{b_1, \dots, b_m\}$ such that $A \cup B$ is a matching and $|B| = m$. Each edge in B has value $m^4/2k$ with probability m^{-4} , and value 0 otherwise.

Edges for First Phase. Consider the vertex set U , which are the vertices not matched by the matching $A \cup B$. Consider a vertex $w \in U$ and let $v_1, \bar{v}_1, v_2, \bar{v}_2, \dots, v_n, \bar{v}_n$ be such that the edges $wv_1, w\bar{v}_1, wv_2, w\bar{v}_2, \dots, wv_n, w\bar{v}_n$ are the first n edges adjacent to w and their arrivals are in the above order. If i is odd, both edges wv_i and $w\bar{v}_i$ have deterministic value 1. If i is even, the edge wv_i has value 2 with probability 0.5 and value 0 otherwise; and the edge $w\bar{v}_i$ has deterministic value 1.

Auxiliary Edges. For each $i = 1, \dots, n$ both edges $v_i\alpha_i$ and $\bar{v}_i\gamma_i$ have deterministic value 3, where α_i and γ_i are the endpoints of a_i . For each $j = 1, \dots, m$ both edges $u_j\beta_j$ and $l_j\tau_j$ have deterministic value 3, where β_j, τ_j are the endpoints of b_j and l_j, u_j correspond to “negations” of the literals in the j th clause of ϕ .

Every remaining edge has deterministic value 0. Note, that all auxiliary edges arrive before the edges in the second and third phase due to the greedy construction of A and B . Also all auxiliary edges are selected by an optimal online policy.

The same analysis as in Section 4.1, but with a slightly degraded inapproximability constant due to the additional guaranteed gain from the auxiliary edges.

Bibliography

- [1] Abolhassani, M., Ehsani, S., Esfandiari, H., Hajiaghayi, M., Kleinberg, R., Lucier, B.: Beating $1-1/e$ for ordered prophets. In: Proceedings of the 49th Annual ACM SIGACT Symposium on Theory of Computing. pp. 61–71 (2017)
- [2] Agrawal, S., Sethuraman, J., Zhang, X.: On optimal ordering in the optimal stopping problem. In: Proceedings of the 21st ACM Conference on Economics and Computation. p. 187–188. EC '20, Association for Computing Machinery, New York, NY, USA (2020). <https://doi.org/10.1145/3391403.3399484>, <https://doi.org/10.1145/3391403.3399484>
- [3] Alaei, S.: Bayesian combinatorial auctions: Expanding single buyer mechanisms to many buyers. In: 2011 IEEE 52nd Annual Symposium on Foundations of Computer Science. pp. 512–521 (2011). <https://doi.org/10.1109/FOCS.2011.90>
- [4] Alaei, S., Hajiaghayi, M., Liaghat, V.: Online prophet-inequality matching with applications to ad allocation. In: Proceedings of the 13th ACM Conference on Electronic Commerce. pp. 18–35 (2012)
- [5] Anari, N., Niazadeh, R., Saberi, A., Shamel, A.: Nearly optimal pricing algorithms for production constrained and laminar bayesian selection. In: Proceedings of the 2019 ACM Conference on Economics and Computation. p. 91–92 (2019)
- [6] Azar, P.D., Kleinberg, R., Weinberg, S.M.: Prophet inequalities with limited information. In: Proceedings of the twenty-fifth annual ACM-SIAM symposium on Discrete algorithms. pp. 1358–1377. SIAM (2014)
- [7] Azar, Y., Chiplunkar, A., Kaplan, H.: Prophet secretary: Surpassing the $1-1/e$ barrier. In: Proceedings of the 2018 ACM Conference on Economics and Computation. pp. 303–318 (2018)
- [8] Braverman, M., Derakhshan, M., Molina Lovett, A.: Max-weight online stochastic matching: Improved approximations against the online benchmark. In: Proceedings of the 23rd ACM Conference on Economics and Computation. p. 967–985. EC '22, Association for Computing Machinery, New York, NY, USA (2022). <https://doi.org/10.1145/3490486.3538315>, <https://doi.org/10.1145/3490486.3538315>
- [9] Chawla, S., Goldner, K., Karlin, A.R., Miller, J.B.: Non-adaptive matroid prophet inequalities. arXiv preprint arXiv:2011.09406 (2020)
- [10] Correa, J., Foncea, P., Hoeksma, R., Oosterwijk, T., Vredeveld, T.: Posted price mechanisms for a random stream of customers. In: Proceedings of the 2017 ACM Conference on Economics and Computation. pp. 169–186 (2017)
- [11] Correa, J., Foncea, P., Hoeksma, R., Oosterwijk, T., Vredeveld, T.: Recent developments in prophet inequalities. SIGecom Exch. **17**(1), 61–70 (may 2019). <https://doi.org/10.1145/3331033.3331039>, <https://doi.org/10.1145/3331033.3331039>
- [12] Correa, J., Saona, R., Ziliotto, B.: Prophet secretary through blind strategies. Mathematical Programming **190**(1-2), 483–521 (2021)
- [13] Dütting, P., Gergatsouli, E., Rezvan, R., Teng, Y., Tsigonias-Dimitriadis, A.: Prophet secretary against the online optimal. In: Proceedings of the 24th ACM Conference on Economics and Computation. p. 561–581. EC '23, Association for Computing Machinery, New York, NY, USA (2023). <https://doi.org/10.1145/3580507.3597736>, <https://doi.org/10.1145/3580507.3597736>
- [14] Ehsani, S., Hajiaghayi, M., Kesselheim, T., Singla, S.: Prophet secretary for combinatorial auctions and matroids. In: Proceedings of the twenty-ninth annual acm-siam symposium on discrete algorithms. pp. 700–714. SIAM (2018)
- [15] Esfandiari, H., Hajiaghayi, M., Liaghat, V., Monemizadeh, M.: Prophet secretary. SIAM Journal on Discrete Mathematics **31**(3), 1685–1701 (2017)
- [16] Ezra, T., Feldman, M., Gravin, N., Tang, Z.G.: Online stochastic max-weight matching: prophet inequality for vertex and edge arrival models. In: Proceedings of the 21st ACM Conference on Economics and Computation. pp. 769–787 (2020)
- [17] Feldman, M., Svensson, O., Zenklusen, R.: Online contention resolution schemes. In: Proceedings of the twenty-seventh annual ACM-SIAM symposium on Discrete algorithms. pp. 1014–1033. SIAM (2016)

- [18] Feng, Y., Niazadeh, R., Saberi, A.: Two-stage stochastic matching with application to ride hailing. In: Proceedings of the 2021 ACM-SIAM Symposium on Discrete Algorithms (SODA). pp. 2862–2877. SIAM (2021)
- [19] Feng, Y., Niazadeh, R., Saberi, A.: Near-optimal bayesian online assortment of reusable resources. In: Proceedings of the 23rd ACM Conference on Economics and Computation. pp. 964–965 (2022)
- [20] Fu, H., Li, J., Xu, P.: A ptas for a class of stochastic dynamic programs. chatzigiannakis i, kaklamanis c, marx d, sannella d, eds. In: Proc. 45th Internat. Colloquium on Automata, Languages, and Programming.(ICALP 2018), Prague, Czech Republic. pp. 1–56 (2018)
- [21] Gravin, N., Wang, H.: Prophet inequality for bipartite matching: Merits of being simple and non adaptive. In: Proceedings of the 2019 ACM Conference on Economics and Computation. pp. 93–109 (2019)
- [22] Gupta, A.: Lecture Notes, IPCO Summer School (2017)
- [23] Hajiaghayi, M.T., Kleinberg, R., Sandholm, T.: Automated online mechanism design and prophet inequalities. In: Proceedings of the 22nd National Conference on Artificial Intelligence - Volume 1. p. 58–65. AAAI’07, AAAI Press (2007)
- [24] Hill, T.P., Kertz, R.P.: Comparisons of stop rule and supremum expectations of i.i.d. random variables. *The Annals of Probability* **10**(2), 336–345 (1982), <http://www.jstor.org/stable/2243434>
- [25] Hill, T.P., Kertz, R.P.: A survey of prophet inequalities in optimal stopping theory. *Contemporary Mathematics* **125**(1), 191–207 (jan 1992)
- [26] Kleinberg, R., Weinberg, S.M.: Matroid prophet inequalities. In: Proceedings of the Forty-Fourth Annual ACM Symposium on Theory of Computing. p. 123–136 (2012)
- [27] Krengel, U., Sucheston, L.: Semiamarts and finite values. *Bulletin of the American Mathematical Society* **83**(4), 745–747 (1977)
- [28] Lucier, B.: An economic view of prophet inequalities. *SIGecom Exch.* **16**(1), 24–47 (sep 2017). <https://doi.org/10.1145/3144722.3144725>, <https://doi.org/10.1145/3144722.3144725>
- [29] Naor, J., Srinivasan, A., Wajc, D.: Online dependent rounding schemes (2023)
- [30] Oxley, J.G.: *Matroid Theory*. Oxford graduate texts in mathematics, Oxford University Press (2006), <https://books.google.ca/books?id=puKta1Hdz-8C>
- [31] Papadimitriou, C., Pollner, T., Saberi, A., Wajc, D.: Online stochastic max-weight bipartite matching: Beyond prophet inequalities. In: Proceedings of the 22nd ACM Conference on Economics and Computation. p. 763–764. EC ’21, Association for Computing Machinery, New York, NY, USA (2021). <https://doi.org/10.1145/3465456.3467613>, <https://doi.org/10.1145/3465456.3467613>
- [32] Pashkovich, K., Sayutina, A.: Non-adaptive matroid prophet inequalities. arXiv preprint arXiv:2301.01700 (2023)
- [33] Rubinstein, A.: Beyond matroids: Secretary problem and prophet inequality with general constraints. In: Proceedings of the forty-eighth annual ACM symposium on Theory of Computing. pp. 324–332 (2016)
- [34] Rubinstein, A., Singla, S.: Combinatorial prophet inequalities. In: Proceedings of the Twenty-Eighth Annual ACM-SIAM Symposium on Discrete Algorithms. pp. 1671–1687. SIAM (2017)
- [35] Rubinstein, A., Wang, J.Z., Weinberg, S.M.: Optimal single-choice prophet inequalities from samples. arXiv preprint arXiv:1911.07945 (2019)
- [36] Samuel-Cahn, E.: Comparison of threshold stop rules and maximum for independent nonnegative random variables. *the Annals of Probability* pp. 1213–1216 (1984)
- [37] Segev, D., Singla, S.: Efficient approximation schemes for stochastic probing and prophet problems. In: Proceedings of the 22nd ACM Conference on Economics and Computation. pp. 793–794 (2021)
- [38] Wajc, D.: Personal Communication (2023)

A Proofs from Section 3

Proof (Proof of Lemma 6). Let $\{\mathcal{X}_t^*(\vec{s}, v_t), \mathcal{X}_t^*(v_t), \mathcal{Y}_t^*(\vec{s}), \mathcal{N}_A^*\}$ indicate an optimal solution for (LP) as in Step 4. Note that the part of the optimal solution which corresponds to the elements from B is also an optimal solution for the following linear program.

$$\begin{aligned} & \text{maximize} && \sum_{u_t \in B} \mathbb{E}_{v_t} [v_t \cdot \mathcal{X}_t(v_t)] \\ & \text{subject to} && \{\mathcal{X}_t(\vec{s}, v), \mathcal{X}_t(v), \mathcal{Y}_t(\vec{s})\} \in \mathcal{P}^B \\ & && \sum_{u_t \in B} \mathbb{E}_{v_t} [\mathcal{X}_t(v_t)] = \mathcal{N}_B^* \end{aligned}$$

Let us now consider the following relaxation of the above linear program by introducing λ .

$$\begin{aligned} & \text{maximize} && \sum_{u_t \in B} \mathbb{E}_{v_t} [v_t \cdot \mathcal{X}_t(v_t)] + \lambda(\mathcal{N}_B^* - \sum_{u_t \in B} \mathbb{E}_{v_t} [\mathcal{X}_t(v_t)]) \\ & \text{subject to} && \{\mathcal{X}_t(\vec{s}, v), \mathcal{X}_t(v), \mathcal{Y}_t(\vec{s})\} \in \mathcal{P}^B \end{aligned}$$

There exists λ^* such that for $\lambda = \lambda^*$ every optimal solution for the first linear program is an optimal solution for the second linear program. Indeed, such a λ^* can be obtained from the dual optimal solution for the first linear program.

Thus, the part of the optimal solution which corresponds to the elements from B is also an optimal solution for the following linear program.

$$\begin{aligned} & \text{maximize} && \sum_{u_t \in B} \mathbb{E}_{v_t} [(v_t - \lambda^*) \cdot \mathcal{X}_t(v_t)] \\ & \text{subject to} && \{\mathcal{X}_t(\vec{s}, v), \mathcal{X}_t(v), \mathcal{Y}_t(\vec{s})\} \in \mathcal{P}^B \end{aligned}$$

Note that the last linear program is encoding optimal online policies on the bin B , where all values for v_t are shifted by λ^* .

B Proofs from Section 4

Lemma 15 (Lemma 2.3 in [31]). *There exist absolute constants $k \in \mathbb{N}$ and $\alpha \in (0, 1)$ so that it is PSPACE-hard to compute an α -approximation for a MAX-S3SAT instance ϕ satisfying the requirement that each variable appears in at most k clauses of ϕ .*

Proof (Proof of Lemma 9). Let ϕ' be an instance of MAX-S3SAT with variables x_1, x_2, \dots, x_n such that each variable appears in at most k' clauses of ϕ' . Let us construct an instance of MAX-S2SAT ϕ as follows:

- define x_1, x_2, \dots, x_n as variables of ϕ
- if a clause in ϕ' contains at most two literals, then directly add this clause to ϕ
- if i th clause in ϕ' contains three literals, i.e. is of the form $(\ell_1 \vee \ell_2 \vee \ell_e)$, define a new deterministic variable c_i , append it to the end of our current variables; after that add ten following *new clauses* to ϕ

$$(\ell_1), (\ell_2), (\ell_3), (c_i), (\neg \ell_1 \vee \neg \ell_2), (\neg \ell_2 \vee \neg \ell_3), (\neg \ell_1 \vee \neg \ell_3), (\ell_1 \vee \neg c_i), (\ell_2 \vee \neg c_i), (\ell_3 \vee \neg c_i)$$

First, note that ϕ satisfies the requirements of Lemma 9 for $k = 10k'$. Indeed, each clause has at most two variables, and each variable appears in at most k clauses of ϕ .

Consider any truth values assigned to literals ℓ_1, ℓ_2, ℓ_3 . If the values of ℓ_1, ℓ_2, ℓ_3 satisfy $(\ell_1 \vee \ell_2 \vee \ell_3)$, then we can assign a value to c_i so that 7 of our new clauses are satisfied. Note that there is no assignment of **True** and **False** to c_i satisfying more than 7 new clauses. If the values of ℓ_1, ℓ_2, ℓ_3 do not satisfy $(\ell_1 \vee \ell_2 \vee \ell_3)$, then we can satisfy at most 6 of our new clauses by any assignment to c_i ; and we can satisfy exactly 6 by setting c_i to **False**.

Let $OPT_{on}(\phi')$ denote the optimal expected value for ϕ' , and equivalently for $OPT_{on}(\phi)$. We claim that $OPT_{on}(\phi) = 6m + OPT_{on}(\phi')$ where m is the number of clauses with three literals in ϕ' .

We can construct an algorithm for ϕ that mimics the decisions of $OPT_{on}(\phi')$ until it reaches clause variables, at which point it assigns them to greedily maximize remaining clauses. As we saw above, we gain 6 satisfied clauses in ϕ for each non-satisfied clause in ϕ' and 7 satisfied clauses in ϕ for each satisfied clause in ϕ , giving

$$OPT_{on}(\phi) \geq 6m + OPT_{on}(\phi').$$

Now construct an algorithm for ϕ' that mimics the decisions of $OPT_{on}(\phi)$. An optimal algorithm for ϕ always yields value at least 6 satisfied clauses per a three-literal clause in ϕ' , since it can set the clause variables c_i , $i = 1, \dots, m$ to get at least 6 satisfied clauses for each original three-literal clause of ϕ' .

Further, as we saw earlier, it is impossible for $OPT_{on}(\phi)$ to gain more than 7 satisfied clauses for any given three-literal clause of ϕ' . In particular, it can gain 7 exactly when the values of x_1, x_2, \dots, x_n satisfy the clause from ϕ' . So our constructed algorithm for ϕ satisfies $OPT_{on}(\phi) - 6m$ clauses, which combined with above implies the equality

$$OPT_{on}(\phi) = 6m + OPT_{on}(\phi').$$

Now suppose that $\alpha' \in (0, 1)$ is the constant from Lemma 15. In order to use Lemma 14, let $Q := OPT_{on}(\phi')$, $Q' := 6m$, and $\beta := 12$. Note that $OPT_{on}(\phi') \geq \frac{m}{2}$ and

$$\frac{Q'}{Q} \leq \frac{6m}{m/2} = \beta.$$

Now Lemma 14 implies an $\alpha := \frac{\alpha'+12}{13}$ approximation for MAX-S2SAT yields an α' -approximation for MAX-S3SAT. So it is PSPACE-hard to approximate MAX-S2SAT within a factor of α .

Proof (Proof of Lemma 10). First, we show that ALG_{opt} selects at least one of $wx_i, w\neg x_i$ for each variable x_i . Suppose for the sake of contradiction that after some history occurring with probability $q > 0$, ALG_{opt} selects neither wx_i nor $w\neg x_i$. Let \mathcal{A} be an algorithm that matches the decisions of ALG_{opt} , except that it selects $w\neg x_i$, and afterwards does not select any edges that would then introduce a cycle.

Consider what we lose out on by running \mathcal{A} instead of ALG_{opt} . Let $\mathcal{A}(\mathcal{I}_\phi)$ be the expected value obtained by \mathcal{A} on \mathcal{I}_ϕ . If no edge adjacent to x_i or $\neg x_i$ arrive in the second phase, then the vertex x_i has no adjacent selected edges before the third phase. So both ALG_{opt} and \mathcal{A} select the edge $x_i\neg x_i$ with value 2 in the third phase, since in this case $x_i\neg x_i$ does not lead to a cycle for any of them.

If some edge adjacent to x_i or $\neg x_i$ arrives in the second phase, then \mathcal{A} can miss out on at most one edge that ALG_{opt} selects. The value of this missed edge can be at most $m^4/2k$. Here, we assume $m^4/2k \geq 2$, which is true for sufficiently large m . By the union bound, the probability that any clause edge adjacent to x_i or $\neg x_i$ arrives is at most $k \cdot m^{-4}$, so we have

$$\mathcal{A}(\mathcal{I}_\phi) - OPT_{on}(\mathcal{I}_\phi) \geq q \left(1 - k \cdot m^{-4} \cdot \frac{m^4}{2k} \right) = \frac{q}{2} > 0,$$

contradicting the optimality of ALG_{opt} .

Second, note that ALG_{opt} never selects both wx_i and $w\neg x_i$ for any variable x_i , $i = 1, \dots, n$. To see this fact, observe that it is more beneficial for ALG_{opt} to accept only wx_i in the first phase and to commit to accept $x_i\neg x_i$ in the third phase.

Proof (Proof of Lemma 11).

It is sufficient to show that if wx_i arrives, i.e. has value 2, ALG_{opt} selects wx_i . For the sake of contradiction suppose that after some history occurring with probability $q > 0$, the edge wx_i arrives but ALG_{opt} does not select it.

Let \mathcal{A} be an algorithm that matches the decisions of ALG_{opt} , except that it selects wx_i when it arrives, and afterwards \mathcal{A} does not select any edges that would then introduce a cycle. Analogously to the proof of Lemma 10 we obtain

$$\mathcal{A}(\mathcal{I}_\phi) - ALG_{opt}(\mathcal{I}_\phi) \geq q \left(1 - k \cdot m^{-4} \cdot \frac{m^4}{2k} \right) = \frac{q}{2} > 0.$$

contradicting the optimality of ALG_{opt} .

Proof (Proof of Lemma 13). Let $\mathcal{A}_1(\mathcal{I}_\phi)$, $\mathcal{A}_2(\mathcal{I}_\phi)$ and $\mathcal{A}_3(\mathcal{I}_\phi)$ be the random variables indicating the total value of elements selected by \mathcal{A} in each of the three phases. We have that $\mathbb{E}[\mathcal{A}_1(\mathcal{I}_\phi)] = 1.25n$ because in expectation each deterministic variable and randomized variable in ϕ lead to the gain of 1 and 1.5 in expectation by rules (1) and (2).

Let C be the random variable indicating the number of edges that arrived in the second phase. We estimate the gain from $\mathcal{A}_2(\mathcal{I}_\phi)$ and $\mathcal{A}_3(\mathcal{I}_\phi)$ conditioned on three possible events $C = 0$, $C = 1$, and $C > 1$. Clearly, we have $\mathbb{E}[\mathcal{A}_2(\mathcal{I}_\phi) + \mathcal{A}_3(\mathcal{I}_\phi) \mid C = 0] = 2n$, as under the condition $C = 0$ there is no gain in the second phase and every edge is selected in the third phase by rule (3). We also have

$$\mathbb{E}[\mathcal{A}_2(\mathcal{I}_\phi) + \mathcal{A}_3(\mathcal{I}_\phi) \mid C = 1] = 2n + P_{\mathcal{A}}(\mathcal{I}_\phi) \cdot \left(\frac{m^4}{2k} - 2 \right),$$

because in this case the edge that arrived in the second phase is selected exactly when the corresponding clause is satisfied by the **True** and **False** assignment produced by the first phase, while the clause is satisfied with probability $P_{\mathcal{A}}(\mathcal{I}_\phi)$.

Let us state a trivial bound for the gain in the second and third phases conditioned on $C > 2$

$$\mathbb{E}[\mathcal{A}_2(\mathcal{I}_\phi) + \mathcal{A}_3(\mathcal{I}_\phi) \mid C > 1] \leq 2n + m \cdot \frac{m^4}{2k} \leq 2 \cdot \frac{m^5}{2k} \leq m^5,$$

which is obtained by assuming that all edges in the last two phases arrive and \mathcal{A} selects all of them. However, the event that $C > 1$ has a very small probability of occurring

$$\Pr[C > 1] = \sum_{t=2}^m \binom{m}{t} (m^{-4})^t (1 - m^{-4})^{m-t} \leq \sum_{t=2}^m m^t (m^{-4t}) \leq 2m^{-6}.$$

So we have

$$\delta_{\mathcal{A}} := \mathbb{E}[\mathcal{A}_2(\mathcal{I}_\phi) + \mathcal{A}_3(\mathcal{I}_\phi) \mid C > 1] \cdot \Pr[C > 1] \in [0, 2m^{-1}].$$

Thus, the expected gain of \mathcal{A} can be estimated as follows

$$\begin{aligned} \mathcal{A}(\mathcal{I}_\phi) &= \mathbb{E}[\mathcal{A}_1(\mathcal{I}_\phi)] + \mathbb{E}[\mathcal{A}_2(\mathcal{I}_\phi) + \mathcal{A}_3(\mathcal{I}_\phi)] = 1.25n + \\ &2n \cdot (1 - m^{-4})^m + \left(2n + P_{\mathcal{A}}(\mathcal{I}_\phi) \cdot \left(\frac{m^4}{2k} - 2 \right) \right) \cdot m \cdot m^{-4} \cdot (1 - m^{-4})^{m-1} + \delta_{\mathcal{A}}, \end{aligned}$$

where we used that $\Pr[C = 0] = (1 - m^{-4})^m$ and $\Pr[C = 1] = m \cdot m^{-4} \cdot (1 - m^{-4})^{m-1}$.

C Laminar Instance with Bad Concentration

Proof (Proof of Theorem 1). For simplicity, we will label the elements of the matroid as $U = \{u_1, u_2, \dots, u_n\}$. For each element u_i , the produced instance uses only two-point distributions with support $\{0, v_i\}$ for some $v_i > 0$. Let p_i be the probability that u_i takes on value v_i . Thus, with probability $1 - p_i$ the element u_i takes on value 0.

Given natural numbers r and k , the following algorithm generates an anti-concentrated instance \mathcal{M} . Here, the choice of k is later determined by the value of ε .

ALGORITHM 2: PRODUCE-INSTANCE(r, k)

```

1  $v \leftarrow 10^{1+2k}, v' \leftarrow 10^k, p \leftarrow 10^{-1-k};$ 
2  $n_1 \leftarrow 1, U_1 \leftarrow \{u_1\};$ 
3  $v_1 \leftarrow 1, p_1 \leftarrow \frac{1}{2};$ 
4  $\Delta_1 \leftarrow 1;$ 
5  $\mathcal{L}_1 \leftarrow \{\{u_1\}\}, c_1(\{u_1\}) \leftarrow 1;$ 
6 for  $i = 2, 3, \dots, r$  do
7    $\alpha_i \leftarrow \frac{\Delta_{i-1}}{10^{(r+1)^2}} \cdot \frac{1}{v};$ 
8    $U_i \leftarrow U_{i-1} \cup \{u_{n_{i-1}+1}, \dots, u_{n_{i-1}+i+2}\}, n_i \leftarrow n_{i-1} + i + 2;$ 
9    $\mathcal{L}_i \leftarrow (\mathcal{L}_{i-1} \setminus \{U_{i-1}\}) \cup \{U_{i-1} \cup \{u_{n_{i-1}+1}\}, U_i, \{u_{n_{i-1}+1}, u_{n_{i-1}+i+2}\}\};$ 
10   $c_i(B) \leftarrow c_{i-1}(B)$  for all  $B \in \mathcal{L}_{i-1} \cap \mathcal{L}_i;$ 
11   $c_i(U_{i-1} \cup \{u_{n_{i-1}+1}\}) \leftarrow i - 1, c_i(U_i) \leftarrow i, c_i(\{u_{n_{i-1}+1}, u_{n_{i-1}+i+2}\}) \leftarrow 1;$ 
12   $\Delta_i \leftarrow \alpha_i \cdot v \cdot p^i \cdot (1 - p);$ 
13   $p_{n_{i-1}+1} \leftarrow 1, v_{n_{i-1}+1} \leftarrow \alpha_i \cdot 10^k + \frac{\Delta_i}{2};$ 
14   $p_{n_{i-1}+2}, \dots, p_{n_{i-1}+i+2} \leftarrow p;$ 
15   $v_{n_{i-1}+2}, \dots, v_{n_{i-1}+i} \leftarrow \alpha_i \cdot v';$ 
16   $v_{n_{i-1}+i+1}, v_{n_{i-1}+i+2} \leftarrow \alpha_i \cdot v;$ 
17 end
18 return  $\mathcal{M} = (U_r, \mathcal{L}_r, C_r)$  with values  $v_1, \dots, v_{n_r}$  and probabilities  $p_1, \dots, p_{n_r};$ 
    
```

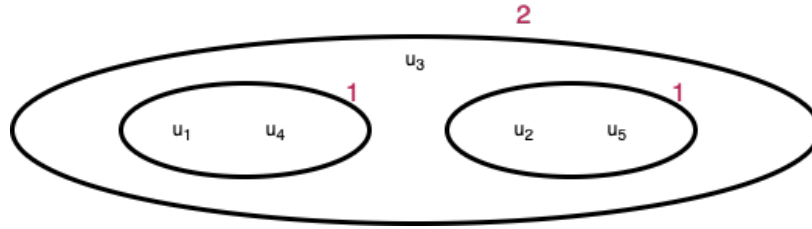


Fig. 5. The laminar family, capacities, and arrival order generated by Algorithm 2 when $r = 2$.

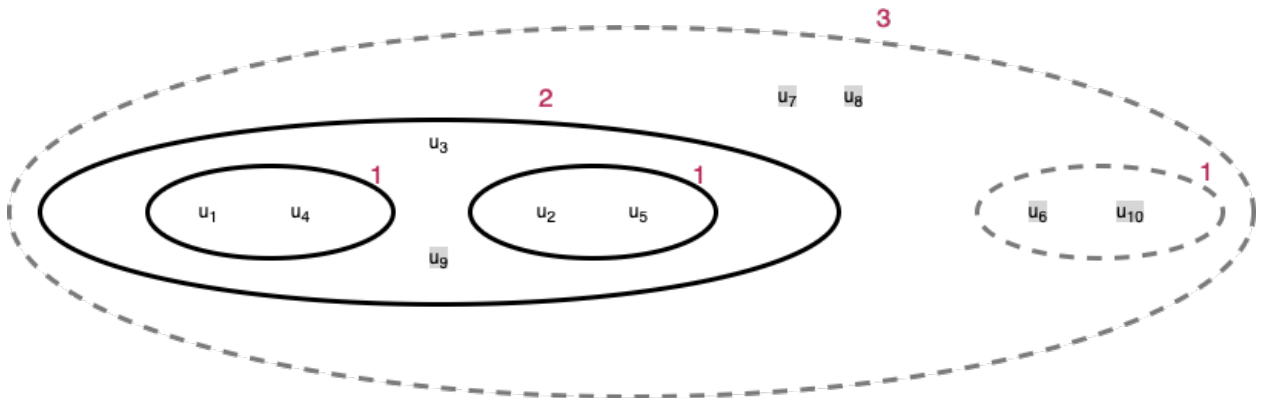


Fig. 6. The laminar family, capacities, and arrival order generated by Algorithm 2 when $r = 3$. New sets in the laminar family are drawn with dashed lines, and new items are highlighted.

We note that the total number of items is $|U_r| = 1 + \sum_{i=2}^r i + 2 \leq (r + 1)^2$.

Lemma 16. *For every $i \geq 2$, the probability that we have $OPT(\mathcal{M}) \cap \{u_1 \dots, u_{n_i}\} = \emptyset$, conditioned on $OPT(\mathcal{M}) \cap \{u_1 \dots, u_{n_{i-1}}\} = \emptyset$, is at least $(1-p)^{i+1}$.*

Proof. Let us re-label the elements so that $(w_1, w_2, \dots, w_{i+2}) = (u_{n_{i-1}+1}, u_{n_{i-1}+2}, \dots, u_{n_{i-1}+i+2})$. Let us show that conditioned on $OPT(\mathcal{M}) \cap \{u_1 \dots, u_{n_{i-1}}\} = \emptyset$ the optimal policy does not select w_1 . This suffices to show the statement of the lemma, since the probability that all elements among w_2, \dots, w_{i+2} have value zero is $(1-p)^{i+1}$.

Now let us condition on $OPT(\mathcal{M}) \cap \{u_1 \dots, u_{n_{i-1}}\} = \emptyset$ and estimate the expected gain of strategies that select and do not select w_1 .

Let us consider a strategy that does not select w_1 and after that greedily accepts every element among w_2, \dots, w_{i+2} that has non-zero value and is feasible. It is feasible to select every element among w_2, \dots, w_{i+2} that has non-zero value, unless all of w_2, \dots, w_{i+2} have non-zero values. On the elements w_2, \dots, w_{i+2} , this strategy yields expected value

$$\alpha_i \cdot ((i-1) \cdot v' \cdot p + 2 \cdot v \cdot p - v \cdot p^{i+1}) .$$

Now consider any strategy that selects the element w_1 . Clearly, such a strategy cannot select w_{i+2} due to the constraints in the laminar matroid. On the elements w_2, \dots, w_{i+2} , this strategy yields expected value at most

$$\alpha_i \cdot ((i-1) \cdot v' \cdot p + v \cdot p - v \cdot p^i) .$$

Indeed, to maximize the expected gain on w_2, \dots, w_{i+1} , this strategy greedily selects any item with non-zero value.

Note that so far we considered only gains on the elements w_2, \dots, w_{i+2} . However, there are elements with arrivals after the arrival of w_{i+2} . Due to our scaling with $\alpha_{i+1}, \alpha_{i+2}, \dots$, we know that the value of any element after w_{i+2} is at most $\Delta_i / (10(r+1)^2)$. There are at most $(r+1)^2$ elements arriving after w_{i+2} , so the sum of their value is at most $\Delta_i / 10$. Therefore, if a strategy selects w_1 , its expected value from elements arriving after w_1 is at most

$$\alpha_i \cdot ((i-1) \cdot v' \cdot p + v \cdot p - v \cdot p^i) + \frac{\Delta_i}{10} .$$

So for the optimal strategy to select w_1 , the value of w_1 should be at least

$$\begin{aligned} & \alpha_i \cdot ((i-1) \cdot v' \cdot p + 2 \cdot v \cdot p - v \cdot p^{i+1}) - \alpha_i \cdot ((i-1) \cdot v' \cdot p + v \cdot p - v \cdot p^i) + \frac{\Delta_i}{10} \\ &= \alpha_i \cdot (v \cdot p - v \cdot p^{i+1} + v \cdot p^i) - \frac{\Delta_i}{10} \\ &= \alpha_i \cdot 10^k + \Delta_i - \frac{\Delta_i}{10} \\ &> \alpha_i \cdot 10^k + \frac{\Delta_i}{2} . \end{aligned}$$

Therefore, the optimal solution does not select w_1 because the value of w_1 is only $\alpha_i \cdot 10^k + \Delta_i / 2$.

Lemma 17. *For every $i \geq 2$, the probability that we have $|OPT(\mathcal{M}) \cap \{u_1 \dots, u_{n_i}\}| = i$, conditioned on $|OPT(\mathcal{M}) \cap \{u_1 \dots, u_{n_{i-1}}\}| = i-1$, equals 1.*

Proof. Let us re-label the elements so that $(w_1, w_2, \dots, w_{i+2}) = (u_{n_{i-1}+1}, u_{n_{i-1}+2}, \dots, u_{n_{i-1}+i+2})$. Let us show that conditioned on $|OPT(\mathcal{M}) \cap \{u_1 \dots, u_{n_{i-1}}\}| = i-1$ the optimal policy selects w_1 . To do so, we analyze the performance of possible strategies on all elements after w_{i+2} in both the situation that w_1 is selected and the situation that it is skipped.

If w_1 is skipped by a strategy, then to obtain optimal gain on w_2, \dots, w_{i+2} , a strategy has to greedily select the first item that has non-zero value, noting that w_{i+1} cannot be taken as it is contained in the saturated constraint corresponding to $U_{i-1} \cup \{w_{i+1}\}$. The probability that at least one of w_2, \dots, w_i has a

non-zero value is $(1 - (1 - p)^{i-1})$, in which case we gain value $\alpha_i \cdot v'$. Otherwise, with probability $(1 - p)^{i-1} \cdot p$, none of w_2, \dots, w_i have a non-zero value but w_{i+2} does, and so a strategy gains the value $\alpha_i \cdot v$. So, a strategy skipping the element w_1 will gain in expectation on the elements $w_2 \dots, w_{i+2}$ at most

$$\alpha_i \cdot (v' \cdot (1 - (1 - p)^{i-1}) + v \cdot p \cdot (1 - p)^{i-1}) = \alpha_i \cdot 10^k.$$

As seen in the proof of Lemma 16, the total value of all elements after w_{i+2} is bounded by $\Delta_i/10$. So the expected gain of a strategy skipping w_1 is at most $\alpha_i \cdot 10^k + \Delta_i/10$.

Now, note that $\alpha_i \cdot 10^k + \Delta_i/10 < \alpha_i \cdot 10^k + \Delta_i/2$ and $\alpha_i \cdot 10^k + \Delta_i/2$ is the value of w_1 . Hence, the optimal strategy selects w_1 , as wanted.

Finally, we note that item u_1 is taken by the optimal algorithm whenever its value is non-zero. So the optimal strategy selects u_1 with probability $1/2$. Applying Lemmas 16 and 17 inductively, this implies that

$$\Pr[|OPT(\mathcal{M})| = 0] \geq \frac{1}{2} \cdot (1 - p)^{(r+1)^2}$$

and

$$\Pr[|OPT(\mathcal{M})| = r] \geq \frac{1}{2}.$$

Selecting sufficiently large k , we have $(1 - p)^{(r+1)^2} \geq (1 - \epsilon)$, obtaining the statement of Theorem 1.