

# Stealing Trust: Unveiling Vulnerabilities in Web3 Authentication

Kailun Yan\*  
School of Cyber Science and  
Technology, Shandong University  
Qingdao, China  
kailun@mail.sdu.edu.cn

Xiaokuan Zhang†  
George Mason University  
Fairfax, United States  
xiaokuan.zhang.cs@gmail.com

Wenrui Diao†  
School of Cyber Science and  
Technology, Shandong University  
Qingdao, China  
diaowenrui@link.cuhk.edu.hk

## ABSTRACT

As the field of Web3 continues its rapid expansion, the security of Web3 authentication, often the gateway to various Web3 applications, becomes increasingly crucial. Despite its widespread use as a login method by numerous Web3 applications, the security risks of Web3 authentication have not received much attention. This paper investigates the vulnerabilities in the Web3 authentication process and proposes a new type of attack. In attacks, attackers trick users into blindly signing messages from target applications by exploiting users' inability to verify the source of messages, thereby achieving unauthorized access to the target application. We have developed Web3AuthChecker, a dynamic detection tool that interacts with Web3 authentication-related APIs to identify vulnerabilities. Our evaluation of real-world Web3 applications shows that a staggering 75.8% (22/29) of Web3 authentication deployments are at risk of attacks. In response to this alarming situation, we implemented Web3AuthGuard on the open-source wallet MetaMask to alert users of potential attacks. Our evaluation results show that Web3AuthGuard can successfully raise alerts in 80% of the tested Web3 authentications. We have responsibly reported our findings to vulnerable websites and have been assigned two CVE IDs.

## CCS CONCEPTS

• Security and privacy → Authentication.

## KEYWORDS

Web3, Authentication, Blockchain, Security

### ACM Reference Format:

Kailun Yan, Xiaokuan Zhang, and Wenrui Diao. 2024. Stealing Trust: Unveiling Vulnerabilities in Web3 Authentication. In . ACM, New York, NY, USA, 4 pages. <https://doi.org/10.1145/nnnnnnn.nnnnnnn>

## 1 INTRODUCTION

Blockchain technology has been evolving rapidly since its first introduction by Satoshi Nakamoto in 2008 [24]. Web3 applications,

taking advantage of the decentralized nature of blockchain technology, have garnered significant attention from both investors and users [21]. Decentralized Finance, or DeFi, is a prominent example of the Web3 application, and its Total Value Locked (TVL) was around 52 billion USD as of December 2023 [34]. The total value of the Non-Fungible Token (NFT) marketplaces has exceeded two billion USD [9]. In January 2024, the total value of assets in the Web3 game *Midas Miner* was over one billion USD [11]. The considerable financial activities underscore the enormous potential of the Web3 ecosystem.

Web3 applications need to perform user authentication to grant the correct permissions for end users to access off-chain resources. Web3 authentication is a challenge-response protocol where the user is identified by a public key (wallet address): the Web3 application sends a specific message to the crypto wallet, signed by the user, and sent back to the application. The application verifies the signature and authenticates the user if it is valid [37]. This decentralized approach differs markedly from the traditional authentication protocols of Web2. The most common way to perform Web3 authentication is through MetaMask [2], a famous Web3 wallet for users to manage their digital assets and perform DeFi transactions. As per statistics, MetaMask had 30 million monthly active users [13]. Since the Web3 application is fundamentally a website, in this paper, we use the terms *application* and *website* interchangeably.

Due to the popularity of Web3 and the large amount of money involved, the security of Web3 is paramount. Existing research mainly focuses on the security risks associated with Web3 applications. These include vulnerabilities in smart contracts [6, 8, 14, 17, 28, 29, 31–33, 40], malicious DeFi attacks [4, 5, 10, 22, 27, 36, 41, 42], and the security of NFT marketplaces [12, 38]. The security and anonymity of crypto wallets [30, 35, 39], as well as cryptocurrency scams [16, 20] have also raised concerns. However, to the best of our knowledge, almost no work has paid attention to the security of Web3 authentication.

To bridge the gap, this paper takes the *first* step toward understanding the security risks of Web3 authentication. We find that during the Web3 authentication process, there needs to be a proper way for the user to identify the origin of the message to be signed. Also, users use crypto wallets to manage key pairs, and one key pair is often used across multiple applications [7]. As a result, a malicious application A can present a valid signing message from application B for the user to sign (assuming the user uses the same key pair on both applications, which is very common [7]). The user *blindly* signs the message, unwittingly granting application A the authorization to access application B. We call such attacks **Message Attacks**. We have systematically analyzed the attack surfaces during the Web3 authentication process, which leads to the identification

\*Part of Kailun Yan's work was done when visiting George Mason University.

†Corresponding authors.

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than ACM must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from [permissions@acm.org](mailto:permissions@acm.org).

Conference'17, July 2017, Washington, DC, USA

© 2024 ACM.

ACM ISBN 978-x-xxxx-xxxx-x/YY/MM

<https://doi.org/10.1145/nnnnnnn.nnnnnnn>

of several categories of potential vulnerabilities in the message design and server verification.

**WEB3AUTHCHECKER.** To detect attacks, we have designed and implemented WEB3AUTHCHECKER, a dynamic detection tool that examines the security of the Web3 authentication process. WEB3AUTHCHECKER bypasses the web page (front-end) and directly tests the API (back-end). It requests Web3 authentication-related APIs and checks the responses to find vulnerabilities. The tool consists of two modules: 1) *Checker*, which defines a set of general attack payloads and rules for testing APIs to find potential vulnerabilities, and 2) *FlexRequest*, an HTTP library designed to streamline testing identical APIs on different websites. Specifically, to test a website, we load the authentication-related APIs of the website to *Checker*. *Checker* then instructs *FlexRequest* to make a series of requests to these APIs. Finally, *Checker* examines the data returned by *FlexRequest* to determine the potential presence of this vulnerability.

To evaluate the impact of Message Attacks, we collected 29 real-world cases of Web3 authentication, including 25 cases of using Web3 authentication for user login and 4 cases for profile update. The 29 cases are from 27 websites, with some encompassing both types. The websites we studied, which span marketplaces, games, and services, were sourced from DappRadar and Google searches. In January 2024 alone, these sites reported a total transaction volume exceeding 592 million US dollars and over 1.29 million unique active wallets (UAW), underscoring the widespread nature of these vulnerabilities. By testing the APIs of 29 cases, WEB3AUTHCHECKER reports that 75.8% (22/29) of Web3 authentications belonging to 20 websites are vulnerable to attacks. We manually checked all 29 cases and confirmed that the results were accurate. Building upon the foundation of the attack, we have developed more advanced attacks: the Replay Attack renders the session mechanism ineffective, while the Multi-Message Attack allows attackers to acquire user identities across multiple websites in a single attack. In our study of 29 cases, we identified 11 instances of the Replay Attacks and 7 of the Multi-Message Attacks.

**WEB3AUTHGUARD.** To address these vulnerabilities, websites and crypto wallets must implement a complete Web3 authentication update, but this is difficult to implement immediately. Therefore, we proposed a user-side mitigation solution, WEB3AUTHGUARD, to help users immediately mitigate attacks in crypto wallets. When a user logs into a website B, the wallet equipped with WEB3AUTHGUARD will extract a message template from B's message. Later, when the user attempts to log into a new website A, the wallet will perform a regex match between the message from A and the message template from B. If a match is successful, the wallet will alert the user about the potential attack on that website. We implement WEB3AUTHGUARD in MetaMask's open-source code. We tested 25 user logins, and WEB3AUTHGUARD successfully addressed 20 of them. WEB3AUTHGUARD is unable to handle the remaining five cases because their vulnerabilities allow an attacker to modify the message body at will.

**Responsible Disclosure.** Following the responsible disclosure policy, we reported the vulnerabilities we discovered to the corresponding websites. One of them (*LearnBlockchain*) has acknowledged and fixed the vulnerability. Additionally, since some vendors did not respond to our security reports, we submitted our findings directly

to the CVE program. Currently, two CVE IDs (CVE-2023-50053 and CVE-2023-50059) have been assigned.

**Demos.** The PoC demos of Message Attacks and mitigation are available at <https://sites.google.com/view/web3auth>.

**Contributions.** Our contributions are as follows:

- **New Vulnerabilities and Attacks.** We conducted an in-depth investigation of the vulnerabilities in Web3 authentication and identified a new type of attack, called Message Attacks, and two advanced attacks – Replay Attacks and Multi-Message Attacks (Section ??).
- **New Detection Tool (WEB3AUTHCHECKER).** We implemented a dynamic detection tool, WEB3AUTHCHECKER, to detect such vulnerabilities. It sends requests to Web3 backends and checks the responses to identify vulnerabilities (Section ??).
- **Empirical Analysis.** We performed detection on 29 Web3 authentication cases using WEB3AUTHCHECKER, and found that 75.8% of them are at risk of Message Attacks. We also conducted two case studies (Section ??).
- **User-side Mitigation (WEB3AUTHGUARD).** We designed and implemented a user-side mitigation solution, WEB3AUTHGUARD, which helps to alert users about a potential Message Attack when the user attempts to log into a new website (Section ??).
- **Open-source Release.** To benefit the Web3 community, we will open-source our code on GitHub, including the detection tool WEB3AUTHCHECKER<sup>1</sup> and a MetaMask-based crypto wallet with built-in WEB3AUTHGUARD<sup>2</sup>.

## 2 BACKGROUND

This section introduces the background of Web3, Web3 authentication, and crypto wallets, then explores the potential impacts of unauthorized access in Web3 applications.

### 2.1 Web3

Web3, also known as Web 3.0, signifies the upcoming evolution of the Internet. It will move away from centralized servers and data centers owned by a few large corporations and instead use a distributed network, blockchain, to host the data [21]. Blockchains are decentralized ledgers that record transactions across many nodes (miners). This ensures that the data cannot be altered without the consensus of the network.

**Web3 Application.** Applications built on the blockchain network are called Web3 applications or decentralized applications (DApps). Web3 applications cover a broad scope, including NFT marketplaces (NFTM), which allow creators and buyers to trade digital assets efficiently and securely; decentralized exchanges (DEX), which enable trading of digital currencies without a central authority; and decentralized finance (DeFi) platforms provide financial services such as lending and borrowing. Each Web3 application typically consists of a smart contract and a website. Smart contracts automate operations (transactions) and store critical data on the blockchain, enhancing transparency and security. Websites serve as the user interface and manage off-chain data. While some Web3 applications are embedded within mobile apps like crypto wallets, they

<sup>1</sup><https://github.com/d0scoo1/Web3AuthChecker>

<sup>2</sup><https://github.com/d0scoo1/Web3AuthGuard>

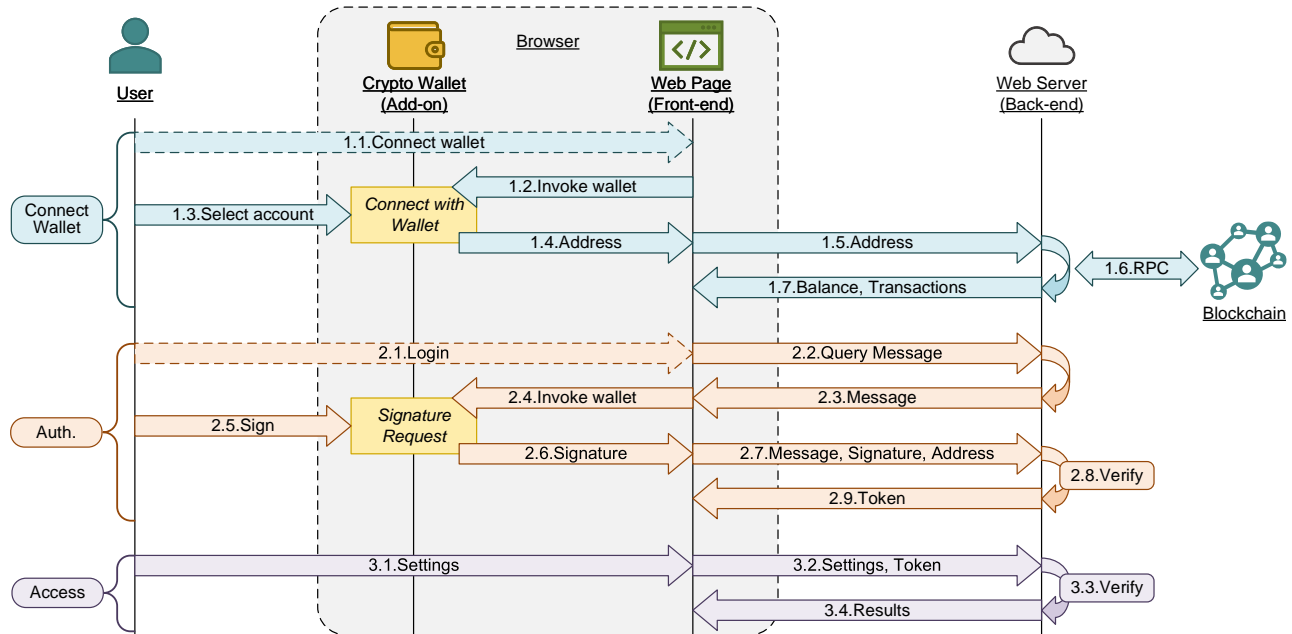


Figure 1: Web3 Authentication Process.

fundamentally function as websites. This paper focuses on websites of Web3 applications and uses the terms *application* and *website* interchangeably.

**Web3 Authentication.** Web3 authentication is a decentralized off-chain authentication technology based on cryptography. Web3 authentication offers benefits such as anonymity, security, and decentralization and is widely used in Web3 applications [25]. In these applications, users can employ their public keys as identifiers to manage their off-chain data. Specifically, it uses asymmetric encryption, where the client (crypto wallet) signs a specific message with their private key, and the server (Web3 application) verifies the message and its signature to authenticate the user’s identity (public key) [19]. Compared to Web2 authentication technologies, Web3 employs elliptic curve algorithms, which provide enhanced security. Moreover, in the Web3 ecosystem, public keys serve as identifiers, offering better anonymity. In contrast, Web2 authentication methods [15, 18, 23, 26] often require users to provide personally identifiable information (PII), such as phone numbers and email addresses. These are stored on centralized servers, exposing users to risks like privacy breaches. Furthermore, Web3 authentication allows users to maintain a unified identity (public key) across multiple applications and services. Users no longer need to manage accounts and passwords for each website, which simplifies the user experience and reduces security risks.

**Crypto Wallet.** Crypto wallets are a crucial component of the Web3 ecosystem, allowing users to securely store and manage their digital assets (key pairs) using hardware or software [35]. Most Web3 applications (websites) are compatible with popular crypto wallets and interact with them through APIs such as *Web3.js* [3] or *ethers.js* [1]. When a user accesses a website, the website examines the browser for the presence of a Web3 provider, which is the API

interface for crypto wallets. If the Web3 provider is detected, the website establishes a connection to it and prompts the user to connect their wallet. After user approval, the wallet shares the account addresses (public keys) with the website. This facilitates subsequent interactions, including transactions, smart contract operations, and Web3 authentication.

## 2.2 Impacts of Unauthorized Access in Web3

**Asset Loss.** Web3 authentication only grants users access to off-chain data, and on-chain transactions usually require additional signatures so that Web3 authentication will not impact users’ on-chain assets. However, attackers can still profit from unauthorized access to user accounts. Here, we highlight two significant asset losses: *Unlocked Content* and *Unfair Trading*.

*Unlocked Content.* In NFT marketplaces, some items are valued from *unlocked content*. If attackers gain unauthorized access to these accounts, they can directly access the *locked content* without any cost. Moreover, most Web3 websites do not have abnormal login detection, meaning that the owners may never be notified when their locked content is leaked or stolen.

*Unfair Trading.* An NFT’s characteristics directly influence its value, with rarer traits often commanding higher prices [12]. For instance, in a popular game, CryptoKitties, the cost of each cat is determined by 13 distinct properties. While an attacker generally cannot manipulate the price of an item without signature authorization, they could alter the properties without restrictions in collections that support *lazy minting*. This could allow an attacker to change the properties of a low-value item to a rare one and then purchase it, resulting in an *unfair trade*. Even if the owner detects the attack afterward, they cannot reverse the transaction.

Lazy minting allows creators to produce NFTs without upfront gas costs, significantly reducing the barriers to selling NFTs.

**Compromised Anonymity and Reputation.** The key pair in the crypto wallet is randomly generated, so the user's public key (address) has good anonymity, but an attacker who gains access to a user's account can link the user's address to personal information such as email, effectively breaking the anonymity. Moreover, unauthorized access can damage users' reputations, as attackers may use the user's account for illegal activities. NFT marketplaces allow users to link their social media accounts, such as Twitter or Facebook. These social media accounts represent important channels for artists to strengthen their connections with users and promote their artworks [38], which attackers can exploit to encourage illegal activities, causing reputational damage.

## REFERENCES

- [1] 2023. Ethers.js. <https://docs.ethers.org/v6/>. (Accessed on 01/27/2024).
- [2] 2024. Metamask. <https://metamask.io/>. (Accessed on 01/27/2024).
- [3] 2024. Web3.js. <https://web3js.org/>. (Accessed on 01/27/2024).
- [4] Kushal Babel, Philip Daian, Mahimna Kelkar, and Ari Juels. 2023. Clockwork Finance: Automated Analysis of Economic Security in Smart Contracts. In *Proc. of the 44th IEEE Symposium on Security and Privacy (S&P 2023)*.
- [5] Kushal Babel, Mojan Javaheripi, Yan Ji, Mahimna Kelkar, Farinaz Koushanfar, and Ari Juels. 2023. Lanturn: Measuring Economic Security of Smart Contracts Through Adaptive Learning. In *Proc. of the ACM SIGSAC Conference on Computer and Communications Security (CCS 2023)*.
- [6] Priyanka Bose, Dipanjan Das, Yanju Chen, Yu Feng, Christopher Kruegel, and Giovanni Vigna. 2022. SAILFISH: Vetting Smart Contract State-Inconsistency Bugs in Seconds. In *Proc. of the 43rd IEEE Symposium on Security and Privacy (S&P 2022)*.
- [7] Ting Chen, Zihao Li, Yuxiao Zhu, Jiachi Chen, Xiapu Luo, John Chi-Shing Lui, Xiaodong Lin, and Xiaosong Zhang. 2020. Understanding Ethereum via Graph Analysis. *ACM Trans. Internet Techn.* (2020).
- [8] Ting Chen, Yufei Zhang, Zihao Li, Xiapu Luo, Ting Wang, Rong Cao, Xiuzhuo Xiao, and Xiaosong Zhang. 2019. TokenScope: Automatically Detecting Inconsistent Behaviors of Cryptocurrency Tokens in Ethereum. In *Proc. of the ACM SIGSAC Conference on Computer and Communications Security (CCS 2019)*.
- [9] Coinmarketcap. 2024. Highest Price NFT Stats. <https://coinmarketcap.com/>. (Accessed on 01/27/2024).
- [10] Philip Daian, Steven Goldfeder, Tyler Kell, Yunqi Li, Xueyuan Zhao, Iddo Bentov, Lorenz Breidenbach, and Ari Juels. 2020. Flash Boys 2.0: Frontrunning in Decentralized Exchanges, Miner Extractable Value, and Consensus Instability. In *Proc. of the 41th IEEE Symposium on Security and Privacy (S&P 2020)*.
- [11] DappRadar. 2024. Midas Miner. <https://dappradar.com/dapp/midas-miner>. (Accessed on 01/27/2024).
- [12] Dipanjan Das, Priyanka Bose, Nicola Ruaro, Christopher Kruegel, and Giovanni Vigna. 2022. Understanding Security Issues in the NFT Ecosystem. In *Proc. of the ACM SIGSAC Conference on Computer and Communications Security (CCS 2022)*.
- [13] EarthWeb. 2022. Ethereum Wallet MetaMask Passes 30M Users, Plans DAO and Token. <https://decrypt.co/95039/metamask-consensys-30-million-users>. (Accessed on 01/27/2024).
- [14] Joel Frank, Cornelius Aschermann, and Thorsten Holz. 2020. ETHBMC: A Bounded Model Checker for Smart Contracts. In *Proc. of 29th USENIX Security Symposium (USENIX Security 2020)*.
- [15] Maximilian Golla, Grant Ho, Marika Lohmus, Monica Pulluri, and Elissa M. Redmiles. 2021. Driving 2FA Adoption at Scale: Optimizing Two-Factor Authentication Notification Design Patterns. In *Proc. of the 30th USENIX Security Symposium (USENIX Security 2021)*.
- [16] Bowen He, Yuan Chen, Zhuo Chen, Xiaohui Hu, Yufeng Hu, Lei Wu, Rui Chang, Haoyu Wang, and Yajin Zhou. 2023. TxPhishScope: Towards Detecting and Understanding Transaction-based Phishing on Ethereum. In *Proc. of the ACM Conference on Computer and Communications Security (CCS 2023)*.
- [17] Ningyu He, Ruiyi Zhang, Haoyu Wang, Lei Wu, Xiapu Luo, Yao Guo, Ting Yu, and Xuxian Jiang. 2021. EOSAFE: Security Analysis of EOSIO Smart Contracts. In *Proc. of the 30th USENIX Security Symposium (USENIX Security 2021)*.
- [18] Louis Jannett, Vladislav Mladenov, Christian Mainka, and Jörg Schwenk. 2022. DISTINCT: Identity Theft using In-Browser Communications in Dual-Window Single Sign-On. In *Proc. of the ACM SIGSAC Conference on Computer and Communications Security (CCS 2022)*.
- [19] Don Johnson, Alfred Menezes, and Scott A. Vanstone. 2001. The Elliptic Curve Digital Signature Algorithm (ECDSA). *Int. J. Inf. Sec.* 1, 1 (2001), 36–63. <https://doi.org/10.1007/S102070100002>
- [20] Xigao Li, Anurag Yepuri, and Nick Nikiforakis. 2023. Double and Nothing: Understanding and Detecting Cryptocurrency Giveaway Scams. In *Proc. of the 30th Annual Network and Distributed System Security Symposium (NDSS 2023)*.
- [21] Zhuotao Liu, Yangxi Xiang, Jian Shi, Peng Gao, Haoyu Wang, Xusheng Xiao, Bihan Wen, Qi Li, and Yih-Chun Hu. 2022. Make Web3.0 Connected. *IEEE Trans. Dependable Secur. Comput.* (2022).
- [22] Robert McLaughlin, Christopher Kruegel, and Giovanni Vigna. 2023. A Large Scale Study of the Ethereum Arbitrage Ecosystem. In *Proc. of the 32nd USENIX Security Symposium (USENIX Security 2023)*.
- [23] Collins W. Munyendo, Philipp Markert, Alexandra Nisenoff, Miles Grant, Elena Korkes, Blase Ur, and Adam J. Aviv. 2022. "The Same PIN, Just Longer": On the (In)Security of Upgrading PINs from 4 to 6 Digits. In *Proc. of the 31st USENIX Security Symposium (USENIX Security 2022)*.
- [24] Satoshi Nakamoto. 2008. Bitcoin: A Peer-to-Peer Electronic Cash System. <https://bitcoin.org/bitcoin.pdf>. (Accessed on 01/27/2024).
- [25] Williams Peter. 2023. Web3 Authentication: What is it? What Use Can It Have? <https://medium.com/coinmonks/web3-authentication-what-is-it-what-use-can-it-have-71bca4a70895>. (Accessed on 04/17/2024).
- [26] Pieter Philippaerts, Davy Preuveneers, and Wouter Joosen. 2022. OAuch: Exploring Security Compliance in the OAuth 2.0 Ecosystem. In *Proc. of the 25th International Symposium on Research in Attacks, Intrusions and Defenses (RAID 2022)*.
- [27] Kaihua Qin, Liyi Zhou, Benjamin Livshits, and Arthur Gervais. 2021. Attacking the DeFi Ecosystem with Flash Loans for Fun and Profit. In *Proc. of the 25th Financial Cryptography and Data Security (FC 2021)*.
- [28] Michael Rodler, Wenting Li, Ghassan O. Karame, and Lucas Davi. 2019. Sereum: Protecting Existing Smart Contracts Against Re-Entrancy Attacks. In *Proc. of the 26th Annual Network and Distributed System Security Symposium (NDSS 2019)*.
- [29] Christoph Sendner, Huili Chen, Hossein Fereidooni, Lukas Petzi, Jan König, Jasper Stang, Alexandra Dmitrienko, Ahmad-Reza Sadeghi, and Farinaz Koushanfar. 2023. Smarter Contracts: Detecting Vulnerabilities in Smart Contracts with Deep Transfer Learning. In *Proc. of the 30th Annual Network and Distributed System Security Symposium (NDSS 2023)*.
- [30] I Wayan Budi Sentana, Muhammad Ikram, and Mohamed Ali Kâaafar. 2023. An Empirical Analysis of Security and Privacy Risks in Android Cryptocurrency Wallet Apps. In *Proc. of the 21st Applied Cryptography and Network Security (ACNS 2023)*.
- [31] Sven Smolka, Jens-Rene Giesen, Pascal Winkler, Oussama Draissi, Lucas Davi, Ghassan Karame, and Klaus Pohl. 2023. Fuzz on the Beach: Fuzzing Solana Smart Contracts. In *Proc. of the ACM SIGSAC Conference on Computer and Communications Security (CCS 2023)*.
- [32] Sunbeam So, Seongjoon Hong, and Hakjoo Oh. 2021. SmartTest: Effectively Hunting Vulnerable Transaction Sequences in Smart Contracts through Language Model-Guided Symbolic Execution. In *Proc. of the 30th USENIX Security Symposium (USENIX Security 2021)*.
- [33] Sunbeam So, Myungho Lee, Jisu Park, Heejo Lee, and Hakjoo Oh. 2020. VERIS-MART: A Highly Precise Safety Verifier for Ethereum Smart Contracts. In *Proc. of the IEEE Symposium on Security and Privacy (S&P 2020)*.
- [34] theblock.co. 2024. Total value locked across DeFi protocols has surged to levels last seen before the collapse of FTX. <https://www.theblock.co/post/269669/total-value-locked-across-defi-protocols-has-surged-to-levels-last-seen-before-the-collapse-of-ftx>. (Accessed on 01/27/2024).
- [35] Md Shahab Uddin, Mohammad Mannan, and Amr M. Youssef. 2021. Horus: A Security Assessment Framework for Android Crypto Wallets. In *Proc. of the 17th Security and Privacy in Communication Networks (SecureComm 2021)*.
- [36] Friedrich Victor and Andrea Marie Weintraud. 2021. Detecting and Quantifying Wash Trading on Decentralized Cryptocurrency Exchanges. In *Proc. of the ACM Web Conference (WWW 2021)*.
- [37] Shicheng Wan, Hong Lin, Wensheng Gan, Jiahui Chen, and Philip S. Yu. 2023. Web3: The Next Internet Revolution. *CoRR abs/2304.06111* (2023). arXiv:2304.06111
- [38] Bryan White, Aniket Mahanti, and Kalpdrum Passi. 2022. Characterizing the OpenSea NFT Marketplace. In *Proc. of the Companion of The Web Conference (WWW Companion 2022)*.
- [39] Kailun Yan, Jilian Zhang, Xiangyu Liu, Wenrui Diao, and Shanqing Guo. 2023. Bad Apples: Understanding the Centralized Security Risks in Decentralized Ecosystems. In *Proc. of the ACM Web Conference (WWW 2023)*.
- [40] Mengya Zhang, Xiaokuan Zhang, Yinqian Zhang, and Zhiqiang Lin. 2020. TXSPECTOR: Uncovering Attacks in Ethereum from Transactions. In *Proc. of the 29th USENIX Security Symposium (USENIX Security 2020)*.
- [41] Liyi Zhou, Kaihua Qin, Antoine Cully, Benjamin Livshits, and Arthur Gervais. 2021. On the Just-In-Time Discovery of Profit-Generating Transactions in DeFi Protocols. In *Proc. of the 42nd IEEE Symposium on Security and Privacy (S&P 2021)*.
- [42] Liyi Zhou, Xihan Xiong, Jens Ernstberger, Stefanos Chaliasos, Zhipeng Wang, Ye Wang, Kaihua Qin, Roger Wattenhofer, Dawn Song, and Arthur Gervais. 2023. SoK: Decentralized Finance (DeFi) Attacks. In *Proc. of the 44th IEEE Symposium on Security and Privacy (S&P 2023)*.