

EduNLP: Towards a Unified and Modularized Library for Educational Resources

Zhenya Huang
University of Science and Technology
of China
Hefei, China
huangzhy@ustc.edu.cn

Yuting Ning*
University of Science and Technology
of China
Hefei, China
ningyt@mail.ustc.edu.cn

Longhu Qin*
University of Science and Technology
of China
Hefei, China
qlonghu@mail.ustc.edu.cn

Shiwei Tong
Tencent Company
Shenzhen, China
shiweitong@tencent.com

Shangzi Xue
University of Science and Technology
of China
Hefei, China
xueshangzi@mail.ustc.edu.cn

Tong Xiao
University of Science and Technology
of China
Hefei, China
tongxiao2002@mail.ustc.edu.cn

Xin Lin
University of Science and Technology
of China
Hefei, China
linx@mail.ustc.edu.cn

Jiayu Liu
University of Science and Technology
of China
Hefei, China
jy251198@mail.ustc.edu.cn

Qi Liu†
University of Science and Technology
of China
Hefei, China
qiliuql@ustc.edu.cn

Enhong Chen
University of Science and Technology
of China
Hefei, China
cheneh@ustc.edu.cn

Shijin Wang
iFLYTEK Research
Hefei, China
sjwang3@iflytek.com

ABSTRACT

Educational resource understanding is vital to online learning platforms, which have demonstrated growing applications recently. However, researchers and developers always struggle with using existing general natural language toolkits or domain-specific models. The issue raises a need to develop an effective and easy-to-use one that benefits AI education-related research and applications. To bridge this gap, we present a unified, modularized, and extensive library, *EduNLP*, focusing on educational resource understanding. In the library, we decouple the whole workflow to four key modules with consistent interfaces including data configuration, processing, model implementation, and model evaluation. We also provide a configurable pipeline to unify the data usage and model usage in standard ways, where users can customize their own needs. For the current version, we primarily provide 10 typical models from four categories, and 5 common downstream-evaluation tasks in

the education domain on 8 subjects for users' usage. The project is released at: <https://github.com/bigdata-ustc/EduNLP>.

KEYWORDS

Pre-trained Language Model, Educational Resources Understanding

1 INTRODUCTION

Online learning platforms have been increasingly popular worldwide in recent years, which collect and manage large volumes of different educational resources (e.g., questions and textbooks) to provide personalized services for learners, such as learning path planning and personalized exercise recommendation [29, 42, 46]. For example, Khan Academy¹ has collected more than 1 million exercises and served millions of users². To improve the quality of intelligent services, it is necessary to understand and analyze these educational resources to make the best of them [11, 40, 48]. Such demands promote growing attention in many awesome intelligent education products. For example, OpenAI has provided a guide about using their awesome ChatGPT in teaching³. Therefore, there is a need for researchers and developers from both academia and industry to incorporate cutting-edge data mining and AI techniques to promote both research and applications of AI in education [12, 33, 43].

*Both authors contributed equally to this research.

†Corresponding author.

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than ACM must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.
Conference acronym 'XX, June 03–05, 2018, Woodstock, NY

© 2018 Association for Computing Machinery.
ACM ISBN 978-1-4503-XXXX-X/18/06...\$15.00
<https://doi.org/XXXXXXXX.XXXXXXX>

¹<https://www.khanacademy.org/>

²<https://www.librarieswithoutborders.org/khan-academy/>

³<https://openai.com/blog/teaching-with-ai>

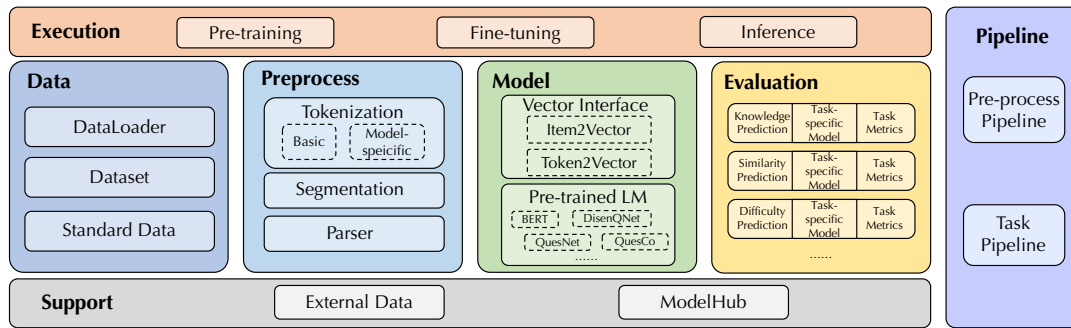


Figure 1: The overall framework of our library EduNLP.

Although there are already mature NLP toolkits or even promising LLMs (e.g., ChatGPT) that we could use [13, 21, 41, 45], they generally do not work well on such educational resources due to their unique characteristics. First, educational resources usually contain multiple necessary components besides texts. For example, as shown in Figure 2, the typical math questions consist of texts, formulas, images and additional side information (such as related knowledge concepts) [5, 32]. Second, different from the common corpus, educational resources are always coupled with much domain-specific knowledge and logic, which is crucial for analyses. For instance, to understand and reason on math questions, models are required to leverage complex math knowledge [23, 25–27]. Directly adopting NLP models for semantic understanding is insufficient, as many logical features are overlooked [35, 48].

Recently, researchers have noticed the above issues and designed many domain-specific models for educational resource understanding, such as QuesNet [48], DisenQet [16], QuesCo [35], and JiZhang [50, 51]. However, their implementations are usually tough to use, which brings obstacles to practical applications and further research. Even experienced researchers also struggle with the following two main issues. First, these implementations usually adopt inconsistent data formats and model interfaces, which makes it hard to reproduce across different models and datasets. Second, the modules (e.g., data preprocessing, model details) in the implementations are tightly coupled, which increases the difficulty of secondary development and further extension. Therefore, researchers/developers are eagerly seeking an easy-to-use toolkit to improve their efficiency, which raises a need to re-implement these methods in a unified way, benefiting the related fields.

To this end, we initiate the *EduNLP* project to provide a unified and modularized library for education resource understanding. We decouple the typical workflow, including data configuration, preprocessing, model implementation, and model evaluation, into four modules with unified interfaces. Based on this library, we would like to offer researchers and developers two key conveniences including easy-to-use reproducing and customized secondary development. Specifically, EduNLP has the following key features.

- EduNLP is a modularized framework. It decouples the whole workflow of model development into different modules including data configuration, data processing, model training, and model inference. We also encapsulate all modules and provide an easy-to-use pipeline interface to meet a variety of personalized needs of users, such as quick inference for downstream tasks, configurable preprocessing, etc.

- EduNLP is compatible with typical educational resource data. We design a standard item format (SIF) to standardize the common features in the data including text, formula, image, and attributes (e.g., knowledge concept label), etc. Based on SIF, we also provide useful preprocessing tools that support users in processing their data with parsing, segmentation, tokenization, etc, which could reduce the redundancy for development.
- EduNLP unifies the model development process. We design an abstract class as the base model for users to implement their own ones. We also provide vector interfaces for easy inference. Users can directly download the models in our library for usage, or pre-train/fine-tune models with new data on their own, etc.
- EduNLP is equipped with several common downstream tasks, facilitating fair evaluation. Users are also supported to develop their application tasks for standard evaluations.
- Primarily, we implement 10 typical models in our library by default with four categories including embedding models, Seq2Seq models, general pre-trained models, and educational pre-trained models. We also provide 5 common downstream evaluation tasks including knowledge prediction, difficulty prediction, etc, on 8 subjects (e.g., math, English).
- EduNLP is flexible and extensible. It is based on PyTorch [36] and is compatible with HuggingFace [45], which are two of the most popular frameworks in the NLP community, allowing researchers and developers to quickly adapt to our library and integrate new models into our library.

2 THE LIBRARY - EDUNLP

The overall framework of our library EduNLP is presented in Figure 1. The data, preprocess, model, and evaluation modules are the core components of our library, which compose the whole workflow from data input to model output. Based on the four core modules, we provide the scripts to pre-train, fine-tune, and evaluate each implemented model. We also design a pipeline module for facilitating pre-processing data and running existing models on downstream applications. Besides, our library also supports downloading pre-trained models with a Model Hub and using external data. In the following, we will introduce each module in detail.

2.1 Data Module

A major guiding principle in the development of our toolkit is to provide standardized and procedural data processing workflows

for education resources. For reusability and extensibility, we design a standard data format for educational resources, and provide an unified data flow to feed the input data into models. Compatible with classical practice in DL community [1, 6, 36], our data flow can be described as as: input data \rightarrow Dataset \rightarrow DataLoader \rightarrow models.

2.1.1 Standard Data. An educational item (such as a test question or a textbook snippet) may contain complex components represented in various formats. For example, in Figure 2, the question is composed of normal texts (“The image ... function”), formulas (“ $y = kx + b$ ” in text content), special tokens (“`_`” for blank to fill in text), images (“Figure 1”) and side information (“Knowledge Concept” and “Difficulty”). Besides, some special words in text may be displayed in different styles (e.g., italic or bold). The complexity of the educational item leads to an inconsistent data format from different data sources, which presents difficulties in reusable data pre-processing and creating unified model structures.


Therefore, to facilitate future research and development, we define a standard item format (SIF) for educational resources compatible with most components. An example of the SIF format is also given in the bottom of Figure 2.

The main principles of our SIF format are as follows:

- **Normal Text:** Currently we only support Chinese and English. Only characters and punctuation in Chinese and English, as well as line breaks, are allowed.
- **Formulas:** Mathematical symbols like formulas, Roman characters and numbers need to be expressed in \LaTeX^4 format, i.e., embedded as $\$ \dots \$$.
- **Special tokens:** Represent underlines of blanks and brackets of choices with $\$ \backslash \text{SIFBlank} \$$ and $\$ \backslash \text{SIFChoice} \$$ respectively. For multi-choice questions, the options should be started with $\$ \backslash \text{SIFTag}\{\text{options}\} \$$ and separated by $\$ \backslash \text{SIFSep} \$$.
- **Text styles:** Text can be represented in different styles with $\$ \backslash \text{textf}\{\text{text}, \text{style_labels}\} \$$. Currently, we have defined some styles: b(bold), i(italic), u(underline), w(wave), d(dotted), t(title). The parameter `style_labels` can be a combination with these styles in alphabetical order.
- **Images:** Pictures and tables can be represented as Base64 or $\text{FigureID}\{\text{uuid}\}$. Especially, $\$ \backslash \text{FormFigureID}\{\text{uuid}\} \$$ is used to represent formula pictures, which can be further converted into latex formula \LaTeX strings using our OCR module base on GAP[47] for multi-line formula recognition.
- **Side information:** Side information (such as knowledge concepts and difficulty), if any, can be additionally represented separately.

2.1.2 Dataset and DataLoader. To facilitate preparing data for model training, we develop the `EduDataset` as the container for the data, which automatically conducts data preprocessing to convert the input data into the form required by the model, including parsing, segmentation and tokenization (detailed in Section 2.2). Notably, `EduDataset` also supports multi-process acceleration for dataset processing. Following classical practice in DL community [1, 6, 36], we also develop the `DataLoader` class based on `Dataset` to organize the data stream in model training, such as sampling data and collating them into a batch.

⁴<https://www.latex-project.org/>

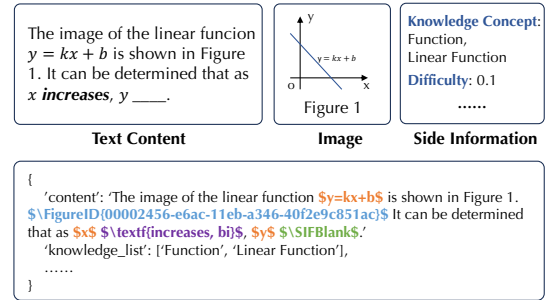

SIF Format in JSON

Figure 2: An example of SIF item.

2.1.3 External Data. EduNLP allows usage of any external data collected by users or downloaded from existing data sources, as long as they are processed into SIF format, such as mathematical problems, reading comprehension, and essay questions. Moreover, to facilitate the use of educational resources data for developers, we collected some open-source datasets of test questions, including mathematical word problems [7, 19, 24, 37, 44, 49], equation problems [2, 30, 39] and so on. We have made these open datasets available with a data tool `EduData`⁵, which provides a convenient downloading interface for researchers to access the data. Specifically, users can directly obtain the data through the command `edudata download DATASET_NAME`.

2.2 Preprocess Module

When feeding the data into models, we need to pre-process the data, i.e., converting an educational item into a sequence of token ids. Considering the complex components in educational items, in EduNLP, we design the workflow of data processing as: Item Format Parse \rightarrow Component Segmentation \rightarrow Tokenization.

2.2.1 Item Format Parse. The module `Parse` is the foundation of the SIF format introduced in Section 2.1.1, which identifies different components in the text (e.g., letters, numbers, formulas, and math symbols) and converts them into SIF format. Specifically, this module implements essential format parsing tools including identifying Chinese characters, detecting English alphabets and numerals outside mathematical expressions, and converting special elements (e.g., blanks (`'_'`) and parentheses (`'()'`)) into predefined standard symbols (e.g., $\$ \backslash \text{SIFChoice} \$$, $\$ \backslash \text{SIFBlank} \$$).

For the convenience of the users, we provide two easy-to-use interfaces containing all the above processes:

- `is_sif()`: This function checks if the raw data adheres to the SIF format, allowing developers to quickly identify conversion requirements for compatibility with our library.
- `to_sif()`: This function converts non-SIF data into SIF format, simplifying preprocessing by eliminating developers' concerns over original data formats.

Furthermore, we also offer more advanced features including matching \LaTeX mathematical expressions, verifying their completeness, converting image-based formulas into \LaTeX format, and encoding images in Base64 format.

⁵<https://github.com/bigdata-ustc/EduData>

2.2.2 Component Segmentation. As we mentioned before, educational resources usually contain multiple components besides text, such as formulas and images. Therefore, this module aims to identify these components and decompose the educational item into different segments based on the SIF format.

Specifically, given a SIF item, the segmentation involves identifying and categorizing various components (including plain text, mathematical expressions and graphical images and so on) in the content. We define special data structures for each component, i.e., `TextSegment`, `FormulaSegment`, `FigureSegment`, `FigureFormulaSegment` and `TagSegment`.

We provide an easy-to-use interface, `seg()`, for the segmentation process, which will yield a `SegmentList` object as a list of all the components. Besides, users can use the parameter `symbol` of the function to mask specific components. For example, if one would like to focus on pure text, he can set `symbol` to 'fgm' (i.e., formulas, figures and marks), and the specified components will be masked.

2.2.3 Tokenization. After getting the components in an educational item, this module tokenizes each component into a serialized sequence of tokens required by the models. The tokens can be pre-defined formula tokens, text tokens, and image tokens, etc.

Text tokenization typically refers to word segmentation, i.e., transforming a sentence into a sequence of words. In EduNLP, we provide multiple candidate tokenization methods, such as Byte Pair Encoding (BPE) based on Huggingface Tokenizers⁶, the Jieba Chinese tokenization algorithm⁷, and nltk tokenization⁸. Notably, we develop an `EduVocab` class to hold the vocabulary for educational resources tokenization.

Formulas tokenization is provided with two typical implementations, i.e., the linear parsing which only keeps the symbols in the formula, and the abstract syntax tree parsing which also keeps the structural information.

Linear parsing of formulas provides a standardized tokenization method for \LaTeX formulas. This is crucial because naive text-based serialization can inadvertently introduce information redundancy or loss. For instance, the fraction command `\frac` might be incorrectly tokenized into `\` and `frac`. We have designed specialized formula rules to identify and process specific identifiers in \LaTeX , such as `\}`, `\frac`, and `\circ`. Abstract syntax tree (AST) parsing is implemented by the `Formula` class, which checks whether formulas are valid and parses the valid ones to AST. To yield a structure-enhanced formula token sequence, we provide the `ast_tokenize` function to serialize the nodes.

Moreover, we provide the `FormulaGroup` class to parse multiple formulas into an AST forest. After acquiring the AST tree or forest, following [18], we further construct a formula graph by adding several relation edges. Based on the formula graph, EduNLP could support more complex modeling methods such as the graph neural network, which we plan to add in the future.

Images tokenization refers to instantiating image with base64 encodings or reading image from the related path with its UUID, which will convert images into tensors in models supporting image modeling such as QuesNet [48].

2.2.4 Tokenizer. To facilitate the standardized data processing and simplify usage, we design an interface `Tokenizer` that integrates Parse, Segmentation and Tokenization altogether. `Tokenizer` is called explicitly by the user or implicitly by `EduDataset` (see Section 2.1.2) to pre-process data for models.

We first provide two pre-packaged basic tokenizers:

- `PureTextTokenizer` processes the text in the item by segmenting words and applies linear parsing methods to formulas in textual format, while other elements such as images and tags are symbolized (e.g., replace the image with a special `[FIGURE]` token). It matches situations where only the text contents are required.
- `AstFormulaTokenizer` is similar to `PureTextTokenizer`, but employs structural tokenization based on abstract syntax tree parsing for formulas. It works in situations where the structural information of the formulas is non-trivial.

We also provide the `CustomTokenizer` class, enabling users to specify configurations for text, formula, and image processing on their demands.

Furthermore, building on basic tokenizers, we design several model-specific tokenizers to facilitate model training and inference. The model-specific tokenizers follow two special class structures:

- `TokenizerForHuggingface` is an abstract class designed to reuse Huggingface's tokenizers. For example, our implemented `BertTokenizer` replaces the basic tokenization `SentencePiece` in `transformers.BertTokenizer` with our basic tokenizers `PureTextTokenizer` or `AstFormulaTokenizer`. These tokenizers work for most general pre-trained language models.
- `PretrainedEduTokenizer` is an abstract class for all the customized tokenizers including `ElmoTokenizer`, `DisenQTokenizer`, `QuesNetTokenizer` and so on, which typically work for models specially designed for educational resources like `DisenQNet` and `QuesNet`. Users can also implement their customized tokenizers specially tailored to their own models based on this class.

2.3 Model Module

In this module, we organize several categories of models into unified implementations. We first design an abstract model that specifies several important interfaces, and then implement 4 categories of models based on the abstract model. For all implemented models, users can directly download and use our pre-trained models from the Model Hub, or pre-train their own model with our provided pre-training scripts.

2.3.1 Unified Interface Design. To unify the implementation and usage of various models, we design an abstract model, i.e., `BaseModel`, that defines the necessary interfaces to work with other components. Therefore, based on the abstract model, all the models can be used with unified interfaces and easily connected to other components in our library. The abstract model is also compatible with HuggingFace Transformers [45], which allows direct adaptation from a large number of models in HuggingFace to our library.

Specifically, compatible with the PyTorch and HuggingFace community, to implement a model, users should at least implement the

⁶<https://huggingface.co/docs/tokenizers>

⁷<https://github.com/foxsjy/jieba>

⁸<https://www.nltk.org/>

Table 1: We implemented 10 models in EduNLP.

Category	Model	Year
Word Embedding	Word2Vec [34]	2013
	Doc2Vec [20]	2014
Seq2Seq Model	Elmo [38]	2018
General Pre-trained Language Model	BERT [10]	2019
	RoBERTa [31]	2019
	MacBERT [8]	2020
Educational Pre-trained Language Model	QuesNet [48]	2019
	DisenQNet [16]	2021
	JiuZhang [50]	2022
	QuesCo [35]	2023

`__init__()` function to define the model architecture and configurations, the `forward()` function to compute the loss and embeddings, the `save_config()` function to save the configuration file and the `from_config()` to initialize the model from an existing configuration file. More details and interfaces will be introduced in Section 3.3. Through these general interfaces for representation models, users can implement various models in a highly unified way, and directly reuse other components in our library with their new models, such as pipelines.

2.3.2 Implemented Models. We have implemented 10 models inherited from our abstract model `BaseModel` until now. The implemented models cover the general representation methods commonly used in the past years, and some representative language models specially designed for educational resources. We roughly divided these models into 4 categories: word embedding models, seq2seq models, general pre-trained language models, and educational pre-trained language models. Table 1 shows the details of these models.

For each implemented model, we provide the pre-training script in EduNLP (e.g., the `pretrain_disenq()` for pre-training DisenQNet), and pre-train the model on our large-scale educational dataset. We also test the performance of these models on 5 downstream tasks with our multi-subject educational dataset (Section 4).

2.3.3 Vector Interfaces. To facilitate the inference of implemented models (i.e., converting educational items like test problems into vectors with the model), we provide two types of API interfaces for them, i.e. `Item2Vector` (I2V) and `Token2Vector` (T2V). Specifically, `Token2Vector` performs model inference to convert the tokenized items (e.g., token list) into embedding vectors. `Item2Vector` further integrates the data pre-processing and model inference, and directly converts the input educational items (e.g., test problems) into output vectors. The two interfaces both support using a local model or loading our pre-trained models remotely. Section 3.2.1 shows the examples of inference with `Item2Vector` and `Token2Vector`.

2.3.4 Model Hub. To facilitate easy use of these models with EduNLP, following HuggingFace Transformers [45], we build a Model Hub⁹ to save and distribute our pre-trained models. We have uploaded the models pre-trained and fine-tuned on our educational data to

Model Hub. We organize models with collections. Specifically, models with the same structure but different data or configurations can be uploaded in one collection for better management.

To download a model from the Model Hub, users can download one from the website or with our APIs (e.g., download a model with `/api/getPretrainedModel`). They can also download a model and load it with I2V container by the `get_pretrained_i2v()` function.

2.4 Evaluation Module

It is important to evaluate model output (e.g., the embedding vectors generated by the models) with unified downstream tasks. Therefore, EduNLP provides several common downstream tasks in real intelligent education scenarios [3, 15, 17, 28] for fair evaluation, i.e., knowledge prediction, difficulty prediction, discrimination prediction, quality prediction and similarity prediction.

- **Knowledge prediction** is a multi-label classification task. Given an educational item (such as a test question), the task aims to predict the related knowledge concepts from a pre-defined concept pool.
- **Difficulty prediction** is a regression task, which aims to quantify the degree of the difficulty of a given question. The difficulty score is defined on a scale from 0 to 1, where a higher score indicates a more difficult question.
- **Discrimination prediction** is a regression task, which aims to estimate the discrimination of a given problem for students with varying proficiency levels. A problem with good discriminatory score means that students with higher ability have a higher success rate on this question than those with lower ability. The discrimination prediction shares the same settings of difficulty prediction.
- **Quality prediction** aims to predict the quality of test questions. The quality scores of test questions are rated from 1 to 5. A high-quality score means that the question is presented in clear text content and standard formula formats and is of high logical consistency. It is worth noting that in this task, we need to first categorize the test questions into three scenarios (i.e., daily practice exercises, quizzes, and final exams) and then predict their quality scores.
- **Similarity prediction** aims to predict the similarity between two given educational items. Here we use the cosine similarity of the pre-trained item representations without further fine-tuning for zero-shot evaluation.

Please refer to Appendix D for more detailed task descriptions. For each downstream task, we implement a task-specific model following the same design with our abstract model. The task-specific model contains a pre-trained language model as the encoder and some prediction layers. For each downstream task, EduNLP implements several common evaluation metrics (Table 2). We provide fine-tuning functions in EduNLP (e.g., the `finetune_disenq_for_knowledge_prediction()` function for DisenQNet on knowledge prediction task). We also provide scripts for fine-tuning and evaluating each task-specific model in `examples/downstream`.

2.5 Pipeline Module

To provide a unified and easy-to-use interface for downstream inference, we implement a configurable pipeline that integrates

⁹<https://modelhub.bdaa.pro/>

Table 2: We provide several evaluation metrics.

Task	Evaluation Metrics
Knowledge Prediction	precision, recall, f1-score
Difficulty Prediction	MAE, MSE, RMSE, NDCG, Pearson correlation coefficient, Spearman correlation coefficient
Discrimination Prediction	MAE, MSE, RMSE, NDCG, Pearson correlation coefficient, Spearman correlation coefficient
Quality Prediction	accuracy, MSE, R2Score, Person correlation coefficient
Similarity Prediction	Pearson correlation coefficient, Spearman correlation coefficient

all components in our library to form the whole workflow from data pre-processing to downstream tasks.

2.5.1 Task Pipeline. Pipelines are easy ways to use pre-trained models in downstream tasks. To set a pipeline for the downstream task, users only need to specify the task, model and tokenizer in the `pipeline()` interface. Then for the input educational items, the pipeline will automatically process the input with the configured tokenizer, construct `Dataset` and `DataLoader`, load the task-specific model, and feed the data into the model to get the predictions for the specified tasks.

2.5.2 Pre-process Pipeline. More flexibly, for users who only want to use our library to process the educational data without models, the pipeline could also be configured for data pre-processing. The general pre-processing process in our library consists of SIF format conversion, segmentation, and tokenization. Moreover, some of the steps may be not necessary, and sometimes there is a need to add more processing steps. To this end, EduNLP provides a configurable way to arrange the pre-processing steps of the pipeline.


Users can initialize a pre-processing pipeline with the `pipeline()` interface and add some initial steps in the meantime. After setting up a pipeline, users can still add new steps by `pipeline.add_pipe()` interface and set the configuration for the steps.

We also support the combined configuration of the pipeline for pre-processing and downstream task. Users can use the parameter `task` to specify the downstream tasks and pass a list of pre-processing steps to the parameter `preprocess` in the same pipeline. The pipeline will first process the input data with the configured steps, and then run the specified downstream tasks to get the predictions.

3 LIBRARY USAGE

In this section, we introduce how to use our library. Figure 3 shows the general procedure of EduNLP. We will illustrate some key usage of our library in this section, i.e., how to prepare the dataset, how to run existing models and how to implement a new model quickly. We will take DisenQNet [16] as an example in the following examples. Please refer to our documentation¹⁰ for more detailed usage.

¹⁰<https://edunlp.readthedocs.io/en/latest>

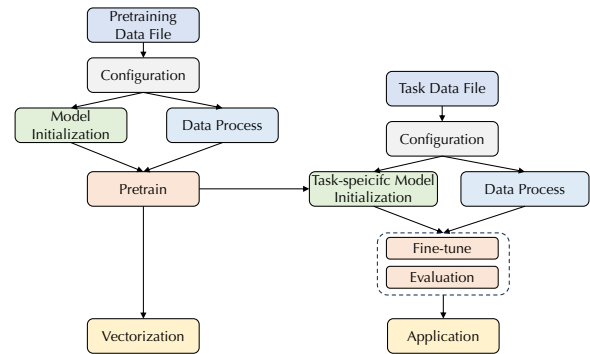**Figure 3: An illustrative usage flow of EduNLP.**

3.1 Processing New Data

Before training a model, it is essential to process the data and ensure it is in the appropriate format.

As mentioned in Section 2.2, we provide the `is_sif()` and `to_sif()` functions for users to first check whether their data is in SIF format and convert their raw data into SIF format if not. Then users can instantiate a tokenizer that conducts the whole data pre-processing (i.e., parsing, segmentation and tokenization) and converts tokenized items into ids as the inputs to models. One step further, the users should prepare the dataset based on the data and tokenizer with our `Dataset` for training.

Code 1 shows an example of preparing the data.

```

from EduNLP.SIF import to_sif
# converting data to SIF format
sif_data = to_sif(raw_data)
# get a tokenizer
from EduNLP.Pretrain import DisenQTokenizer
tokenizer = DisenQTokenizer(vocab_path, text_params=
    text_params)
# prepare dataset
from EduNLP.Pretrain import DisenQDataset
dataset = DisenQDataset(sif_data, tokenizer=tokenizer)
  
```

Code 1: A simple example for preparing data.

3.2 Running Existing Models

Users can directly load pre-trained model checkpoints and perform inference with them. Besides, EduNLP also supports users to pre-train and fine-tune the implemented models with their own data.

3.2.1 Inference with a Pre-trained Model. To infer with an existing model, we provide an easy-to-use interface (i.e., `Item2Vector (I2V)`) that can convert educational items (e.g., questions) to vectors. We provide an API to directly initialize an `I2V` instance with our pre-trained models, i.e., `get_pretrained_i2v(model_name)`. It will download the model from our Model Hub and load the model with `I2V`. One can also load local models with model-specific `I2V` interfaces. After loading models with `I2V`, one can use the function `infer_item_vector()` to get the vectors of items and use the function `infer_token_vector()` to get the embeddings of all tokens in each item. Code 2 shows an example of using `I2V` interface for inference. We also provide another interface, `Token2Vector (T2V)`, to convert tokenized items (i.e., tokens) to vectors, which is a subprocess of `I2V`.


```

from EduNLP.I2V import DisenQ, get_pretrained_i2v
# load provided models from ModelHub directly
i2v = get_pretrained_i2v("disenq_test_128", model_dir=
    download_model_dir)
# load local models
tokenizer_kwargs = {"tokenizer_config_dir": model_dir}
i2v = DisenQ('disenq', 'disenq', model_dir,
    tokenizer_kwargs=tokenizer_kwargs)
# infer vectors
i_vec = i2v.infer_item_vector(items)

```

Code 2: A simple example of using the I2V container.

One step further, if users have their own data, they can also pre-train and fine-tune the models with their own data.

3.2.2 Pre-training and Fine-tuning Models. To pre-train an implemented model with EduNLP, users only need to process the dataset as we introduced in Section 3.1 and specify the training configurations. Then the pre-training can be run with simple interfaces in EduNLP.Pretrain. These functions will construct the dataset, initialize the model with specified configurations and then pre-train the model. The pre-training leverages the Trainer class in HuggingFace, supporting all the training features inherently. The pre-trained model will be saved to output_dir. Code 3 shows an example of pre-training a model. We provide code examples for pre-training all the implemented models in the folder examples/pretrain in EduNLP.

For downstream tasks, we have implemented five downstream tasks in EduNLP. Users can load the pre-trained language models and fine-tune them for a task-specific model. We implemented some interfaces to finetune the models, such as finetune_disenq_for_knowledge_prediction(). Code 3 shows an example of fine-tuning a pre-trained DisenQNet for knowledge prediction. The fine-tuning also leverages the Trainer class in HuggingFace Transformers. One can also directly run the scripts in examples/downstreams.

```

from EduNLP.Pretrain import pretrain_disenqnet,
    finetune_disenqnet_for_knowledge_prediction
# pre-training
pretrain_disenqnet(train_items, output_dir, data_params=
    data_params, train_params=train_params)
# fine-tuning
finetune_disenqnet_for_knowledge_prediction(fine_items,
    task_output_dir, pretrained_model=output_dir,
    train_params=train_params, data_params=data_params)

```

Code 3: A simple example for pre-training a DisenQNet model and fine-tuning it for knowledge prediction.

3.3 Implementing a New Model

All the new models should inherit the BaseModel class defined in our library. It is worth noting that our BaseModel is compatible with HuggingFace Transformers, so that the user can also directly reuse a model or layer from HuggingFace. Based on our unified interface design, it is convenient to implement a new model by instantiating 4 mandatory functions as follows:

- `__init__()` function. In this function, the user should perform parameter initialization, configuration setting, modules and layers definition and so on.
- `forward()` function. This function calculates the loss and item embedding. The user should first define a new output class, which should be a subclass of ModelOutput, for

the new model. The `forward()` function should return an instance of the new output class.

- `save_config()` function. This function saves the configuration files. It can be directly reused from the BaseModel if there is no special operations other than saving all the configuration parameters to one json file.
- `from_config()` function. This function is a classmethod which initializes the new model with parameters from a configuration file.

We have also implemented the `save_pretrained()` and `from_pretrained()` functions to save and load pre-trained checkpoints, which can be directly reused in general. One can also rewrite these two functions if needed.

In addition, to support easy inference, one can also implement the corresponding I2V (Item2Vector) and T2V (Token2Vector) class for the new model by re-written inference functions. More details are available in our documentation.

4 EXPERIMENTS

To evaluate the models in EduNLP, we conduct extensive experiments to compare their performances on 8 subjects and 5 downstream tasks which are common in educational scenarios.

4.1 Dataset and Setup

We construct 8 large-scale educational datasets in different subjects as our pre-training corpus, consisting of millions of problems and papers from primary, junior high, and senior high school levels. The data is of high quality and in a unified format, including problem type, statement, answer, and analysis. Table 3 shows the detailed statistics with our data used in the library. Based on the datasets, we pre-train our implemented models on each subject. More training details can be found in Appendix B.

For evaluation, we create a benchmark with 5 task-specific tagged datasets from real-world data. For example, the difficulty prediction and discrimination prediction dataset based on classical test theory [9] with actual student answer records. Please refer to Appendix D for the introduction of our datasets.

4.2 Experimental Performance

We conduct extensive experiments to test our models' performance and their domain generalization on diverse subject datasets.

4.2.1 Performance on downstream tasks. We use our implemented common educational tasks to evaluate the performances of all the implemented models in EduNLP. Due to the limited annotations of our dataset, we evaluate all the tasks in the math subject. Table 4 shows the performances of different models across 5 educational downstream tasks. For general language models, we further pre-trained them with the same educational pre-training dataset (i.e., getting Edu-BERT with BERT, Edu-MacBERT with MacBERT and Edu-RoBERTa with RoBERTa).

4.2.2 Performance on Different Subjects. As we mentioned in Section 4.1, we pre-train models on 8 large-scale datasets of different subjects and get subject-specific pre-trained models. Since Jiuzhang [50] and QuesCo [35] are designed for educational math

Table 3: Statistics for pre-training corpus on 8 subjects.

Subject	English	Math	Chinese	Physics	Chemistry	Biology	History	Geography
#Problem	403515	1495807	300336	889468	694154	443520	991212	218677

Table 4: Performance comparison between different models for five educational downstream tasks, i.e., difficulty prediction, knowledge concept prediction, discrimination prediction, similarity prediction, quality prediction and paper segmentation.

Model	Knowledge			Difficulty		Discrimination		Quality		Similarity	
	Precision (↑)	Recall (↑)	F1 (↑)	RMSE (↓)	NDCG@all (↑)	MAE (↓)	MSE (↓)	ACC (↑)	MSE (↓)	PCC (↑)	SCC (↑)
Word2Vec	0.5826	0.6597	0.6188	1.3844	0.8148	0.2032	0.0687	0.7013	0.1237	0.312	0.366
Doc2Vec	0.5461	0.6426	0.5905	1.3417	0.8212	0.1735	0.0462	0.7234	0.2388	0.3487	0.2825
Elmo	0.5397	0.6226	0.5782	1.4836	0.8142	0.2147	0.0875	0.7291	0.113	0.3557	0.3425
Edu-BERT	0.6197	0.7021	0.6583	1.1133	0.8241	0.1242	0.0248	0.7348	0.0582	0.6504	0.6407
Edu-MacBERT	0.6084	0.6997	0.6513	1.0993	0.8051	0.1245	0.0249	0.7242	0.0606	0.6189	0.6003
Edu-RoBERTa	0.6089	0.6986	0.6506	1.1041	0.8394	0.1241	0.0248	0.7283	0.0604	0.6269	0.6067
QuesNet	0.5964	0.6738	0.6328	1.3332	0.8102	0.1481	0.0432	0.7307	0.3349	0.3845	0.4516
DisenQNet	0.5956	0.678	0.6342	1.5737	0.8244	0.1965	0.0453	0.7062	0.1209	0.475	0.4711
JiuZhang	0.548	0.6486	0.5941	1.2788	0.8445	0.1203	0.0232	0.7242	0.0605	0.538	0.5402
QuesCo	0.6036	0.6883	0.6432	1.1084	0.8737	0.1167	0.0221	0.7504	0.0567	0.7314	0.6986

Table 5: Model performance on 8 subjects and two tasks. We use F1-score and RMSE as the metrics for the knowledge prediction task and difficulty prediction tasks respectively. Note that ‘-’ indicates DisenQNet lacks sufficient knowledge tags for pretraining.

Task	Model	English	Math	Chinese	History	Geometry	Physics	Chemistry	Biology
Knowledge Prediction (F1 ↑)	Word2Vec	0.5691	0.6188	0.8735	0.5905	0.6399	0.7275	0.5693	0.7873
	Doc2Vec	0.5757	0.5905	0.8886	0.5711	0.637	0.726	0.5603	0.7905
	DisenQNet	0.6450	0.6342	0.5676	-	-	-	-	-
	Edu-BERT	0.6914	0.6583	0.921	0.7175	0.7651	0.7882	0.6477	0.8117
	Edu-RoBERTa	0.6638	0.6506	0.9151	0.7086	0.732	0.7723	0.6439	0.8117
Difficulty Prediction (RMSE ↓)	Word2Vec	1.2787	1.3844	0.9506	1.2365	1.1901	0.9484	0.9165	1.2671
	Doc2Vec	1.2106	1.3417	0.9087	1.2142	1.1268	0.9024	0.8706	1.2488
	DisenQNet	0.9628	1.5737	0.8822	-	-	-	-	-
	Edu-BERT	0.9897	1.1133	0.8764	1.2088	0.9011	0.7496	0.7604	0.9958
	Edu-RoBERTa	0.9759	1.1041	0.8042	1.2492	1.0826	0.7556	0.9517	1.2462

questions, we do not pre-train and evaluate them on other subjects. We selected some representative models in each category we introduced in Section 2.3.2 and compare them on 8 subjects with the knowledge prediction task and difficulty prediction task as examples. Table 5 presents the results.

5 DISCUSSION

We developed EduNLP specifically for the processing of educational resources due to the inadequacies of existing toolkits, which can handle general textual data but fall short in dealing with typical educational data with diverse content components. However, when large language models are increasingly dominating traditional NLP tasks, is it necessary to design such a sophisticated toolkit specially for educational resources? Our answer is that it is still absolutely crucial and necessary for the following reasons.

First, high-quality data is essential for effective modeling, even for LLMs. EduNLP provided users with a standardized processing flow to handle high-quality data. Second, domain-specific LLMs should be further trained with relevant tasks that consider domain

characteristics[14], which is also a common solution for other resources such as code[4, 22, 52]. LMs usually perform better in educational tasks after trained in educational resources (Appendix C.1). As for general LLMs, they often struggle to achieve satisfactory results on educational tasks without fine-tuning(Appendix C.2). Third, our library aims to provide a practical tool for researchers and developers, supporting them to start with educational resources easily. EduNLP is compatible with current popular frameworks (e.g. Huggingface Transformers). Users can quickly adapt to our toolkit and benefit from our features designed for educational resources.

6 CONCLUSION

In this paper, we introduced *EduNLP*, a unified and modularized library for educational resource understanding to facilitate application and research in both industry and academics. EduNLP consists of four key modules covering the whole workflow (i.e., Data, Preprocess, Model, and Evaluation), with a unified interface for easy usage and secondary development. For data, we designed a standard item format for education resources and provided useful tools for data preprocessing. For model, we designed an abstract model as the

interface, and implemented 10 pre-trained models of 4 categories for educational resources in the framework. We also evaluated these models with 5 unified downstream tasks in education scenarios. In the future, we will continue expanding EduNLP with more pre-trained models. Moreover, we hope to incorporate the capability of educational resource generation in the next stage of EduNLP. We invite researchers and practitioners to join and enrich EduNLP, and help push forward the research on educational resource analysis.

REFERENCES

- [1] Martin Abadi, Ashish Agarwal, Paul Barham, Eugene Brevdo, Zhifeng Chen, Craig Citro, Greg S. Corrado, Andy Davis, Jeffrey Dean, Matthieu Devin, Sanjay Ghemawat, Ian Goodfellow, Andrew Harp, Geoffrey Irving, Michael Isard, Yangqing Jia, Rafal Jozefowicz, Lukasz Kaiser, Manjunath Kudlur, Josh Levenberg, Dandelion Mané, Rajat Monga, Sherry Moore, Derek Murray, Chris Olah, Mike Schuster, Jonathon Shlens, Benoit Steiner, Ilya Sutskever, Kunal Talwar, Paul Tucker, Vincent Vanhoucke, Vijay Vasudevan, Fernanda Viégas, Oriol Vinyals, Pete Warden, Martin Wattenberg, Martin Wicke, Yuan Yu, and Xiaoqiang Zheng. 2015. TensorFlow: Large-Scale Machine Learning on Heterogeneous Systems. <https://www.tensorflow.org/>. Software available from tensorflow.org.
- [2] Aida Amini, Saadia Gabriel, Shanchuan Lin, Rik Koncel-Kedziorski, Yejin Choi, and Hannaneh Hajishirzi. 2019. MathQA: Towards Interpretable Math Word Problem Solving with Operation-Based Formalisms. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, Jill Burstein, Christy Doran, and Thamar Solorio (Eds.). Association for Computational Linguistics, Minneapolis, Minnesota, 2357–2367. <https://doi.org/10.18653/v1/N19-1245>
- [3] Matthew Byrd and Shashank Srivastava. 2022. Predicting Difficulty and Discrimination of Natural Language Questions. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*, Smaranda Muresan, Preslav Nakov, and Aline Villavicencio (Eds.). Association for Computational Linguistics, Dublin, Ireland, 119–130. <https://doi.org/10.18653/v1/2022.acl-short.15>
- [4] Guanzheng Chen, Xin Li, Zaiqiao Meng, Shangsong Liang, and Lidong Bing. 2023. Clex: Continuous length extrapolation for large language models. *arXiv preprint arXiv:2310.16450* (2023).
- [5] Jiaqi Chen, Jianheng Tang, Jinghui Qin, Xiaodan Liang, Lingbo Liu, Eric Xing, and Liang Lin. 2021. GeoQA: A Geometric Question Answering Benchmark Towards Multimodal Numerical Reasoning. In *Findings of the Association for Computational Linguistics: ACL-IJCNLP 2021*, 513–523.
- [6] François Chollet et al. 2015. Keras. <https://keras.io>.
- [7] Karl Cobbe, Vineet Kosaraju, Mohammad Bavarian, Mark Chen, Heewoo Jun, Lukasz Kaiser, Matthias Plappert, Jerry Tworek, Jacob Hilton, Reiichiro Nakano, et al. 2021. Training verifiers to solve math word problems. *arXiv preprint arXiv:2110.14168* (2021).
- [8] Yiming Cui, Wanxiang Che, Ting Liu, Bing Qin, Shijin Wang, and Guoping Hu. 2020. Revisiting pre-trained models for Chinese natural language processing. *arXiv preprint arXiv:2004.13922* (2020).
- [9] Robert F DeVellis. 2006. Classical test theory. *Medical care* (2006), S50–S59.
- [10] Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. BERT: Pre-training of Deep Bidirectional Transformers for Language Understanding. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, Jill Burstein, Christy Doran, and Thamar Solorio (Eds.). Association for Computational Linguistics, Minneapolis, Minnesota, 4171–4186. <https://doi.org/10.18653/v1/N19-1423>
- [11] Songtao Fang, Zhenya Huang, Ming He, Shiwei Tong, Xiaoqing Huang, Ye Liu, Jie Huang, and Qi Liu. 2021. Guided Attention Network for Concept Extraction.. In *IJCAI*, 1449–1455.
- [12] Wensheng Gan, Zhenlian Qi, Jiayang Wu, and Jerry Chun-Wei Lin. 2023. Large language models in education: Vision and opportunities. In *2023 IEEE International Conference on Big Data (BigData)*. IEEE, 4776–4785.
- [13] Matt Gardner, Joel Grus, Mark Neumann, Oyvind Tafjord, Pradeep Dasigi, Nelson F. Liu, Matthew Peters, Michael Schmitz, and Luke S. Zettlemoyer. 2017. AllenNLP: A Deep Semantic Natural Language Processing Platform. [arXiv:arXiv:1803.07640](https://arxiv.org/abs/1803.07640)
- [14] Suchin Gururangan, Ana Marasović, Swabha Swayamdipta, Kyle Lo, Iz Beltagy, Doug Downey, and Noah A Smith. 2020. Don't Stop Pretraining: Adapt Language Models to Domains and Tasks. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, 8342–8360.
- [15] Wei Huang, Enhong Chen, Qi Liu, Yuying Chen, Zai Huang, Yang Liu, Zhou Zhao, Dan Zhang, and Shijin Wang. 2019. Hierarchical multi-label text classification: An attention-based recurrent network approach. In *Proceedings of the 28th ACM international conference on information and knowledge management*, 1051–1060.
- [16] Zhenya Huang, Xin Lin, Hao Wang, Qi Liu, Enhong Chen, Jianhui Ma, Yu Su, and Wei Tong. 2021. DisenQNet: Disentangled Representation Learning for Educational Questions. In *Proceedings of the 27th ACM SIGKDD Conference on Knowledge Discovery & Data Mining (Virtual Event, Singapore) (KDD '21)*. Association for Computing Machinery, New York, NY, USA, 696–704. <https://doi.org/10.1145/3447548.3467347>
- [17] Zhenya Huang, Qi Liu, Enhong Chen, Hongke Zhao, Mingyong Gao, Si Wei, Yu Su, and Guoping Hu. 2017. Question difficulty prediction for READING problems in standard tests. In *Proceedings of the Thirty-First AAAI Conference on Artificial Intelligence (<conf-loc>, <city>San Francisco</city>, <state>California</state>, <country>USA</country>, </conf-loc>)* (AAAI'17). AAAI Press, 1352–1359.
- [18] Zhenya Huang, Qi Liu, Weibo Gao, Jinze Wu, Yu Yin, Hao Wang, and Enhong Chen. 2020. Neural mathematical solver with enhanced formula structure. In *Proceedings of the 43rd International ACM SIGIR Conference on Research and Development in Information Retrieval*, 1729–1732.
- [19] Rik Koncel-Kedziorski, Subhro Roy, Aida Amini, Nate Kushman, and Hannaneh Hajishirzi. 2016. MAWPS: A Math Word Problem Repository. In *Proceedings of the 2016 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, Kevin Knight, Ani Nenkova, and Owen Rambow (Eds.). Association for Computational Linguistics, San Diego, California, 1152–1157. <https://doi.org/10.18653/v1/N16-1136>
- [20] Quoc Le and Tomas Mikolov. 2014. Distributed representations of sentences and documents. In *International conference on machine learning*. PMLR, 1188–1196.
- [21] Junyi Li, Tianyi Tang, Gaole He, Jinhao Jiang, Xiaoxuan Hu, Puzhao Xie, Zhipeng Chen, Zhuohao Yu, Wayne Xin Zhao, and Ji-Rong Wen. 2021. TextBox: A Unified, Modularized, and Extensible Framework for Text Generation. In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing: System Demonstrations*, 30–39.
- [22] Raymond Li, Loubna Ben Allal, Yangtian Zi, Niklas Muennighoff, Denis Kocetkov, Chenghao Mou, Marc Marone, Christopher Akiki, Jia Li, Jenny Chim, et al. 2023. Starcoder: may the source be with you! *arXiv preprint arXiv:2305.06161* (2023).
- [23] Xin Lin, Zhenya Huang, Hongke Zhao, Enhong Chen, Qi Liu, Hao Wang, and Shijin Wang. 2021. Hms: A hierarchical solver with dependency-enhanced understanding for math word problem. In *Proceedings of the AAAI conference on artificial intelligence*, Vol. 35, 4232–4240.
- [24] Wang Ling, Dani Yogatama, Chris Dyer, and Phil Blunsom. 2017. Program Induction by Rationale Generation: Learning to Solve and Explain Algebraic Word Problems. In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, Regina Barzilay and Min-Yen Kan (Eds.). Association for Computational Linguistics, Vancouver, Canada, 158–167. <https://doi.org/10.18653/v1/P17-1015>
- [25] Jiayu Liu, Zhenya Huang, Xin Lin, Qi Liu, Jianhui Ma, and Enhong Chen. 2022. A cognitive solver with autonomously knowledge learning for reasoning mathematical answers. In *2022 IEEE International Conference on Data Mining (ICDM)*, IEEE, 269–278.
- [26] Jiayu Liu, Zhenya Huang, Zhiyuan Ma, Qi Liu, Enhong Chen, Tianhuang Su, and Haifeng Liu. 2023. Guiding Mathematical Reasoning via Mastering Commonsense Formula Knowledge. In *Proceedings of the 29th ACM SIGKDD Conference on Knowledge Discovery and Data Mining*, 1477–1488.
- [27] Jiayu Liu, Zhenya Huang, Chengxiang Zhai, and Qi Liu. 2023. Learning by applying: A general framework for mathematical reasoning via enhancing explicit knowledge learning. In *Proceedings of the AAAI Conference on Artificial Intelligence*, Vol. 37, 4497–4506.
- [28] Qi Liu, Zai Huang, Zhenya Huang, Chuanren Liu, Enhong Chen, Yu Su, and Guoping Hu. 2018. Finding Similar Exercises in Online Education Systems. In *Proceedings of the 24th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining (London, United Kingdom) (KDD '18)*. Association for Computing Machinery, New York, NY, USA, 1821–1830. <https://doi.org/10.1145/3219819.3219960>
- [29] Qi Liu, Zhenya Huang, Yu Yin, Enhong Chen, Hui Xiong, Yu Su, and Guoping Hu. 2019. Ekt: Exercise-aware knowledge tracing for student performance prediction. *IEEE Transactions on Knowledge and Data Engineering* 33, 1 (2019), 100–115.
- [30] Tianqiao Liu, Qiang Fang, Wenbiao Ding, Hang Li, Zhongqin Wu, and Zitao Liu. 2021. Mathematical Word Problem Generation from Commonsense Knowledge Graph and Equations (Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing). Association for Computational Linguistics, 4225–4240. <https://doi.org/10.18653/v1/2021.emnlp-main.348>
- [31] Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. 2019. RoBERTa: A Robustly Optimized BERT Pretraining Approach. [arXiv:1907.11692](https://arxiv.org/abs/1907.11692) [cs.CL]
- [32] Pan Lu, Hritik Bansal, Tony Xia, Jiacheng Liu, Chunyuan Li, Hannaneh Hajishirzi, Hao Cheng, Kai-Wei Chang, Michel Galley, and Jianfeng Gao. 2023. Mathvista: Evaluating mathematical reasoning of foundation models in visual contexts. *arXiv preprint arXiv:2310.02255* (2023).
- [33] Xinyi Lu, Simin Fan, Jessica Houghton, Lu Wang, and Xu Wang. 2023. ReadingQuizMaker: A Human-NLP Collaborative System that Supports Instructors to Design High-Quality Reading Quiz Questions. In *Proceedings of the 2023 CHI*

- Conference on Human Factors in Computing Systems. 1–18.
- [34] Tomas Mikolov, Kai Chen, Greg Corrado, and Jeffrey Dean. 2013. Efficient estimation of word representations in vector space. *arXiv preprint arXiv:1301.3781* (2013).
- [35] Yuting Ning, Zhenya Huang, Xin Lin, Enhong Chen, Shiwei Tong, Zheng Gong, and Shijin Wang. 2023. Towards a holistic understanding of mathematical questions with contrastive pre-training. In *Proceedings of the Thirty-Seventh AAAI Conference on Artificial Intelligence and Thirty-Fifth Conference on Innovative Applications of Artificial Intelligence and Thirteenth Symposium on Educational Advances in Artificial Intelligence (AAAI'23/IAAI'23/EAAI'23)*. AAAI Press, Article 1504, 10 pages. <https://doi.org/10.1609/aaai.v37i11.26573>
- [36] Adam Paszke, Sam Gross, Francisco Massa, Adam Lerer, James Bradbury, Gregory Chanan, Trevor Killeen, Zeming Lin, Natalia Gimelshein, Luca Antiga, et al. 2019. Pytorch: An imperative style, high-performance deep learning library. *Advances in neural information processing systems* 32 (2019).
- [37] Arkil Patel, Satwik Bhattamishra, and Navin Goyal. 2021. Are NLP Models really able to Solve Simple Math Word Problems?. In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*. Association for Computational Linguistics, Online, 2080–2094. <https://doi.org/10.18653/v1/2021.naacl-main.168>
- [38] Matthew E. Peters, Mark Neumann, Mohit Iyyer, Matt Gardner, Christopher Clark, Kenton Lee, and Luke Zettlemoyer. 2018. Deep Contextualized Word Representations. In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long Papers)*, Marilyn Walker, Heng Ji, and Amanda Stent (Eds.). Association for Computational Linguistics, New Orleans, Louisiana, 2227–2237. <https://doi.org/10.18653/v1/N18-1202>
- [39] Jinghui Qin, Lihui Lin, Xiaodan Liang, Rumin Zhang, and Liang Lin. 2020. Semantically-Aligned Universal Tree-Structured Solver for Math Word Problems. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*. Association for Computational Linguistics, Online, 3780–3789. <https://doi.org/10.18653/v1/2020.emnlp-main.309>
- [40] Ahmed Tlili, Jingjing Zhang, Zacharoula Papamitsiou, Sven Manske, Ronghuai Huang, Kinshuk, and H Ulrich Hoppe. 2021. Towards utilising emerging technologies to address the challenges of using Open Educational Resources: a vision of the future. *Educational Technology Research and Development* 69 (2021), 515–532.
- [41] Jianing Wang, Nuo Chen, Qiushi Sun, Wenkang Huang, Chengyu Wang, and Ming Gao. 2023. HugNLP: A Unified and Comprehensive Library for Natural Language Processing. In *Proceedings of the 32nd ACM International Conference on Information and Knowledge Management (CIKM '23)*. Association for Computing Machinery, New York, NY, USA, 5111–5116. <https://doi.org/10.1145/3583780.3614742>
- [42] Tianqi Wang, Fenglong Ma, Tang Tang, Longfei Zhang, and Jing Gao. 2022. Textbook Enhanced Student Learning Outcome Prediction. In *Proceedings of the 2022 SIAM International Conference on Data Mining (SDM)*. SIAM, 352–360.
- [43] Xu Wang, Simin Fan, Jessica Houghton, and Lu Wang. 2022. Towards process-oriented, modular, and versatile question generation that meets educational needs. *arXiv preprint arXiv:2205.00355* (2022).
- [44] Yan Wang, Xiaojiang Liu, and Shuming Shi. 2017. Deep Neural Solver for Math Word Problems. In *Proceedings of the 2017 Conference on Empirical Methods in Natural Language Processing*, Martha Palmer, Rebecca Hwa, and Sebastian Riedel (Eds.). Association for Computational Linguistics, Copenhagen, Denmark, 845–854. <https://doi.org/10.18653/v1/D17-1088>
- [45] Thomas Wolf, Lysandre Debut, Victor Sanh, Julien Chaumond, Clement Delangue, Anthony Moi, Pierric Cistac, Tim Rault, Rémi Louf, Morgan Funtowicz, et al. 2019. Huggingface’s transformers: State-of-the-art natural language processing. *arXiv preprint arXiv:1910.03771* (2019).
- [46] Zhengyang Wu, Ming Li, Yong Tang, and Qingyu Liang. 2020. Exercise recommendation based on knowledge concept prediction. *Knowledge-Based Systems* 210 (2020), 106481.
- [47] Zhe Yang, Qi Liu, Kai Zhang, Shiwei Tong, and Enhong Chen. 2024. GAP: A Grammar and Position-Aware Framework for Efficient Recognition of Multi-Line Mathematical Formulas. In *Proceedings of the 17th ACM International Conference on Web Search and Data Mining*. 901–910.
- [48] Yu Yin, Qi Liu, Zhenya Huang, Enhong Chen, Wei Tong, Shijin Wang, and Yu Su. 2019. QuesNet: A Unified Representation for Heterogeneous Test Questions. In *Proceedings of the 25th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining (Anchorage, AK, USA) (KDD '19)*. Association for Computing Machinery, New York, NY, USA, 1328–1336. <https://doi.org/10.1145/3292500.3330900>
- [49] Wei Zhao, Mingyue Shang, Yang Liu, Liang Wang, and Jingming Liu. 2020. Ape210k: A large-scale and template-rich dataset of math word problems. *arXiv preprint arXiv:2009.11506* (2020).
- [50] Wayne Xin Zhao, Kun Zhou, Zheng Gong, Beichen Zhang, Yuanhang Zhou, Jing Sha, Zhigang Chen, Shijin Wang, Cong Liu, and Ji-Rong Wen. 2022. JiuZhang: A Chinese Pre-trained Language Model for Mathematical Problem Understanding. In *Proceedings of the 28th ACM SIGKDD Conference on Knowledge Discovery and Data Mining (Washington DC, USA) (KDD '22)*. Association for Computing

Machinery, New York, NY, USA, 4571–4581. <https://doi.org/10.1145/3534678.3539131>

- [51] Xin Zhao, Kun Zhou, Beichen Zhang, Zheng Gong, Zhipeng Chen, Yuanhang Zhou, Ji-Rong Wen, Jing Sha, Shijin Wang, Cong Liu, and Guoping Hu. 2023. JiuZhang 2.0: A Unified Chinese Pre-trained Language Model for Multi-task Mathematical Problem Solving (*KDD '23*). Association for Computing Machinery, New York, NY, USA, 5660–5672. <https://doi.org/10.1145/3580305.3599850>
- [52] Qinkai Zheng, Xiao Xia, Xu Zou, Yuxiao Dong, Shan Wang, Yufei Xue, Zihan Wang, Lei Shen, Andi Wang, Yang Li, et al. 2023. Codegeex: A pre-trained model for code generation with multilingual evaluations on humaneval-x. *arXiv preprint arXiv:2303.17568* (2023).

A CORPUS EXAMPLES

Our pre-training datasets are extensive collections of practice quizzes, mock exams, and test problems. These data have been sourced from various educational supplementary materials providers. After data cleaning like filtering out HTML tags, unifying data structure and standardizing data formatting, we obtain the SIF datasets. Table 10 showcases illustrative examples of the SIF questions in different subject.

B TRAINING SETTINGS

During pre-training, we utilize the AdamW optimizer as the common optimizer for all models. We pre-train subject-specific models for each subject. Specifically, for RNN-based models, we pre-train them with a batch size of 64 and a learning rate of 10^{-3} . For transformer-based models, we generally use a batch size of 32 and a learning rate of 10^{-5} . We report the specific configurations we used for pre-training in our experiments in Table 6

Table 6: Parameter settings of the baselines.

Model	Training Settings
Word2Vec & Doc2Vec	window=5, min_count=20 sg=1(W2V), dm=1(D2V), epoch=10
Elmo	AdamW, learning_rate= $5e^{-3}$ batch_size=64, epoch=5
BERT & RoBERTa & MacBERT	AdamW, learning_rate= $5e^{-5}$ batch_size=32, epoch=5
QuesNet & DisenQNet	AdamW, learning_rate= $5e^{-4}$ batch_size=64, epoch=10
Jiuzhang	AdamW, learning_rate= $3e^{-5}$ batch_size=32, epoch=2(stage1), 1(stage2), 1(stage3)
QuesCo	AdamW, learning_rate= $5e^{-5}$ batch_size=8, epoch=1

C DISCUSSION ABOUT LLMS

C.1 Effects of domain-specific training

As we mentioned in Section 5, LMs usually perform better in educational tasks after trained in educational resources. To prove it, we take BERT as an example, comparing the performance of original LMs and Edu-LMs that are further pre-trained on our SIF data in the similarity prediction task. Table 7 shows that Edu-BERT performs much better than the original BERT, indicating the domain-specific training is important for LMs used in educational tasks.

Table 7: Edu-BERT that are further pre-trained on our SIF data perform much better than the original BERT in the similarity prediction task.

Metrics	BERT	Edu-BERT
PCC	0.3694	0.6504
SCC	0.4133	0.6407

C.2 Failure cases of LLMs in educational tasks

As we mentioned in Section 5, We also tried prompting-based LLMs, but they did not achieve satisfactory results. Instances of ChatGPT are shown in Table 8. Specially, for knowledge prediction(KP), LLMs struggle to precisely predict knowledge labels due to output variability and lack of knowledge hierarchical information. For difficulty prediction(DP), LLMs demonstrate defect in perceiving difficulty compared to humans, even with contextual examples.

Table 8: Examples of bad cases of ChatGPT on two typical educational tasks.

<p>Knowledge Prediction</p> <p>#Input: 设数列a_n的前n项和为S_n,若$S_n = 2a_n - 2^{n+1} (n \in N_+)$,则数列$a_n$的通项公式为 \$\text{\SIFBlank}\$.</p> <p>#Label: [数列, 数列的概念和基本表示, 数列的递归关系]</p> <p>#Prediction: [数列的通项公式, 数列的前n项和公式, 求和公式的运用]</p>
<p>Difficulty Prediction</p> <p>#Input: 学校周三要排语文、数学、英语、物理、化学和生物6门不同的课程,若第一节不排语文且第六节排生物,则不同的排法共有多少种?</p> <p>#Label: 0.14</p> <p>#Prediction: 0.75</p>

D DOWNSTREAM TASKS

Our evaluation consists of two evaluation protocols, namely freezing evaluation and unfreezing evaluation. Specifically, freezing means that we freeze the language model as the encoder and only train the prediction networks, while unfreezing evaluation means that we will fine-tune the language model as well as the prediction networks. In our experiments, we adopt freezing evaluation for difficulty prediction, discrimination prediction and similarity prediction, and unfreezing evaluation for knowledge prediction and quality prediction.

For each downstream task, we construct high-quality tagged datasets. Table 9 provides illustrative data examples for each downstream task within the math subject domain.

Though we have introduced our downstream tasks in Section 2.4, more detailed descriptions of these tasks and our settings are as follows.

- **Knowledge Prediction:** The related knowledge concepts are organized into a 3-level knowledge hierarchy in our case, where knowledge concepts in lower-layers are considered as subclasses of those in upper-layers. We adopt different pre-trained language models as encoders of questions, and

Table 9: Examples of data samples of downstream tasks.

<p>Knowledge Prediction</p> <p>#Input: 函数$f(x)$是定义在R上的奇函数,且对任意$x \in R$都有$f(x+6)=f(x)+f(3-x)$,则$f(2010)$的值为 \$\text{\SIFBlank}\$</p> <p>#Output: Knowledge=[三角函数, 三角函数及其恒等变换, 半角的三角函数]</p>
<p>Difficulty Prediction</p> <p>#Input: 若连续掷两次骰子,第一次掷得的点数为m,第二次掷得的点数为n,则点$P(m,n)$落在圆$x^2 + y^2 = 16$内的概率是 \$\text{\SIFBlank}\$</p> <p>#Output: Difficulty=0.6316</p>
<p>Discrimination Prediction</p> <p>#Input: 若连续掷两次骰子,第一次掷得的点数为m,第二次掷得的点数为n,则点$P(m,n)$落在圆$x^2 + y^2 = 16$内的概率是 \$\text{\SIFBlank}\$</p> <p>#Output: Discrimination=0.4153</p>
<p>Quality Prediction</p> <p>#Input: 设A, B是椭圆$C: \frac{x^2}{3} + \frac{y^2}{m} = 1$长轴的两个端点,若$C$上存在点$M$满足$\angle \text{\mathrm{AMB}} = 120^\circ$,则$m$的取值范围是 \$\text{\SIFBlank}\$</p> <p>#Output: score=5 (highest ratings), label=2 (exam problems)</p>
<p>Similarity Prediction</p> <p>#Input:</p> <p>Problem1=已知$\sin \left(\frac{\pi}{4} - x \right) = \frac{1}{3}$, $\sin 2x$的值为 \$\text{\SIFBlank}\$</p> <p>Problem2=已知$\sin \left(\theta + \frac{\pi}{2} \right) = \frac{3}{5}$, 则$\cos 2\theta$等于 \$\text{\SIFBlank}\$</p> <p>#Output: Similarity=0.733</p>

feed the extracted semantic representations into HARL [15] for knowledge prediction, which is the network specifically designed for hierarchical classification.

- **Difficulty prediction:** The difficulty score is calculated with real-world student response data with classical test theory [9]. Specifically, we use 1-pass_rate of each question as its difficulty. A higher difficulty means that the question is harder and fewer students can answer correctly. We use a simple linear layer with a Sigmoid function as the prediction network.
- **Discrimination prediction:** Following classical test theory, the discrimination score is formally defined as $D = P_u - P_l$, where P_u is the correct response rate of the group with upper ability and P_l represent the correct response rate of the lower group. It measures whether and how higher-ability students performing better than lower-ability students. We use a simple linear layer with a Sigmoid function as the prediction network.
- **Quality prediction:** We annotate the quality scores in a semi-automatic way based on an assumption that real exam papers, which are designed by expert committees and contain comprehensive questions, have higher scores than mock and practice papers. We annotate real exam papers, mock papers and practice papers with basic ratings of 5, 4 and 3 respectively. Lower-quality samples are generated by randomly removing formulas, images, or text from question

Table 10: Examples of SIF items of different subjects.

English	<p>content: Knowing what colors look good $\\$SIFBlank\\$ your skin is of great importance when you buy clothes.</p> <p>options: A:beyond, B:within, C:against, D:over</p> <p>answer: $\\$C\\$</p> <p>knowledge: Vocabulary, Pronunciation, Phrases difficulty: 0.569</p>
Math	<p>content: $\\$SIFChoice\\$函数$f(x)$是定义在$R$上的奇函数,且对任意$x \in R$都有$f(x+6)=f(x)+f(3-x)$,则$f(2010)$的值为$\\$SIFChoice\\$</p> <p>options: A:$\\$2010\\$, B:\\$-2010\\$, C:\\$0\\$, D:不确定$</p> <p>answer: $\\$C\\$</p> <p>knowledge: 三角函数, 三角函数及其恒等变换, 半角的三角函数 difficulty: 0.396</p>
Chinese	<p>content: 对下面文段中加点词的解释有错误的一项是$\\$SIFChoice\\$ 蒋氏大戚,汪然出涕曰:“君将哀而$\\$text{生,u\\$}$之乎?则吾$\\$text{斯,u\\$}$役之不幸,未若复吾赋不幸之甚也,$\\$text{向,u\\$}$吾不为斯役,则久已$\\$text{病,u\\$}$矣。……”</p> <p>options: A:君将哀而$\\$text{生,u\\$}$之乎生:使……活下去, B:则吾$\\$text{斯,u\\$}$役之不幸斯:此,这, C:$\\$text{向,u\\$}$吾不为斯役向:从前, D:则久已$\\$text{病,u\\$}$矣病:患病</p> <p>answer: $\\$D\\$</p> <p>knowledge: None difficulty: 0.053</p>
Physics	<p>content: 如图所示,在一个凸透镜的主光轴上距光心$\\$2\\$倍焦距的地方放一点光源$\\$S,\\$在透镜的另一侧距光心$\\$3\\$倍焦距的地方垂直于主光轴放置的屏上得到一个亮圆斑,若将透镜的上半部遮住,则$\\$SIFChoice\\$ $\\$FigureID001b16ae-e7af-11eb-be0e-40f2e9c851ac\\$</p> <p>options: A:屏上亮圆斑上半部消失, B:屏上亮圆斑下半部消失, C:屏上亮圆斑仍完整,但亮度减弱, D:屏上亮圆斑直径减小</p> <p>answer: $\\$C\\$</p> <p>knowledge: None difficulty: 0.732</p>
Chemistry	<p>content: 某化合物在氧气中完全燃烧后生成二氧化碳和水,已知生成的二氧化碳和水的质量比为$\\$22\\$:9\\$,\\$则该化合物的化学式可能是$\\$SIFChoice\\$</p> <p>options: A:$\\$C_2H_2\\$, B:\\$C_2H_4\\$, C:\\$C_2H_5OH\\$, D:\\$CH_4\\$</p> <p>answer: $\\$B\\$</p> <p>knowledge: None difficulty: 0.496</p>
Biology	<p>content: 下列关于人体血糖平衡调节的叙述中,正确的是$\\$SIFChoice\\$</p> <p>options: A:胰岛细胞产生的激素均能降低血糖浓度, B:胰岛α细胞和β细胞分泌的激素协同调节血糖平衡, C:细胞摄取和利用血液中葡萄糖的能力下降,可导致血糖升高, D:糖尿病是由于经常摄入过量的糖所引起的,所以停止吃糖不用药就可治愈</p> <p>answer: $\\$C\\$</p> <p>knowledge: None difficulty: 0.496</p>
History	<p>content: 1902年2月4月, 梁启超又在《新民丛报》上发表《论民族竞争之大势》, 指出:“今日欲救中国, 无他术焉, 亦先建设一民族主义之国家而已。”为此, 梁启超 $\\$SIFChoice\\$</p> <p>options: A:主张国家属于人民, 王侯将相是人们的公仆, B:借助经学的外衣否定君主专制, C:宣传伸民权、设议院、变法图存, D:主张民主与科学, 反对专制与愚昧、迷信</p> <p>answer: $\\$C\\$</p> <p>knowledge: 近代中国, 近代中国的思想潮流, 维新思想 difficulty: 0.295</p>
Geography	<p>content: 下列实例中,证明了地球上海陆发生过变迁的是$\\$SIFChoice\\$</p> <p>options: A:流水堆积成的三角洲, B:风力侵蚀成的蘑菇石, C:经常发生地震现象, D:在喜马拉雅山中发现了海洋生物化石</p> <p>answer: $\\$D\\$</p> <p>knowledge: None difficulty: 0.805</p>

contents, which will be rated from 1 to 4 based on different portions of removal. For modeling, we employ two simple linear layers with Softmax and Sigmoid functions for scenario classification and rating regression, respectively. The

metric accuracy evaluates the scenario classification and MSE evaluates the quality score prediction.

- **Similarity prediction:** We invited three experts to label the similarities of question pairs from 0 to 10, which will be scaled to 0-1. When determining the similarities of question

pairs, experts are expected to consider the similarity of their related knowledge, required ability and quality. We directly used the pre-trained language models as frozen encoders for question representations without any further fine-tuning,

and use the cosine similarity of representations as the predicted similarity.

Received 20 February 2007; revised 12 March 2009; accepted 5 June 2009