
SELFGOAL: Your Language Agents Already Know How to Achieve High-level Goals

Ruihan Yang[∇], Jiangjie Chen^{∇,*}, Yikai Zhang[∇], Siyu Yuan[∇], Aili Chen[∇],
Kyle Richardson^{*}, Yanghua Xiao[∇], Deqing Yang^{∇,*}

[∇]Fudan University ^{*}Allen Institute for AI

{rhyang17, jjchen19, alchen20, shawyh, deqingyang}@fudan.edu.cn
{y kzhang22, syyuan21}@m.fudan.edu.cn kyler@allenai.org

Abstract

Language agents powered by large language models (LLMs) are increasingly valuable as decision-making tools in domains such as gaming and programming. However, these agents often face challenges in achieving high-level goals without detailed instructions and in adapting to environments where feedback is delayed. In this paper, we present SELFGOAL, a novel automatic approach designed to enhance agents’ capabilities to achieve high-level goals with limited human prior and environmental feedback. The core concept of SELFGOAL involves adaptively breaking down a high-level goal into a tree structure of more practical subgoals during the interaction with environments while identifying the most useful subgoals and progressively updating this structure. Experimental results demonstrate that SELFGOAL significantly enhances the performance of language agents across various tasks, including competitive, cooperative, and deferred feedback environments.²

1 Introduction

The advancement of large language models (LLMs) [1; 2; 3] has enabled the construction of autonomous *language agents* (or LLM-based agents) to solve complex tasks in dynamic environments without task-specific training. In reality, these autonomous agents are often tasked with very broad, high-level goals, such as “winning the most money” or “succeeding in a competition”, whose ambiguous nature and delayed reward raise great challenges for autonomous task-solving. More importantly, it is not practical to frequently train these models to adapt to new goals and tasks [4; 5; 6]. Therefore, a critical question arises: *How can we enable autonomous language agents to consistently achieve high-level goals without training?*

Previous works focus on creating two types of auxiliary guidance in the instructions for language agents to achieve high-level goals in tasks: prior task decomposition and post-hoc experience summarization. The former involves decomposing the task before acting, utilizing prior knowledge from LLMs to break down high-level goals into more tangible subgoals related to specific actions at hand [7; 4; 8; 9]. However, this line of work does not ground these subgoals into the environment during interaction, resulting in the loss of empirical guidance. In contrast, the latter allows agents to interact directly with environments and summarize valuable experiences from history [10; 11; 12; 13], e.g., “X contributes to Y”. However, the difficulty of inducing rules from experience causes the guidance to be simple and unstructured, making it difficult to prioritize or adjust strategies effectively.

A natural solution to combine the best of both worlds is to dynamically decompose the task and its high-level goal during interaction with the environment. This approach requires an agent to

*Corresponding authors.

²Project page: <https://selfgoal-agent.github.io>.

build and use guidelines that vary in detail and aspect. A tree structure is ideal for this requirement, as it allows hierarchical organization, providing both broad overviews and detailed guidance as needed. However, this approach presents two major challenges: 1) Not all nodes are relevant to the current context during task execution, which requires selecting the most suited nodes to guide current actions. For example, “watch for bargains” is a more prudent choice than “bid on the most expensive item” when budget is tight; 2) The granularity of guidance provided by nodes increases with tree depth, yet the appropriate detail level varies across scenarios, making a fixed tree depth not general. For example, a generic guideline like “earn more money” is not useful in auctions.

To tackle these challenges, we propose SELFGOAL, a self-adaptive framework for a language agent to utilize both prior knowledge and environmental feedback to achieve high-level goals. The main idea is to build a tree of textual subgoals, where agents choose appropriate ones as the guidelines to the prompt based on the situation. Specifically, as shown in Figure 1, SELFGOAL is featured with two main modules to operate a GOALTREE, which is constructed, updated, and utilized during task execution: 1) **Search Module** is prompted to select the top-K most suited nodes of goals based on the provided current state and existing nodes in GOALTREE, which utilizes the prior knowledge of LLMs; 2) **Decomposition Module** breaks down a goal node into a list of more concrete subgoals as subsequent leaves, ensuring an adaptive self-growth of GOALTREE. Note that we filter out the redundant nodes during decomposition based on the textual similarity between new ones and the existing nodes of goals; 3) **Act Module** takes as input the selected subgoals as guidelines, and prompts LLMs for actions for the current state. Extensive experiments in various competition and collaboration scenarios show that SELFGOAL provides precise guidance for high-level goals and adapts to diverse environments, significantly improving language agent performance.

In summary, our contributions in this paper are as follows:

- We target the challenge of enabling autonomous language agents to consistently achieve high-level goals without the need for frequent retraining.
- We introduce SELFGOAL, a self-adaptive framework that constructs, updates, and utilizes a GOALTREE to dynamically decompose a task’s high-level goals into subgoals during interaction with the environment.
- We conduct extensive experiments in both collaborative and competitive scenarios where agents tend to deviate from their goals. The results demonstrate that SELFGOAL significantly enhances the capability of language agents to adhere to high-level goals consistently.

2 Related Work

Learning from Feedback LLMs have become a promising tool for building goal-directed language agents [14]. With textual input that includes the world state, task, and interaction history, language agents are to decide the next action to achieve a goal [15; 16]. Studies have explored enhancing the reasoning and planning abilities of language agents through feedback from environments. For example, Reflexion [17] enables an agent to reflect on its failures and devise a new plan that accounts for previous mistakes. Similarly, Voyager [18] operates in Minecraft, developing a code-based skill library from detailed feedback on its failures. Recent works [11; 19] analyze both failed and successful attempts, summarizing a memory of causal abstractions. However, learnings directly from feedback are often too general and not systematic, making it difficult to prioritize strategies effectively.

LLMs for Decision Making LLMs are increasingly used as policy models for decision-making in interactive environments such as robotics [20; 21; 22], textual games [23; 24; 25; 26], and social tasks [27]. However, the goals in these environments, like “find a fruit” in ScienceWorld [28], are often simple and specific. For long-term, high-level goals, LLMs struggle to perform effectively [29; 30], and additional modules are needed for support[4]. In our work, we use a method that does not require updating LLM parameters, enabling language agents to consistently pursue high-level goals during interactions with environments.

Decomposition and Modularity Decomposing complex decision-making tasks into sub-tasks is a traditional method that enhances LLM task-solving capabilities [31; 32]. Approaches like

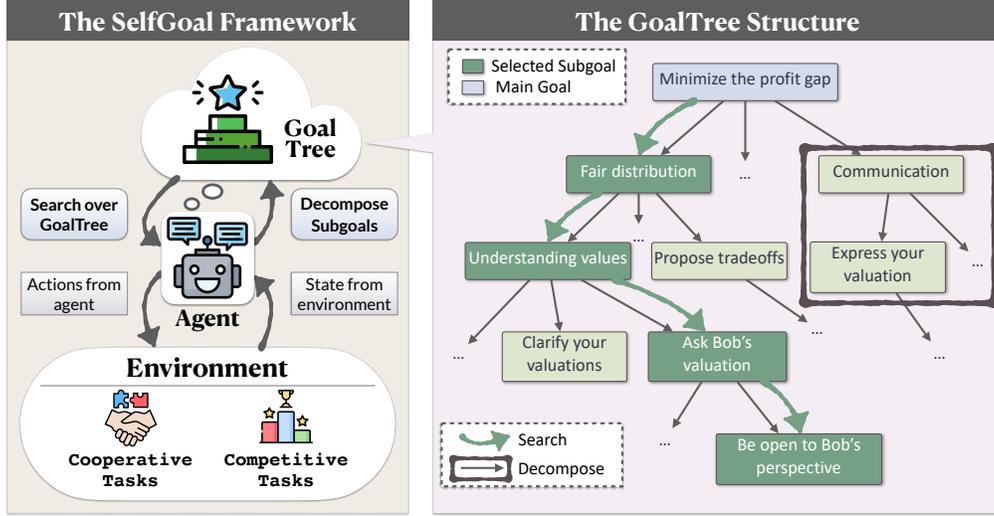


Figure 1: An overview of SELF GOAL, illustrated with a bargaining example. The agent interacts with environments, and make actions based on environmental feedback and the GOAL TREE dynamically constructs, utilizes and updates with Search and Decompose Modules.

Hierarchical Task Networks leverage domain knowledge, including a hand-specified library of plans, to simplify complex problems [33]. Recently, some studies have assigned LLMs the role of decomposing goals. For example, Decomposed Prompting [34] uses a few-shot prompting approach to tackle multi-step reasoning tasks by breaking them into a shared library of prompts. OKR-Agent [4] utilizes self-collaboration and self-correction mechanisms, supported by hierarchical agents, to manage task complexities. ADAPT [6] enables LLMs to recursively re-decompose goals based on feedback in decision-making tasks. However, these approaches often decompose tasks before interaction with the environments, resulting in a lack of grounded, dynamic adjustment. To address this, we aim to combine modular goal decomposition with learning from environmental feedback.

3 Methodology

When executing complex tasks with high-level goals (e.g., “forecast future stock prices”), humans usually decompose it into specific detailed subgoals (e.g., “gather historical price data and adjust predictions based on recent market events”) for effective execution [35]. Inspired from this idea, we propose SELF GOAL in this paper, which is a non-parametric learning approach for language agents to exploit and achieve high-level goals. SELF GOAL conducts a top-down hierarchical decomposition of the high-level goal, with a tree of nodes representing useful guidance for decision-making.

In this section, we first outline how SELF GOAL works in §3.1. Next, we explain the details of three key modules (Search, Decompose and Act) in SELF GOAL that help maintain a tree of subgoals (GOAL TREE) in §3.2 and guide task execution.

3.1 Overview of SELF GOAL

Problem Formulation: Tasks with High-level Goals First, we formulate the features of our stud-

Algorithm 1: Workflow of SELF GOAL

Data: Main Goal: g_0 , Threshold: ξ , Stopping criterion

- 1 Initialize Actor M_a , p_0 , and policy $\pi_\theta(a_i|s_i)$, $\theta = \{p_0\}$
- 2 Generate initial action-state pair $\{a_0, s_0\}$ using π_θ
- 3 Generate initial GOAL TREE:
 $\mathbb{T} = g_0 \cup \text{DECOMPOSE}(g_0, \{a_0, s_0\})$
- 4 Set $t = 0$
- 5 **while** *Stopping criterion not met*
do
- 6 $g_{i,j} = \text{SEARCH}(\mathbb{T}, s_t)$
- 7 $p_{t+1} \leftarrow \{p_t, g_{i,j}\}$
- 8 $a_{t+1} = \text{ACT}(\pi_\theta, p_{t+1}, s_t)$
- 9 $G \leftarrow \text{DECOMPOSE}(g_{i,j}, \{a_{t+1}, s_{t+1}\})$
 // Update \mathbb{T}
- 10 **foreach** $g \in G$ **do**
- 11 **if** $\text{cosine}(g, \mathbb{T}) < \xi$ **then**
- 12 $\mathbb{T} \leftarrow \mathbb{T} \cup g$
- 13 Increment t
- 14 **return**

ied tasks, requiring an agent to interact with a dynamic environment and evaluated based on the achievement of the high-level goal. We focus on the scenarios where an actor model M_a aims to achieve a high-level goal g_0 in an environment E through interaction. The policy employed by M_a is denoted as π_θ . At each timestep t , π_θ generates an action a_t , and the environment E returns a state s_t . This action-state pair $\{a_t, s_t\}$ is then utilized to update π_θ . Note that SELFGOAL also supports accomplishing long-horizon tasks that do not always have immediate rewards. In this case, only by completing the task M_a will be evaluated with a score according to the achievement of the goal g_0 .

Workflow of SELFGOAL SELFGOAL is a non-parametric learning algorithm for language agents, i.e., without parameter update. The workflow of SELFGOAL is shown at Algorithm 1, which models $\pi_\theta = p$ by setting p as the instruction prompt provided to M_a (an LLM), i.e., $a_t = \text{LLM}(p_t, s_{t-1})$. The policy π_θ is updated through the modifications to p , which is the modification of subgoal instructions $g_{i,j}$ (i -th layer, j -th leaf node) that best suit the current situation. Concretely, SELFGOAL is featured with two key modules, **Decomposition** and **Search** which construct and utilize a subgoal tree \mathbb{T} respectively, namely GOALTREE, to interact with the environment. Setting the high-level goal of the task as the root node in GOALTREE, **Search Module** finds the nodes that are helpful for the status quo, and **Decomposition Module** decomposes the node into subgoals as leaf nodes if it is not clear enough.

3.2 Details in SELFGOAL

Search: Identifying Useful Subgoals for Current Situation In the **Search Module** of SELFGOAL, we ask the backbone LLM of the agent to identify the most appropriate subgoal for the current situation, e.g., “Select K most useful sub-goals that will help you reach your main goal in the current situation ...” (see Appendix A.4 for the complete prompt). We represent the the current state s_t for timestep t as a description of the dialogue history of the interaction with the environment. We also find the leaf nodes of each branch in GOALTREE as the candidate subgoal list for LLMs to decide which ones that are useful. The LLM then selects K most suitable subgoals, followed by decomposition and the update of the instruction prompt p_t at this step.

Decompose: Refine GOALTREE to Adapt to the Environment Based on the current action-state pair $\{a_t, s_t\}$, GOALTREE is updated through decomposition if it is not specific enough for useful guidance to the agent. We use the backbone LLM to break down the selected subgoal $g_{i,j}$ in the **Search Module** (initially set to g_0). We prompt the LLM with the instruction such as “What subgoals can you derive from $\{g_{i,j}\}$, based on $\{a_t, s_t\}$ ”, which generates a new set of subgoals G (see also Appendix A.4). To control the granularity of these subgoals, we apply a *filtering mechanism* that if the cosine similarity [36] between a new subgoal and existing subgoals exceeds ξ , the current node will not be updated. Otherwise, we add the new subgoals under the current node, thus expanding the GOALTREE. Moreover, a *stopping mechanism* is designed that if no new nodes are added to the GOALTREE for N consecutive rounds, the update is stopped.

Act: Utilizing Subgoals to Take Actions After getting the subgoals from GOALTREE that are found by SELFGOAL as useful, the agent updates the instruction prompt p_t for the LLM and takes action a_t to interact with the environment. The prompt of this step can also be found in Appendix A.4.

4 Experimental Setup

4.1 Tasks and Environments

We evaluate SELFGOAL across 4 dynamic tasks with high-level goals, including **Public Goods Game**, **Guess 2/3 of the Average**, **First-price Auction**, and **Bargaining**, which are implemented by existing works [37; 38; 39]. As seen in Table 1, they are either single-round or multi-round games, requiring the collaboration or competition of multiple agents. Note that agents in multi-round games will only receive delayed rewards

Table 1: The categorization of studied tasks.

Task	Rounds	Task Type
Public Goods Game	Single	Competitive
Guess 2/3 of the Average	Single	Cooperative
First-price Auction	Multiple	Competitive
Bargaining	Multiple	Cooperative

at the end of the game. In our experiments, we repeat single-round games for $T = 20$ times and multi-round games for $T = 10$ times for stable results.

Public Goods Game: GAMA-Bench We use **GAMA-Bench** [37] as the implemented environment for this game. Specifically, each of $N = 5$ players privately decides the number of tokens contributed to a public pot. The tokens in the pot are multiplied by a factor R ($1 \leq R \leq N$), and the created “public good” is distributed evenly among all players. Players keep any tokens they do not contribute. A simple calculation reveals that for each token a player contributes, their net gain is $\frac{R}{N} - 1$ (i.e., income-contribution). Since this value is negative, it suggests that the most rational strategy for each player is to contribute no tokens. This strategy results in a Nash equilibrium [40] in the game. N agents using the same backbone model and equipped with the same method (e.g., CLIN or SELFGOAL) play games with each other to observe group behavior. Following [37], we set $R = 2$.

Guess 2/3 of the Average: GAMA-Bench Using the implementation of **GAMA-Bench** [37], N players independently choose a number between 0 and 100 [41], and whoever has the number closest to two-thirds of the group’s average wins the game. This setup effectively tests players’ theory-of-mind (ToM) abilities [42; 43]. In behavioral economics, the Cognitive Hierarchy Model [44] categorizes players as follows: Level-0 players choose numbers randomly. Level-1 players assume others are Level-0 and pick two-thirds of an expected mean of 50. Level- k players believe that the participants include levels 0 to $k - 1$, and therefore choose $(2/3)^k \times 50$. The optimal outcome is to choose 0 for all players, achieving a Nash equilibrium. In this game, $N = 5$ agents using same backbone model with the same prompting method (e.g., SELFGOAL) play games with each other to observe group behavior.

First-price Auction: AucArena We use **AucArena** [38] as the implementation of first-price auctions. An auctioneer collects and announces the bids of all participants, revealing the current highest bid. Participants must publicly make their decisions after privately considering their bids. The auction comprises if $K = 15$ items with values ranging from \$2,000 to \$10,000, with an increment of \$2,000 between each item. These items are presented in a randomized sequence, making the auction last for $K = 15$ rounds. $N = 4$ agents participate in the auction as bidders. Each agent aims to secure the highest profit by the end of the auction and thereby outperform all competitors. In our experiment, we set the budget for each bidder at \$20,000. We have an agent, enhanced by various methods (e.g., SELFGOAL), using different backbone models to compete against three identical opponents powered by the same model (GPT-3.5 [2]).

Bargaining: DealOrNotDeal We use **DealOrNotDeal** [39] to implement the bargaining over multiple issues. $N = 2$ agents, namely Alice and Bob, are presented with sets of items (e.g., books, hats, balls) and must negotiate their distribution. Each agent is randomly assigned an integer value between 0 and 10 for each item, ensuring that the total value of all items for any agent does not exceed 10. The bargaining goes on for $K = 10$ rounds, and if the agents fail to agree on the distribution of items within 10 rounds, neither party profits. The goal is to minimize profit discrepancies between the two agents. We randomly select $M = 50$ items for Alice and Bob to negotiate over. The final profits at the end of the negotiation for Alice and Bob are defined as P_{Alice} and P_{Bob} , respectively. Note that, we alter the prompting methods of the agent behind Alice, and keep Bob fixed (GPT-3.5).

4.2 Agent Framework Baselines and Backbone LLMs

We adopt two types of agent frameworks providing guidance for achieving high-level goals in the above tasks.³ One is **task decomposition** framework, including ReAct [16] and ADAPT [6]. ReAct enables agents to reason before acting, while ADAPT recursively plans and decomposes complex sub-tasks when the LLM cannot execute them. Another is **experience summarization** framework, including Reflexion [17] and CLIN [11]. Reflexion prompts agents to reflect on failed task attempts and retry. CLIN creates a memory of causal abstractions to assist trials in future by reflecting on past experiences, expressed as “A [may/should] be necessary for B.”.

To drive these language agent frameworks, we use the following LLMs: **GPT-3.5-Turbo** (gpt-3.5-turbo-1106) [3] and **GPT-4-Turbo** (gpt-4-1106-preview) [3]; **Gemini 1.0 Pro** [45]; **Mistral-7B-**

³Implementation details are in Appendix A.2.

Table 2: Comparison of the SELFGOAL powered by different models with alternative methods across four scenarios. The best results are **bolded**, and the second best ones are underlined.

Methods	ReAct ADAPT Reflexion CLIN SELFGOAL					ReAct ADAPT Reflexion CLIN SELFGOAL				
	Public Goods Game: GAMA [37] ($S_1 \downarrow$)					Guess 2/3 of the Average: GAMA [37] ($S_2 \uparrow$)				
Mistral-7B	55.70	46.00	51.28	41.00	28.45	89.43	84.91	<u>92.65</u>	91.95	93.64
Mixtral-8x7B	46.05	55.80	<u>34.65</u>	<u>52.69</u>	32.00	82.16	79.46	89.73	74.33	<u>89.50</u>
Qwen-7B	66.55	56.44	<u>60.15</u>	<u>55.59</u>	54.93	65.11	55.95	<u>69.99</u>	64.22	72.99
Qwen-72B	<u>20.75</u>	22.95	21.57	<u>24.60</u>	8.45	78.87	88.77	<u>91.47</u>	83.65	94.51
Gemini Pro	37.55	<u>25.78</u>	34.00	39.20	19.20	77.90	73.45	71.82	76.58	<u>77.33</u>
GPT-3.5	61.20	<u>42.25</u>	46.95	47.15	42.19	73.44	64.14	<u>78.75</u>	63.25	83.28
GPT-4	19.55	<u>16.70</u>	22.90	31.35	11.95	92.57	91.31	<u>94.41</u>	90.88	94.54

Methods	ReAct ADAPT Reflexion CLIN SELFGOAL					ReAct ADAPT Reflexion CLIN SELFGOAL				
	First-price Auction: AucArena [38] ($S_3 \uparrow$)					Bargaining: DealOrNotDeal [39] ($S_4 \downarrow$)				
Mistral-7B	23.91	23.03	<u>26.24</u>	24.27	28.21	2.57	2.38	1.97	2.32	1.88
Mixtral-8x7B	35.85	32.35	<u>33.18</u>	<u>36.37</u>	39.23	2.38	2.66	<u>2.46</u>	<u>2.34</u>	1.97
Qwen-7B	29.88	30.15	32.97	<u>33.44</u>	33.50	2.83	2.88	3.15	<u>2.73</u>	2.05
Qwen-72B	34.77	34.25	<u>35.92</u>	34.24	36.48	2.59	2.10	<u>2.06</u>	2.26	2.00
Gemini Pro	36.12	36.47	<u>38.82</u>	36.79	39.28	<u>2.10</u>	2.33	2.28	2.36	1.95
GPT-3.5	<u>22.85</u>	22.10	22.00	21.21	27.40	<u>2.31</u>	2.95	2.44	2.87	2.20
GPT-4	<u>36.46</u>	35.40	34.41	<u>38.98</u>	39.02	1.94	<u>1.80</u>	1.92	1.83	1.71

Instruct-v0.2 [46] and a Mixture of Experts (MoE) model **Mixtral-8x7B-Instruct-v0.1** [47]; **Qwen 1.5** (7B and 72B variants) [48]. The temperature is set to 0 to minimize randomness.

4.3 Metrics for Tasks

In GAMA-Bench’s Public Goods Game [37], where N players participating in repeated T times, the score S_1 for this game is then given by: $S_1 = \frac{1}{NT} \sum_{ij} C_{i,j}$, where $C_{i,j} \in [0, 1]$ is the proposed contribution of player i in round j .

In GAMA-Bench’s Guess 2/3 of the Average Game [37], the score S_2 is calculated by $S_2 = 100 - \frac{1}{NT} \sum_{ij} C_{i,j}$, where $C_{i,j}$ is the number chosen by player i in round j .

In AucArena’s First-price Auction [38], we use the TrueSkill Score [49; 50] (Appendix A.3) to rank the profits of agents. TrueSkill Score estimates dynamic skill levels (μ) through Bayesian statistics while considering the uncertainty (σ) in their true skills. Thus the performance score of an agent is defined as $S_3 = \text{TrueSkill Score}$. This method is commonly used in competitions such as online games or tournaments.

In DealOrNotDeal’s Bargaining Game [39], we calculate the absolute difference in their profits: $S_4 = \frac{|P_{Alice} - P_{Bob}|}{M}$, where P_{Alice}, P_{Bob} represents the profits at the end of the negotiation, and M is the number of items to negotiate on. (S_4 can also be represented by TrueSkill Score for convenience.)

5 Results and Analysis

5.1 Main Results

The main results across 4 scenarios are presented in Table 2. Overall, our SELFGOAL significantly outperforms all baseline frameworks in various environments containing high-level goals, where larger LLMs produce higher gains. When diving into the generated guidelines and corresponding agents’ behaviors, we find that some of those subgoals given by task decomposition methods like ReAct and ADAPT are no longer suited for the current situation. For example, “bid on the most expensive item” is not useful when the budget is tight. Moreover, task decomposition before interacting with the environment does not consider the practical experience, leading to broad and meaningless guidance. For example, in Public Goods Game, ADAPT provides broad subgoals like “It’s important to strike a balance between

contributing enough tokens to the public pot to earn a significant payoff while retaining enough tokens in my private collection for future rounds”. In contrast, post-hoc experience summarization methods, i.e., Reflexion and CLIN, tend to induce too detailed guidelines, lacking a correlation with the main goal and might deviating agents from their paths. For example, CLIN produces subgoals focusing on minutiae, such as “Considering the distribution of numbers chosen by opponents may be necessary to make an informed decision on your own selection.”

In comparison, SELFGOAL overcomes both of the shortcomings. At each round, SELFGOAL decomposes new nodes referring to existing guidance, aligning with the main goal as the game progresses. For example, in Public Good Game, the initial subgoal is “The player aims to contribute strategically based on their assessment of other players’ behaviors and the overall distribution of tokens in the public pot.” If all players contribute less to the public pot during the game, SELFGOAL absorbs the observation and refines existing nodes to “If the player notices that the average contribution of the group has been increasing in recent rounds, they might choose to contribute fewer tokens in the current round to avoid over-contributing and potentially losing out on their own gain.” According to the new subgoal as a practical guideline, agents can dynamically adjust their contributions.⁴

Interestingly, SELFGOAL shows superior performance in smaller LLMs as well, while others can not due to the deficiency of induction and summarization capability of these models. For example, CLIN is 0.7 inferior to Reflexion for Mistral-7B and 5.77 for Qwen-7B in Guess 2/3 of the Average, but SELFGOAL brings improvements consistently. This can be attributed to the logical, structural architecture of GOALTREE in SELFGOAL. At each time for decomposition, the model receives existing subgoals on the last layer of GOALTREE as clear references, making it easy for decomposition.

Competition between Different Agent Framework

Previous results are mostly evaluated against a fixed baseline (GPT-3.5). To understand how these agent frameworks behave when competing with each other, we set an AucArena for a multi-agent comparison. As shown in Table 3, SELFGOAL has a clear advantage over baselines. When looking closer at the bidding behaviors, we find that other methods tend to be overly cautious. They often stop bidding or avoid participating once bidding starts, resulting in zero profits. However, SELFGOAL takes a different approach by bidding frequently in the early stages of the bidding war when competition is less intense. This allows for purchasing high-priority items early on, avoiding fierce competition in the later stages.

Table 3: Result of auction competitions between the reported five agents with baseline frameworks and our SELFGOAL.

Methods	ReAct	ADAPT	Reflexion	CLIN	SEALGOAL
GPT-3.5	23.96 \pm 1.72	20.46 \pm 1.79	25.72 \pm 1.71	22.95 \pm 1.73	29.59\pm1.99
GPT-4	22.62 \pm 1.80	24.85 \pm 1.78	21.79 \pm 1.79	27.16 \pm 1.74	28.98\pm1.88

5.2 Analysis of SELFGOAL

How does the granularity of guidelines in GOALTREE affect task solving? As discussed in §5.1, SELFGOAL adjusts to the dynamic environment by setting different depths, where subgoal nodes of deeper layers provide more detailed instructions. Here, we explore how such granularity affects the performance of SELFGOAL. We use Auction and Bargaining environments as testbeds, and modify the level of subgoals by setting the threshold ξ in the stopping mechanism as 0.6, 0.7, 0.8, and 0.9. According to Figure 2, the agent’s performance initially improves with increasing depth but eventually diminishes. A shallow tree ($\xi = 0.6$) lacks guidance details, thus leading to the poorest performance. Yet, the deepest tree ($\xi = 0.9$) does not show superior performance, probably because repetitive guidance interferes with model selection of useful guidance. Redundant nodes increase the candidate set, making it difficult for the search

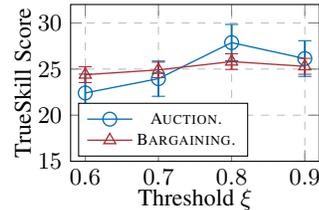


Figure 2: Granularity control of the threshold ξ in SELFGOAL’s stopping mechanism.

⁴More details of GOALTREE are in Appendix A.5.

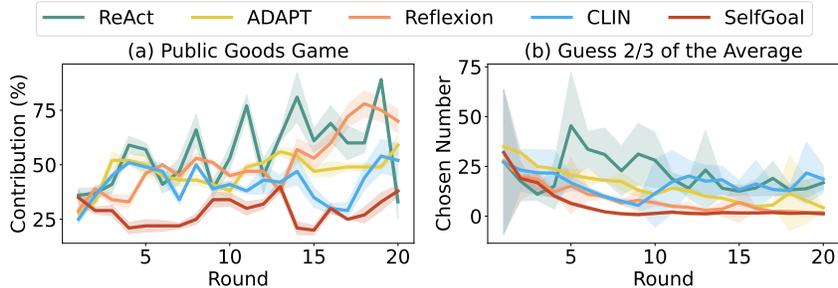


Figure 5: Patterns of model behavior in repeated games. (a): Fluctuations in contributions within the Public Goods game. The agent equipped with SELFGOAL displays more rational behavior (*i.e.*, achieving a Nash equilibrium) by consistently contributing fewer tokens than other methods. (b): Adjustments in number predictions within the Guessing Game. Our SELFGOAL shows enhanced ToM abilities by converging to a guess of zero more quickly in each round.

module to select all the valuable nodes. In fact, the search module always focuses on multiple nodes representing the same meaning, resulting in the loss of other helpful nodes. This experiment confirms that more detailed instructions help language agents achieve high-level goals, but only with a balanced, adaptive depth of the guidance tree to mitigate the drawbacks of overly detailed guidance.

Ablation Study of Search Module *Can the Search Module in SELFGOAL succeed in finding useful subgoal nodes?* We employ two methods as baselines to replace the original LLM-based search module, which is instantiated with GPT-3.5. One baseline is *random selection*, where we randomly choose a node from the set of subgoal nodes. The other is the selection based on *embedding similarity*, which selects the subgoals most similar to the current situation based on cosine similarity. On multi-round games as Auction and Bargaining, we keep the Trueskill Score for evaluating the rankings of these methods. As shown in Figure 3, the LLM search module gains a better score in both games. Besides, similarity-based method performs worse than random selection in Bargaining, which could be the reason that the guidance is usually short, making it hard to capture semantic embeddings between subgoals and situations. This experiment demonstrates the rationality of the LLM-based search module in SELFGOAL’s design.

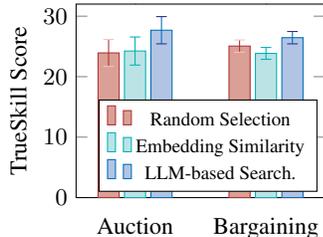


Figure 3: Ablation study of different search modules.

How does the quality of GOALTREE affect goal achievement? To explore the influence of GOALTREE on SELFGOAL, we conduct an experiment in Auction and Bargaining Games by replacing the model that constructs GOALTREE with GPT-4 or GPT-3.5 for comparison, while keeping the model that utilizes the tree fixed as GPT-3.5. Results in Figure 4 illustrate that higher-quality GOALTREE (from GPT-4) significantly boosts the performance of SELFGOAL, with gains of +2.87 in Auction and +3.10 in Bargaining compared to one using GPT-3.5. This improvement comes from more abundant and higher-quality guidance, generated by a strong model equipped with better understanding and summarizing capabilities. (We also conduct an ablation study about the influence of pruning on GOALTREE in Appendix A.1.)

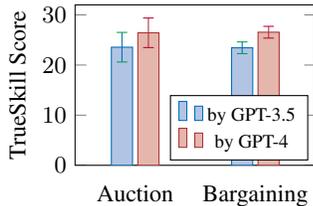


Figure 4: Ablation study of the model that generates GOALTREE, either by a stronger (GPT-4) or weaker (GPT-3.5) model. The rest of the agent framework is driven by GPT-3.5.

Can SELFGOAL improve the rationality in agents’ behaviors? Aside from the final performance gain, we are also interested in whether each agent behavior at every turn benefits from SELFGOAL. Therefore, we use two games from GAMA-Bench to examine the impact of SELFGOAL on model behavior, where behavioral changes are easier to evaluate. Here, we use LLMs with great improvement from SELFGOAL, *i.e.*, Mistral-7B for Public Goods Game and Qwen-72B for Guessing 2/3 Average Number Game. We record patterns in the model’s number predictions and token contributions by

Task: Bargaining (DealOrNotDeal)		Item Valuation			
Task: You are Alice and you want to negotiate with your partner, Bob, about the allocation plan of items: 1 book, 1 hat, and 2 ball. Your goal is to minimize the profit gap. Observation: Bob: Hi, Let's start to negotiate about the allocation plan.			Book	Hat	Ball
		Alice	0	6	2
		Bob	8	2	0

CLIN	SelfGoal
Learnings: Understanding the other party's primary objectives SHOULD BE NECESSARY to propose mutually beneficial agreements. Action: Let's start by discussing our priorities and preferences for the items. Observation: Bob: I prefer to receive the book and the ball. Action: Great! I will take 2 balls and you can have the book and ball. Profit: Alice: \$ 4, Bob \$ 10 ✗	Sub-goal: Ask clarifying questions: [...] If necessary, ask Bob to clarify or provide more details about his valuation of each item. [...] Action: [...] Based on my understanding, you have a different valuation for each item compared to me. Could you please share your valuation for each item? [...] Observation: Bob: I value book at \$8, hat at \$2, book at \$0. Sub-goal: Be willing to compromise: Be willing to make concessions and adjust your proposals to accommodate your partner's feedback and suggestions. Action: Great! Since I value book at \$0, hat at \$6, ball at \$2, to minimize our profit gap, I propose I take 1 hat and 1 ball while you take the book. Then we both give up 1 ball. Observation: Bob: Great! I agree to that proposal. Profit: Alice: \$ 8, Bob \$ 8 ✔
ADAPT	
PLAN: I will propose an allocation plan that give an Equal allocation of items. [...] Action: [...] I'd like to propose that we split the items evenly , with you taking 1 book, and 1 balls, and me taking 1 hat, and 1 ball. [...] Observation: Bob: Great! I agree to that proposal. Profit: Alice: \$ 8, Bob \$ 10 ✗	

Figure 6: In the Bargaining task, Mistral-7B with CLIN or ADAPT gives guidance that is either too broad or too detailed resulting in large profit discrepancy, whereas SELFGOAL is successful.

visualizing data from 20 repeated experiments. Note that GOALTREE is updated across these 20 rounds of games. With SELFGOAL, agents in the Public Goods scenario consistently act more rationally compared to those using alternative methods, as illustrated in Figure 5(a). For the Guessing Game, enhanced models showed smoother, more steadily declining curves, indicating quicker convergence to the Nash equilibrium, as depicted in Figure 5(b).

5.3 Case Study

To illustrate how agents from different frameworks reason and plan in a dynamic environment, we conduct a case study using Mistral-7B, a small LLM, as the backbone in a bargaining game (Figure 6). We find that SELFGOAL’s emphasis on granularity control offers clear advantages. SELFGOAL provides agents with actionable guidance such as “ask clarifying questions”, prompting agents to pay early attention to their opponent’s psychological assessment and different valuations of items. After acquiring a partner’s valuation, SELFGOAL then gives guidance such as “make concessions”, leading the agent to propose a plan that gives up a particular item in exchange for minimizing the profit difference.

In contrast, CLIN advises agents to “consider the preference of the partner”, which leads agents to focus on the opponent’s preferences but may result in plans that sacrifice their own interests to improve the other party’s income. ADAPT, which decomposes tasks beforehand, provides very broad advice such as “equal allocation”. This generic advice aims to minimize the profit gap but may not be suitable for scenarios lacking knowledge of the partner’s valuation. Consequently, the model proposes allocation plans without first clarifying the partner’s valuations, assuming that all participants have the same valuation for each item.

6 Conclusion

In this paper, we introduce SELFGOAL, an agent framework that enhances the capabilities of LLMs for achieving high-level goals across various dynamic tasks and environments. We demonstrate that SELFGOAL significantly improves agent performance by dynamically generating and refining a hierarchical GOALTREE of contextual subgoals based on interactions with the environments. Experiments show that this method is effective in both competitive and cooperative scenarios, outperforming baseline approaches. Moreover, GOALTREE can be continually updated as agents with SELFGOAL further engage with the environments, enabling them to navigate complex environments with greater precision and adaptability. However, we also notice that although SELFGOAL is effective

for small models, there is still a demand for the understanding and summarizing capability of models, which might prevent SELFGOAL from achieving its full effectiveness.

References

- [1] Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel M. Ziegler, Jeffrey Wu, Clemens Winter, Christopher Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. Language models are few-shot learners. In Hugo Larochelle, Marc’Aurelio Ranzato, Raia Hadsell, Maria-Florina Balcan, and Hsuan-Tien Lin, editors, *Advances in Neural Information Processing Systems 33: Annual Conference on Neural Information Processing Systems 2020, NeurIPS 2020, December 6-12, 2020, virtual*, 2020.
- [2] OpenAI. Chatgpt, 2022.
- [3] OpenAI. Gpt-4 technical report, 2024.
- [4] Yi Zheng, Chongyang Ma, Kanle Shi, and Haibin Huang. Agents meet okr: An object and key results driven agent system with hierarchical self-collaboration and self-evaluation, 2023.
- [5] Tushar Khot, Harsh Trivedi, Matthew Finlayson, Yao Fu, Kyle Richardson, Peter Clark, and Ashish Sabharwal. Decomposed prompting: A modular approach for solving complex tasks, 2023.
- [6] Archiki Prasad, Alexander Koller, Mareike Hartmann, Peter Clark, Ashish Sabharwal, Mohit Bansal, and Tushar Khot. Adapt: As-needed decomposition and planning with language models, 2024.
- [7] Siyu Yuan, Jiangjie Chen, Ziquan Fu, Xuyang Ge, Soham Shah, Charles Jankowski, Yanghua Xiao, and Deqing Yang. Distilling script knowledge from large language models for constrained language planning. In Anna Rogers, Jordan Boyd-Graber, and Naoaki Okazaki, editors, *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 4303–4325, Toronto, Canada, 2023. Association for Computational Linguistics.
- [8] Ishika Singh, David Traum, and Jesse Thomason. Twostep: Multi-agent task planning using classical planners and large language models. *ArXiv preprint*, abs/2403.17246, 2024.
- [9] Yuchen Liu, Luigi Palmieri, Sebastian Koch, Ilche Georgievski, and Marco Aiello. Delta: Decomposed efficient long-term robot task planning using large language models, 2024.
- [10] Aman Madaan, Niket Tandon, Prakhar Gupta, Skyler Hallinan, Luyu Gao, Sarah Wiegrefe, Uri Alon, Nouha Dziri, Shrimai Prabhumoye, Yiming Yang, Shashank Gupta, Bodhisattwa Prasad Majumder, Katherine Hermann, Sean Welleck, Amir Yazdanbakhsh, and Peter Clark. Self-refine: Iterative refinement with self-feedback, 2023.
- [11] Bodhisattwa Prasad Majumder, Bhavana Dalvi Mishra, Peter Jansen, Oyvind Tafjord, Niket Tandon, Li Zhang, Chris Callison-Burch, and Peter Clark. Clin: A continually learning language agent for rapid task adaptation and generalization, 2023.
- [12] Andrew Zhao, Daniel Huang, Quentin Xu, Matthieu Lin, Yong-Jin Liu, and Gao Huang. Expel: Llm agents are experiential learners. In Michael J. Wooldridge, Jennifer G. Dy, and Sriraam Natarajan, editors, *Thirty-Eighth AAAI Conference on Artificial Intelligence, AAAI 2024, Thirty-Sixth Conference on Innovative Applications of Artificial Intelligence, IAAI 2024, Fourteenth Symposium on Educational Advances in Artificial Intelligence, EAAI 2024, February 20-27, 2024, Vancouver, Canada*, pages 19632–19642. AAAI Press, 2024.
- [13] Debjit Paul, Mete Ismayilzada, Maxime Peyrard, Beatriz Borges, Antoine Bosselut, Robert West, and Boi Faltings. Refiner: Reasoning feedback on intermediate representations, 2024.

- [14] Wenlong Huang, Pieter Abbeel, Deepak Pathak, and Igor Mordatch. Language models as zero-shot planners: Extracting actionable knowledge for embodied agents. In Kamalika Chaudhuri, Stefanie Jegelka, Le Song, Csaba Szepesvári, Gang Niu, and Sivan Sabato, editors, *International Conference on Machine Learning, ICML 2022, 17-23 July 2022, Baltimore, Maryland, USA*, volume 162 of *Proceedings of Machine Learning Research*, pages 9118–9147. PMLR, 2022.
- [15] Bill Yuchen Lin, Yicheng Fu, Karina Yang, Faeze Brahman, Shiyu Huang, Chandra Bhagavatula, Prithviraj Ammanabrolu, Yejin Choi, and Xiang Ren. Swiftsage: A generative agent with fast and slow thinking for complex interactive tasks, 2023.
- [16] Shunyu Yao, Jeffrey Zhao, Dian Yu, Nan Du, Izhak Shafran, Karthik Narasimhan, and Yuan Cao. React: Synergizing reasoning and acting in language models, 2023.
- [17] Noah Shinn, Federico Cassano, Edward Berman, Ashwin Gopinath, Karthik Narasimhan, and Shunyu Yao. Reflexion: Language agents with verbal reinforcement learning, 2023.
- [18] Guanzhi Wang, Yuqi Xie, Yunfan Jiang, Ajay Mandlekar, Chaowei Xiao, Yuke Zhu, Linxi (Jim) Fan, and Anima Anandkumar. Voyager: An open-ended embodied agent with large language models. *ArXiv preprint*, abs/2305.16291, 2023.
- [19] Kolby Nottingham, Bodhisattwa Prasad Majumder, Bhavana Dalvi Mishra, Sameer Singh, Peter Clark, and Roy Fox. Skill set optimization: Reinforcing language model behavior via transferable skills, 2024.
- [20] Michael Ahn, Anthony Brohan, Noah Brown, Yevgen Chebotar, Omar Cortes, Byron David, Chelsea Finn, Chuyuan Fu, Keerthana Gopalakrishnan, Karol Hausman, Alex Herzog, Daniel Ho, Jasmine Hsu, Julian Ibarz, Brian Ichter, Alex Irpan, Eric Jang, Rosario Jauregui Ruano, Kyle Jeffrey, Sally Jesmonth, Nikhil J Joshi, Ryan Julian, Dmitry Kalashnikov, Yuheng Kuang, Kuang-Huei Lee, Sergey Levine, Yao Lu, Linda Luu, Carolina Parada, Peter Pastor, Jornell Quiambao, Kanishka Rao, Jarek Rettinghouse, Diego Reyes, Pierre Sermanet, Nicolas Sievers, Clayton Tan, Alexander Toshev, Vincent Vanhoucke, Fei Xia, Ted Xiao, Peng Xu, Sichun Xu, Mengyuan Yan, and Andy Zeng. Do as i can, not as i say: Grounding language in robotic affordances, 2022.
- [21] Wenlong Huang, Fei Xia, Ted Xiao, Harris Chan, Jacky Liang, Pete Florence, Andy Zeng, Jonathan Tompson, Igor Mordatch, Yevgen Chebotar, Pierre Sermanet, Noah Brown, Tomas Jackson, Linda Luu, Sergey Levine, Karol Hausman, and Brian Ichter. Inner monologue: Embodied reasoning through planning with language models, 2022.
- [22] Bo Liu, Yuqian Jiang, Xiaohan Zhang, Qiang Liu, Shiqi Zhang, Joydeep Biswas, and Peter Stone. Llm+p: Empowering large language models with optimal planning proficiency, 2023.
- [23] Lei Wang, Wanyu Xu, Yihuai Lan, Zhiqiang Hu, Yunshi Lan, Roy Ka-Wei Lee, and Ee-Peng Lim. Plan-and-solve prompting: Improving zero-shot chain-of-thought reasoning by large language models. In Anna Rogers, Jordan Boyd-Graber, and Naoaki Okazaki, editors, *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 2609–2634, Toronto, Canada, 2023. Association for Computational Linguistics.
- [24] Yikai Zhang, Siyu Yuan, Caiyu Hu, Kyle Richardson, Yanghua Xiao, and Jiangjie Chen. Timearena: Shaping efficient multitasking language agents in a time-aware simulation. *ArXiv preprint*, abs/2402.05733, 2024.
- [25] Jian Xie, Kai Zhang, Jiangjie Chen, Tinghui Zhu, Renze Lou, Yuandong Tian, Yanghua Xiao, and Yu Su. Travelplanner: A benchmark for real-world planning with language agents. *ArXiv preprint*, abs/2402.01622, 2024.
- [26] Chengdong Ma, Ziran Yang, Minquan Gao, Hai Ci, Jun Gao, Xuehai Pan, and Yaodong Yang. Red teaming game: A game-theoretic framework for red teaming language models, 2024.
- [27] Xuhui Zhou, Hao Zhu, Leena Mathur, Ruohong Zhang, Haofei Yu, Zhengyang Qi, Louis-Philippe Morency, Yonatan Bisk, Daniel Fried, Graham Neubig, and Maarten Sap. Sotopia: Interactive evaluation for social intelligence in language agents, 2024.

- [28] Ruoyao Wang, Peter Jansen, Marc-Alexandre Côté, and Prithviraj Ammanabrolu. ScienceWorld: Is your agent smarter than a 5th grader? In *Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing*, pages 11279–11298, Abu Dhabi, United Arab Emirates, 2022. Association for Computational Linguistics.
- [29] Christopher Hoang, Sungryull Sohn, Jongwook Choi, Wilka Carvalho, and Honglak Lee. Successor feature landmarks for long-horizon goal-conditioned reinforcement learning. In Marc’Aurelio Ranzato, Alina Beygelzimer, Yann N. Dauphin, Percy Liang, and Jennifer Wortman Vaughan, editors, *Advances in Neural Information Processing Systems 34: Annual Conference on Neural Information Processing Systems 2021, NeurIPS 2021, December 6-14, 2021, virtual*, pages 26963–26975, 2021.
- [30] Zhiao Huang, Fangchen Liu, and Hao Su. Mapping state space using landmarks for universal goal reaching. In Hanna M. Wallach, Hugo Larochelle, Alina Beygelzimer, Florence d’Alché-Buc, Emily B. Fox, and Roman Garnett, editors, *Advances in Neural Information Processing Systems 32: Annual Conference on Neural Information Processing Systems 2019, NeurIPS 2019, December 8-14, 2019, Vancouver, BC, Canada*, pages 1940–1950, 2019.
- [31] Andrew G Barto and Sridhar Mahadevan. Recent advances in hierarchical reinforcement learning. *Discrete event dynamic systems*, 13:341–379, 2003.
- [32] Damien Pellier, Alexandre Albore, Humbert Fiorino, and Rafael Bailon-Ruiz. Hddl 2.1: Towards defining a formalism and a semantics for temporal htn planning, 2023.
- [33] Kutluhan Erol, James Hendler, and Dana S Nau. Htn planning: Complexity and expressivity. In *AAAI*, volume 94, pages 1123–1128, 1994.
- [34] Tushar Khot, Harsh Trivedi, Matthew Finlayson, Yao Fu, Kyle Richardson, Peter Clark, and Ashish Sabharwal. Decomposed prompting: A modular approach for solving complex tasks. *ArXiv preprint*, abs/2210.02406, 2022.
- [35] Valerie Goffaux, Judith Peters, Julie Haubrechts, Christine Schiltz, Bernadette Jansma, and Rainer Goebel. From coarse to fine? spatial and temporal dynamics of cortical face processing. *Cerebral Cortex*, page 467–476, 2011.
- [36] Faisal Rahutomo, Teruaki Kitasuka, Masayoshi Aritsugi, et al. Semantic cosine similarity. In *The 7th international student conference on advanced science and technology ICAST*, volume 4, page 1. University of Seoul South Korea, 2012.
- [37] Jen-tse Huang, Eric John Li, Man Ho Lam, Tian Liang, Wenxuan Wang, Youliang Yuan, Wenxiang Jiao, Xing Wang, Zhaopeng Tu, and Michael R Lyu. How far are we on the decision-making of llms? evaluating llms’ gaming ability in multi-agent environments. *ArXiv preprint*, abs/2403.11807, 2024.
- [38] Jiangjie Chen, Siyu Yuan, Rong Ye, Bodhisattwa Prasad Majumder, and Kyle Richardson. Put your money where your mouth is: Evaluating strategic planning and execution of llm agents in an auction arena, 2023.
- [39] Mike Lewis, Denis Yarats, Yann Dauphin, Devi Parikh, and Dhruv Batra. Deal or no deal? end-to-end learning of negotiation dialogues. In *Proceedings of the 2017 Conference on Empirical Methods in Natural Language Processing*, pages 2443–2453, Copenhagen, Denmark, 2017. Association for Computational Linguistics.
- [40] Constantinos Daskalakis, Paul W Goldberg, and Christos H Papadimitriou. The complexity of computing a nash equilibrium. *Communications of the ACM*, 52(2):89–97, 2009.
- [41] Alain Ledoux. Concours résultats complets: Les victimes se sont plu à jouer le 14 d’atout. *Jeux & Stratégie*, 2(10):10–11, 1981.
- [42] Michal Kosinski. Theory of mind might have spontaneously emerged in large language models. *ArXiv preprint*, abs/2302.02083, 2023.

- [43] Yuanyuan Mao, Shuang Liu, Pengshuai Zhao, Qin Ni, Xin Lin, and Liang He. A review on machine theory of mind, 2023.
- [44] Colin F. Camerer, Ho Teck-Hua, and Chong Juin-Kuan. A cognitive hierarchy model of games. *The Quarterly Journal of Economics*, 119, 2004.
- [45] Gemini Team, Rohan Anil, Sebastian Borgeaud, Yonghui Wu, Jean-Baptiste Alayrac, Jiahui Yu, Radu Soricut, Johan Schalkwyk, Andrew M Dai, Anja Hauth, et al. Gemini: a family of highly capable multimodal models. *ArXiv preprint*, abs/2312.11805, 2023.
- [46] Albert Q. Jiang, Alexandre Sablayrolles, Arthur Mensch, Chris Bamford, Devendra Singh Chaplot, Diego de las Casas, Florian Bressand, Gianna Lengyel, Guillaume Lample, Lucile Saulnier, L lio Renard Lavaud, Marie-Anne Lachaux, Pierre Stock, Teven Le Scao, Thibaut Lavril, Thomas Wang, Timoth e Lacroix, and William El Sayed. Mistral 7b, 2023.
- [47] Albert Q Jiang, Alexandre Sablayrolles, Antoine Roux, Arthur Mensch, Blanche Savary, Chris Bamford, Devendra Singh Chaplot, Diego de las Casas, Emma Bou Hanna, Florian Bressand, et al. Mixtral of experts. *ArXiv preprint*, abs/2401.04088, 2024.
- [48] Jinze Bai, Shuai Bai, Yunfei Chu, Zeyu Cui, Kai Dang, Xiaodong Deng, Yang Fan, Wenbin Ge, Yu Han, Fei Huang, Binyuan Hui, Luo Ji, Mei Li, Junyang Lin, Runji Lin, Dayiheng Liu, Gao Liu, Chengqiang Lu, Keming Lu, Jianxin Ma, Rui Men, Xingzhang Ren, Xuancheng Ren, Chuanqi Tan, Sinan Tan, Jianhong Tu, Peng Wang, Shijie Wang, Wei Wang, Shengguang Wu, Benfeng Xu, Jin Xu, An Yang, Hao Yang, Jian Yang, Shusheng Yang, Yang Yao, Bowen Yu, Hongyi Yuan, Zheng Yuan, Jianwei Zhang, Xingxuan Zhang, Yichang Zhang, Zhenru Zhang, Chang Zhou, Jingren Zhou, Xiaohuan Zhou, and Tianhang Zhu. Qwen technical report, 2023.
- [49] Ralf Herbrich, Tom Minka, and Thore Graepel. TrueskillTM: a bayesian skill rating system. *Advances in neural information processing systems*, 19, 2006.
- [50] Tom Minka, Ryan Cleven, and Yordan Zaykov. Trueskill 2: An improved bayesian skill rating system. *Technical Report*, 2018.

A SELFGOAL Details

A.1 Does pruning the GOALTREE affect search quality?

We investigate whether pruning nodes not selected for a long time from the target tree affects the Search Module’s decisions. Pruning begins after the Decompose Module completes building the tree, and nodes unselected for more than five consecutive rounds will be deleted. We assess the impact of pruning on GPT-3.5’s performance in Auction and Bargaining. As shown in Table 4, the TrueSkill Score with and without pruning are similar. This suggests that nodes not chosen for extended periods do not compromise the Search Module’s decision-making effectiveness. This efficiency likely results from our Search Module using prior knowledge from LLM to identify and avoid selecting unnecessary nodes, akin to lazy deletion. For efficiency, these redundant nodes are also removed every five rounds.

Table 4: Comparison of agents guided by GOALTREE with and without pruning.

GOALTREE	Scenario	
	Auction	Bargaining
Pruned	24.74 ± 3.22	24.90 ± 1.21
w/o Pruned	25.25 ± 3.23	25.09 ± 1.21

A.2 Implementation Details

We compare our SELFGOAL with the following methods: ReAct [16], which induces an LLM actor to engage in preliminary reasoning about the task before initiating action, Reflexion [17], which encourages an LLM actor to re-assess unsuccessful task attempts before attempting the task again, CLIN [11], which leverages historical insights to deduce transition strategies, articulated as “A [may/should] be necessary for A”. To adapt these methods to our experimental environment, we update the memory of the CLIN/Reflexion approach at each timestep within a single trial, whether it is a bid in the Auction environment, a dialogue round in the Negotiation environment, or a game round in GAMA-Bench. Specifically, for Reflexion, the model uses historical steps from the current trial to generate verbal self-reflections. These self-reflections are then added to long-term memory, providing valuable feedback for future trials. In the case of CLIN, we use the BASE method due to the absence of a training set in our environment. The memory is updated at each step by prompting the model with historical steps from the current trial and all previous memories to generate an updated memory, which includes a new list of semi-structured causal abstractions. This updated memory is then incorporated into the historical memories.

A.3 Details of TrueSkill Score

In a game with a population of n players $\{1, \dots, n\}$, consider a match where k teams compete. The team assignments are specified by k non-overlapping subsets $A_j \subset \{1, \dots, n\}$ of the player population, with $A_i \cap A_j = \emptyset$ for $i \neq j$. The outcome $\mathbf{r} := (r_1, \dots, r_k) \in \{1, \dots, k\}$ is defined by a rank r_j for each team j , with $r = 1$ indicating the winner and draws possible when $r_i = r_j$. Ranks are based on the game’s scoring rules.

The probability $P(\mathbf{r} | \mathbf{s}, A)$ of the game outcome \mathbf{r} is modeled given the skills \mathbf{s} of the participating players and the team assignments $A := \{A_1, \dots, A_k\}$. From Bayes’ rule, we get the posterior distribution

$$p(\mathbf{s} | \mathbf{r}, A) = \frac{P(\mathbf{r} | \mathbf{s}, A)p(\mathbf{s})}{P(\mathbf{r} | A)}.$$

We assume a factorizing Gaussian prior distribution, $p(\mathbf{s}) := \prod_{i=1}^n N(s_i; \mu_i, \sigma_i^2)$. Each player i is assumed to exhibit a performance $p_i \sim N(p_i; s_i, \beta^2)$ in the game, centered around their skill s_i with fixed variance β^2 .

The performance t_j of team j is modeled as the sum of the performances of its members, $t_j := \sum_{i \in A_j} p_i$. Teams are reordered in ascending order of rank, $r_{(1)} \leq r_{(2)} \leq \dots \leq r_{(k)}$. Disregarding draws, the probability of a game outcome \mathbf{r} is modeled as

$$P(\mathbf{r} | \{t_1, \dots, t_k\}) = P(t_{r_{(1)}} > t_{r_{(2)}} > \dots > t_{r_{(k)}})$$

In other words, the order of performances determines the game outcome. If draws are allowed, the winning outcome $r_{(j)} < r_{(j+1)}$ requires $t_{r_{(j)}} > t_{r_{(j+1)}} + \varepsilon$ and the draw outcome $r_{(j)} = r_{(j+1)}$ requires $|t_{r_{(j)}} - t_{r_{(j+1)}}| \leq \varepsilon$, where $\varepsilon > 0$ is a draw margin calculated from the assumed probability of a draw.¹

To report skill estimates after each game, we use an online learning scheme called Gaussian density filtering. The posterior distribution is approximated to be Gaussian and is used as the prior distribution for the next game. If skills are expected to change over time, a Gaussian dynamics factor $N(s_{i,t+1}; s_{i,t}, \gamma^2)$ can be introduced, leading to an additive variance component of γ^2 in the subsequent prior.

Consider a game with $k = 3$ teams with team assignments $A_1 = \{1\}$, $A_2 = \{2, 3\}$ and $A_3 = \{4\}$. Assume that team 1 wins and teams 2 and 3 draw, i.e., $\mathbf{r} := (1, 2, 2)$. The function represented by a factor graph in our case, the joint distribution $p(\mathbf{s}, \mathbf{p}, \mathbf{t} \mid \mathbf{r}, A)$, is given by the product of all the potential functions associated with each factor. The structure of the factor graph provides information about the dependencies of the factors involved and serves as the foundation for efficient inference algorithms. Referring back to Bayes' rule, the quantities of interest are the posterior distribution $p(s_i \mid \mathbf{r}, A)$ over skills given game outcome \mathbf{r} and team assignments A . The $p(s_i \mid \mathbf{r}, A)$ are calculated from the joint distribution by integrating out the individual performances $\{p_i\}$ and the team performances $\{t_i\}$:

$$p(\mathbf{s} \mid \mathbf{r}, A) = \int_{-\infty}^{\infty} \cdots \int_{-\infty}^{\infty} p(\mathbf{s}, \mathbf{p}, \mathbf{t} \mid \mathbf{r}, A) d\mathbf{p} d\mathbf{t}.$$

A.4 Instruction Prompt Examples

The instruction prompts of three modules in SELFGOAL are presented in Listing 1.

Listing 1: The instruction prompts in SELFGOAL.

Decomposition Instruction:

```
# Main Goal
Humans exhibit numerous behaviors and sub-goals, which can be traced back
to the primary aim of survival. For instance:
1. Food Acquisition: To maintain physical and mental functionality,
individuals seek nourishment. They target foods with high energy and
nutritional values to augment their health, thus enhancing survival
possibilities.
2. Shelter Construction: Safe and secure housing is a fundamental human
need. It offers protection from potentially harmful natural elements and
potential threats.
```

```
Imagine you are an agent in an ascending-bid auction. You will compete
against other bidders in a bidding war. The price steadily increases as
bidders progressively pull out. Eventually, a single bidder emerges as
the winner, securing the item at the final bid.
```

```
Taking analogy from human behaviors, if your fundamental objective in
this auction is "{goal}", what sub-goals you might have?
```

```
# Sub-Goal
For the goal: "{sub_goal}", can you further run some deduction for fine-
grained goals or brief guidelines?
```

Search Instruction:

```
Here's the current scenario:
{scene}
```

```
-----
To better reach your main goal: {objective}, in this context, please do
the following:
```

1. Evaluate how the sub-goals listed below can assist you in reaching your main goal given the present circumstances.

Sub-goals:

{guidance}

2. Select {width} most useful sub-goals that will help you reach your main goal in the current situation, and note their IDs.

Start by explaining your step-by-step thought process. Then, list the {width} IDs you've chosen, using the format of this example: {"IDs": [1, 3, 10, 21, 7]}.

Task Solving Instruction:

Here is the current scenarios:

{scene}

Here are some possible subgoals and guidance derived from your primary objective {main_goal}:

{sub_goals}

In this round, You may target some of these subgoals and detailed guidance to improve your strategy and action, to achieve your primary objective.

We implemented CLIN and Reflexion methods in our environments as presented in Listing 2.

Listing 2: The instructions for Reflexion and CLIN.

REFLEXION Instruction:

You are an advanced reasoning agent that can improve based on self reflection.

Review and reflect on the historical data provided from a past auction.

{past_auction_log}

Based on the auction log, in a few sentences, diagnose a possible reason for failure or phrasing discrepancy and devise a new, concise, high level plan that aims to mitigate the same failure. Use complete sentences.

CLIN Instruction:

Review and reflect on the historical data provided from a past auction.

{past_auction_log}

Here are your past learnings:

{past_learnings}

Based on the auction log, formulate or update your learning points that could be advantageous to your strategies in the future. Your learnings should be strategic, and of universal relevance and practical use for future auctions. Consolidate your learnings into a concise numbered list of sentences.

Each numbered item in the list can ONLY be of the form:

X MAY BE NECESSARY to Y.

X SHOULD BE NECESSARY to Y.

X MAY BE CONTRIBUTE to Y.

X DOES NOT CONTRIBUTE to Y.

A.5 Examples of GoalTree

Here, we provide examples of GOALTREE from four environments in Listing 3, with their main goals as follows:

- **Public Goods:** maximize your total token count by the end of the game;

- **Guess 2/3 of the Average:** choose a number that you believe will be closest to 2/3 of the average of all numbers chosen by players, including your selection;
- **First-price Auction:** secure the highest profit at the end of this auction, compared to all other bidders;
- **Bargaining:** minimize the profit gap between yourself and your partner in this negotiation, regardless of your own profit.

Listing 3: Examples of GOALTREE in SELFGOAL.

Public Goods Game:

```

root: Maximize your total token count by the end of the game.
root-0: Maximizing Contribution
root-0-0: Assess the Current State
root-0-0-2: Long-term Token Accumulation
root-0-0-2-3: Collaboration and Competition
root-0-0-2-3-0: Observation and Analysis
root-0-0-2-3-0-1: Identify Potential Collaborators
root-0-0-2-3-0-1-1: Observe Consistency
root-0-0-2-3-0-1-1-1: Establish Trustworthy Partnerships
root-0-0-2-3-0-1-1-1-2: Monitor Trustworthiness
root-0-0-2-3-0-1-1-1-2-1: Identify Unreliable Contributors
root-0-0-2-3-0-1-1-1-2-1-0: Track and Analyze Contributions
root-0-0-2-3-0-1-1-1-2-1-0-1: Identify Inconsistent Contributors
root-0-0-2-3-0-1-1-1-2-1-0-1-1: Monitor Reliability
root-0-0-2-3-0-1-1-1-2-1-0-1-2: Consider Communication
root-0-0-2-3-0-1-1-1-2-1-0-1-3: Adjust Your Strategy
root-0-0-2-3-0-1-1-1-2-1-0-1-3-2: Anticipate Player Behavior
root-0-0-2-3-0-1-1-1-2-1-0-1-3-4: Risk Management
root-0-0-2-3-0-1-1-1-2-1-0-1-4: Collaborate with Consistent Contributors
root-0-0-2-3-0-1-1-1-2-1-0-1-4-0: Identify Reliable Contributors
root-0-0-2-3-0-1-1-1-2-1-0-1-4-1: Establish Communication
root-0-0-2-3-0-1-1-1-2-1-0-1-4-1-2: Observe Behavioral Patterns
root-0-0-2-3-0-1-1-1-2-1-0-1-4-1-3: Formulate a Joint Strategy
root-0-0-2-3-0-1-1-1-2-1-0-1-4-1-3-1: Optimal Contribution Levels
root-0-0-2-3-0-1-1-1-2-1-0-1-4-1-3-2: Establish Communication
root-0-0-2-3-0-1-1-1-2-1-0-1-4-1-3-3: Adaptation and Flexibility
root-0-0-2-3-0-1-1-1-2-1-0-1-4-1-3-4: Trust and Collaboration
root-0-0-2-3-0-1-1-1-2-1-0-1-4-3: Monitor Consistency
root-0-0-2-3-0-1-1-1-2-1-0-4: Communication and Collaboration
root-0-0-2-3-0-1-1-1-2-1-0-4-2: Encourage Consistency
root-0-0-2-3-0-1-1-1-2-1-0-4-3: Form Alliances
root-0-0-2-3-0-1-1-1-2-1-0-4-3-1: Establish Communication
root-0-0-2-3-0-1-1-1-2-1-0-4-3-2: Coordinate Contribution Efforts
root-0-0-2-3-0-1-1-1-2-1-0-4-3-3: Build Trust and Reliability
root-0-0-2-3-0-1-1-1-2-1-0-4-4: Monitor and Adapt
root-0-0-2-3-0-1-1-1-2-1-2: Communicate and Negotiate
root-0-0-2-3-0-1-1-1-2-1-2-0: Analyze Contribution Patterns
root-0-0-2-3-0-1-1-1-2-1-2-3: Monitor Trustworthiness
root-0-0-2-3-0-1-1-1-2-1-2-4: Adapt to Changing Dynamics
root-0-0-2-3-0-1-1-1-2-1-2-4-1: Form Alliances
root-0-0-2-3-0-1-1-1-2-1-2-4-4: Long-term Planning
root-0-0-2-3-0-1-1-1-2-1-2-4-4-0: Assess the Current Trend
root-0-0-2-3-0-1-1-1-2-1-2-4-4-4: Flexibility in Strategy
root-0-0-2-3-0-1-1-1-2-1-2-4-4-5: Consistency in Contributions
root-0-0-2-3-0-1-1-1-2-1-4: Build a Reputation
root-0-0-2-3-0-1-1-1-2-1-4-2: Observation and Adaptation
root-0-0-2-3-0-1-1-1-2-1-4-4: Communication and Collaboration
root-0-0-2-3-0-1-1-1-2-2: Establish Collaborative Partnerships
root-0-0-2-3-0-1-1-1-2-2-0: Identify Trustworthy Players
root-0-0-2-3-0-1-1-1-2-2-0-2: Consider Long-Term Behavior
root-0-0-2-3-0-1-1-1-2-2-0-2-1: Identify Trustworthy Players
root-0-0-2-3-0-1-1-1-2-2-0-2-3: Adjust Your Strategy
root-0-0-2-3-0-1-1-1-2-2-0-3: Form Alliances

```

root-0-0-2-3-0-1-1-1-2-2-0-3-1: Assess Trustworthiness
 root-0-0-2-3-0-1-1-1-2-2-0-3-3: Mutual Benefit
 root-0-0-2-3-0-1-1-1-2-2-0-3-4: Long-Term Collaboration
 root-0-0-2-3-0-1-1-1-2-2-0-4: Monitor Changes
 root-0-0-2-3-0-1-1-1-2-2-1: Initiate Communication
 root-0-0-2-3-0-1-1-1-2-2-2: Reciprocate Trust
 root-0-0-2-3-0-1-1-1-2-2-4: Adaptability
 root-0-0-2-3-0-1-1-1-2-2-4-0: Assess Other Players' Contributions
 root-0-0-2-3-0-1-1-1-2-2-4-2: Identify Potential Alliances
 root-0-0-2-3-0-1-1-1-4: Long-term Planning
 root-0-0-2-3-0-1-1-1-4-2: Encourage Cooperative Behavior
 root-0-0-2-3-0-1-1-1-4-2-0: Establish Trust
 root-0-0-2-3-0-1-1-1-4-2-1: Strategic Communication
 root-0-0-2-3-0-1-1-1-4-2-1-2: Highlight Long-Term Benefits
 root-0-0-2-3-0-1-1-1-4-2-1-3: Negotiate Contribution Strategies
 root-0-0-2-3-0-1-1-1-4-2-1-4: Foster Trust and Collaboration
 root-0-0-2-3-0-1-1-1-4-2-2: Highlight Mutual Gains
 root-0-0-2-3-0-1-1-1-4-2-3: Foster Collaboration
 root-0-0-2-3-0-1-1-1-4-2-4: Long-Term Perspective
 root-0-0-2-3-0-1-1-1-4-3: Monitor and Adapt
 root-0-0-2-3-0-1-1-1-4-3-1: Build Sustainable Partnerships
 root-0-0-2-3-0-1-1-1-4-3-3: Strategic Observation
 root-0-0-2-3-0-1-1-1-4-3-4: Long-term Adaptation
 root-0-0-2-3-0-1-1-1-4-4: Evaluate Long-Term Gains
 root-0-0-2-3-0-1-1-1-4-4-2: Monitor Contribution Trends
 root-0-0-2-3-0-1-1-2: Monitor Changes in Contributions
 root-0-0-2-3-0-1-1-2-2: Form Partnerships
 root-0-0-2-3-0-1-1-2-2-1: Establish Communication
 root-0-0-2-3-0-1-1-2-2-2: Form Strategic Alliances
 root-0-0-2-3-0-1-1-2-2-4: Maximize Collective Gain
 root-0-0-2-3-0-1-1-2-3: Anticipate Changes
 root-0-0-2-3-0-1-1-2-4: Evaluate Risk-Reward Ratio
 root-0-0-2-3-0-1-3: Build Trust and Cooperation
 root-0-0-2-3-0-1-4: Monitor Results
 root-0-0-2-3-0-1-4-1: Assess Impact on Public Good Payoff
 root-0-0-2-3-0-1-4-1-1: Evaluate Public Pot Growth
 root-0-0-2-3-0-1-4-1-3: Identify Collaborative Strategies
 root-0-0-2-3-0-1-4-1-4: Predict Future Payoff Trends
 root-0-0-2-3-0-1-4-2: Compare Individual Gains
 root-0-0-2-3-0-1-4-4: Formulate Collaboration Tactics
 root-0-0-2-3-0-2: Detect Potential Competition
 root-0-0-2-3-2: Strategic Adaptation
 root-0-0-2-3-2-0: Analyze Other Players' Contributions
 root-0-0-2-3-2-4: Flexibility in Decision Making
 root-0-0-2-3-2-4-1: Adjust Contribution Based on Public Pot Size
 root-0-0-2-3-2-4-2: Balance Risk and Reward
 root-0-0-2-3-2-4-2-0: Assess the Current Token Balance
 root-0-0-2-3-2-4-2-2: Adapt Contribution Strategy
 root-0-0-2-3-2-4-2-4: Observe Patterns
 root-0-0-2-3-3: Long-term Planning
 root-0-0-2-3-4: Risk Assessment
 root-0-0-2-3-4-0: Analyze Previous Rounds
 root-0-0-2-3-4-0-1: Gain Assessment
 root-0-0-2-3-4-0-2: Competitive Strategies
 root-0-0-2-3-4-0-3: Collaboration Opportunities
 root-0-0-2-3-4-2: Assess Potential Losses
 root-0-0-2-3-4-4: Long-term Planning
 root-0-0-2-4: Long-term Planning
 root-0-0-2-4-0: Monitor Token Balance
 root-0-0-2-4-0-0: Analyze Contribution Impact
 root-0-0-2-4-0-0-2: Strategy Effectiveness
 root-0-0-2-4-0-0-2-0: Contribution Analysis
 root-0-0-2-4-0-0-2-0-2: Identify rounds with lower gain than expected and analyze potential reasons

root-0-0-2-4-0-0-2-0-3: Experiment with different contribution amounts in future rounds
 root-0-0-2-4-4: Risk Management
 root-0-0-2-4-4-0: Assess Potential Gains
 root-0-0-2-4-4-0-0: Analyze Contribution Impact
 root-0-0-2-4-4-1: Balance Contribution
 root-0-0-2-4-4-3: Long-term Planning
 root-0-0-2-4-4-4: Flexibility in Contributions
 root-0-3: Adaptability
 root-0-3-2: Observation and Prediction
 root-0-3-2-1: Predict Potential Strategies
 root-0-3-2-1-0: Player 1
 root-0-3-2-1-1: Player 2
 root-0-3-2-1-2: Player 3
 root-0-3-2-2: Adjust Your Strategy
 root-0-3-2-4: Stay Flexible
 root-0-3-3: Risk Assessment
 root-0-3-3-1: Consider Contribution Variability
 root-0-3-3-1-1: Predict Potential Contributions
 root-0-3-4: Long-term Adaptation
 root-0-3-4-2: Flexibility in Contribution
 root-0-3-4-2-2: Balance Short-term Gains and Long-term Goal
 root-0-4: Risk Assessment
 root-0-4-0: Analyze Previous Rounds
 root-0-4-0-1: Risk Assessment
 root-0-4-0-1-0: Analyze Previous Rounds
 root-0-4-0-1-1: Consider Variability
 root-0-4-0-1-3: Risk Tolerance
 root-0-4-0-1-4: Strategic Adjustment
 root-0-4-0-3: Strategic Planning
 root-0-4-4: Adaptation
 root-1: Strategic Decision Making
 root-1-0: Analyze Other Players' Contributions
 root-1-0-3: Consider Overall Game Dynamics
 root-1-0-3-1: Assess Token Distribution
 root-1-1: Consider Potential Payoff
 root-1-1-2: Risk Assessment
 root-1-1-2-0: Analyze Previous Rounds
 root-1-1-2-0-0: Contribution Level Analysis
 root-1-1-2-0-2: Trend Identification
 root-1-1-2-0-2-0: Consider the overall game dynamics
 root-1-1-2-0-2-1: Flexibility in contribution strategies
 root-1-1-2-0-2-2: Risk management
 root-1-1-2-0-2-2-0: Analyze Trends
 root-1-1-2-0-2-2-2: Diversify Contributions
 root-1-1-2-0-2-3: Observation of player behavior
 root-1-1-2-0-3: Risk Assessment
 root-1-1-2-0-4: Adaptation Strategy
 root-1-1-2-0-4-2: Consider Overall Game Dynamics
 root-1-1-2-4: Long-term Risk Management
 root-1-1-3: Adapt to Player Behaviors
 root-1-1-3-2: Strategic Decision Making
 root-1-3: Adapt to Player Behaviors
 root-1-3-3: Balance Risk and Reward
 root-1-5: Flexibility
 root-1-5-1: Adjust Contribution Based on Public Pot
 root-1-5-1-0: Analyze Public Pot Size
 root-1-5-1-0-2: Monitor Overall Trends
 root-1-5-1-0-2-2: Compare with Other Players
 root-1-5-1-2: Monitor Overall Token Accumulation
 root-2: Long-term Planning
 root-2-0: Assess Previous Contributions
 root-2-0-1: Identify Optimal Contribution Levels
 root-2-0-2: Consider Player Behaviors

root-2-0-3: Adjust Contribution Strategy
root-2-1: Strategic Contribution
root-2-2: Monitor Other Players

Guess 2/3 of the Average:

root: Choose a number that you believe will be closest to 2/3 of the average of all numbers chosen by players, including your selection
root-0: Observation
root-0-0: Analyze Trends
root-0-0-1: Evaluate Deviations
root-0-0-1-3: Stay Informed
root-0-0-1-3-3: Flexibility in Decision-Making
root-0-0-1-3-3-1: Adapt to Changing Dynamics
root-0-0-1-3-3-1-3: Consider Risk-Reward
root-0-0-1-3-3-2: Consider Risk-Reward Tradeoff
root-0-0-1-3-3-2-3: Adapt to Changing Circumstances
root-0-0-1-3-3-2-3-3: Strategic Observation
root-0-0-1-3-3-2-3-3-1: Consider Recent Rounds
root-0-0-1-3-3-2-3-3-2: Identify Outliers
root-0-0-1-3-3-2-3-3-3: Predict Potential Average
root-0-0-1-3-3-2-3-4: Risk Assessment
root-0-0-1-3-3-4: Balance Consistency and Adaptability
root-0-0-1-3-4: Strategic Observation
root-0-0-1-3-4-0: Analyze Winning Numbers
root-0-0-1-3-4-0-1: Identify Common Numbers
root-0-0-1-3-4-0-2: Consider the Average
root-0-0-1-3-4-1: Monitor Average Numbers
root-0-0-1-3-4-1-2: Consider Previous Results
root-0-0-1-3-4-1-4: Adjust Risk Tolerance
root-0-0-1-3-4-2: Observe Your Performance
root-0-0-1-3-4-3: Consider Player Strategies
root-0-0-1-3-4-3-0: Analyze Winning Strategies
root-0-0-1-3-4-3-1: Adaptation
root-0-0-1-3-4-3-2: Observation
root-0-0-1-3-4-3-4: Risk Assessment
root-0-1: Identify Outliers
root-0-1-0: Analyze Previous Rounds
root-0-1-0-1: Consider Trends
root-0-1-0-1-0: Consider the decreasing trend in the average number chosen by players in the previous rounds and select a number slightly lower than the expected average for the upcoming round
root-0-1-0-1-0-3: Balance Risk and Reward
root-0-1-0-1-0-3-2: Cautious Approach
root-0-1-0-1-0-3-3: Strategic Thinking
root-0-1-0-1-0-3-5: Observation
root-0-1-0-1-0-4: Monitor Results
root-0-1-0-2: Adjust for Variability
root-0-1-0-2-0: Analyze Previous Averages
root-0-1-0-2-0-1: Identify Trends
root-0-1-0-2-0-1-2: Consider the Range
root-0-1-0-2-0-2: Consider Outliers
root-0-1-0-2-0-2-0: Analyze Previous Outliers
root-0-1-0-2-0-2-3: Factor in Player Behavior
root-0-1-0-2-0-2-3-1: Identify Player Tendencies
root-0-1-0-2-0-2-3-2: Adjust Number Selection
root-0-1-0-2-1: Consider Conservative Approach
root-0-1-0-2-1-1: Identify Central Tendency
root-0-1-0-2-1-2: Avoid Extreme Outliers
root-0-1-0-2-1-3: Consider Stability
root-0-1-0-2-1-4: Balance Risk and Reward
root-0-1-0-2-1-4-1: Consider the Current Average
root-0-1-0-2-1-4-2: Assess Your Position

root-0-1-0-2-1-4-4: Adapt to the Game Dynamics
 root-0-1-0-2-1-4-5: Stay Informed
 root-0-1-0-2-2: Evaluate Trends
 root-0-1-0-2-4: Adapt to Changing Dynamics
 root-0-1-0-2-4-1: Flexibility in Number Selection
 root-0-1-0-2-4-2: Consider Outliers
 root-0-1-0-2-4-4: Risk Assessment
 root-0-1-1: Consider Potential Influences
 root-0-1-2: Predict Potential Outliers
 root-0-1-2-0: Analyze the Trend
 root-0-1-3: Adjust Your Strategy
 root-0-1-3-1: Consider the Trend
 root-0-1-3-1-1: Adjust Strategy
 root-0-1-3-1-2: Stay Vigilant
 root-0-1-3-2: Balance Risk and Reward
 root-0-1-3-2-1: Consider the Impact of Outliers
 root-0-1-3-2-1-0: Analyze Previous Rounds
 root-0-1-3-2-1-1: Adjust Strategy
 root-0-1-3-2-1-2: Monitor Extreme Numbers
 root-0-1-3-2-1-4: Stay Flexible
 root-0-1-3-2-4: Stay Informed
 root-0-1-3-3: Adapt to Competitors
 root-0-1-3-3-1: Balance Risk and Reward
 root-0-1-3-3-2: Anticipate Competitors' Choices
 root-0-1-3-3-2-4: Flexibility
 root-0-1-3-3-4: Strategic Risk-Taking
 root-0-1-3-3-4-2: Consider the Range
 root-0-1-3-3-4-3: Balance Consistency and Differentiation
 root-0-1-3-3-4-4: Adapt Based on Previous Outcomes
 root-0-2: Consider Player Behavior
 root-0-2-1: Adjust Based on Averages
 root-0-2-3: Stay Flexible
 root-0-2-3-2: Evaluate Your Position
 root-0-2-3-3: Monitor Player Behaviors
 root-0-3: Factor in Previous Results
 root-0-3-1: Consider Trend
 root-0-4: Adjust Strategy
 root-0-4-1: Consider Your Competitors
 root-0-4-1-1: Adjust for Biases
 root-0-4-1-3: Use Game Theory
 root-0-4-1-3-1: Anticipate Competitors' Choices
 root-0-4-1-3-3: Consider Risk-Reward
 root-0-4-3: Stay Informed
 root-0-4-4: Utilize Strategic Thinking
 root-1: Strategic Thinking
 root-1-2: Calculating 2/3 of the Average
 root-1-3: Strategic Number Selection
 root-1-4: Adaptation and Flexibility
 root-1-4-2: Evaluate Your Own Strategy
 root-1-4-4: Stay Informed
 root-1-4-5: Strategic Variation
 root-2: Risk Assessment
 root-2-1: Consider Variability
 root-2-3: Assess Risk Tolerance
 root-2-4: Anticipate Strategic Play
 root-3: Adaptation
 root-3-3: Risk Assessment
 root-3-3-1: Consider the Range
 root-3-3-4: Utilize Previous Experience
 root-4: Long-term Planning
 root-4-2: Strategic Adjustment
 root-4-4: Risk Assessment
 root-4-4-1: Consider Variability
 root-4-4-2: Evaluate Your Performance

Auction Arena:

- root: secure the highest profit at the end of this auction, compared to all other bidders
- root-0: Efficiently allocate budget
- root-0-0: Prioritize items with a higher difference between your estimated value and the starting price
- root-0-0-1: Consider the competition
- root-0-0-1-1: Identify Weaknesses
- root-0-0-1-1-1: Monitor Budget Utilization
- root-0-0-1-1-1-1: Strategically Allocate Bids
- root-0-0-1-1-1-1-2: Monitor Competitor Bids
- root-0-0-1-1-1-1-2-1: Strategic Allocation of Bids
- root-0-0-1-1-1-1-2-1-1: Focus on Items with Less Interest
- root-0-0-1-1-1-1-2-1-2: Monitor Potential Withdrawals
- root-0-0-1-1-1-1-2-2: Budget Conservation
- root-0-0-1-1-1-1-4: Maintain Flexibility
- root-0-0-1-1-2: Assess Risk-Taking Behavior
- root-0-0-1-1-2-1: Identify Weaknesses
- root-0-0-1-1-2-1-0: Analyze Bidding Patterns
- root-0-0-1-1-2-1-3: Monitor Remaining Items
- root-0-0-1-1-2-3: Budget Management
- root-0-0-1-1-3: Identify Overestimation
- root-0-0-1-1-4: Exploit Predictable Behavior
- root-0-0-1-2: Formulate Counter-Strategies
- root-0-0-1-2-4: Psychological Tactics
- root-0-0-1-3: Adaptability
- root-0-0-1-3-1: Adjust Bidding Strategy
- root-0-0-1-3-4: Evaluate Risk-Reward Ratio
- root-0-0-1-5: Information Utilization
- root-0-0-1-5-0: Analyze Bidders' Behavior
- root-0-0-1-5-1: Adjust Bidding Strategy
- root-0-0-1-5-1-0: Analyze Previous Bidding Patterns
- root-0-0-1-5-1-0-1: Target Items with Lower Competition
- root-0-0-1-5-1-0-3: Evaluate True Values
- root-0-0-1-5-1-2: Evaluate Profit Margins
- root-0-0-1-5-1-3: Identify High-Value Items
- root-0-0-1-5-1-6: Adapt to True Values
- root-0-1: Monitor the bidding behavior of other bidders
- root-0-1-2: Strategic Bidding
- root-0-1-2-5: Stay Informed
- root-0-3: Be prepared to adjust your estimated value
- root-0-4: Aim for a balance between winning bids and maximizing profit
- root-1: Accurately estimate item values
- root-1-0: Research
- root-1-1: Analyze Previous Auctions
- root-1-1-1: Analyze Market Trends
- root-1-1-1-0: Research Market Demand
- root-1-1-1-1: Consider Seasonality
- root-1-1-1-2: Economic Conditions
- root-1-1-2: Adjust Estimated Values
- root-1-2: Consider Item Condition
- root-1-3: Adjust Estimations
- root-1-3-1: Consider True Value
- root-1-3-4: Adapt to Competition
- root-1-4: Budget Management
- root-1-4-1: Risk Assessment
- root-1-4-2: Prioritize High-Value Items
- root-1-4-2-0: Assess Remaining Budget
- root-1-4-2-3: Monitor Competing Bidders
- root-1-5: Risk Assessment
- root-2: Strategic bidding

- root-2-0: Budget Management
- root-2-1: Estimated Value Comparison
- root-2-2: Observation of Competitors
- root-2-3: Risk Assessment
- root-2-4: Strategic Withdrawal
- root-2-4-0: Assess Potential Profit Margin
- root-2-4-5: Long-term Profit Maximization
- root-3: Risk management
- root-3-1: Budget Allocation
- root-3-2: Competitive Analysis
- root-3-2-1: Assess Remaining Competitors
- root-3-2-2: Estimate Competitors' Valuation
- root-3-3: Flexibility in Bidding
- root-3-5: Information Gathering
- root-3-5-1: Refine risk assessment
- root-3-5-4: Anticipate competition
- root-3-5-5: Adapt bidding strategy
- root-4: Adaptability
- root-4-4: Risk Management
- root-4-6: Adapt to Market Dynamics

DealOrNotDeal

- root: minimize the profit gap between yourself and your partner in this negotiation, regardless of your own profit.
- root-0: Maximize the number of items you receive
- root-0-0: Evaluate the value of each item
- root-0-1: Consider trade-offs
- root-0-2: Seek compromise
- root-0-3: Communicate effectively
- root-0-4: Be flexible
- root-1: Prioritize high-value items
- root-1-0: Assess the value of each item
- root-1-1: Consider trade-offs
- root-1-2: Negotiate for high-value items
- root-1-3: Be open to compromise
- root-1-4: Communicate the reasoning behind your prioritization
- root-2: Ensure fair distribution
- root-2-0: Consider the value of each item
- root-2-1: Propose a balanced allocation
- root-2-2: Be open to compromise
- root-2-3: Communicate the reasoning behind your proposal
- root-2-4: Seek mutual agreement
- root-3: Maintain a cooperative and communicative approach
- root-3-0: Clarify interests and priorities
- root-3-1: Seek common ground
- root-3-2: Explore trade-offs
- root-3-3: Remain open to creative solutions
- root-3-4: Maintain a positive and respectful tone
- root-4: Adapt and adjust strategies
- root-4-0: Understand Bob's priorities
- root-4-2: Propose alternative allocations
- root-4-3: Maintain open communication
- root-4-4: Be willing to compromise