

Mind Mansion: Exploring Metaphorical Interactions to Engage with Negative Thoughts in Virtual Reality

Julian Rasch
LMU Munich
Munich, Germany
julian.rasch@ifi.lmu.de

Michelle Johanna Zender
LMU Munich
Munich, Germany
michelle.zender@campus.lmu.de

Sophia Sakel
LMU Munich
Munich, Germany
sophia.sakel@ifi.lmu.de

Nadine Wagener
University of Bremen
Bremen, Germany
nwagener@uni-bremen.de

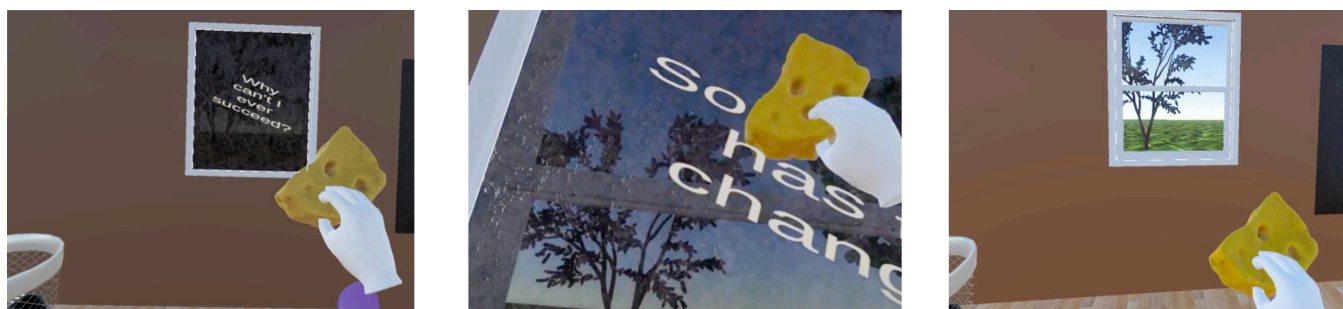


Figure 1: In this paper, we explore the potential of metaphorical interactions with negative thoughts in VR in the context of everyday interactions. In *MIND MANSION* users gradually sort and clean their virtual apartment, leading to a more friendly environment through engagement with thoughts.

ABSTRACT

Recurrent negative thoughts can significantly disrupt daily life and contribute to negative emotional states. Facing, confronting, and noticing such thoughts without support can be challenging. To provide a playful setting and leverage the technical maturation of Virtual Reality (VR), our VR experience, *MIND MANSION*, places the user in an initially cluttered virtual apartment. Here we utilize established concepts from traditional therapy and metaphors identified in prior works to let users engage metaphorically with representations of thoughts, gradually sorting the space, fostering awareness of thoughts, and supporting mental self-care. The results of our user study ($n = 30$) reveal that *MIND MANSION* encourages the exploration of alternative perspectives, fosters acceptance, and potentially offers new coping mechanisms. Our findings suggest that this VR intervention can reduce negative affect and improve overall emotional awareness.

CCS CONCEPTS

• **Human-centered computing** → *Collaborative and social computing; Virtual reality; HCI theory, concepts and models; Interaction techniques.*

KEYWORDS

Interactions, Therapeutic Applications, Mental Health, Virtual Reality

ACM Reference Format:

Julian Rasch, Michelle Johanna Zender, Sophia Sakel, and Nadine Wagener. 2024. Mind Mansion: Exploring Metaphorical Interactions to Engage with Negative Thoughts in Virtual Reality. In *Designing Interactive Systems Conference (DIS '24)*, July 1–5, 2024, IT University of Copenhagen, Denmark. ACM, New York, NY, USA, 14 pages. <https://doi.org/10.1145/3643834.3661557>

1 INTRODUCTION

Recurring negative thoughts trouble many people [4, 41], and can be challenging to regulate consciously, consequently hindering daily functioning and contributing to negative emotional states like increased levels of stress and anxiety [14, 17]. Actively perceiving and facing these challenging emotions and thoughts can facilitate long-term mental well-being [26, 65]. Individuals often require external support to reflect on and question existing negative thoughts and emotions. This can encourage alternative perspectives and offer impulses for effective coping strategies. While this external support can come from literature or a social circle, traditional therapeutic

interventions such as Cognitive Behavior Therapy (CBT) and Acceptance and Commitment Therapy (ACT) are common approaches in treating negative emotions [12, 21, 31, 41], building upon techniques like cognitive restructuring, cognitive defusion [41] and emotional regulation [26], guiding patients to critically evaluate the validity of their negative thoughts and encourage the development of alternative, more realistic thoughts that better align with their actual circumstances [41]. Despite its effectiveness, access to these interventions or suitable conversational partners is often limited, leaving many individuals experiencing negative emotions with no access to these treatments, especially on an everyday basis [44].

Here, technology can offer new opportunities to support and provide coping strategies for mental health challenges, e.g., by offering individuals autonomous mental health management in their everyday routine [56, 59]. With the technical maturing and rising availability of affordable head-mounted displays (HMDs), also VR is becoming a promising and innovative tool for frequent use, making it a powerful tool for advancing the understanding, assessment, and treatment of mental health issues. VR allows for controlled yet immersive environments [43], blocking out distractions from the real world and allowing metaphoric actions that are not possible in reality (e.g. [10, 24]). In that regard, recent research has explored VR applications and approaches to practice and explore coping strategies for negative emotions and techniques to support common therapy approaches [2]. For instance, VR applications can help visualize emotions for emotional engagement [61] and facilitate reflecting on past challenges [62]. Further, Grieger et al. [24] explored two approaches to manipulate and destroy negative text messages, while Wang et al. [64] researched the potential of embodying metaphors. Additionally, Wagener et al. [63] identified design approaches for future VR applications addressing negative emotion states. Despite these efforts, little research addresses the direct confrontation of negative thoughts in a VR context.

To address this gap, we developed MIND MANSION, a VR application exploring how to directly interact and confront negative thoughts in VR. In particular, we investigate how metaphorical interactions can be implemented and how they can assist in effectively coping with negative thoughts. Our approach aims to provide users with a way to engage with their thoughts by cleaning a virtual apartment, which serves as a visual representation of the cognitive process of sorting one's thoughts. This approach finds support in established research on repetitive movements as a coping strategy [39], highlighting the positive effects of decluttering [51] and mindful cleaning [30] on well-being. Building upon research about the effectiveness of using metaphors in psycho-therapy [38], coupled with the improvements in creative performance demonstrated by the integration of embodied metaphors in VR [64], each interaction was implemented using attribute or space metaphors that analogize feelings and emotions [33, 34]. Furthermore, we incorporate the design concepts identified by Wagener et al. [63], as well as research that established the positive impact of VR on self-reflection [62], emotions and well-being [61], and the hands-on approach on dismantling text messages that evoke negative feelings [24].

To evaluate MIND MANSION, we conducted an explorative user study ($n = 30$) where participants were confronted with 30 pre-chosen negative thoughts and engaged with them through metaphorical interactions. Our results suggest users of MIND MANSION understood and enjoyed the metaphorical interactions and that it helped them to sort and remove negative thoughts, fostering a positive mindset. Furthermore, our analysis indicates a trend towards improved emotional awareness. Based on our findings, we discuss relevant design considerations for creating a VR experience to interact with negative thoughts metaphorically.

This paper contributes the following: (1) the design and implementation of MIND MANSION a virtual environment to support engagement with thoughts using cleaning metaphors; (2) a mixed-method user study to evaluate MIND MANSION; and (3) design recommendations for VR applications that aim to support engagement with negative thoughts as a self-care practice, informing future work in a more clinical context.

2 RELATED WORK

This section provides an overview of traditional therapy approaches, VR-based interventions, and the role of metaphors within the contexts of therapy, interaction design, and emotions.

2.1 Traditional Therapy Approaches

Cognitive Behavioral Therapy (CBT) employs various techniques, such as questioning the validity of negative thoughts and developing alternative, realistic thoughts that better reflect one's situation [41]. Acceptance and Commitment Therapy (ACT) creates a context in which individuals can become more self-aware of their thoughts and emotions, allowing them to develop a more accepting and compassionate attitude towards them [41]. The main difference between CBT and ACT lies in the different meaning of cognition, as it is viewed as "a thought process in CBT and a private behavior in ACT" [31]. Cognitive restructuring, cognitive defusion, and emotional regulation are key features of these therapy approaches [26, 41], which will be explained in the following.

Cognitive Restructuring: Cognitive restructuring aims to recognize negative thoughts and examine their accuracy to take charge of them by substituting them with rational alternatives [41]. This technique can also be employed to handle negative emotions [21]. Essentially, cognitive restructuring aims to provide a realistic perspective of the actual world rather than teaching patients positive thinking techniques or making their thoughts seem absurd [31].

Cognitive Defusion: In contrast to cognitive restructuring, cognitive defusion focuses on altering the patient's relationship to their thoughts rather than controlling them or changing their appearance and recurrence. In other words, the approach involves observing the thoughts without attempting to counter or change them [41]. The most common technique is inspired by Titchener's "word repetition technique" [58], which involves repeating a word frequently until it no longer seems credible.

Emotion Regulation: Managing negative emotions is called Emotion Regulation (ER) [25, 27, 45]. ER encompasses all (un-)conscious processes that affect one's emotional responses in order to achieve a more appropriate mode of functioning and well-being [7, 26]. The core of ER is to alter emotions in their intensity,

quality, and duration, mainly through paying attention to specific aspects of a situation, reframing a troubling situation, or regulating the emotional reactions one has towards troubling stimuli [65].

2.2 VR-Based Interventions for Emotion Regulation and Mental Well-Being

In regard to engaging with negative emotions, VR has recently been explored as a tool to be administered to patients during advanced stages of art therapy [28, 29]. However, only a limited number of studies have explored the design space of VR applications that are explicitly tailored to individuals seeking digital support for processing negative emotions in a self-care context. We argue that one of the reasons for the limited amount of research found in this area is the need to carefully design such interventions, including theoretical grounding and state-of-the-art interventions from psychology [55]. Otherwise, they can potentially re-introduce trauma and lead to rumination [60]. Further, as this is a sensitive and very personal topic, personalized VR content is of utmost importance [2]. Another illustrative case of personalized emotional content are self-created emotional islands to visualize valence in a multi-user VR setup [52].

In terms of mental well-being, Wagener et al. [61] discovered that enabling users to independently create a virtual environment for visualizing their emotions is a valuable tool for emotional engagement. The results suggest that autonomous creation in VR positively impacts emotions and well-being. To further explore its potential for personal reflection, another VR application was developed, known as SelVRreflect [62]. This VR guided users through reflecting on their personal struggles and emotions with a voice-guided approach, providing a platform for free expression through painting. The findings indicate that the VR experience allowed participants to gain a better understanding of their challenges and themselves, letting them approach their issues and their components from different perspectives.

Furthermore, previous work identified two general design requirements and four specific design concepts for emotion regulation in VR through expert interviews with therapists [63]. Here, therapists recommended that VR should engage users both mentally and physically to enhance cognitive involvement. It is also crucial to provide users with a space for individually interpreting metaphors using stereotypical objects, like a bench for relaxation, while also allowing them to create their own environments for personal needs. This approach aims to offer a personalized and individualized experience. Additionally, related work has provided frameworks for facilitating reflection in VR, for example, the “RIOR” model by Jiang and Ahmadpour [35]. It applies a theatrical perspective, suggesting techniques such as altering users’ physical perspectives and incorporating personal item representations. However, the RIOR framework lacks specific design recommendations. In this study, we address the RIOR framework by providing common objects from a typical apartment that users may identify with.

Although further research on applications that touch on the processing of negative emotions is still scarce, Grieger et al. [24] developed two distinct concepts in a prototype: ‘Positivity’, where users transform negative messages into positive ones through interactions like changing their color and crossing out negative words,

and ‘Trash-it’, where users physically engage with the message by crumpling, punching, and ultimately making it disappear. The prototype has shown promising results in positively shifting negative thoughts. All study participants reported feeling more relaxed following the VR interactions, and most of them noted a sense of self-reflection. The physical interaction with textual messages through gestures received positive feedback, as did the immersive and focusing nature of VR technology. The two distinct concepts produced different effects, as ‘Positivity’ offered a fresh perspective, while ‘Trash-It’ helped temper anger. However, it’s worth noting that ‘Trash-It’ had a more polarized effect, with some participants finding it too aggressive.

Apart from well-being, VR has been proven to be effective in the treatment of anxiety disorders, including post-traumatic stress and phobias [2]. Through cognitive restructuring training, patients have been able to reduce their anxiety symptoms [8, 20, 49]. VR Exposure Therapy has been found to be equally effective as standard exposure therapy, making it a promising tool in mental health treatment [49].

2.3 Metaphors

2.3.1 Metaphors in Traditional Psychology. To grasp the concept of emotional experiences, feelings, and situations, metaphors are often used as a tool of self-expression [38], especially when a specific word is missing to convey a certain meaning. This integrates the logic of words with the imagery of analogies to enhance comprehension of the intended message [40]. Kopp and Craw [38] demonstrated that the use of metaphors in psychotherapy can assist patients in elaborating and exploring their emotions, which can then be transformed by finding similarities between the created imagery and their actual situations. By altering the image, patients gain new insights into the nature of the problem, and new opportunities for constructive problem-solving arise. Metaphors can assist patients in recognizing negative cognitive patterns that have become habitual and comfortable. By using emotional symbols to identify self-critical habits, patients can develop strategies to counteract them. Moreover, metaphors are useful for leveraging one’s own knowledge and experiences to guide treatment efforts [48].

2.3.2 Metaphors in Technology. Embodied interaction is a fundamental approach in HCI design that emphasizes the importance of everyday experiences in user-system interaction, whereas metaphorical references help users understand complex or abstract concepts by relating them to something familiar or tangible [13, 36, 37]. Wang et al. [64] found that using embodied metaphors in a VR environment resulted in improved creative performance, with increased originality, fluency, flexibility, and persistence. Specifically, the metaphor “breaking the rules” was embodied as an action of breaking down walls, where the physical sense of “breaking” translated into conceptual processing. More specifically, participants had to ‘break the walls’ while navigating a corridor and were tasked with solving creativity-demanding problems under two conditions: ‘break,’ where they had to break virtual barriers to continue, and ‘no-break,’ where no barriers were present. Participants showed higher levels of originality and fluency in Alternative Uses Tests when confronted with the ‘break’ condition compared to the ‘no-break’ condition.

Hurtienne et al. [32–34] identified several image-schematic metaphors for mapping physical-to-abstract concepts in interaction design. These metaphors include attribute and space metaphors that can be used to draw analogies to feelings and emotions. In the context of the big - small attribute pair, it was associated with amount, power, importance, and significance. The bright - dark attribute pair is mostly associated with quality, morality, happiness, religiousness, and anger. Additionally, emotions and anger are suitable target domains for the warm - cold attribute pair. When an object is described as smooth, it typically conveys qualities of ease, predictability, and continuity. In contrast, when labeled as rough, it often signifies challenges, dangers, or interruptions in a process [34]. Further identified metaphors were “Happy is up - Sad is down”, “Powerful is up - Powerless is down”, “Good is up - Bad is down”, “The future is in front - The past is back”, “Novel is front - old-fashioned is back”, and “The present is near - The past is far” [33].

Effective use of metaphors is crucial in the development of VR as it determines the behavior of the virtual environment and the user’s interaction with it. Clear and appropriate metaphors allow users to interact with the virtual environment in a comfortable and effective way, while poor or confusing metaphors can lead to disorientation and hinder user effectiveness. To ensure the effectiveness of metaphors in VR, it is important to determine whether a specific task requires a particular metaphor or if there is room for flexibility to optimize the interaction. For instance, if the user is expected to feel like they are inside a building, the metaphor used should closely mimic the real-world environment of a building. On the other hand, for presenting additional information, less intrinsic metaphors can be used to trigger interactions. Ultimately, the choice of metaphor should align with the goals of the VR experience and enhance the user’s overall experience [11].

2.3.3 The Effect of Clutter and Cleaning on Mental Health. Furthermore, Lee and Schwarz [42] found that the metaphor of washing away one’s sins has evolved into a broader concept of starting fresh or clearing one’s past, allowing individuals to get rid of unwanted baggage, whether it’s related to their moral self-image, recent decisions, or concerns about bad luck.

Complementing this, a study found that women who labeled their homes as stressful due to clutter and unfinished projects showed chronic stress levels associated with adverse health outcomes. They experienced increased depressive moods as the day progressed, following greater evening fatigue and difficulties in transitioning from work to personal life. On the other hand, women who described their homes as relaxing and often mentioned their gardens or outdoor areas were less stressed throughout the day and felt less sad. These positive effects on stress and mood remained consistent regardless of marital satisfaction or neuroticism [51]. Other research has shown that the quality of housing can affect the socio-emotional development and cognitive abilities of children and adolescents. Poor housing quality has been linked to potential negative effects on their well-being. Additionally, housing quality can play a role in influencing levels of psychological distress [19]. These findings imply a potential connection between household stress and overall well-being, underscoring the significance of addressing stress factors in household management within the context

of mental health. Therefore decluttering can be a helpful exercise in order to relieve stress and improve one’s mental well-being.

Other research demonstrated that people with high levels of anxiety or stress often engage in repetitive behaviors like cleaning in order to regain a sense of control [39]. A study conducted by Hanley et al. [30] examined the practice of mindful dish-washing, involving participants to be mindful while washing dishes by being conscious about aspects like the scent of soap and the warmth of the water on their hands. The findings indicate that compared to the baseline of generic dish-washing, mindful dish-washing results in a 27% decrease in nervousness and a 25% improvement in inspiration. In addition to mindfulness, the physical activity that inevitably accompanies cleaning is another factor in improving overall well-being because of its release of endorphins. Endorphins are neurochemicals created by the brain during exercise, moments of excitement, or in response to pain. They serve as natural pain relievers and play a role in promoting a positive sense of well-being [47]. Consequently, physical activity offers positive effects on symptoms of depression. Current research indicates that physical activity may serve as an effective therapeutic approach for both acute and chronic depression [16].

3 DESIGNING MIND MANSION

We propose an approach to support mental health that leverages VR technology to engage with and manage negative thoughts. Building on research on decluttering and cleaning to positively impact mental health [30, 51], we designed a home setting displaying an apartment. Cleaning and physical activity are linked to beneficial effects on mental health [39, 47] and offer space for many common metaphors from everyday life activities applicable to coping with thoughts. For our VR application MIND MANSION, we used a simulated home environment resembling an apartment, with cleaning activities symbolizing coping mechanisms for negative thoughts. Users interact with objects representing negative thoughts, gradually transforming the environment from cluttered, dusty, and dark to tidy and bright. To design the individual interactions, we leveraged concepts, building on related work to cope with emotions and thoughts. Through physical interactions, users can diminish the perceived importance of negative thoughts or emotions by physically engaging with them. This process not only allows users to confront and manage their emotions in a tangible way but also empowers them by gaining a sense of control and strength relative to their emotions. Furthermore, engaging in physical activity can lead to various psychological benefits, including elevated mood, stress relief, improved coordination, and increased confidence [54]. After every interaction, we designed a further transition from darkness to brightness, associated with the “dark-bright” attribute pair [34], to evoke happiness during cleaning. Cleaner, more organized spaces signify a shift from chaos to clarity. The concept also leverages the “big-small” attribute pair associated with the perception of importance and significance [34] of internal thoughts and struggles by minimizing the size of some objects. Additionally, the concept of “Wrapping It Up,” as discussed by Wagener et al. [63], is evident in those interactions where objects are sorted and stored for future engagement rather than entirely eliminating them. Other objects instead are designed to disappear after the interaction, following the

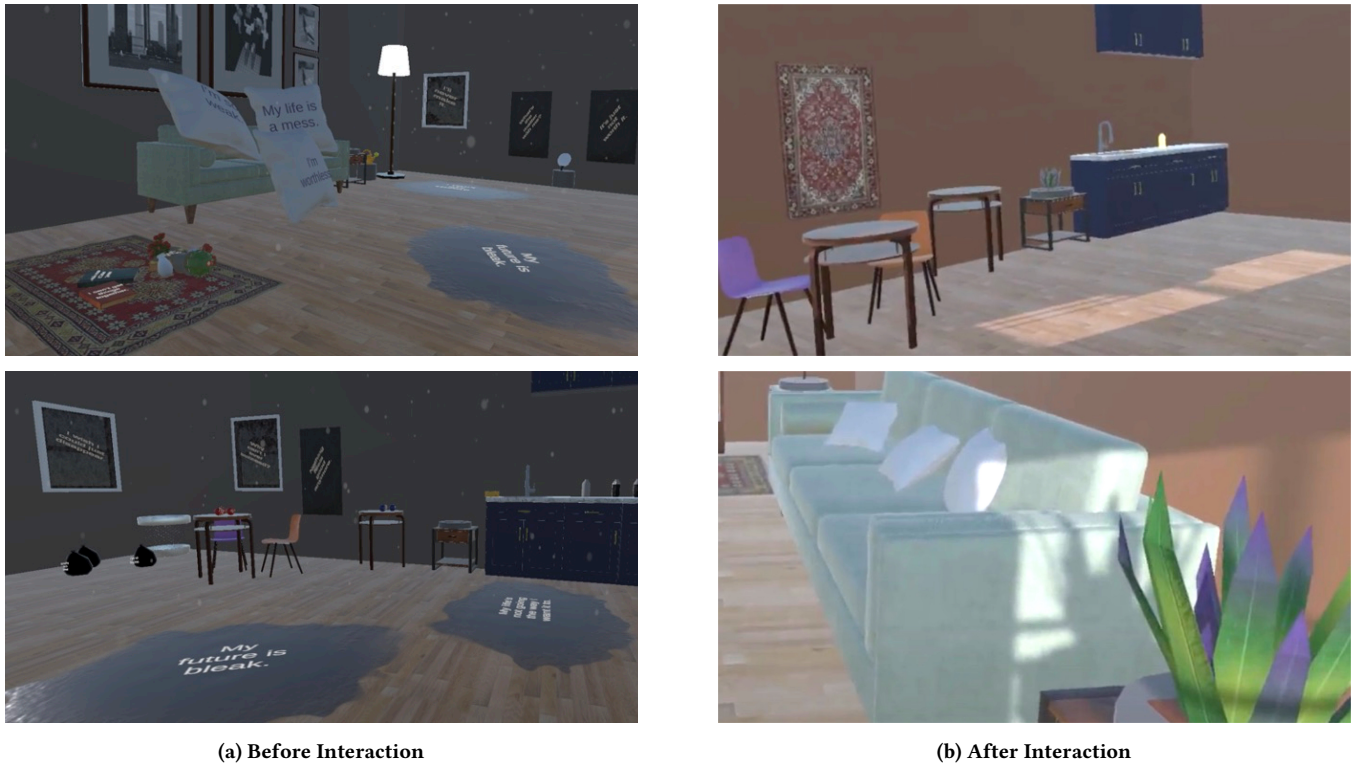


Figure 2: The Room of MIND MANSION (a) before interacting with the thoughts and (b) after interacting. Each completed interaction also increases the brightness of the room, resulting in a friendly and sorted space after finishing all interactions.

concept of "Letting It Go" [63]. Eliminating these physical manifestations of dirt allows individuals to let go of past neglect or disorder. The gradual cleanup of the environment through the interaction with the individual objects and negative thoughts mirrors emotional progress, with walls changing from cold gray to warm orange. This alteration aims to create a warmer, more comfortable atmosphere as users progress through their negative thoughts, reinforcing a positive shift in emotions like happiness and excitement [67] once all interactions are completed. After completing interactions, users are encouraged to reflect on positive changes. Hand controllers in VR simulate real-world hand movements for immersive interaction. As repetitive movements can contribute to coping [39], the experience includes ten interactions repeated three times each, presenting 30 negative thoughts in total, ensuring repetition and engagement.

Clean your Space, Clean your Mind. Cleaning interactions are metaphorical representations of overcoming challenges and interruptions in a process, as noted by Hurtienne et al. [34]. Just as clutter symbolizes roughness and obstacles, cleaning involves addressing and removing these impediments, restoring both physical and metaphorical order. This process fosters clarity, happiness, and renewal. MIND MANSION incorporates two interactions to implement the metaphor of cleaning up.

As one way to interact with a negative thought, users can **mop the floor**, depicted in Figure 3, 4A and 4B. Three dark puddles, each displaying a negative thought, are spread across the floor. As users

use the mop to wipe a puddle, it gradually becomes more transparent until it ultimately disappears, taking the negative thought with it. To trigger this interaction, users grab the handle of the virtual mop and use a physical left-to-right or circular arm motion while standing upright and remain stationary otherwise.

Another cleaning interaction is implemented through **wiping windows**, as displayed in Figure 3, 9A and 9B. This interaction lets users wipe three windows using a sponge by performing a physical wiping motion. Each window has a negative thought written across it and is obscured by dirt, preventing light from entering. As users wipe the windows with the sponge, the dirt gradually fades away, allowing sunlight to pour in and illuminating the floor and walls with expansive rays of light. Simultaneously, the negative thought disappears, and users can enjoy the view outside. Notably, this interaction also creates a sense of stress relief evoked through the opportunity to look at the nature outside and the slabs of sunlight illuminating the apartment [22].

Sorting your Thoughts. Organizing and structuring interactions in MIND MANSION serve as a visual representation of the cognitive process of sorting one's thoughts. Users encounter a bookshelf with three fallen books and four plants lying in front of it, encouraging the user to **sort the bookshelf** and therefore also sorting the mind, depicted in Figure 3 10A and 10B. The titles of these fallen books represent negative thoughts, and while the four plants do not specifically represent negative thoughts, they were implemented to ensure sufficient engagement in order to give users time to grasp



Figure 3: An overview of the 10 different METAPHORICAL INTERACTIONS each (xA) before and (xB) after the interaction. 1 BOTTLE REFILLING, 2 BURSTING BALLOONS, 3 CARPET BEATING, 4 PUDDLE SWEEPING, 5 TRASH BAG THROWING, 6 WATERING PLANTS, 7 RISING BALLOONS, 8 PILLOW PUNCHING, 9 WINDOW WIPING, and 10 BOOKSHELF SORTING.

the meaning of this interaction. Users are tasked with sorting the fallen pieces back into the bookshelf. When an object is grabbed, a purple transparent mesh in the object's shape appears inside the bookshelf, providing guidance on where the object should be placed. This design element ensures that users maintain an organized shelf, preventing haphazard placement and the creation of additional clutter. As the object touches the purple indicator, it will snap into place, allowing the user to throw or place the object into the shelf. Once the books touch the shelf, the negative thoughts disappear

from their title. To reach the objects on the ground, users have to bend over or kneel down. Once holding the objects, users have to extend their arms to reach the objects' target locations. When this task is completed, users will find themselves in front of a nicely organized shelf with no clutter in front of it. To metaphorically discard negative thoughts and sort them out of the user's mind, MIND MANSION allows the user to engage in **throwing out trash bags** representing negativity as displayed in Figure 3 5A and 5B. For the trash bags interaction, users can grab three trash bags, each

containing a negative thought depicting the metaphorical ballast one bears, and either throw or place them into the bin. Again, users must bend over or kneel to reach the trash bags. Following this, users either simulate the action of throwing the trash bag by physically raising their arm and swinging it forward, or they move to the bin to deposit the bags. Through this action, users create a physiological distance from their thoughts, hinting at the ‘The future is in front - The past is back’ analogy [33], symbolizing concluding with a thought.

Battle Negative Thinking. Another common metaphor to cope with thoughts is to fight them. Through physical interactions, such as punching or boxing, users can diminish the perceived importance of negative thoughts or emotions by physically fighting and engaging with them, symbolized by the act of striking at an object or thought.

By **punching pillows**, as shown in Figure 3, 8A and 8B, users can deal with thoughts by minimizing their size and rearranging them. Here, users have to punch three oversized pillows on the couch, each displaying a negative thought in writing. By pressing the select button on the side of the controller, users can clench their virtual hands into fists. Users use proper physical punching, hitting, and slapping motions to shrink the pillows, similar to boxing a punching bag. When making contact with a pillow, the controller provides haptic feedback through vibrations, enhancing the sense of touch. With every punch, the size of the pillow decreases. Once it reaches a certain size, the negative thought disappears, and the pillow will no longer shrink. Users then have the option to arrange the pillows to their liking on the couch.

Similar to the pillow - punching interaction, users can **beat carpets** as presented in Figure 3, 3A and 3B, where they hit three carpets arranged on the walls of the apartment. In contrast to the hands-on approach of the previous interaction, users will use a virtual carpet bat to rid the carpets of dust by performing a physical beating motion. While this task requires less of the intense punching motion needed for the pillow interaction, the large size of the carpet causes users to stretch and bend over to reach all parts of it. A negative thought is written across each carpet. Initially, the carpets appear dark. However, with each strike of the carpet bat, the dust disappears, revealing the carpet’s true pattern and colors. The negative thought disappears when all of the dust and dirt is removed.

Deal with Bottled-up Emotions. Inspired by the saying “bottling up emotions” we leverage the metaphor of closing up on emotions, not expressing or showing them, especially when they make one tense or angry. To deal with it we included two different approaches.

Watering plants serves as an illustration of the design principle known as ‘Tying It In’ [63], demonstrating how personal growth and transformation can result from accepting negative thoughts. Further, prior work [46] showed that virtual plants in a VR scene increase the psychological well-being of participants. In this interaction, as shown in Figure 3 6A and 6B, users grab a virtual watering can in order to water plant pots. When the watering can is in their grasp, three plant pots are highlighted with white outlines for easy identification. Users can approach each plant pot, each of which contains a negative thought written in the soil. To initiate the interaction, users raise their arms and tilt their wrists to pour

water from the can, mimicking the motions of real-life plant watering. Once the users start watering the soil, a plant emerges from the negative thought. Additionally, this incorporates research that underscores the positive impact of indoor plants on well-being [5].

Moreover, the action of **pouring bottles** embodies the concept of perceiving and recognizing a thought without a consequent removal or action. Users approach three water bottles filled with black liquid, each labeled with a negative thought. Users can pick up these bottles, and while grabbing, an empty water bottle to the left is highlighted, indicating it can be filled. This task requires users to extend their arms to reach each bottle and turn their arms over to pour the water. Although the task does not require vigorous physical activity, precise motor skills, and spatial awareness are required to prevent water spilling. The black liquid from the three bottles is sequentially poured into the empty one, and when a bottle is emptied, the negative thought written on the bottle vanishes. Although the empty bottle appears to be the same size as the others, users will observe it fits the contents of all three bottles. Notably, the black liquid transforms into a light yellow color when filled into the empty bottle.

Blowing off Steam. Inflating negative thoughts, initially magnifying their importance, shrinking again upon release, or floating away can illustrate their exaggerated nature. The process of inflation also resembles ‘blowing off steam’, where the once inflated thoughts afterward diminish in relevance and are removed from the environment.

Users can inflate three balloons, each labeled with a negative thought, using the microphone, embodying the metaphor of ‘blowing off steam’ and watching **rising balloons**. To float upwards, the balloon must reach a certain size, however, users are not limited to how large they wish to inflate the balloon beyond that point, allowing users to engage with this thought at their own pace. Once they’re ready, they can release the balloon, allowing it to ascend into the air, passing through the ceiling and into infinity. The white outline surrounding the balloons allows the user to follow their ascent, even after passing through the ceiling. If a balloon has not reached the necessary size to ascend, it descends, and users get another opportunity to inflate it further.

Similar to the previous balloon - rising interaction, users approach three additional balloons on the table with negative thoughts written on them and enable users to **popping balloons**. Each balloon can be grabbed and inflated by blowing into the microphone. As the balloons expand, they reach a certain size, after which they pop, bursting into small pieces until they completely disappear. For both balloon interactions, users have to physically reach out for the balloons and use their respiratory control and timing to inflate them by blowing into a microphone integrated into the headset.

4 METHODOLOGY

For the evaluation of this prototype, we conducted an exploratory user study involving 30 participants, following related works (e.g., [24, 52, 62]). Other conventional ER interventions could integrate confounding factors. For instance, real-life cleaning cannot offer the metaphorical changes of the intervention, mobile phone applications for emotion regulation (e.g., [50, 53]) limit autonomy in 3D spaces, and similar VR approaches in that regard, such as by Grieger et al.

[24] do not provide metaphoric interactions linked with decluttering. Thus, as our aim is to provide an initial exploration of how metaphoric interactions in VR can support emotional awareness of negative thoughts, we decided on an exploratory study design. The goal of this study was to evaluate the impact of MIND MANSION on users, focusing on emotional states and awareness of thoughts. Additionally, we studied participants' perceptions of negative thoughts in the context of different metaphors and interaction styles and how this affects the ability to cope and engage with these thoughts. We counterbalanced the set of 30 negative thoughts and the 10 interactions using a Balanced Latin Square design. We designed and conducted the user study in compliance with our institution's ethics committee guidelines.

4.1 Data Collection and Evaluation

We chose a mixed-method approach by combining quantitative data gathered from questionnaires and qualitative data through semi-structured interviews. This mixed-method approach enhances the breadth and depth of understanding and strengthens the validity and reliability of the findings by triangulating data [23].

For the quantitative data, we collected answers from each participant, using a custom in-VR questionnaire after each condition as well as a custom post-VR questionnaire after completing all conditions.

As a qualitative method, we conducted semi-structured interviews at the end of our user study with an average time of five minutes. During the interview, participants were asked about their overall impressions of the experiment, their preferred and least preferred interactions, the reason behind their preferences, possible mood shifts, the takeaways from the experience, and their expectations regarding encountering negative thoughts in the future. The interview's audio recordings were transcribed verbatim and analyzed in ATLAS.ti. We used thematic analysis to systematically examine the data [6]. Initially, one researcher coded 10% of the interviews, and subsequently, three researchers discussed and agreed on the final codes. Following this, one researcher coded the remaining interviews accordingly. After this, two researchers deliberated on how to organize and group the interview codes, which resulted in three overarching themes presented in Section 5.

4.2 Participants

We recruited $n = 30$ participants (male:12, female:18, diverse:0) via social networks and our institution's email distributor for user studies, with an average age of 26 years ranging from 22 to 62 years. Among the participants, 12 had no prior experience with VR, 13 were sporadic users, and 5 identified themselves as experienced VR users. We compensated participants with an equivalent of 10 €. All participants were required to confirm their current mental stability and health.

4.3 Apparatus

The application was developed using Unity version 2021.3.16f and operated on an HTC Vive Pro. The same HMD and corresponding controllers were used throughout this study. The negative thoughts featured in the VR experience were drawn from the Automatic Thoughts Questionnaire (ATQ) [57], consisting of a total of 30

common negative thoughts that pop into people's minds, in order to keep the study comparable.

4.4 Study Procedure

After welcoming the participants and introducing them to the study's topic and procedure, participants were asked to fill out a consent form, confirm they were without a history of mental illnesses, and complete a demographic survey. Following this, participants were presented with the ATQ to get familiar with the negative thoughts by reading and rating the negative thoughts on the accompanying scale. Following the questionnaires, the experimenter explained the controls and let participants familiarize themselves with the system and each of the METAPHORICAL INTERACTIONS in a tutorial scene. Here, no negative thoughts were displayed yet. After clarifying potential questions regarding the controls, the experimenter started the MIND MANSION application. Before actively engaging with the application, participants were advised to take in the virtual apartment and reflect on the emotions it evoked. Once participants felt ready to proceed, condition 1 of the experiment started. The experiment consisted of 10 conditions, each corresponding to an interaction described in Section 3. Both the set of 30 negative thoughts and the 10 interactions were counterbalanced using a Balanced Latin Square design. As described in more detail in Section 3 for each condition, participants had to repeat each METAPHORICAL INTERACTION 3 times to ensure repetition. After completing a condition, participants filled out the in-VR questionnaire that appeared once the interaction was finished and then progressed to the next condition. We chose this in-VR approach to let participants perceive the gradual changes of the virtual apartment. Upon completing all 10 conditions, participants were again encouraged to look around the room and reflect on their emotions. When they felt ready, participants took off the HMD and returned to the computer to fill out the post-VR questionnaire. To conclude the study, we conducted a semi-structured interview, and participants received their reimbursement.

5 RESULTS

In this section, we report the results of our user study. We report the quantitative results from our in-VR questionnaire and post-VR questionnaire before presenting the qualitative results.

5.1 Quantitative Results

We analyzed the in-VR Likert questionnaire as non-parametric data using an Aligned Rank Transform (ART) ANOVA suggested by Wobbrock et al. [66]. We followed the ART-C procedure [18] for post-hoc testing of the significant results. Here, we report the generalized ETA squared η_G^2 as a measure of the effect and classify it according to Bakeman [3]. For effect size classification, we follow the suggestions by Cohen [15] for small ($> .0099$), medium ($> .0588$), or large ($> .1379$) effect size. In this subsection, we present the results of our statistical analysis.

5.1.1 ENGAGEMENT "Through This Interaction I Felt Engaged With the Thought". We found a significant ($F_{1,9} = 3.46, p < .001$) main effect for the METAPHORICAL INTERACTION on the ENGAGEMENT rating with a medium ($\eta_G^2 = 0.10$) effect size. Post-hoc tests revealed

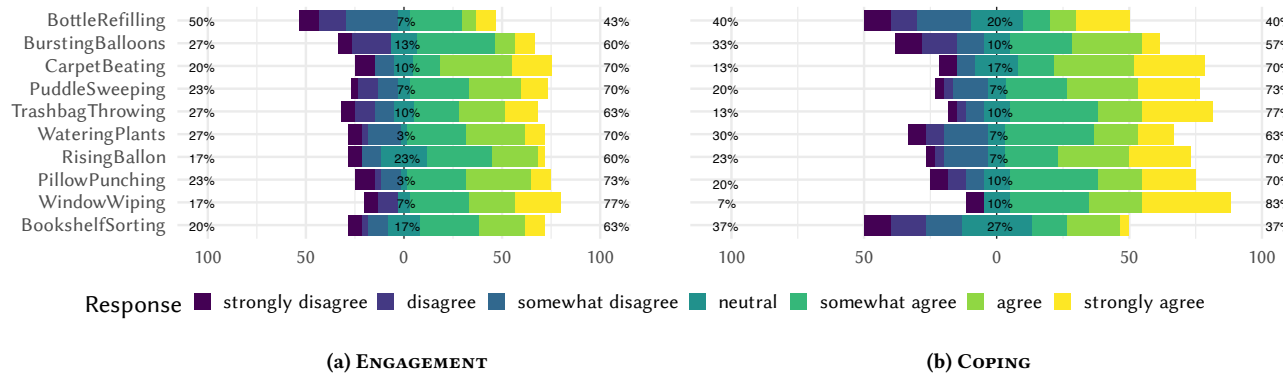


Figure 4: Participants' in-VR responses regarding (a) ENGAGEMENT and (b) COPING with a thought through the 10 METAPHORICAL INTERACTIONS on a 7-point Likert scale.

significantly lower ratings for BOTTLEREFILLING compared to CARPETBEATING ($p < .001$) and WINDOWWIPING ($p < .00$). The results are visualized in Figure 4a.

5.1.2 COPING "This Interaction Helped Me Cope With the Thought". We found a significant ($F_{1,9} = 4.84, p < .001$) main effect for the METAPHORICAL INTERACTION on the COPING rating with a large ($\eta_G^2 = 0.14$) effect size. Post-hoc tests revealed significantly lower ratings for BOOKSHELF SORTING compared to CARPETBEATING ($p < .01$), TRASHBAG THROWING ($p < .01$) and PUDDLESWEEPING ($p < .05$). We also found significantly higher ratings for WINDOWWIPING compared to BOOKSHELF SORTING ($p < .001$), BOTTLEREFILLING ($p < .01$) and BURSTINGBALLOONS ($p < .05$). The results are visualized in Figure 4b.

5.1.3 Desired Future Usage "If I Were to Use This Application on a Regular Basis I Would Like to Use the Following Interactions". Looking at the results of our post-study questionnaire regarding desired future usage, we can see differences between the interactions. Figure 5a shows how many participants indicated a desired future usage for each of the 10 METAPHORICAL INTERACTIONS. In a hypothetical regular future usage, participants mostly want to interact with WATERINGPLANTS (22), CARPETBEATING (22), WINDOWWIPING (20), and PILLOWPUNCHING (20) again. Also, the RISINGBALLOONS (18) and TRASHBAG THROWING (17) interaction was mentioned by more than half of the 30 participants. Less mentioned for future usage were the PUDDLESWEEPING (10), BOOKSHELF SORTING (9), and BURSTINGBALLOONS (8) interactions. The least mentioned was the BOTTLEREFILLING (5) interaction, which still 5 participants would like to use in a future application. Consequently, none of the 10 interactions was unfavorable in a way that no participant would like to use them again.

5.1.4 Impact on Daily Life "Which of These Interactions Do You Think Will Have an Impact on Your Negative Thoughts in Your Daily (Non-VR) Life?". Also, in the results of our post-study questionnaire regarding the impact on daily life, we can see differences between the 10 METAPHORICAL INTERACTIONS in Figure 5b. When asked about what interaction participants think will have an impact on

their daily life, most mentioned the WATERINGPLANTS (20) interaction and TRASHBAG THROWING (17). Half of all participants also mentioned the BOOKSHELF SORTING (15) and WINDOWWIPING (15). Less often, participants mentioned the CARPETBEATING (14), PILLOWPUNCHING, and RISINGBALLOONS (10). Least mentioned was the PUDDLESWEEPING (8), BURSTINGBALLOONS (5), and BOTTLEREFILLING (5). Again, with 5 mentions at least no interaction was perceived impact-less by everyone looking at our group of 30 participants.

5.2 Qualitative Findings

Based on the qualitative results, three themes were derived from the interviews: *Engagement*, *Externalizing and "Tangibility"*, and *Impact Beyond VR*. The findings are specified below and depicted with quotes from the interviews.

5.2.1 Engagement. The first theme explores how MIND MANSION motivated participants to engage with negative thoughts and how it increased the awareness of the effects that negative thoughts can have. In that regard, participants understood that MIND MANSION provides "a personalized way with an overview of my own feelings and how things make me feel right now" (P25). Through Mind Mansion, they acknowledged the need to deal with negative thoughts for their well-being, as one participant described as follows: "It felt like a releasing journey, and [...] it really helped with negative thoughts" (P16). Participants further reflected that it "would be helpful for people to feel more engaged with the thoughts" (P16) and that MIND MANSION is seen as an application that encourages such an engagement: "[through Mind Mansion] it is good to be able to actually get in touch with the thoughts" (P14). In that regard, participants also emphasized that they enjoyed physically engaging with their thoughts by repeatedly interacting with them. They felt it helpful to "actually doing something" (P26) and to feel empowered through the physical interactions, "because I could do it myself" (P14).

5.2.2 Externalizing and "Tangibility". Besides getting motivated to deal with negative thoughts, participants also reflected on the main reasons why MIND MANSION encouraged engagement. Thus, the second theme revolves around the benefits of externalizing and

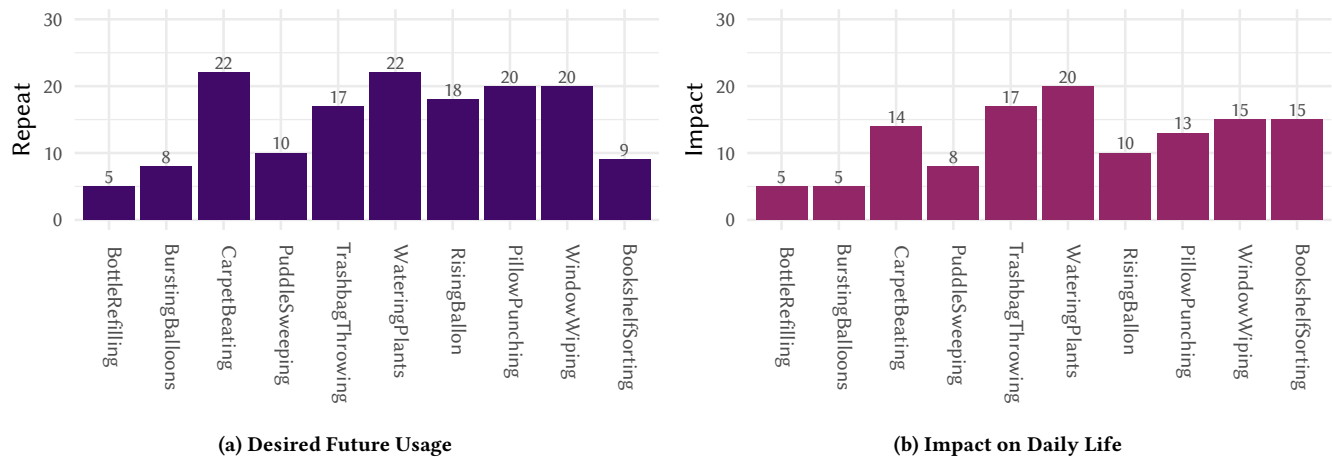


Figure 5: The results of the post-VR questionnaire visualized as a histogram showing how often each interaction was mentioned by participants for (a) desired future usage and (b) impact on daily life.

making thoughts "tangible" in VR. In that regard, participants felt that externalizing negative thoughts and making them visible in a space around them was therapeutic and helpful. One participant stressed: "I think for the people who don't have a good way of visualizing things in their mind, it's really helpful" (P14) and another one reflected that "giving your thoughts a face or a form of interaction is more powerful than you think [because] it can get quite confusing in your own head, so giving them a space in the external world or digital world is quite powerful" (P28). They also specified that externalizing negative thoughts facilitated the process of dealing with negative thoughts, as it provides step-by-step instructions, and the interactions can be seen as a progress bar motivating users to keep on dealing with their thoughts. P25 described this aspect as follows: "It made me feel in control. Seeing it and having it all around me or in front of me felt like, 'okay, this is what I have to deal with', and then I can do it step by step and have a clearer image of 'How far am I? Is there a progress?'" (P25).

Further, participants identified that the "tangibility" of negative thoughts in VR, along with a haptic experience, helped them to process and manage negative thoughts. One participant elaborated: "your thoughts [become] a concrete image that you can work with or touch" (P28). This "tangibility" led to participants feeling empowered to deal with the negative thoughts, and through interacting with them, they felt in control. One participant explained: "I could hold them [the negative thoughts], and then it was my control to let them go" (P10).

5.2.3 Impact Beyond VR. The third theme encompasses comprehensive insights into the lasting effects of MIND MANSION beyond the scope of the VR experience, reflecting on and learning new skills usable in real life. At first, participants reported that through MIND MANSION, they started to reflect on their strategies used in real life to cope with negative thoughts. They thought that if they would "play this game, then maybe it helps me with my negative thoughts and getting a new perspective" (P16). Further, they emphasized reflecting on how negative thoughts affect them in their daily lives, perceiving MIND MANSION as "a metaphor how negative

thoughts affect my view and my acting in life" (P23). They also started thinking about strategies when dealing with negative thoughts in reality. To elaborate, some participants emphasized the importance of accepting negative thoughts. For instance, P25 said: "it made me realize that these low phases are normal or even important, you just take a moment and confront them, but still knowing you can move on and just create something new and beautiful for yourself" (P25) while other participants learned about the importance of actively managing negative thoughts: "it is a quiet corner to think about how this might affect me in the future, because I feel like holding back these thoughts can have a negative impact on life" (P31).

Additionally, participants reported that the interactions felt familiar because they act similarly in real life when experiencing negative thoughts. To say this with the words of P8: "[The pillow punching] is an action that I think most of us have done before. When you feel sad, you punch something. And pillow punching is very close to what most people have punched before." (P8) In turn, participants were also inspired by the VR interactions to use them in reality to cope with negative thoughts. One participant explained: "this virtual reality experience can start to get [into] an interaction routine, it can copy to real life" (P12).

6 DISCUSSION

Based on the quantitative and qualitative findings of our user study we derive the following design recommendations for effectively engaging with negative thoughts in VR: *Design for Physical and Mental Engagement* with a balance of challenge and effort in the task, *Give Thoughts a Body* to foster awareness and externalization, *Make the Positive Progress Visible*, and *Use Familiar Interactions to allow Users to "Take Something Back to Reality"*.

6.1 Design for Physical and Mental Engagement

Aligning with the concepts identified by Wagener et al. [63], the user study demonstrated that both mentally and physically engaging interactions positively influence the user's ability to cope with

the corresponding thoughts. The findings also emphasize the importance of providing sufficient haptic feedback to enhance immersion and the user's connection to their mindset. In contrast to the findings of Grieger et al. [24], interactions that were more physically engaging and could potentially be perceived as 'aggressive', such as punching and beating, did not lead to polarized reactions among participants. Instead, they were generally perceived as very helpful and likable. One possible explanation for this contrast could be the absence of interpersonal elements in the negative thoughts of this experience, unlike the negative text messages used in the 'Trash-It' experiment. This absence of personal connections to other people may have made it easier for individuals to engage in more physically aggressive interactions. Additionally, interactions should strike a balance: they should be challenging enough to engage the user to reflect on the thought without causing frustration or feelings of failure while not requiring excessive effort that might reduce the overall enjoyment and motivation of the experience, as emphasized by Agapie et al. [1].

Moreover, providing users with a sense of control without stronger limitations has proven to be an important consideration for this interaction design. Allowing users their own time to engage with each thought has helped them track their progress in coping with the associated thoughts and has empowered them to feel more confident approaching the thoughts. In contrast, interactions that were more challenging or proved difficult to handle diminished users' confidence, making them not feel in control anymore.

6.2 Give Thoughts a Body to Foster Awareness and Externalization

This allows users to "face" a thought and have a representation to relate to. Our findings show that users appreciated a "tangible" representation of the thoughts, which is in line with previous works [9, 10]. By externalizing the thought, users could take a different perspective and question it. Also, when not interacting with a thought, users perceive the representation and can accept its existence.

6.3 Make the Positive Progress Visible

Our METAPHORICAL INTERACTIONS benefited from clear visual representations of the progress. Visual outcomes that created a more positive environment, such as filling the room with sunlight, allowing users to see nature, and growing plants, helped users recognize they have created something positive while acknowledging and working on the negative thoughts, aligning with the "Tying It In" concept [63]. Furthermore, the ability to visibly track progress during interactions, such as observing the pillow shrinking with each punch or the carpet lightening with each beat, helped users to feel more engaged with the thoughts and improved their ability to realize the progress.

6.4 Use Familiar Interactions to Allow Users to "Take Something Back to Reality"

The use of appropriate and clear metaphors has demonstrated varying effects on how effectively users cope with negative thoughts and understand the coping process [11]. When users embodied certain metaphors, two distinct associations emerged where some users felt they created something positive, while others perceived an

enhancement of something negative. In contrast, some metaphors remained incomprehensible and, therefore, had no impact on how participants coped with the associated thoughts. This can be prevented by using more stereotypical objects and allowing users to create their own space, as suggested by Wagener et al. [62]. However, the effectiveness of certain metaphors could be improved with additional guidance on the underlying purpose of the interaction. For instance, while people technically understood the concept of "Wrapping It Up" [63], some participants were not open to allowing themselves to store a thought and leave it for future exploration, preferring instead to remove it entirely.

Therefore, interactions and metaphors that participants found familiar proved to have a positive impact on their ability to cope with the thoughts. Connecting interactions to real-life coping mechanisms, such as cleaning in general [39] or using boxing as a stress relief [54], for instance, punching pillows, helped users quickly grasp the underlying meaning behind these interactions and coping more effectively with the thoughts.

Additionally, using these familiar interactions allows users to connect the in VR experience with an interaction in the physical world. We speculate that this allows for a more persistent effect of the engagement, as the physical repetition could be linked to the VR experience.

7 LIMITATIONS AND FUTURE WORK

We opted for an explorative user study in a lab environment, which comes with the following limitations, requiring future studies.

7.1 Limited Interaction Time

In the context of our explorative study, the VR experience lasted approximately 20-25 minutes, and each participant went through each condition only once. One participant mentioned that while the VR provided some insights into approaching negative thoughts, the amount of thoughts and interactions presented in the experience made it challenging to reflect comprehensively within the limited duration of the study. To potentially enhance the impact on how users cope with negative thoughts in the future, future studies may consider offering users the opportunity for repetition of the VR experience, involving fewer interactions that participants can choose for themselves. Furthermore, there was no follow-up study to assess whether the impact of MIND MANSION persisted over time. Future research should include a follow-up study to monitor the long-term impact of MIND MANSION on individuals' responses to negative thoughts and how repeated VR experiences may influence real-life behavior.

7.2 Missing Comparison to Similar Approaches

To keep the overall study time within a reasonable time frame, we opted against a direct comparison to other existing approaches. This allowed us to explore the presented METAPHORICAL INTERACTIONS more in detail, to gain insights for future iterations of MIND MANSION. Consequently, the application could not be assessed in comparison to a different pre-existing application, as it introduces a new approach to engaging with negative thoughts. For example, it goes beyond confronting negative messages that evoke negative feelings in VR [24] by directly addressing the thoughts themselves.

Additionally, the application directly used metaphors to confront these thoughts, addressing research on metaphors associated with emotions [33, 34], and the embodiment of these metaphors, which extends research on creativity-demanding problem solving through embodied metaphors [64].

Therefore, identifying a suitable baseline for comparison with this prototype proved difficult. Due to this experience being new, it was important to first explore how it enabled users to perceive and cope with negative thoughts, as was the focus of this work. However, based on the result gathered in this experiment concerning the relationship between different design concepts and their effectiveness in coping with the associated thoughts, future studies may consider these findings as hypotheses to be further explored.

7.3 Technical Limitations of VR Environments

While the application was carefully designed, issues with controls, for example trying to grab bottles and without spilling the liquid, presented challenges in immersing into the VR and effectively confronting negative thoughts. Consequently, some users reported not experiencing any noticeable shift in their emotions during the experience. For this reason, future applications should consider using objects that require less precise motor skills, allowing a more accessible transition into the VR for all users. Furthermore, because the participants were engaged in physical activity, some of them noted experiencing sweating around their eyes. This discomfort, which could cause the HMD to slip or simply feel uncomfortable, ultimately hindered their sense of immersion by serving as a constant reminder of the VR headset they were wearing.

7.4 Predefined Set of Negative Thoughts

To ensure the comparability of this study, all participants received the same set of negative thoughts based on related work, making it harder for participants who did not relate to some thoughts to experience a shift in their emotions. Future studies could further explore the effect of similar tools when using personalized thoughts in the experiment.

7.5 Therapeutic Value

While mental health professionals recognize the advantages of self-care at home, it is essential not to underestimate the potential of falling into recurring negative emotional patterns [17]. As seen in the study, issues arose with interactions that were either too challenging or not understandable, potentially increasing negative thoughts. These interactions present a risk, especially for vulnerable users, when not guided by professionals [60]. This suggests a more in-depth examination of the specific design elements that support coping and the need for research on using this application with therapeutic guidance. In summary, the findings of MIND MANSION indicate support in engagement with negative thoughts and a decrease in negative affect. However, it is important to note that these results are specific to this particular experiment. Therefore, future research should address this subject again and involve experts for a more comprehensive exploration.

8 CONCLUSION

With our explorative study around designing MIND MANSION, we gained insights into how metaphorical interaction in a VR experience can be used to engage with otherwise abstract thoughts. MIND MANSION was developed, drawing upon existing literature and building upon established concepts, and invites users to engage with thoughts in a novel way. The VR experience immerses users in a virtual apartment, enabling them to engage with negative thoughts through the embodiment of spatial and attribute metaphors. This interaction helps users sort and remove negative thoughts by sorting and disposing of objects in a virtual apartment, ultimately fostering a more organized and positive mindset. In our user study ($n = 30$), we evaluated this approach using exemplary negative thoughts derived from the ATQ, mapped onto the objects in the virtual apartment. MIND MANSION empowered participants to draw connections between real-life challenges and the interactions integrated into this experience. This, in turn, enabled them to approach new perspectives on negative thoughts, embrace them, and identify constructive ways to deal with negative thoughts in the future. Our design recommendations for designing similar VR systems are 1) *Design for Physical and Mental Engagement* with a balance of challenge and effort in the task, 2) *Give Thoughts a Body* to foster awareness and externalization, 3) *Make the Positive Progress Visible*, and 4) *Use Familiar Interactions, to allow Users to "Take Something Back to Reality"*. In summary, VR interventions for interacting with negative thoughts through embodied metaphors are a promising tool to confront negative thoughts and foster awareness of emotions. However, finding the right balance between allowing users some independence and effectively addressing negative thoughts, carefully implementing the embodied metaphors is crucial to prevent users from becoming trapped in recurring negative emotions. This needs further future investigation, and we see MIND MANSION as an early prototype of this journey.

REFERENCES

- [1] Elena Agapie, Patricia A. Areán, Gary Hsieh, and Sean A. Munson. 2022. A Longitudinal Goal Setting Model for Addressing Complex Personal Problems in Mental Health. *Proceedings of the ACM on Human-Computer Interaction* 6, CSCW2 (Nov. 2022), 1–28. <https://doi.org/10.1145/3555160>
- [2] Nilufar Baghaei, Lehan Stemmet, Andrej Hlasnik, Konstantin Emanov, Sylvia Hach, John A. Naslund, Mark Billingham, Imran Khaliq, and Hai-Ning Liang. 2020. Time to Get Personal: Individualised Virtual Reality for Mental Health. In *Extended Abstracts of the 2020 CHI Conference on Human Factors in Computing Systems*. ACM, Honolulu HI USA, 1–9. <https://doi.org/10.1145/3334480.3382932>
- [3] Roger Bakeman. 2005. Recommended effect size statistics for repeated measures designs. *Behavior Research Methods* 37, 3 (Aug. 2005), 379–384. <https://doi.org/10.3758/BF03192707>
- [4] Amparo Belloch, Carmen Morillo, Mariela Lucero, Elena Cabedo, and Carmen Carrió. 2004. Intrusive thoughts in non-clinical subjects: the role of frequency and unpleasantness on appraisal ratings and control strategies. *Clinical Psychology & Psychotherapy* 11, 2 (March 2004), 100–110. <https://doi.org/10.1002/cpp.397>
- [5] Jenny Berger, Emmanuel Essah, Tijana Blanus, and C. Philip Beaman. 2022. The appearance of indoor plants and their effect on people's perceptions of indoor air quality and subjective well-being. *Building and Environment* 219 (July 2022), 109151. <https://doi.org/10.1016/j.buildenv.2022.109151>
- [6] Ann Blandford, Dominic Furniss, and Stephann Makri. 2016. *Qualitative HCI Research: Going Behind the Scenes*. Springer International Publishing, Cham. <https://doi.org/10.1007/978-3-031-02217-3>
- [7] Tibor Bosse, Charlotte Gerritsen, Jeroen De Man, and Jan Treur. 2013. Learning Emotion Regulation Strategies: A Cognitive Agent Model. In *2013 IEEE/WIC/ACM International Joint Conferences on Web Intelligence (WI) and Intelligent Agent Technologies (IAT)*. IEEE, Atlanta, GA, USA, 245–252. <https://doi.org/10.1109/WI-IAT.2013.116>

- [8] Cristina Botella, Rosa M. Baños, Helena Villa, Conxa Perpiñá, and Azucena García-Palacios. 2000. Virtual reality in the treatment of claustrophobic fear: A controlled, multiple-baseline design. *Behavior Therapy* 31, 3 (2000), 583–595. [https://doi.org/10.1016/S0005-7894\(00\)80032-5](https://doi.org/10.1016/S0005-7894(00)80032-5)
- [9] Pablo Briñol, Margarita Gascó, Richard E. Petty, and Javier Horcajo. 2013. Treating Thoughts as Material Objects Can Increase or Decrease Their Impact on Evaluation. *Psychological Science* 24, 1 (Jan. 2013), 41–47. <https://doi.org/10.1177/0956797612449176>
- [10] Pablo Briñol, Richard E. Petty, and Jennifer Belding. 2017. Objectification of people and thoughts: An attitude change perspective. *British Journal of Social Psychology* 56, 2 (June 2017), 233–249. <https://doi.org/10.1111/bjso.12183>
- [11] Steve Bryson. 1995. Approaches to the successful design and implementation of VR applications. *Virtual reality applications* (1995), 3–15.
- [12] A Butler, J Chapman, E Forman, and A Beck. 2006. The empirical status of cognitive-behavioral therapy: A review of meta-analyses. *Clinical Psychology Review* 26, 1 (Jan. 2006), 17–31. <https://doi.org/10.1016/j.cpr.2005.07.003>
- [13] John M. Carroll. 2003. *HCI Models, Theories, and Frameworks: Toward a Multidisciplinary Science*. Elsevier.
- [14] David A Clark and Shelley Rhyno. 2005. *Unwanted Intrusive Thoughts in Non-clinical Individuals: Implications for Clinical Disorders*. (2005). Publisher: The Guilford Press.
- [15] Jacob Cohen. 2013. *Statistical Power Analysis for the Behavioral Sciences* (0 ed.). Routledge. <https://doi.org/10.4324/9780203771587>
- [16] P. C. Dinas, Y. Koutedakis, and A. D. Flouris. 2011. Effects of exercise and physical activity on depression. *Irish Journal of Medical Science* 180, 2 (June 2011), 319–325. <https://doi.org/10.1007/s11845-010-0633-9>
- [17] Elizabeth Victoria Eikey, Clara Marques Caldeira, Mayara Costa Figueiredo, Yunan Chen, Jessica L. Borelli, Melissa Mazmanian, and Kai Zheng. 2021. Beyond self-reflection: introducing the concept of rumination in personal informatics. *Personal and Ubiquitous Computing* 25, 3 (June 2021), 601–616. <https://doi.org/10.1007/s00779-021-01573-w>
- [18] Lisa A. Elkin, Matthew Kay, James J. Higgins, and Jacob O. Wobbrock. 2021. An Aligned Rank Transform Procedure for Multifactor Contrast Tests. In *The 34th Annual ACM Symposium on User Interface Software and Technology*. ACM, Virtual Event USA, 754–768. <https://doi.org/10.1145/3472749.3474784>
- [19] Gary W. Evans. 2006. Child Development and the Physical Environment. *Annual Review of Psychology* 57, 1 (Jan. 2006), 423–451. <https://doi.org/10.1146/annurev.psych.57.102904.190057>
- [20] A Garcia-Palacios, H Hoffman, A Carlin, T.A Furness, and C Botella. 2002. Virtual reality in the treatment of spider phobia: a controlled study. *Behaviour Research and Therapy* 40, 9 (Sept. 2002), 983–993. [https://doi.org/10.1016/S0005-7967\(01\)00068-7](https://doi.org/10.1016/S0005-7967(01)00068-7)
- [21] Nadia Garnefski, Tessa Van Den Kommer, Vivian Kraaij, Jan Teerds, Jeroen Legerstee, and Evert Onstein. 2002. The relationship between cognitive emotion regulation strategies and emotional problems: comparison between a clinical and a non-clinical sample. *European Journal of Personality* 16, 5 (Sept. 2002), 403–420. <https://doi.org/10.1002/per.458>
- [22] Ambra Gentile, Salvatore Ficarra, Ewan Thomas, Antonino Bianco, and Anna Nordstrom. 2023. Nature through virtual reality as a stress-reduction tool: A systematic review. *International Journal of Stress Management* (July 2023). <https://doi.org/10.1037/str0000300>
- [23] Jennifer C. Greene, Valerie J. Caracelli, and Wendy F. Graham. 1989. Toward a Conceptual Framework for Mixed-Method Evaluation Designs. *Educational Evaluation and Policy Analysis* 11, 3 (Sept. 1989), 255–274. <https://doi.org/10.3102/01623737011003255>
- [24] Florian Grieger, Holger Klapperich, and Marc Hassenzahl. 2021. Trash It, Punch It, Burn It – Using Virtual Reality to Support Coping with Negative Thoughts. In *Extended Abstracts of the 2021 CHI Conference on Human Factors in Computing Systems*. ACM, Yokohama Japan, 1–6. <https://doi.org/10.1145/3411763.3451738>
- [25] James J. Gross. 1998. The Emerging Field of Emotion Regulation: An Integrative Review. *Review of General Psychology* 2, 3 (Sept. 1998), 271–299. <https://doi.org/10.1037/1089-2680.2.3.271>
- [26] James J. Gross. 2015. Emotion Regulation: Current Status and Future Prospects. *Psychological Inquiry* 26, 1 (Jan. 2015), 1–26. <https://doi.org/10.1080/1047840X.2014.940781>
- [27] James J. Gross and Oliver P. John. 2003. Individual differences in two emotion regulation processes: Implications for affect, relationships, and well-being. *Journal of Personality and Social Psychology* 85, 2 (2003), 348–362. <https://doi.org/10.1037/0022-3514.85.2.348>
- [28] Irit Hacmun, Dafna Regev, and Roy Salomon. 2018. The Principles of Art Therapy in Virtual Reality. *Frontiers in Psychology* 9 (Oct. 2018), 2082. <https://doi.org/10.3389/fpsyg.2018.02082>
- [29] Irit Hacmun, Dafna Regev, and Roy Salomon. 2021. Artistic creation in virtual reality for art therapy: A qualitative study with expert art therapists. *The Arts in Psychotherapy* 72 (Feb. 2021), 101745. <https://doi.org/10.1016/j.aip.2020.101745>
- [30] Adam W. Hanley, Alia R. Warner, Vincent M. Dehili, Angela I. Canto, and Eric L. Garland. 2015. Washing Dishes to Wash the Dishes: Brief Instruction in an Informal Mindfulness Practice. *Mindfulness* 6, 5 (Oct. 2015), 1095–1103. <https://doi.org/10.1007/s12671-014-0360-9>
- [31] Stefan G. Hofmann and Gordon J.G. Asmundson. 2008. Acceptance and mindfulness-based therapy: New wave or old hat? *Clinical Psychology Review* 28, 1 (Jan. 2008), 1–16. <https://doi.org/10.1016/j.cpr.2007.09.003>
- [32] Jörn Hurtienne. 2017. How Cognitive Linguistics Inspires HCI: Image Schemas and Image-Schematic Metaphors. *International Journal of Human-Computer Interaction* 33, 1 (Jan. 2017), 1–20. <https://doi.org/10.1080/10447318.2016.1232227>
- [33] Jörn Hurtienne and Oliver Meschke. 2016. Soft Pillows and the Near and Dear: Physical-to-Abstract Mappings with Image-Schematic Metaphors. In *Proceedings of the TEL '16: Tenth International Conference on Tangible, Embedded, and Embodied Interaction*. ACM, Eindhoven Netherlands, 324–331. <https://doi.org/10.1145/2839462.2839483>
- [34] Jörn Hurtienne, Christian Stöfel, and Katharina Weber. 2009. Sad is heavy and happy is light: population stereotypes of tangible object attributes. In *Proceedings of the 3rd International Conference on Tangible and Embedded Interaction*. ACM, Cambridge United Kingdom, 61–68. <https://doi.org/10.1145/1517664.1517686>
- [35] Jade Jiang and Naseem Ahmadpour. 2021. Beyond Immersion: Designing for Reflection in Virtual Reality. In *33rd Australian Conference on Human-Computer Interaction*. ACM, Melbourne VIC Australia, 208–220. <https://doi.org/10.1145/3520495.3520501>
- [36] Heekyoung Jung, Heather Wiltse, Mikael Wiberg, and Erik Stolterman. 2017. Metaphors, materialities, and affordances: Hybrid morphologies in the design of interactive artifacts. *Design Studies* 53 (Nov. 2017), 24–46. <https://doi.org/10.1016/j.destud.2017.06.004>
- [37] Jingoog Kim and Mary Lou Maher. 2019. Metaphors, Signifiers, Affordances, and Modalities for Designing Mobile and Embodied Interactive Systems. In *Proceedings of the 31st Australian Conference on Human-Computer-Interaction*. ACM, Fremantle WA Australia, 542–545. <https://doi.org/10.1145/3369457.3369527>
- [38] Richard R. Kopp and Michael Jay Craw. 1998. Metaphoric language, metaphoric cognition, and cognitive therapy. *Psychotherapy: Theory, Research, Practice, Training* 35, 3 (1998), 306–311. <https://doi.org/10.1037/h0087795>
- [39] Martin Lang, Jan Krátký, John H. Shaver, Danijela Jerotijević, and Dimitris Xygalatas. 2015. Effects of Anxiety on Spontaneous Ritualized Behavior. *Current Biology* 25, 14 (July 2015), 1892–1897. <https://doi.org/10.1016/j.cub.2015.05.049>
- [40] Susanne K. Langer. 2009. *Philosophy in a New Key: A Study in the Symbolism of Reason, Rite, and Art, Third Edition*. Harvard University Press.
- [41] Andreas Larsson, Nic Hooper, Lisa A. Osborne, Paul Bennett, and Louise McHugh. 2016. Using Brief Cognitive Restructuring and Cognitive Defusion Techniques to Cope With Negative Thoughts. *Behavior Modification* 40, 3 (May 2016), 452–482. <https://doi.org/10.1177/0145445515621488>
- [42] Spike W. S. Lee and Norbert Schwarz. 2011. Wiping the Slate Clean: Psychological Consequences of Physical Cleansing. *Current Directions in Psychological Science* 20, 5 (Oct. 2011), 307–311. <https://doi.org/10.1177/0963721411422694>
- [43] Jack M. Loomis, James J. Blascovich, and Andrew C. Beall. 1999. Immersive virtual environment technology as a basic research tool in psychology. *Behavior Research Methods, Instruments, & Computers* 31, 4 (Dec. 1999), 557–564. <https://doi.org/10.3758/BF03200735>
- [44] Karina Lovell and David Richards. 2000. Multiple access points and levels of entry (MAPLE): Ensuring choice, accessibility and equity for CBT services. *Behavioural and Cognitive Psychotherapy* 28, 4 (Oct. 2000), 379–391. <https://doi.org/10.1017/S1352465800004070>
- [45] Kateri McRae and James J. Gross. 2020. Emotion regulation. *Emotion* 20, 1 (Feb. 2020), 1–9. <https://doi.org/10.1037/emo0000703>
- [46] Fariba Mostajeran, Frank Steinicke, Sarah Reinhart, Wolfgang Stuerzlinger, Bernhard E. Riecke, and Simone Kühn. 2023. Adding virtual plants leads to higher cognitive performance and psychological well-being in virtual reality. *Scientific Reports* 13, 1 (May 2023), 8053. <https://doi.org/10.1038/s41598-023-34718-3>
- [47] Ricard Navinés, Rocío Martín-Santos, Esther Gómez-Gil, María J. Martínez De Osa, and Cristóbal Gastó. 2008. Interaction between serotonin 5-HT1A receptors and beta-endorphins modulates antidepressant response. *Progress in Neuro-Psychopharmacology and Biological Psychiatry* 32, 8 (Dec. 2008), 1804–1809. <https://doi.org/10.1016/j.pnpbp.2008.07.021>
- [48] Michael W. Otto. 2000. Stories and metaphors in cognitive-behavior therapy. *Cognitive and Behavioral Practice* 7, 2 (March 2000), 166–172. [https://doi.org/10.1016/S1077-7229\(00\)80027-9](https://doi.org/10.1016/S1077-7229(00)80027-9)
- [49] Barbara Olasov Rothbaum, Larry Hodges, Samantha Smith, Jeong Hwan Lee, and Larry Price. 2000. A controlled study of virtual reality exposure therapy for the fear of flying. *Journal of Consulting and Clinical Psychology* 68, 6 (Dec. 2000), 1020–1026. <https://doi.org/10.1037/0022-006X.68.6.1020>
- [50] Dmitri Rozgonjuk and Jon D. Elhai. 2021. Emotion regulation in relation to smartphone use: Process smartphone use mediates the association between expressive suppression and problematic smartphone use. *Current Psychology* 40, 7 (July 2021), 3246–3255. <https://doi.org/10.1007/s12144-019-00271-4>
- [51] Darby E. Saxbe and Rena Repetti. 2010. No Place Like Home: Home Tours Correlate With Daily Patterns of Mood and Cortisol. *Personality and Social Psychology Bulletin* 36, 1 (Jan. 2010), 71–81. <https://doi.org/10.1177/0146167209352864>
- [52] Sinem Semsioğlu, Pelin Karaturhan, Saliha Akbas, and Asim Evren Yantac. 2021. Isles of Emotion: Emotionally Expressive Social Virtual Spaces for Reflection

- and Communication. In *Creativity and Cognition*. ACM, Virtual Event Italy, 1–10. <https://doi.org/10.1145/3450741.3466805>
- [53] Yaoxi Shi, Peter Koval, Vassilis Kostakos, Jorge Goncalves, and Greg Wadley. 2023. “Instant Happiness”: Smartphones as tools for everyday emotion regulation. *International Journal of Human-Computer Studies* 170 (Feb. 2023), 102958. <https://doi.org/10.1016/j.ijhcs.2022.102958>
- [54] Dr. Mohammed Shosha. 2020. A brief introduction to therapeutic boxing. *International Journal of Physiology, Nutrition and Physical Education* 5, 2 (July 2020), 29–31. <https://doi.org/10.22271/journalofsport.2020.v5.i2a.1977>
- [55] Petr Slovak, Alissa Antle, Nikki Theofanopoulou, Claudia Daudén Roquet, James Gross, and Katherine Isbister. 2023. Designing for Emotion Regulation Interventions: An Agenda for HCI Theory and Research. *ACM Transactions on Computer-Human Interaction* 30, 1 (Feb. 2023), 1–51. <https://doi.org/10.1145/3569898>
- [56] Wally Smith, Greg Wadley, Sarah Webber, Benjamin Tag, Vassilis Kostakos, Peter Koval, and James J. Gross. 2022. Digital Emotion Regulation in Everyday Life. In *CHI Conference on Human Factors in Computing Systems*. ACM, New Orleans LA USA, 1–15. <https://doi.org/10.1145/3491102.3517573>
- [57] Hollon Steven D. and Kendall Philip C. 2011. Automatic Thoughts Questionnaire. <https://doi.org/10.1037/t00735-000>
- [58] Edward Bradford Titchener. 1914. *A text-book of psychology*. MacMillan Co, New York. <https://doi.org/10.1037/10907-000>
- [59] Greg Wadley, Wally Smith, Peter Koval, and James J. Gross. 2020. Digital Emotion Regulation. *Current Directions in Psychological Science* 29, 4 (Aug. 2020), 412–418. <https://doi.org/10.1177/0963721420920592>
- [60] Nadine Wagener, Tu Dinh Duong, Johannes Schöning, Yvonne Rogers, and Jasmin Niess. 2021. The Role of Mobile and Virtual Reality Applications to Support Well-Being: An Expert View and Systematic App Review. In *Human-Computer Interaction – INTERACT 2021*, Carmelo Ardito, Rosa Lanzilotti, Alessio Malizia, Helen Petrie, Antonio Piccinno, Giuseppe Desolda, and Kori Inkpen (Eds.). Vol. 12935. Springer International Publishing, Cham, 262–283. https://doi.org/10.1007/978-3-030-85610-6_16
- [61] Nadine Wagener, Jasmin Niess, Yvonne Rogers, and Johannes Schöning. 2022. Mood Worlds: A Virtual Environment for Autonomous Emotional Expression. In *CHI Conference on Human Factors in Computing Systems*. ACM, New Orleans LA USA, 1–16. <https://doi.org/10.1145/3491102.3501861>
- [62] Nadine Wagener, Leon Reicherts, Nima Zargham, Natalia Bartłomiejczyk, Ava Elizabeth Scott, Katherine Wang, Marit Bentvelzen, Evropi Stefanidi, Thomas Mildner, Yvonne Rogers, and Jasmin Niess. 2023. SelVReflect: A Guided VR Experience Fostering Reflection on Personal Challenges. In *Proceedings of the 2023 CHI Conference on Human Factors in Computing Systems*. ACM, Hamburg Germany, 1–17. <https://doi.org/10.1145/3544548.3580763>
- [63] Nadine Wagener, Johannes Schöning, Yvonne Rogers, and Jasmin Niess. 2023. *Letting It Go: Four Design Concepts to Support Emotion Regulation in Virtual Reality*.
- [64] Xinyue Wang, Kelong Lu, Mark A. Runco, and Ning Hao. 2018. Break the “wall” and become creative: Enacting embodied metaphors in virtual reality. *Consciousness and Cognition* 62 (July 2018), 102–109. <https://doi.org/10.1016/j.concog.2018.03.004>
- [65] Thomas L. Webb, Eleanor Miles, and Paschal Sheeran. 2012. Dealing with feeling: A meta-analysis of the effectiveness of strategies derived from the process model of emotion regulation. *Psychological Bulletin* 138, 4 (July 2012), 775–808. <https://doi.org/10.1037/a0027600>
- [66] Jacob O. Wobbrock, Leah Findlater, Darren Gergle, and James J. Higgins. 2011. The aligned rank transform for nonparametric factorial analyses using only anova procedures. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems*. ACM, Vancouver BC Canada, 143–146. <https://doi.org/10.1145/1978942.1978963>
- [67] Kemal Yildirim, M. Lutfi Hidayetoglu, and Aysen Capanoglu. 2011. Effects of Interior Colors on Mood and Preference: Comparisons of Two Living Rooms. *Perceptual and Motor Skills* 112, 2 (April 2011), 509–524. <https://doi.org/10.2466/24.27.PMS.112.2.509-524>