ComplexityMeasures.jl: scalable software to unify and accelerate entropy and complexity timeseries analysis

George Datseris^{1*}, Kristian Agasøster Haaga^{2,3,4},

1 Department of Mathematics and Statistics, University of Exeter, United Kingdom

2 Department of Earth Science, University of Bergen, Norway

3 Center for Deep Sea Research, University of Bergen, Norway

4 Bjerknes Centre for Climate Research, Bergen, Norway

* g.datseris@exeter.ac.uk

Abstract

In the nonlinear timeseries analysis literature, countless quantities have been presented as new "entropy" or "complexity" measures, often with similar roles. The ever-increasing pool of such measures makes creating a sustainable and all-encompassing software for them difficult both conceptually and pragmatically. Such a software however would be an important tool that can aid researchers make an informed decision of which measure to use and for which application, as well as accelerate novel research. Here we present ComplexityMeasures.jl, an easily extendable and highly performant open-source software that implements a vast selection of complexity measures. The software provides 1530 measures with 3,834 lines of source code, averaging only 2.5 lines of code per exported quantity (version 3.5). This is made possible by its mathematically rigorous composable design. In this paper we discuss the software design and demonstrate how it can accelerate complexity-related research in the future. We carefully compare it with alternative software and conclude that ComplexityMeasures.jl outclasses the alternatives in several objective aspects of comparison, such as computational performance, overall amount of measures, reliability, and extendability. ComplexityMeasures.jl is also a component of the DynamicalSystems.jl library for nonlinear dynamics and nonlinear timeseries analysis and follows open source development practices for creating a sustainable community of developers.

1 Introduction

A large aspect of nonlinear timeseries analysis [1–3] is concerned with extracting quantities (i.e. computing various statistics) from timeseries that quantify some property of the underlying dynamics that generated the timeseries. The purpose of these statistics can be to distinguish one type of dynamics from another [4], to classify timeseries into classes with different dynamics [5,6], to quantify directional associations between time series [7], which in turn can be integrated into frameworks for conditional independence testing between time series [8], and more. Most of these statistics are labelled *complexity measures*, because they quantify in some way the amount of complexity in the system. Although the word "complex" does not have a widely-accepted definition yet [9], it typically describes something that is both not regular nor purely stochastic.

The majority of complexity measures are based on some form of axiomatically well-founded entropy. For example, the permutation entropy [10] and the wavelet entropy [11] are based on the Shannon entropy (Eq. 1). Other complexity measures are not entropies in the formal mathematical sense, but are inspired by, or related to, entropies. Approximate entropy [12] and

sample entropy [13], for example, are entropy *rates*, rather than entropies. Like an entropy, these entropy-like measures will typically yield higher numerical values for more "complex" data, where "complex" has a measure-specific definition. In the rest of the text we will be referring to all these entropy or complexity quantities simply as *complexity measures*, and only use the word "entropy" if its rigorous mathematical definition is important in the context.

1.1 Example of estimating a complexity measure

There exists a surprisingly large amount of complexity measures in the literature. For simplicity, we will start by focusing on the largest class of complexity measures: those that are functionals of probabilities mass functions (PMFs). Here, we will deal exclusively with *empirical PMFs*, which are PMFs estimated from data. We will use the terms "probabilities" and empirical PMFs interchangeably.

All discrete probability-based complexity measures apply the same fundamental steps, and can unified under one estimation pipeline. To estimate probabilities from observed data, it is necessary to first define a specific and countable *outcome space* Ω . The goal is then to assign a probability $p_i = p(\omega_i)$ to each outcome $\omega_i \in \Omega$ based on the input data. To do so, the input data needs to be mapped (encoded, or discretized) onto the elements of Ω . Sometimes, this procedure is also called *symbolization*. After encoding, we can form an empirical distribution over the encoded symbols. An empirical distribution in this context just means a histogram, or a normalized pseudo-histogram, depending on the structure of the outcome space. Next, the probabilities $p(\omega_i)$ are estimated based from this empirical distribution, for example using relative frequency estimation. Finally, once a probability vector $\mathbf{p} = \{p(\omega_i)\}_{i=1}^N$ has been constructed, these probabilities can be given as an input to some probabilities functional.

As an example, let's say we'd want to compute the order-3 permutation entropy [10] for an input time series x. To do so, we first construct a 3-dimensional embedding of x. Three-element state vectors can be ordered in 3! = 6 different ways. We'll consider each one of these possible orderings, which are also called *ordinal patterns*, as separate outcomes. We can then proceed by mapping each state vector in the embedding uniquely onto one of the ordinal patterns ¹, which is the same as saying that we *encode* the input data. To estimate probabilities, we can then simply count the relative frequency/occurrence of the different ordinal patterns and normalize these counts to sum to 1 (also called plug-in, or maximum likelihood estimation). Finally, these probabilities are given to the Shannon entropy formula [14]

$$H_{\mathcal{S}}(p) = -\sum_{i}^{M} p_{i} \log(p_{i}).$$
⁽¹⁾

This *estimator* of the Shannon entropy is called the *naive*, or *plug-in* estimator, and returns a non-negative number which is indicative of the "complexity" of the input data.

1.2 Combinatorial explosion of complexity measures

In the first step of the procedure outlined above, we implicitly chose an *outcome space* (a way to map data into outcomes). We could decide to use any other outcome space instead. One commonly used class of outcome spaces are rectangular binnings (i.e., histograms), in which each each data point is mapped onto one bin according to its value. Other examples of outcome spaces are dispersion patterns [15], binned cosine similarities [16], binned state vector distances [17], sorting complexity [18], which all consist of an initial embedding step, after which the embedding vectors are encoded using some procedure that cleverly highlights some interesting property of the underlying data.

In the second step, any count-based probabilities estimator could be applied to transform the observed outcome frequencies into probabilities. More sophisticated estimators include

¹Assuming there are no ties in the state vector.

Bayesian regularization [19], shrinkage estimators [20], and add-constant estimators [21], which apply smoothing to the counts.

In the third step, we could have instead considered any of the other theoretically well-founded information measures, for example Rényi entropy (H_R) [22], Tsallis entropy (H_T) [23], Kaniadakis entropy (H_K) [24], Curado entropy (H_C) [25] and the Anteneodo-Plastino streched exponential entropy (H_{AP}) [26], the lesser known Shannon extropy (J_S) [27], Rényi extropy [28] or Tsallis extropy (J_T) [29], or any other probabilities functional that in some way quantify complexity.

Since the naive plug-in estimator systematically underestimates the Shannon entropy [30], in the third step, we could also have used any of the plethora of bias-corrected estimators for Shannon entropy that have been proposed [19, 30–36]. Any of the other measures can also be computed either using plug-in estimation or other generic estimators such as the jackknife estimator [37], or any tailored measure-specific estimator.

Thus, excluding parameterizations, there are four degrees of freedom when computing a discrete, probabilities-based complexity measure: the discretization/encoding procedure, the probabilities estimator, the information measure, and the *estimator* for the information measure. Now let's assume that the literature describes N_O different outcome spaces, N_P different ways of estimating probabilities, and N_C different probabilities-based complexity measures. Assume the number of estimators for a particular measure M_i is N_{M_i} . Then the number of total computable PMF-based complexity measures is

$$N_O \times N_P \times \sum_{i=1}^{N_C} N_{M_i} \tag{2}$$

We quickly realize that there is a vast set possible complexity measures, varying across all four degrees of freedom, with differences ranging from very minor technicalities to major conceptual differences, yet all quantifying complexity in some unique way. Adding (for example) one more entropy definition $N_C \rightarrow N_C + 1$ drastically increases the total amount of computable measures, because there are $N_O \times N_P$ potential ways of computing it from data for every unique estimator of this new measure. We call this the *combinatorial explosion* of complexity measures. In this context, the traditional software design approach of implementing one function for each measure is *not scalable* as it requires adding many more functions when wanting to add "only" one more complexity measure definition.

The large number of possible complexity measures could provide great opportunities for future research into complexity quantification. However, a systematic and easy-to-use software for exploring and comparing these different measures, that is also easy to extend with new ones, and has the computational capacity to compute all of them quickly, is lacking.

1.3 Enter ComplexityMeasures.jl

ComplexityMeasures.jl was built to fill this gap. It resolves the explosion problem by taking a fundamentally different approach: the software allows for *composable instructions* for how to compute a complexity measure. For discrete, probabilities-based measures, this entails composing instructions on which definition to use, which estimator to use, with which probabilities estimator to estimate probabilities, and which outcome space to use for the discretization (Figure 1). A similar approach is taken when estimating other complexity measures, which are described later in the paper. In practice this leads to an incredibly lean source code base that is also easily extendable. This new design approach avoids the one-function-per-estimator typical software design that leads to an unnecessarily large, hard-to-maintain code base that is also hard to bugfix efficiently or future-proof. Additionally, by developing ComplexityMeasures.jl following highest standards in scientific software development [38], we made it both easily extendable and highly performant, so that it is

sufficiently future-proof and can handle all complexity measures present and to-be-added in the future.

In Sec. 2 we expose the design behind ComplexityMeasures.jl and how it integrates into a wider ecosystem enabling further innovation (such as CausalityTools.jl [39]); in Sec. 3 we provide some selected examples that highlight how accessible yet powerful the library is; lastly in Sec. 4 we compare the software with existing alternatives in a comprehensive tabular format and show that across many objective aspects of comparison ComplexityMeasures.jl performs best.

2 Design of ComplexityMeasures.jl

2.1 Core functions

The design of ComplexityMeasures.jl is displayed in Fig. 1 and perfectly parallelizes the mathematically rigorous formulation of an information measure as we described it in Sec. 1.1. Software usage revolves around two functions: information and complexity. The first is called as information(discr_ent_est, prob_est, ospace, data), and estimates an information measure given the information measure estimator from a PMF, a probabilities estimator to map discrete outcomes into a PMF, and an outcome space to map input data into discrete outcomes. To estimate the permutation entropy (as originally defined in [10]) one would call information(Shannon(), RelativeAmount(), OrdinalPatterns(m = 3), input). For convenience and conciseness, simpler "shortcuts" are also possible in ComplexityMeasures.jl. For example, entropy(OrdinalPatterns(m = 3), data) uses default values for the probability estimator (RelativeAmount()) and the information measure estimator (Shannon()). For a few handpicked measures even simpler syntax is available, such as the call entropy_permutation(data; m = 3), which is equivalent with the previous ones. More syntax shortcuts are discussed in the software documentation.

a) discrete information measure (explicit functional of a probability mass function)

<pre>information(info_est,</pre>	prob_est,	outcome_space,	data)
how to estimate the measure from probabilities. it always references a definition of an information measure (default: Shannon entropy)	how to go from outcomes to probabilities (default: relative occurrence of each outcome divided by the total)	how to discretize, or symbolize, input data into a finite set of outcomes	input data can be univariate or multivariate timeseries, or even spatiotempoiral data, depending on the measure estimated

b) other complexity measure (not explicit functional of a probability mass function)

<pre>complexity(complexity_estimator,</pre>	data)
how to estimate the complexity measure directly from input data. it may reference an outcome space or information definition.	

Fig 1. The two central functions of ComplexityMeasures.jl and the inputs they expect.

For complexity measures that are not explicit functionals of a PMF, we have implemented a simpler design shown in Fig. 1b. There a function complexity takes as an input a "complexity estimator" the defines a complexity measure as well as includes instructions on how to compute it directly from input data. Differential (or continuous) information measure estimators follow the same design in the current software version. In the future we plan to make a dedicated probability *density* estimation interface for continuous measures, similar to our discrete estimation interface based on probability mass functions. Both information and complexity have a normalized option that returns the complexity measure divided by its maximum possible

value. Similarly, a multiscale function computes the multiscale variant of a chosen complexity measure (a framework originally introduced in Ref. [40] as "multiscale sample entropy"). Both normalized and multiscale forms are valid for *any* complexity measure in the library since these forms are also based on a composable design.

Structuring ComplexityMeasures.jl on this interface comes with many benefits:

- 1. Orthogonality of inputs (information estimator, probabilities, and outcomes). This means that if, e.g., a combination of a probability estimator works for a given outcome space, it is guaranteed to work for *any* outcome space implemented in the software. This guarantee occurs automatically due to the design (and also permitted by the Julia language multiple dispatch system [41]) and does not need to be enforced by the user or even the developer.
- 2. The software is easy to maintain. Finding a bug in e.g., creating a histogram of some (optionally symbolized) data requires fixing this bug in only a single function that does the histogram counting, not in potentially hundreds of functions that utilize histograms in some way.
- 3. Simple and scalable extensions. Adding a new outcome space requires writing code for one new type (Julia's version of "classes") and one mandatory function extension instructing how to discretize data for this outcome space. This is can be as simple as 10 lines of code. Yet, once implemented, this outcome space would allow the user, without writing any additional code, to compute any probabilities-based complexity measure using this outcome space, in combination with any probabilities estimation, any information measure, and any estimator of this measure, including even some non-information complexity measures such as missing patterns [42].
- 4. The probabilities themselves are directly accessible by the user and compose a comprehensive interface that we expand more in Sec. 2.2. Analyzing the probabilities directly may expose something interesting about the data that is "integrated away" by the complexity measure computation. For example, if one computes the associated probabilities for the 6 order-3 ordinal patterns of a timeseries coming for a logistic map, 2 of the 6 patterns will have 0 probability due to the logistic map's dynamics. Information like this can only be obtained by looking at the probability mass function directly, which is hidden away in the majority of alternative software. Additionally, having access to the probabilities directly allows expanding and creating new complexity measures not published before like the example we showcase in Sec. 3.2.

2.2 Outcome spaces and probabilities

During the design of ComplexityMeasures.jl, it became obvious that the majority of complexity measures are estimated based on some PMF extracted from data. To create the extendable design mentioned above, behind the main functions information, complexity there stands a fully-fledged API (application programming interface) for extracting probabilities from data, based on the mathematically rigorous formulation of an outcome space. To the best of our knowledge, there isn't any open source software in any programming language that provides such an extensive interface for extracting probabilities from data.

In ComplexityMeasures.jl we define an abstract hierarchy of types called OutcomeSpace. An instance o of a concrete implementation of an OutcomeSpace describes how to discretize data into discrete outcomes. Given o, we define many functions for handling probabilities. For example, total_outcomes returns the cardinality of o, while missing_outcomes returns the number of outcomes defined by o as possible but not present in the data, and counts returns a vector of integers, counting how many times was each outcome present in the input data. We further separate this API into outcome spaces that are counting-based, which allow mapping each element of input data into an integer, and non-counting based which cannot do this. More details on this can be found on the developer documentation of ComplexityMeasures.jl.

2.3 Clarifying and educative approach to naming

The literature is full of complexity measures that are named similarly, but represent fundamentally different concepts. For example, the term "bubble entropy" [18] is not an entropy per se, but a scaled difference between two Rényi [43] entropies which have been computed by discretizing the input data in a particular manner which has to do with the bubble sort algorithm. Rényi entropy, however, is an axiomatically well-founded entropy. Similarly, the permutation entropy [10] or wavelet entropy [11] are not distinct forms of entropy in terms of the mathematical definition of entropy. They are just the Shannon entropy computed by discretizing the input data into outcomes based on permutation patterns or wavelet coefficients, respectively. It is in fact common that papers that introduce new discretization procedures, i.e., *outcome spaces*, are given the name "entropy" [15, 16, 44].

We believe that this abuse of terminology can be confusing, especially to newcomers to the field. Indeed, while teaching nonlinear timeseries analysis we experience that students often interpret the Shannon entropy and permutation entropy as two different quantities. With ComplexityMeasures.jl and this paper, we aim to clarify this naming confusion, while also highlighting what the common elements between different complexity measures are: estimating probabilities from data. That is why in the software we do not promote function names like "permutation entropy". That being said, we understand that some terms (like the permutation entropy) are very well recognized in the field and should be accessible. Thus, for a few handpicked complexity measures we provide a shorter syntax, such as the function entropy_permutation(input; m = 3). Nevertheless we make it clear in the documentation of these "convenience functions" that they do not provide a genuinely new entropy even if named as such.

2.4 Software quality

ComplexityMeasures.jl was implemented following best practices in scientific code [38]. The software is free and open source (MIT-licensed), hosted on GitHub, and also available through the Julia package manager. The repository is composed in total of 3,834 lines of source code, 2,406 lines of test code, and 5,984 lines of documentation text according to PackageAnalyzer.jl [45]. The online documentation is very extensive. It features a central tutorial; full API reference listing outcome spaces, entropy/complexity measures, and estimators provided by the software; more than a dozen of individual examples that are created by showing real code tied with its output; a developer's documentation for contributing more features to the library. The documentation also cites all research articles introducing the implemented measures/estimators via BiBTeX, and provides an explanation and/or description of each measure/estimator implemented, making it straightforward to understand what this measure is and what it estimates without needing to consult the research article. The software is extensively tested, with coverage of $\tilde{9}0\%$, which means that at least 90% of the source code lines are explicitly called in the test suite. Both tests and documentation are run through continuous integration upon every committed change to the software. ComplexityMeasures, jl is continuously improved and follows agile development practices [46]. A new feature, or even the smallest bugfix, is immediately released as a new software version, which the users can obtain instantly via a standard update command provided by the Julia language. The quoted numbers in this subsection refer to version v3.5 of the software.

2.5 Part of a greater whole

ComplexityMeasures.jl can be used as a standalone software. However, it is also part of a greater whole. It is a component of the DynamicalSystems.jl [47] software library for nonlinear dynamics and nonlinear timeseries analysis, and is also the basis for the CausalityTools.jl library

for relational (or causal) timeseries analysis [39]. In this way, ComplexityMeasures.jl integrates with a wider ecosystem for timeseries and data analysis.

For example, it can be immediately used with TimeseriesSurrogates.jl [48] to perform surrogate analysis testing for nonlinearities, thus eliminates the need to re-implement surrogate testing (as in e.g., in PyBioS [49]). Indeed, if the reader has a look at the associated code of Fig. 3 in appendix S1, performing timeseries surrogates significance testing by combining TimeseriesSurrogates.jl and ComplexityMeasures.jl is as seamless as if they were one package. DynamicalSystems.jl also has a component for fractal dimensions [2, Ch. 5]. Fractal dimensions themselves are complexity measures, and were initially part of ComplexityMeasures.jl. They were split off due to their codebase becoming extensive as well as being dedicated to a review article on fractal dimensions [50]. Finally, a component of DynamicalSystems.jl is about estimating optimal parameters for delay coordinate embeddings [2, Ch. 6], including the latest methods in the literature [51]. This can be used seamlessly to estimate optimal delay time and/or embedding dimension, which are crucial for the majority of complexity measures. Additionally, DelayEmbeddings.jl is used by ComplexityMeasures.jl to perform the actual delay embedding, which is a benefit since DelayEmbeddings.jl has been optimized for delay embeddings all the way down to machine code.

A software based on ComplexityMeasures.jl is CausalityTools.jl [39], which implements measures for relational (cross-variable) association quantification. Relational association quantification is in itself is a huge research field, extending far beyond the scope of ComplexityMeasures.jl, where we exclusively deal with quantifying complexity within a single dataset, not between datasets. Many of these cross-variable (conditional) measures can be expressed in terms of single-variable complexity measures. For example, conditional mutual information (CMI) can be decomposed as a sum of four marginal entropy terms computed from some subset of the joint variables considered for the relational association analysis. Each entropy estimator compatible with multivariate input data is therefore also a CMI estimator. We have been very deliberate in the design of ComplexityMeasures.jl to mimic the mathematical identities between, for example, CMI and entropy. In the case of CMI, any probabilities estimator or entropy definition added to ComplexityMeasures.jl automatically enables a corresponding CMI estimator upstream in CausalityTools.jl. This enables limitless extensibility with no additional coding effort. We leave a detailed review of CausalityTools.jl and its tools for relational/association analysis for a future paper.

2.6 Performance optimizations

A large part of the development time of ComplexityMeasures.jl has been spent exclusively on optimizing the software performance. To document every single optimization we did, such as removing memory allocations, operation order re-sequencing, parallelization, etc., would take several pages and would bring us out of scope. Here we will give only a couple of characteristic examples of performance optimization via algorithmic choices. One example is the usage of Lehmer code to cast a timeseries into a sequence of ordinal patterns [52], a step required to estimate the permutation entropy. Another example is the invention of a new advanced algorithm to estimate the histogram of a multidimensional dataset whose memory requirement does not scale exponentially with the dataset dimension. The estimation is used when any sort of histogram of a delay-embedded timeseries or symbol sequence is required. The algorithm is described in Appendix A, Sec. 1 of [50].

As becomes evident in the comparison with other software (Sec. 4), these performance optimizations and algorithmic choices, along with in general following good development practices for Julia code, make ComplexityMeasures.jl by far the most performant software for complexity measure estimation, sometimes > 1,000x faster than the competition (Table 1).

3 Example applications

3.1 Simple complexity analysis of stock market timeseries

Here we present a straightforward analysis of stock market timeseries from the lens of complexity measures. This is an emerging topic in the literature, with relevant publications emerging only in the last 5 years. For example, Refs. [53, 54] show that regularity of the stock market anti-correlates with sample entropy. This example highlights how simple it is to integrate ComplexityMeasures.jl within a realistic data analysis workflow, as well as how many little lines of code the user needs to write: at most 1 line of code per complexity measure estimated.

For this analysis, we used a range of complexity measures: sample entropy [13], approximate entropy [12], permutation entropy [10], dispersion entropy [15], and spectral entropy [44]. These measures were estimated for the 500 stocks that compose the S&P500 index, using daily-resolution timeseries of stock closing prices for years 2000 to 2020. The complexity measures were then compared with the relative success of each stock with respect to S&P500, that is, the total price change of the stock divided by the total price change of S&P500 from start to end of the time interval (Fig. 2). The analysis shows that sample, approximate, and dispersion entropy anti-correlate with stock success, spectral entropy correlates with stock success, and permutation entropy has no relation with stock success.

This example is a modification of a group project performed by BSc Mathematics students over the course of 4 weeks. The students did not have any prior knowledge of the Julia programming language, nor of the concepts of complexity measures. This is a testament of how simple it is to learn and use ComplexityMeasures.jl, even if one has to learn an entirely new programming language from scratch.


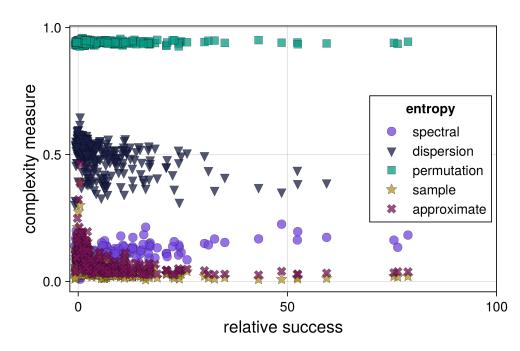


Fig 2. Stock market timeseries analysis: various complexity measures of each stock plotted versus the relative success of the stock with respect to S&P500 index.

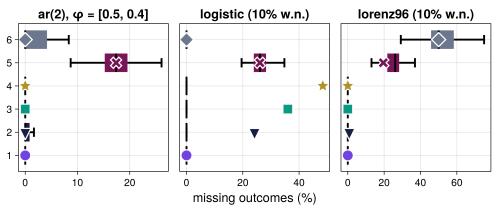

outcome space: 1 = ordinal (m = 4), 2 = ordinal (m = 5), 3 = dispersion (m = 2, c = 5), 4 = dispersion (m = 3, c = 4), 5 = bubble sort swaps (m = 10), 6 = cosine similarity (m = 3, nbins = 24)

Fig 3. Using missing outcomes to test for nonlinearity. The figure shows three panels for three timeseries: a stochastic autoregressive process of order 2, the chaotic logistic map with 10% white noise, and an 8-dimensional chaotic Lorenz-1996 model [56] with 10% white noise. For each panel we estimate the missing outcomes percentages (x-axis) corresponding to six outcome spaces (y-axis), with spaces numbered. 3 and 4 relating to Ref. [42]. The box plots show the percentage of missing outcomes of random surrogate realizations of the timeseries versus the value corresponding to the real timeseries (markers with white outlining). See [2, ch.7] for more about timeseries surrogates.

3.2 Missing patterns research acceleration

In Ref. [42] the authors devise a complexity measure that can be used in timeseries surrogate studies [48, 55] to detect nonlinearity in a timeseries. This measure is called *missing dispersion patterns*, and is estimated as follows. First, a timeseries is mapped onto outcomes defined by the *dispersion patterns* outcome space. This outcome space was used by Ref. [15] to define the *dispersion entropy*. We then count how many of the total possible outcomes (dispersion patterns) are actually present in the data. The ones not present are the missing dispersion patterns.

The concept of missing dispersion patterns is trivially generalizable to any outcome space. Instead of missing dispersion patterns one has missing outcomes. Indeed, besides the missing dispersion pattern, Ref. [42] estimated also the missing ordinal patterns (used to define the permutation entropy [10]) and compared the two.

In this subsection we show how easy it is to make such generalizations, and accelerate novel research with ComplexityMeasures.jl. The software implements the generic function missing_outcomes, which can take in any outcome space to obtain the missing outcomes. With this function, one can create a complexity measure similar to the missing dispersion patterns of Ref. [42], but for *any* outcome space. Perhaps other outcome spaces, not explored in Ref. [42], are more suitable for distinguishing nonlinearity than the dispersion patterns, and such new research would be very easy to do with ComplexityMeasures.jl. We show an example of such an analysis in Fig. 3, and the code to create the figure in Appendix S1. The results show that missing dispersion patterns can detect nonlinearity in simple nonlinear systems such as the logistic map, and the same can be said for missing ordinal patterns. However, neither of the two appear capable of detecting non-linearity in a moderately complex 8-dimensional chaotic system (the Lorenz-1996 model [56]). These results can lead to new research with more careful analysis that gives a more robust estimate of whether missing outcomes can be used to distinguish nonlinearity.

3.3 Paintings in the complexity entropy plane

The complexity-entropy plane is a way to characterize data in terms of their complexity [57]. Ref. [58] analyzed the history of art paintings by quantifying in terms of this complexity plane. They consider a database of ca. 137,000 historical artworks from the WikiArt.org database, and convert each painting into a n_x -by- n_y matrix M, where n_x and n_y are the pixel dimensions of the image, and the matrix entry M_{ij} is a number between 0 and 1 obtained from a greyscale-like transformation of the red-blue-green color channels in the *ij*-th pixel. For each painting, they then compute normalized spatial (Shannon) permutation entropy [10] (H_S^{perm}) and statistical complexity [4] (C) from PMFs constructed by sliding a 2x2 square pixel window across the painting and counting the relative frequency of ordinal patterns.

ComplexityMeasures.jl provides an easily extendable interface for spatiotemporal probabilities and generalized entropies. With our implementation of the generalized statistical complexity measure [4,59], we can not only reproduce [58]'s analysis, but easily perform a much more varied study of artistic styles in terms of their complexity. Our implementation of the StatisticalComplexity measure is a prime example of the power of multiple dispatch of the Julia language: the estimator leverages the entire discrete entropy-based ecosystem. The measure accepts any spatial probabilities estimator, which can be arbitrarily parameterized (currently, we offer three such estimators), and accepts any stencil/template (local pixel arrangement) to construct the probability distributions over an image (or higher-dimensional arrays), not restricted to adjacent 2x2 or 3x3 pixel patterns. StatisticalComplexity also works with any normalizable discrete information measure definition and estimator, and accepts many different distance measures for computing *C*. This powerful interface allows us to explore the robustness of [58] results with relatively few lines of code.

Reproducing [58]'s ordinal pattern based analysis a 2x2 square stencil (Fig. 4, left panel), supplementing with a custom non-square 4-pixel stencil using a dispersion patterns outcome space (Fig. 4, right panel), we find that artistic styles *differ dramatically* in their *H-C* values depending on stencil pattern and outcome space, even when there are only small differences in the stencil pattern. Since [58]'s paper is not accompanied by code, we can't actually determine whether their *H-C* values are exactly reproduced here, or if any differences are caused by the addition of more paintings to the database since their analysis, differing code implementations, or other factors. However, using our software, it is trivial to further explore these topics further using different outcome space, probabilities estimators and entropy definitions/estimators, which we leave for future work.

4 Comparison with alternative software

There is a multitude (100+) of software that implement some form of complexity measures. An excellent summary of some of these software is given in the supplementary material of [60]. The overwhelming majority of these software only provide a dozen or so complexity measures as individual functions, and/or focus on a particular type of timeseries (e.g. physiological, EEG, or ECG timeseries). While we may have missed something, after a brief overview of these software, none of them appear to provide a composable orthogonal design like ComplexityMeasures.jl. Here we decided to compare more extensively with some software that have an associated peer-reviewed publication and appear to have a decent number of features: EntropyHub [61], CEPS (complexity and entropy in physiological timeseries) [6], and PyBioS [49].

In Table 1 we showcase an extensive comparison between ComplexityMeasures.jl and these three software. Explanations to superscripts in the table are as follows:

1. Surprisingly, even though all other software have been published through peer review in reputable journals, none of them has any *publicly accessible* test suite that confirms the correctness of the software. ComplexityMeasures.jl has an extensive publicly accessible test suite covering 90% of the total source code of the software. Without (public) tests, the

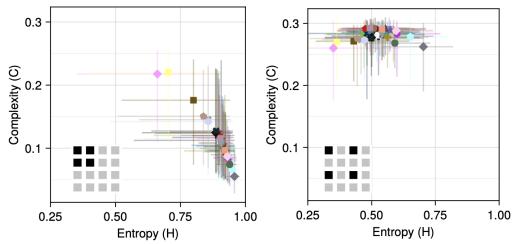


Fig 4. Re-analysis of Figure 2 in [58], using our updated dataset of 153465 paintings (downloaded July 2023). Only styles with at least 1000 paintings in the Wikiart database are included here. In the left panel, we've used the SpatialOrdinalPatterns (as in [58]), while in the right panel, we've used the SpatialDispersion outcome space with parameter c = 3. Insets show the shape of the pixel stencil. Note that [58]'s error bars are standard errors of the mean for each style, while here scatter points here are the medians with 10th to 90th percentile ranges.

only way to check for software validity is either for every user to create their own test suite, or to "just trust the developers". Either option dramatically reduces software reliability.

- 2. Executed code examples are examples in the documentation that are the result of running real code snippets during the compilation of the documentation, and presenting the executed code and its output interlaced in the documentation. They are the only way to absolutely guarantee that the syntax presented in the documentation, and the output it produces, are actually the result of running the software.
- 3. Counting the total number of measures in each package is non-trivial and may have different answers depending on how one counts. For the other software we counted the individual entries in the table of contents in their respective manuals, trying to count fundamentally different variants (e.g., amplitude-aware vs. standard permutation entropy) as different versions. We excluded cross-entropies from this list, since we implement cross (relational) measures in the CausalityTools.jl software instead of ComplexityMeasures.jl. A rough estimate shows the cross-measures in CausalityTools.jl to be in the several hundreds, compared to ~dozen in the alternatives.
- 4. This row refers to the definition of "true" or axiomatic entropies. I.e., permutation entropy does not count as a new entropy definition. ComplexityMeasures.jl is unique in this approach, as it allows the concept of entropy definition. CEPS, while it allows computing the Tsallis entropy and the Tsallis permutation entropy, it doesn't allow composing the Tsallis entropy definition with arbitrary probability mass functions.
- 5. For the performance comparison, we evaluated the permutation, sample, cosine similarity, and dispersion entropy of a white nose timeseries with embedding dimension m = 4, and the Shannon entropy of the histogram of a 30-dimensional chaotic Lorenz-1996 (Ref. [56]) timeseries. We report the computation time and allocated memory, showing that ComplexityMeasures.jl is routinely 10-1000x faster. For CEPS and PyBioS we

cannot measure performance straightforwardly, because they are GUI-based. We note that even a difference of 10x in performance can already have a massive impact; typically one wants to estimate a complexity measure for many input timeseries (like in Sec. 3.3), or for thousands of surrogates of an input timeseries (like in Sec. 3.2).

5 Conclusions

In conlusion in this paper we introduced ComplexityMeasures.jl. We highlighted the software's scalability, both in terms of being able to compute countless complexity measures with little source code, or almost no effort from the user, but also in terms of computational performance, being up to 1,000x faster than alternatives. The performance aspect enables practical applications that were previously limited by computational capacity, such as extensive null hypothesis testing using surrogate data on large time series ensembles. We also highlighted its composable design that allows creating new types of complexity measures "on the fly", and its extensibility, which allows any new measure or estimator to be instantly usable within the wider ecosystem. For this, we believe that wider adoption of ComplexityMeasures.jl can be an invaluable asset for both academics and industry, wherever estimating complexity measures is useful.

We also wish to highlight the openness in the development of ComplexityMeasures.jl. ComplexityMeasures.jl was purposefully built from the ground up on Github as a *community effort*. After we, the authors, crossed path in various open source projects trying to implement similar functionality, we quickly realized that there were *many* commonalities between our disparate research fields. We also realized that the most efficient way forward to ensure solid, reproducible research, and to achieve a good overview of the field, was to establish a common software framework for complexity quantification. Since its conception more than three years ago, ComplexityMeasures.jl's Github repository has seen over 200 pull requests and over 140 issues have been closed. We follow best open source practices, and greatly value openness and community contributions — principles which we share with the software consortium for scientific computing developed by the JuliaDynamics organization.

It is our hope that in the future, researchers that develop new complexity measures contribute them directly to ComplexityMeasures.jl when submitting their paper for review. This has numerous benefits for both the researchers themselves, and for the wider community. For the researchers, their new method is instantly accessible to an established pool of users, and citable via BiBTeX integration, generating the contributing researchers citations and recognition. The method is also instantly integrated with a wide range of estimators, allowing further research and study. For the community, the method becomes part of a well-tested, well-documented, and established software, enhancing reliability and accessibility. The integration of ComplexityMeasures.jl with a wider ecosystem such as DynamicalSystems.jl also allows the community to easily test whether the claims of a new paper are accurate and robust w.r.t. variability in the parameters or input data (e.g., see the applications of Sec.3.2 and 3.3). Lastly, this approach also promotes openness in academic code, an aspect that we believe is important in its own right, beyond complexity measures.

Supporting information

S1 Code snippet for Figure 3. See the reproducible code repository [62] for code for all figures (and also code highlighting via GitHub).

```
using ComplexityMeasures # at least version 3.5
using TimeseriesSurrogates # at least version 2.7
using ARFIMA
```

```
using CairoMakie
using PredefinedDynamicalSystems
using Statistics
using Random
# %% Setup: decide which outcome spaces to use for missing outcomes:
ospaces = [ # map delay time to concrete outcome space instance
    tau -> OrdinalPatterns(; tau, m = 4),
    tau -> OrdinalPatterns(; tau, m = 5),
    tau -> Dispersion(; tau, m = 2, c = 5),
    tau -> Dispersion(; tau, m = 3, c = 4),
    tau -> BubbleSortSwaps(; tau, m = 10),
    tau -> CosineSimilarityBinning(; tau, m = 3, nbins = 24),
٦
# %% Generate timeseries
N = 2000 \# length of timeseries
rng = Xoshiro(124314) # reproducibility
# Logistic map timeseries
ds = PredefinedDynamicalSystems.logistic(r = 4.0)
Y, t = trajectory(ds, N-1; Ttr = 100)
y = standardize(Y[:, 1]) .+ 0.1 .* randn(rng, N)
# Lorenz96 timeseries
ds = PredefinedDynamicalSystems.lorenz96(8; F = 24.0)
Dt = 0.01
W, t = trajectory(ds, (N-1)*Dt; Dt, Ttr = 100)
w = standardize(W[:, 1]) .+ 0.1 .* randn(rng, N)
# Arma timeseries
phi = SVector(0.5, 0.4)
x = arma(rng, N, 1.0, phi)
# %% Main computation
# function that computes normalized % of missing outcomes
nmo(o, x) = 100missing_outcomes(o, x)/total_outcomes(o)
surrotype = AAFT() # amplitude-adjusted fourier transform
# Set up figure and axes
fig = Figure()
axs = [Axis(fig[1, i] for i in 1:3]
# loop over timeseries and outcome spaces
for (i, t) in enumerate((x, y, w))
    # estimate delay time for embedding
    if i == 2 # logistic timeseries always has delay 1
        tau = 1
    else
        tau = max(1 ,estimate_delay(t, "mi_min"))
    end
```

```
# initialize a generator for surrogates
sgen = surrogenerator(t, surrotype)
for (j, ogen) in enumerate(ospaces)
        o = ogen(tau) # 'o' is the concrete outcome space instance
        # Surrogate test allows us to compute the quantity of interest
        # (here missing outcomes) for input data and 1000 surrogates
        # using parallel computing
        stest = SurrogateTest(x -> nmo(o, x), t, surrotype; rng, n = 1000)
        # extract real value and surrogate values
        rval, vals = fill_surrogate_test!(stest)
        # plot the results:
        boxplot!(axs[i], fill(j, 1000), vals; orientation = :horizontal)
        scatter!(axs[i], rval, j; strokecolor = :white)
end
```

display(fig)

end

S2 Total measures in Complexity Measures In Table 2 we list the content of ComplexityMeasures.jl in terms of available outcome spaces, information and complexity measures, and estimators thereof. In this subsection we use this table to count how many total complexity measures can be estimated with ComplexityMeasures.jl, version 3.5.0. We advise the reader to visit the software documentation for always-up-to-date measure counts estimates that are computed fully programmatically from the software source code.

We start with estimating the ways to extract a PMF from data. PMFs are used to estimate discrete information measures or complexity measures. Currently, the software implements 16 outcome spaces. Ten of these count-based, and for each count-based outcome space, PMFs can be estimated using four different probabilities estimators. The six remaining outcome spaces can generate PMFs in one way (using the RelativeAmount estimator). Therefore, there are currently $10 \cdot 4 + 6 = 46$ different ways of estimating a PMF from data.

There are 11 discrete information measure definitions in the software. Every discrete information measure can be estimated with either of the two generic estimators JackKnife or PlugIn. For Shannon entropy, five additional dedicated estimators are implemented. This means that in total we have $11 \cdot 2 + 5 = 27$ ways to estimate a discrete information measure from a PMF. Since all discrete information measures are functionals of PMFs, the number of ways to estimate a discrete information measure from data is $27 \cdot 46 = 1242$.

Next, the software also implements 12 differential information measure estimators that compute Shannon entropy. One of these estimators, LeonenkoProzantoSavani, can also estimate Rényi and Tsallis entropies. This gives a total of 12 + 2 = 14 ways to estimate a differential information measure from data.

Finally, the software provides 7 complexity estimators that are not functionals of PMFs. One of them, StatisticalComplexity, must be handled separately, because in our software, we made the innovation to make the statistical complexity computable from any configuration of input outcome spaces, probabilities estimators, discrete information measure definition and estimator. To be a bit conservative with counting, we here only count the variability of the statistical complexity arising from varying outcome spaces and discrete information measure definitions, as these two would have the strongest impact on the statistic. This gives $16 \cdot 11 = 176$ variants of statistical complexity, and the total number of non-probability-based complexity measures is thus 176 + 6 = 182.

We believe that it is fair to count some of the probabilities functions themselves as additional measures (see Sec. 2.2), because they allow straightforwardly defining new, or expanding existing, complexity measures, as we show in Sec. 3.2. In particular here we count two functions probabilities, allprobabilities, as all other probabilities-related functions can be created based on them in ComplexityMeasures.jl. These two functions can be combined with any way of estimating PMFs from input data, which means that we have $2 \cdot 46$ additional "probabilities measures" as well.

This makes the grand total of measures that one can estimate with ComplexityMeasures.jl equal to: 92 + 182 + 14 + 1242 = 1530.

Acknowledgments

We would like to acknowledge all volunteer contributors to ComplexityMeasures.jl, which can be found on its GitHub page under the URL: https:

//github.com/JuliaDynamics/ComplexityMeasures.jl/graphs/contributors. KAH would like to thank the Earth System Evolution group at the University of Bergen, in particular Bjarte Hannisdal and David Diego, for creating a thriving environment where scientific software development becomes a natural part of the research process.

Reproducibility

The figures and the performance numbers quoted in the comparison table are fully reproducible. The codebase that produced them can be found in [62].

References

- 1. Kantz H, Schreiber T. Nonlinear time series analysis. vol. 7. Cambridge university press; 2004.
- 2. Datseris G, Parlitz U. Nonlinear dynamics. 1st ed. Undergraduate Lecture Notes in Physics. Cham, Switzerland: Springer Nature; 2022.
- 3. Bradley E, Kantz H. Nonlinear time-series analysis revisited. Chaos. 2015;25(9):097610.
- 4. Rosso OA, Larrondo H, Martin MT, Plastino A, Fuentes MA. Distinguishing noise from chaos. Physical review letters. 2007;99(15):154102.
- 5. Zanin M, Olivares F. Ordinal patterns-based methodologies for distinguishing chaos from noise in discrete time series. Communications Physics. 2021;4(1):190.
- 6. Mayor D, Steffert T, Datseris G, Firth A, Panday D, Kandel H, et al. Complexity and entropy in physiological signals (ceps): Resonance breathing rate assessed using measures of fractal dimension, heart rate asymmetry and permutation entropy. Entropy. 2023;25(2):301.
- Vejmelka M, Paluš M. Inferring the directionality of coupling with conditional mutual information. Physical Review E. 2008;77(2):026214. doi:10.1103/PHYSREVE.77.026214.
- Runge J. Conditional independence testing based on a nearest-neighbor estimator of conditional mutual information. In: Storkey A, Perez-Cruz F, editors. Proceedings of the Twenty-First International Conference on Artificial Intelligence and Statistics. vol. 84 of Proceedings of Machine Learning Research. PMLR; 2018. p. 938–947. Available from: https://proceedings.mlr.press/v84/runge18a.html.

- Beale D, Dazzi F, Tryfonas T. Unweaving the definitions of complexity. IEEE Trans Syst Man Cybern Syst. 2023; p. 1–11.
- 10. Bandt C, Pompe B. Permutation entropy: a natural complexity measure for time series. Physical review letters. 2002;88(17):174102.
- Rosso OA, Blanco S, Yordanova J, Kolev V, Figliola A, Schürmann M, et al. Wavelet entropy: a new tool for analysis of short duration brain electrical signals. Journal of neuroscience methods. 2001;105(1):65–75.
- Pincus SM. Approximate entropy as a measure of system complexity. Proceedings of the National Academy of Sciences. 1991;88(6):2297–2301.
- Richman JS, Lake DE, Moorman JR. Sample entropy. In: Methods in enzymology. vol. 384. Elsevier; 2004. p. 172–184.
- 14. Shannon CE. A mathematical theory of communication. The Bell system technical journal. 1948;27(3):379–423. doi:10.1002/j.1538-7305.1948.tb01338.x.
- Rostaghi M, Azami H. Dispersion entropy: A measure for time-series analysis. IEEE Signal Processing Letters. 2016;23(5):610–614.
- Wang X, Si S, Li Y. Multiscale diversity entropy: A novel dynamical measure for fault diagnosis of rotating machinery. IEEE Transactions on Industrial Informatics. 2020;17(8):5419–5429.
- Li P, Liu C, Li K, Zheng D, Liu C, Hou Y. Assessing the complexity of short-term heartbeat interval series by distribution entropy. Medical & biological engineering & computing. 2015;53:77–87. doi:10.1007/s11517-014-1216-0.
- 18. Manis G, Aktaruzzaman M, Sassi R. Bubble entropy: An entropy almost free of parameters. IEEE Transactions on Biomedical Engineering. 2017;64(11):2711–2718.
- 19. Hausser J, Strimmer K. Entropy inference and the James-Stein estimator, with application to nonlinear gene association networks. Journal of Machine Learning Research. 2009;10(7).
- James W, Stein C. Estimation with quadratic loss. In: Breakthroughs in statistics: Foundations and basic theory. Springer; 1992. p. 443–460. Available from: https://link.springer.com/chapter/10.1007/978-1-4612-0919-5_30.
- 21. Orlitsky A, Suresh AT. Competitive Distribution Estimation: Why is Good-Turing Good. In: Cortes C, Lawrence N, Lee D, Sugiyama M, Garnett R, editors. Advances in Neural Information Processing Systems. vol. 28. Curran Associates, Inc.; 2015. p. 1. Available from: https://proceedings.neurips.cc/paper_files/paper/2015/file/ d759175de8ea5b1d9a2660e45554894f-Paper.pdf.
- 22. Rényi A, et al. On measures of information and entropy. In: Proceedings of the 4th Berkeley symposium on mathematics, statistics and probability. vol. 1; 1961. p. 547.
- 23. Tsallis C. Possible generalization of Boltzmann-Gibbs statistics. Journal of statistical physics. 1988;52:479–487.
- 24. Tsallis C. Introduction to nonextensive statistical mechanics: approaching a complex world. vol. 1. Springer; 2009.
- 25. Curado EM, Nobre FD. On the stability of analytic entropic forms. Physica A: Statistical Mechanics and its Applications. 2004;335(1-2):94–106.

- Anteneodo C, Plastino AR. Maximum entropy approach to stretched exponential probability distributions. Journal of Physics A: Mathematical and General. 1999;32(7):1089.
- 27. Lad F, Sanfilippo G, Agrò G. Extropy: Complementary Dual of Entropy. Statistical Science. 2015;30(1):40 58. doi:10.1214/14-STS430.
- 28. Liu J, Xiao F. Renyi extropy. Communications in Statistics, Theory and Methods. 2023;52(16):5836–5847. doi:10.1080/03610926.2021.2020843.
- 29. Xue Y, Deng Y. Tsallis extropy. Communications in Statistics-Theory and Methods. 2023;52(3):751–762. doi:10.1080/03610926.2021.1921804.
- Schürmann T. Bias analysis in entropy estimation. Journal of Physics A: Mathematical and General. 2004;37(27):L295.
- Paninski L. Estimation of entropy and mutual information. Neural computation. 2003;15(6):1191–1253.
- Arora A, Meister C, Cotterell R. Estimating the entropy of linguistic distributions. arXiv preprint arXiv:220401469. 2022;.
- Chao A, Shen TJ. Nonparametric estimation of Shannon's index of diversity when there are unseen species in sample. Environmental and ecological statistics. 2003;10:429–443.
- Wolpert DH, Wolf DR. Estimating functions of probability distributions from a finite set of samples. Physical Review E. 1995;52(6):6841.
- 35. Horvitz DG, Thompson DJ. A generalization of sampling without replacement from a finite universe. Journal of the American statistical Association. 1952;47(260):663–685.
- Nemenman I, Shafee F, Bialek W. Entropy and inference, revisited. Advances in neural information processing systems. 2001;14.
- Zahl S. Jackknifing an index of diversity. Ecology. 1977;58(4):907–913. doi:10.2307/1936227.
- 38. Datseris G. JuliaDynamics/GoodScientificCodeWorkshop: Release to assign a Zenodo DOI; 2023. Available from: https://doi.org/10.5281/zenodo.7789872.
- 39. Haaga KA, Datseris G. JuliaDynamics/CausalityTools.jl: v2.10.1; 2023. Available from: https://doi.org/10.5281/zenodo.8409495.
- Costa M, Goldberger AL, Peng CK. Multiscale Entropy Analysis of Complex Physiologic Time Series. Phys Rev Lett. 2002;89:068102. doi:10.1103/PhysRevLett.89.068102.
- 41. Bezanson J, Edelman A, Karpinski S, Shah VB. Julia: A fresh approach to numerical computing. SIAM review. 2017;59(1):65–98.
- 42. Zhou Q, Shang P, Zhang B. Using missing dispersion patterns to detect determinism and nonlinearity in time series data. Nonlinear Dyn. 2023;111(1):439–458.
- 43. Rényi A. On measures of entropy and information. In: Proceedings of the Fourth Berkeley Symposium on Mathematical Statistics and Probability, Volume 1: Contributions to the Theory of Statistics. vol. 4. University of California Press; 1961. p. 547–562. Available from: https://projecteuclid.org/ebook/Download?urlid= bsmsp/1200512181&isFullBook=false.

- 44. Llanos F, Alexander JM, Stilp CE, Kluender KR. Power spectral entropy as an information-theoretic correlate of manner of articulation in American English. The Journal of the Acoustical Society of America. 2017;141(2):EL127–EL133.
- 45. Giordano M, Hanson E. JuliaEcosystem/PackageAnalyzer.jl: v3.1.0; 2024. Available from: https://doi.org/10.5281/zenodo.10835826.
- 46. Springer Berlin Heidelberg. Agile Software Development: Current Research and Future Directions. Springer Berlin Heidelberg; 2010. Available from: http://dx.doi.org/10.1007/978-3-642-12575-1.
- 47. Datseris G. DynamicalSystems.jl: A Julia software library for chaos and nonlinear dynamics. Journal of Open Source Software. 2018;3(23):598. doi:10.21105/joss.00598.
- 48. Haaga KA, Datseris G. TimeseriesSurrogates.jl: a Julia package for generating surrogate data. Journal of Open Source Software. 2022;7(77):4414. doi:10.21105/joss.04414.
- Silva LEV, Fazan R, Marin-Neto JA. PyBioS: A freeware computer software for analysis of cardiovascular signals. Computer Methods and Programs in Biomedicine. 2020;197:105718. doi:10.1016/j.cmpb.2020.105718.
- 50. Datseris G, Kottlarz I, Braun AP, Parlitz U. Estimating fractal dimensions: A comparative review and open source implementations. Chaos. 2023;33(10).
- Kraemer KH, Datseris G, Kurths J, Kiss IZ, Ocampo-Espindola JL, Marwan N. A unified and automated approach to attractor reconstruction. New Journal of Physics. 2021;23(3):033017. doi:10.1088/1367-2630/abe336.
- Berger S, Kravtsiv A, Schneider G, Jordan D. Teaching ordinal patterns to a computer: Efficient encoding algorithms based on the Lehmer code. Entropy (Basel). 2019;21(10):1023.
- 53. Raubitzek S, Neubauer T. An exploratory study on the complexity and machine learning predictability of stock market data. Entropy (Basel). 2022;24(3):332.
- 54. Olbrys J, Majewska E. Approximate entropy and sample entropy algorithms in financial time series analyses. Procedia Comput Sci. 2022;207:255–264.
- 55. Lancaster G, Iatsenko D, Pidde A, Ticcinelli V, Stefanovska A. Surrogate data for hypothesis testing of physical systems. Phys Rep. 2018;748:1–60.
- 56. Lorenz EN. Predictability: a problem partly solved. Seminar on Predictability, 4-8 September 1995. 1995;1:1–18.
- Ribeiro HV, Zunino L, Lenzi EK, Santoro PA, Mendes RS. Complexity-entropy causality plane as a complexity measure for two-dimensional patterns. PLoS One. 2012;7(8):e40689.
- Sigaki HY, Perc M, Ribeiro HV. History of art paintings through the lens of entropy and complexity. Proceedings of the National Academy of Sciences. 2018;115(37):E8585–E8594.
- Rosso OA, Martín M, Larrondo HA, Kowalski A, Plastino A. Generalized statistical complexity: A new tool for dynamical systems. Concepts and recent advances in generalized information measures and statistics. 2013; p. 169–215.
- 60. Mayor D, Panday D, Kandel HK, Steffert T, Banks D. Ceps: An open access matlab graphical user interface (gui) for the analysis of complexity and entropy in physiological signals. Entropy. 2021;23(3):321.

- 61. Flood MW, Grimm B. EntropyHub: An open-source toolkit for entropic time series analysis. PLOS ONE. 2021;16(11):e0259448. doi:10.1371/journal.pone.0259448.
- 62. Datseris G. Datseris/ComplexityMeasuresPaper: Initial release (paper submitted); 2024. Available from: https://doi.org/10.5281/zenodo.11473772.

	ComplexityMeasures.jl v3.5	EntropyHub v2	CEPS v2	PyBioS (no v)
Software and developmen	it aspects			
Language	Julia	Julia, Python, MATLAB	MATLAB	Python
Cost-free	\checkmark	✓	X	✓
OSI license	MIT	Apache-2.0	LGPLv3	not open source
GUI Interface	X	X	\checkmark	✓
Multivariate input	\checkmark	✓	X	X
Spatiotemporal input	\checkmark		X	X
Integrates with a wider ecosystem	1	•	X	X
Tests ¹	89% coverage	no tests	no tests	no tests
Extendable design	\checkmark	X	X	X
Compiled documentation	1	✓	X	X
Introductory tutorial	\checkmark	X	1	X
Explanation of measures	\checkmark	X	✓	X
in the documentation				
Number of <i>executed</i>	19	10	0	0
code examples in docs ²				
Developer's docs	\checkmark	X	X	X
Overall content (related to	o complexity measures, ign	oring statistical, physi	iological, or relationa	l measures)
Total entropy and complexity measures ³	1,530 (Appendix S2)	38	74	7
Outcome spaces	13	0	0	0
Probabilities estimators	4	1	1	1
Information definitions ⁴	11	0	0	0
Entropy estimators	7	1	1	1
Fractal dimensions	11	0	17	0
Normalized forms	✓		X	X
Multiscale forms	\checkmark	1		X
Performance comparison ⁵	5			
Permutation entropy	0.56 ms, 470.47 KiB	7.16 ms, 8.89 MiB	-	-
Sample entropy	0.5 s, 1.71 MiB	5.23 s, 7.63 GiB	-	-
Cosine similarity entropy		5.03 s, 4.48 GiB	-	-
Dispersion entropy	1.46 ms, 525.75 KiB	78.55 ms, 8.23 MiB		-
30-D value histogram	1.47ms, 177.70 KiB	∞ (out of memory)	-	-

Table 1. Comparison table across software for entropic and complexity timeseries analysis. The symbols mean: \checkmark = has aspect, \aleph = does not have aspect, \aleph = partially has aspect. The numeric superscripts in the first column correspond to more extensive descriptions that we provide in the main text of Sec. 4.

Abstract type	Concrete implementations
OutcomeSpace	Uni- or multivariate timeseries: UniqueElements, ValueBinning, OrdinalPatterns, WeightedOrdinalPatterns, AmplitudeAwareOrdinalPatterns, Dispersion, CosineSimilarityBinning, BubbleSortSwaps, SequentialPairDistances, TransferOperator, NaiveKernel, WaveletOverlap, PowerSpectrum; Spatiotemporal timeseries: SpatialDispersion, SpatialOrdinalPatterns, SpatialBubbleSortSwaps
ProbabilitiesEstimator	RelativeAmount,Shrinkage, BayesianRegularization,AddConstant
InformationMeasure	Shannon, Renyi, Tsallis, Curado, Kaniadakis, StretchedExponential, ShannonExtropy, RenyiExtropy, TsallisExtropy
DiscreteInfoEstimator	Generic: PlugIn, Jackknife; Shannon-entropy spe- cific: MillerMadow,HorvitzThompson, Schuermann, GeneralizedSchuermann, ChaoShen
DifferentialInfoEstimator	Shannon entropy: KozachenkoLeonenko, Kraskov, Goria, Gao, Zhu, ZhuSingh, Lord, AlizadehArghami, Correa, Vasicek, Ebrahimi; Shannon, Rényi or Tsallis entropy: LeonenkoProzantoSavani
ComplexityEstimator	ApproximateEntropy, SampleEntropy, LempelZiv76, MissingDispersionPatterns, StatisticalComplexity, ReverseDispersion, BubbleEntropy

Table 2. Central abstract types in ComplexityMeasures.jl and their concrete implementations for software version 3.5.0.