

Generative modeling of density regression through tree flows

Zhuoqun Wang

Department of Statistical Science, Duke University
zw122@duke.edu

Naoki Awaya

School of Political Science and Economics, Waseda University
nawaya@waseda.jp

Li Ma

Department of Statistical Science, Duke University
li.ma@duke.edu

June 11, 2024

Abstract

A common objective in the analysis of tabular data is estimating the conditional distribution (in contrast to only producing predictions) of a set of “outcome” variables given a set of “covariates”, which is sometimes referred to as the “density regression” problem. Beyond estimation on the conditional distribution, the generative ability of drawing synthetic samples from the learned conditional distribution is also desired as it further widens the range of applications. We propose a flow-based generative model tailored for the density regression task on tabular data. Our flow applies a sequence of tree-based piecewise-linear transforms on initial uniform noise to eventually generate samples from complex conditional densities of (univariate or multivariate) outcomes given the covariates and allows efficient analytical evaluation of the fitted conditional density on any point in the sample space. We introduce a training algorithm for fitting the tree-based transforms using a divide-and-conquer strategy that transforms maximum likelihood training of the tree-flow into training a collection of binary classifiers—one at each tree split—under cross-entropy loss. We assess the performance of our method under out-of-sample likelihood evaluation and compare it with a variety of state-of-the-art conditional density learners on a range of simulated and real benchmark tabular datasets. Our method consistently achieves comparable or superior performance at a fraction of the training and sampling budget. Finally, we demonstrate the utility of our method’s generative ability through an application to generating synthetic longitudinal microbiome compositional data based on training our flow on a publicly available microbiome study.

1 Introduction

Many data analytical tasks involving tabular data require learning the conditional distribution of a (possibly multivariate) outcome y given a set of contextual variables (or covariates) x , and generating new observations of y conditional on the value of x . Given the effectiveness of tree-ensemble based approaches for characterizing tabular data in both supervised learning (Grinsztajn et al., 2022) and generative modeling of joint (i.e., unconditional) multivariate distributions (Inouye and Ravikumar, 2018; Awaya and Ma, 2023), we aim to introduce an efficient approach to approximate conditional densities of tabular data using ensembles of tree-based transforms. Specifically, we introduce a tree-based normalizing flow capable of (1) outputting the fitted density $p(y|x)$ for any given pair of value (x, y) ; (2) efficiently generating y given x from the estimated

distribution; and (3) being trained efficiently based on maximum likelihood using tree-fitting algorithms that requires a computational budget linear in the sample size.

Key to efficient training of our tree flow is a new single-tree learning algorithm for approximating conditional densities, which is employed repeatedly to find the sequence of tree-based transforms whose composition constitutes the flow. The single-tree learning algorithm transforms the unsupervised problem of learning a conditional density into a collection of supervised problems involving binary classification, one at each tree split, and accomplishes maximum likelihood fitting on the tree-based transform through minimizing the cross-entropy loss on the corresponding binary classification tasks. The framework allows any binary classifier, and in particular non-tree based classifiers to be incorporated, thereby complementing the effectiveness of the tree-based transforms in approximating the conditional density. For illustration, we assess the performance of the resulting tree-flow using logistic regression and multi-layer perceptrons (MLPs) as the binary classifier at the tree splits.

The tree-based transforms are all piecewise linear mappings with closed form expressions derived from the trained binary classifiers, and so are their inverses. The Jacobian of the piecewise linear transforms is piecewise constant and corresponds exactly to the fitted conditional density at each iteration of the tree fitting to the current “observations” and therefore are available immediately as an output of the tree fitting algorithms during training. The sampling stage of the algorithm involves simply applying a sequence of piecewise linear transforms, which are the inverses of the transforms learned during training, to uniform noise which can be carried out in linear time.

In summary, we propose a flow-based generative model for conditional density $p(y|x)$ that utilizes tree-based transforms along with covariate-dependent probability splits to approximate the conditional density, while offering exact density evaluation and efficient training and sampling. Some unique features of our method are

- **Combining the strength of trees and non-tree based approximations.** Our approach exploits the effectiveness of tree-based transforms in approximating multivariate distribution on tabular data, along with the additional flexibility of non-tree based approximators such as logistic regression and neural network (NN)-based binary classifiers to approximate the smooth varying density over covariate values. We empirically show that the tree and non-tree hybrid approach can achieve superior performance on conditional density estimation tasks involving tabular data over other state-of-the-art methods based only on NNs.
- **Efficient training and sampling.** We employ a divide-an-conquer strategy by converting the unsupervised density learning problem to a collection of binary classification problems defined on the tree splits, and introduce a tree-fitting algorithm with $O(ndq)$ time complexity for a training set of n observations with d outcome variables and q conditioning covariates. Sampling from the trained flow involves applying a sequence of piecewise linear transforms to uniform noise, which can be completed efficiently at complexity $O(q)$ for drawing each sample, independent of d .

Because our approach falls into the general class of normalizing flows (NFs), it also inherits the general desirable properties of NFs, including

- **Exact conditional density evaluation.** Our method allows evaluating the fitted conditional density at any point in the sample space. In particular, the time complexity of evaluating the conditional density of one sample with our method is $O(q)$, independent of the number of outcome variables.

We carry out extensive numerical experiments to assess the performance of our method in density estimation and compare it to a range of state-of-the-art competitors on both simulated and real benchmark datasets. We consider an application to a longitudinal microbiome compositional dataset in which we generate synthetic microbiome compositions given time as a covariate. The results showcase the effectiveness of our method in capturing complex multivariate conditional densities.

2 A conditional flow with tree-based transforms

2.1 A tree ensemble-based approximation to conditional densities

The problem of conditional density estimation is to find a close approximation $f_x : \mathcal{Y} \rightarrow R$ to an unknown conditional distribution $p(\cdot|x)$ given a training set of n observations $\{(x_i, y_i)\}_{i=1}^n$, where $y_i|x_i \sim p(y_i|x_i)$ independently given the covariate x_i . We build the conditional distributions of a d -dimensional vector y as normalizing flows. That is, given a set of covariate values x , the vector y can be obtained by applying a sequence of x -dependent invertible and differentiable transformations on a random variable u uniformly distributed over the d -dimensional unit cube, $(0, 1]^d$.

We train the normalizing flow to a target conditional distribution by maximum likelihood, i.e., minimizing the forward KL divergence. Inouye and Ravikumar (2018) introduced a flow incorporating a class of piecewise linear transforms defined on binary partition trees. This class of tree-based flows was later more formally studied and shown to be analogous to ensemble tree approximators such as tree boosting by Awaya and Ma (2023). The tree-based piecewise linear transforms generalize the notion of the cumulative distribution function (CDF) for a one-dimensional distribution to multivariate sample spaces based on a reordering of the sample space based on dyadic tree partition on the sample space. Accordingly, Awaya and Ma (2023) referred to this class of transforms as “tree-CDF” transforms. In this work we continue to choose the tree-CDF transform as the basis for the flow model due to its computational advantage and expressive power established under the unconditional scenario (Awaya and Ma, 2023) as well as the evidence for the effectiveness of tree-ensemble based approximations to tabular data (Grinsztajn et al., 2022). Our first task is to generalize the tree-CDF to covariate-dependent tree-CDFs.

Without loss of generality, throughout this paper we assume the outcome observations are defined on the d -dimensional unit cube, that is, $y_i = (y_{i1}, \dots, y_{id}) \in (0, 1]^d$, and we place no assumptions on the covariate space or distribution since the covariates x_i will always be treated as given. Consider nested axis-aligned dyadic partitions on $(0, 1]^d$ represented by a full dyadic tree T with internal nodes $I(T)$ and leaf nodes $L(T)$. Each node of the tree represents a rectangular region resulted from the partitions. The root node is $(0, 1]^d$, and each internal node is split into two children. Each finite dyadic tree T gives rise to a piecewise constant conditional density given some covariate value x : $g_x(y) = \sum_{A \in L(T)} c_{x,A} \mathbf{1}(y \in A)$, where $\mathbf{1}(\cdot)$ is the indicator function. The conditional density g_x uniquely defines a conditional distribution for y given x , denoted by G_x , and $g_x = dG_x/d\mu$, where μ represents the Lebesgue measure. Moreover, there exists a piecewise linear transform (which is invertible with analytic Jacobian) corresponding to the tree T and the probabilities $c_{x,A}$, called the (covariate-dependent) “tree-CDF” and denoted by $\mathbf{G}_x : (0, 1]^d \rightarrow (0, 1]^d$ that generalizes the notion of univariate CDFs in the following sense:

$$\mathbf{G}_x(y) \sim \text{Uniform}((0, 1]^d) \text{ if } y \sim g_x \quad \text{and} \quad \mathbf{G}_x^{-1}(u) \sim g_x \text{ if } u \sim \text{Uniform}((0, 1]^d).$$

Moreover, $|\det(J_{\mathbf{G}_x}(y))| = g_x(y)$. Further mathematical details of the tree-CDF are provided in Appendix A. Awaya and Ma (2023) shows that compositions of tree-CDFs generalizes the notion of additive tree ensembles such as the one used in tree boosting for supervised learning to the unsupervised generative modeling context.

Next we use tree-CDFs to construct our covariate-dependent normalizing flows. Specifically, to generate a sample y from an arbitrary conditional probability distribution given some covariate x , we sample $u \sim \text{Uniform}((0, 1]^d)$, and then apply a sequence of transforms

$$y = \mathbf{G}_{1,x}^{-1} \circ \mathbf{G}_{2,x}^{-1} \circ \dots \circ \mathbf{G}_{K,x}^{-1}(u)$$

where $\mathbf{G}_{k,x}^{-1}$ is the corresponding inverse of a tree-CDF which is also a piecewise linear mapping. Each tree-CDF in the sequence is associated with a distinct partition tree. The conditional distribution for y is thus approximated by the additive ensemble of single-tree conditional probability measures represented in the group formed by the tree-CDFs $\mathbf{G}_{k,x}$. (Awaya and Ma (2023) proves that the tree-CDFs and their inverses form a group in which the composition is the addition.)

By the chain rule, the log conditional density of y is given by

$$\log f_x(y) = \sum_{k=1}^K \log g_{k,x}(y^{(k-1)}) \quad (1)$$

where $g_{k,x} = dG_{k,x}/d\mu$ is the corresponding piecewise constant density for $G_{k,x}$ with respect to the Lebesgue measure μ , and $y^{(k-1)} = \mathbf{G}_{k-1,x} \circ \dots \circ \mathbf{G}_{1,x}(y)$ is called the “*residual*” at step k . (The notion of residuals is analogous to that in the supervised tree boosting, which serves in each step as the “data” for training the k th base learner, here $g_{k,x}$.)

Eq. (1) also implies that maximizing the likelihood, that is, finding the collection of densities $\{g_{k,x} : k = 1, 2, \dots, K\}$ that maximizes $\sum_i \log f_{x_i}(y_i)$ based on training data $\{(x_i, y_i) : i = 1, 2, \dots, n\}$ can be achieved by iteratively maximizing the residual likelihood $\sum_i \log g_{k,x_i}(y_i^{(k-1)})$ over $g_{k,x}$ for $k = 1, \dots, K$. See Algorithm 1 in Appendix C for details. Next we address how to learn each $g_{k,x}$, or equivalently $G_{k,x}$ and $\mathbf{G}_{k,x}$ in detail.

2.2 Fitting a single covariate-dependent tree-CDF through binary classification

The key to training the flow using Algorithm 1 (in Appendix C) is the fitting of the individual (covariate-dependent) tree-CDF transform $\mathbf{G}_{k,x}$ based on the residuals $\{y_i^{(k-1)} : i = 1, 2, \dots, n\}$. This involves learning the corresponding partition tree T_k as well as the piecewise constant density $g_{k,x}$ defined on T_k . To this end, we introduce a divide-and-conquer strategy that efficiently accomplishes this task through transforming it into training a collection of binary classifications along the tree splitting decisions. This strategy also allows us to approximate the dependency of the outcome distribution on the covariates—which trees do not effectively approximate—through flexible approximators such as neural networks.

First, we note that the conditional probability distribution $G_{k,x}$ can be expressed equivalently in terms of the probability it allocates at each tree split along the corresponding dyadic partition tree T_k on the space of y . Specifically, for each internal node $A \in I(T_k)$ we let A_l and A_r be the two children nodes of A . Then $G_{k,x}(A_l|A) = G_{k,x}(A_l)/G_{k,x}(A)$ is the relative probability $G_{k,x}$ assigns to A_l and similarly $G_{k,x}(A_r|A) = G_{k,x}(A_r)/G_{k,x}(A)$ that of A_r . $G_{k,x}$ and thus $g_{k,x}$ is fully specified by these splitting probabilities $G_{k,x}(A_l|A)$ and $G_{k,x}(A_r|A)$ at all of the internal nodes of T_k .

Then we note that learning $G_{k,x}(A_l|A)$ can be viewed as a binary classification task on predicting whether an outcome y in A falls in A_l or in A_r given the corresponding covariate value x . As such, we can model $G_{k,x}(A_l|A)$ using any binary classifier

$$G_{k,x}(A_l|A) = p_{\theta_{k,A}}(x),$$

where the classification probability $p_{\theta_{k,A}}(x)$ is parametrized by $\theta_{k,A}$. In our later numerical experiments, we consider the logistic regression and the multi-layer perceptrons (MLPs) as well as a combination of the two as the binary classifier, though the choice of the binary classifier can really be up to the practitioner and different classifiers can be adopted on different nodes A .

Next we describe how to train both the tree T_k and the classifiers at the internal nodes of T_k . We eliminate k in all subscripts in the following to avoid overly cumbersome notation. Let θ denote the collection of all binary classifiers on the internal nodes of the tree T . That is, $\theta = \{\theta_A : A \in I(T)\}$, where θ_A is the binary classifier associated with an individual internal node A .

As we show in Appendix B, the log-likelihood can be decomposed along the tree splits as follows

$$l(T, \theta) := \sum_{i=1}^n \log g_{x_i}(y_i) = \sum_{A \in I(T)} \left(l_{A, \text{bin}}(T, \theta_A) + C_A(T) \right) \quad (2)$$

where $l_{A, \text{bin}}(T, \theta_A) = \sum_{y_i \in A} (\mathbf{1}(y_i \in A_l) \log p_{\theta_A}(x_i) + \mathbf{1}(y_i \in A_r) \log(1 - p_{\theta_A}(x_i)))$ is the cross-entropy loss of the binary classifier, and $C_A(T) = -n(A_l) \log \frac{\mu(A_l)}{\mu(A)} - n(A_r) \log \frac{\mu(A_r)}{\mu(A)}$ with μ being the Lebesgue measure and $n(A_l)$ and $n(A_r)$ the number of observations y_i in A_l and A_r respectively. (One can also incorporate a penalty on the complexity of the tree T into $C_A(T)$ for further regularization, which we discuss in Appendix B.)

It is most important to note that the term $C_A(T)$ does not depend on the binary classifier θ or x . This means that for each A maximizing $l_{A,\text{bin}}(T, \theta_A) + C_A(T)$ over (T, θ_A) can proceed in two steps: first maximizing over θ_A by training a binary classifier based on the cross-entropy loss under each candidate way of splitting A , and then, maximizing over the ways to split A based on the minimum loss from the trained binary classifier.

Specifically, we describe this two-step training inductively. Suppose the current tree and corresponding node-level parameters are $(T_{j-1}^*, \theta_{j-1}^*)$. (At initiation, T_0^* has only the root node, and θ_0^* is an empty set. Suppose there are M possible ways to divide a node A of T_{j-1}^* , yielding M candidates for the tree structure, $\{T_{j,1}, \dots, T_{j,M}\}$. Then

Step 1. Given $T \in \{T_{j,1}, \dots, T_{j,M}\}$, train the optimal binary classifier, $\theta_A^*(T)$, which minimizes the cross-entropy loss $l_{A,\text{bin}}(T, \theta_A)$: $\theta_A^*(T) = \arg \min_{\theta} l_{A,\text{bin}}(T, \theta_A)$.

Step 2. Choose $T_j^* = \arg \max_{T \in \{T_{j,1}, \dots, T_{j,M}\}} (l_{A,\text{bin}}(T, \theta_A^*(T)) + C_A(T))$ and set $\theta_j^* = \theta_{j-1}^* \cup \{\theta_A^*(T_j^*)\}$.

In Algorithm 2 in Appendix C, we summarize the full root-to-leaf tree learning algorithm that starts off with the root (whole sample space of y), and expand one split at a time using the above two-step updating. A node is no longer split when it either reaches a predefined maximum depth or the number of samples in the node falls below a specified threshold. See Algorithm 2 in Appendix C for details.

Suppose the training set consists of n samples, each with d outcomes and q covariates. Our algorithm for training the tree flow exhibits linear time complexity $O(ndq)$. Both the density evaluation of a test sample and generating a new sample operate at a complexity of $O(q)$, independent of d . Detailed analysis of the time complexity is in Appendix D. This will also be confirmed empirically in our numerical experiments.

2.3 Additional technical improvements

We incorporate two additional technical strategies in training the tree flow that can lead to substantial improvement in applications. The first strategy involves regularization through shrinkage, which ensures that each tree transform in the flow modifies the residual distribution only slightly to avoid overfitting, and adopts different rates of transform at different spatial scales. The second strategy addresses the limitation of axis-aligned partition in the tree fitting by ensembling over multiple (covariate-dependent) rotations of the training data.

1. *Regularization through scale-dependent learning rate and early stopping.* To avoid overfitting and smooth the resulting probability measure, a small learning rate can be applied to each tree-CDF to shrink its corresponding probability measure towards the uniform distribution, thereby achieving regularization. Specifically, in our implementation, the regularization can be applied in a scale-specific fashion by specifying a learning rate for each tree node A according to the size of the set A , as measured by the Lebesgue measure $\mu(A)$. Specifically, we incorporate the scale-dependent learning rate $\{c(A)\}_{A \in I(T_k)}$ by setting $G_{k,x}(A_l|A) = c(A)p_k^\theta(x) + (1 - c(A))\frac{\mu(A_l)}{\mu(A)}$ where $c(A)$ is defined as $c(A) = c_0(1 + \log_2 \mu(A))^{-\gamma}$. The constant $c_0 \in (0, 1)$ controls the global shrinkage level, and $\gamma \geq 0$ controls the rate at which shrinkage intensifies as the node volume decreases. Specifically, a γ of 0 applies uniform shrinkage across all nodes regardless of their volume, whereas a positive γ results in increased shrinkage at smaller nodes, serving as a form of "soft pruning".

The total number K of tree-CDFs is determined using early stopping, which halts the algorithm when the log-likelihood on a separate validation set does not increase for w consecutive iterations, where w is a predefined window size. Additionally, since tree-CDFs may utilize various types of binary classifiers, this early stopping criterion can be independently applied to each classifier type. For example, the algorithm might initially use the logistic regression for node-level probability assignments. If there is no improvements in log-likelihood, this indicates that the logistic regression may no longer be capturing additional distributional structure from the training data. At this point, the algorithm could switch to a more complex classifier, such as MLPs, to attempt to extract more refined distributional structures, using potentially fewer tree-CDFs but with more complicated node-level models. As we shall see later in the experiments, such combination of classifiers can improve the performance over a single classifier.

The full algorithm for training the conditional tree flow that includes scale-specific shrinkage and early stopping is summarized in Algorithm 1.

2. *Rotation ensemble of tree flows.* To alleviate the restrictions associated with axis-aligned partitions and enhance the approximative ability of our tree flow, we propose using an ensemble of conditional tree flows trained on multiple rotated versions of the training data. To this end, we rotate the y_i 's in the original training data to generate J distinct data sets, denoted as D_1, \dots, D_J , where $D_j = \{(x_i, y_i R_j)\}$, R_j is a rotation matrix applied to each data set. The ensemble model is built by training individual conditional tree flows on rotated datasets and taking a weighted average of their conditional densities with covariate-dependent weights. Specifically, to maintain computational efficiency we adopt an adaptive binning strategy in constructing the weights. We partition the covariate space \mathcal{X} into disjoint regions, where weights are constant in each region but can vary across regions. Within each region, the weights are determined by the likelihood of the rotated training samples—rotations that yield a higher likelihood are up-weighted. (The details of the weights are provided in Appendix E.) In our experiments, equally spaced 2D rotations are used, and \mathcal{X} is partitioned using k-means clustering, with further details provided in Section 3.

3 Experiments

3.1 Real-world tasks with univariate outcomes

We first assess the performance of the proposed method in estimating the conditional density for univariate outcomes. This experiment involves nine benchmark datasets recorded in the University of California, Irvine (UCI) machine learning repository (Markelle Kelly, Markelle Kelly), whose characteristics are summarized in Table 3 in Appendix G. For each trial, the data are randomly split into a training set and a test set with a ratio of 9:1. We use the same preprocessed data as Gal and Ghahramani (2016).

We compare the performance of our proposed method with other methods for conditional density estimation on these univariate tasks. Specifically, we assess the log likelihood of the test set using our method against various established methods including NGBoost (Duan et al., 2020), PGBM (Sprangers et al., 2021), RoNGBa (Ren et al., 2019), TreeFlow (Wielopolski and Zięba, 2023), enhanced versions of KMN and MDN (“KMN+” and “MDN+”) (Rothfuss et al., 2019), Bayesian radial normalizing flows (RNF) (Trippe and Turner, 2018), Bayesian neural networks with homoscedastic Gaussian likelihoods using a mean-field variational approximation (MF), Mixture Density Networks (MDN) (Papamakarios and Murray, 2016), neural networks with latent variable inputs (LV) (Depeweg et al., 2017), Bayesian neural networks with homoscedastic Gaussian likelihoods using Hamiltonian Monte Carlo (HMC) Bui et al. (2016), and Bayesian neural networks with dropout (Dropout) (Gal and Ghahramani, 2016). For our method, the algorithm initially fits tree-CDFs with node-level Logistic Regression and a maximum tree depth of 6. It then switches to node-level MLP with hidden layers sized (4,4) with the maximum tree depth reduced to 4. The hyperparameter that controls the level of l_1 penalty on the imbalanced splits in our method, η (detailed in Appendix B), is set to 0.1. For scale-specific shrinkage, we set $c_0 = 0.05$ and $\gamma = 0.5$. The detailed experimental specifications and source of results are available in the Appendix F.

The results are shown in Figure 1. Our method achieved the highest log likelihood on two datasets and outperformed most other methods on the remaining datasets. No other method consistently outperforms ours. Furthermore, the standard errors associated with our method are competitively low.

Additional experiments with variants of our proposed method (Table 5 in Appendix G.1) show that flexible splits dominates constrained splits in the middle, and in most cases, the combination of Logistic Regression and MLP outperforms than either of the two, indicating different classifiers can indeed extract different aspects of the conditional distributions from the training data.

3.2 Simulation examples for bivariate outcomes

We assess our method using some challenging tasks involving bivariate outcome, originally proposed in Chen et al. (2021). The conditional densities are shown in Figure 2, and detailed settings are provided in

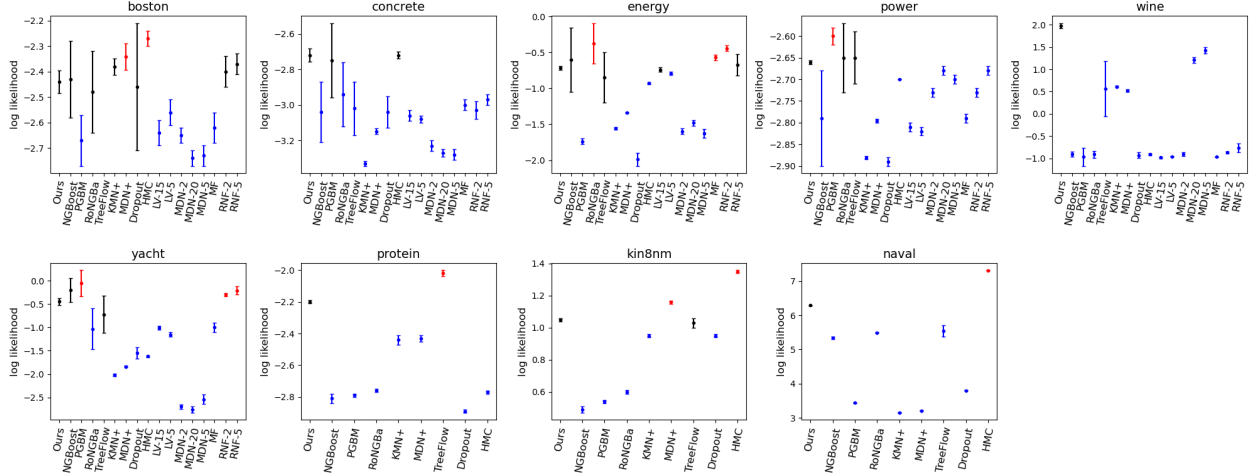


Figure 1: Comparison on UCI benchmark datasets as measured by log-likelihood of test set (mean \pm standard error). Marker color indicates relative performance: blue indicates our method outperforms the alternative method, while red indicates the instances when our method underperforms, and black denotes comparable performance within the standard error bounds. The results of NGBoost (Duan et al., 2020), RoNGBa (Ren et al., 2019), and TreeFlow (Wielopolski and Zięba, 2023) are obtained from their original papers. The results of PGMB (Sprangers et al., 2021) are obtained from Wielopolski and Zięba (2023). The results of Dropout, LV, MDN, MF, RNF are obtained from Trippe and Turner (2018).

Appendix F. For each task, the training set consists of 2000 observations generated from the joint probability distributions $p(x, y_1, y_2)$.

Our tree-flow is trained with the same hyperparameters and specifications as used in comparisons with other methods in Section 3.1. Training on one simulated dataset with 2000 samples takes 405 seconds, 414 seconds, 407 seconds, and 580 seconds under the four scenarios respectively (using a single core on a MacBook Air equipped with an Apple M2 chip and 16GB RAM).

For these simulated examples, the ground truth of the conditional density is analytically available, and the sum of squared errors (SSE) calculated on a 64×64 grid of values of (y_1, y_2) is used to measure the difference between the estimated conditional density and the ground truth. As shown in Table 1, our method achieves the lowest SSE under all scenarios. Applying rotations substantially reduces the SSE under all scenarios, while the performance without rotation is already competitive. Visual comparisons between the ground truth and the conditional densities estimated by our method with and without rotations are included

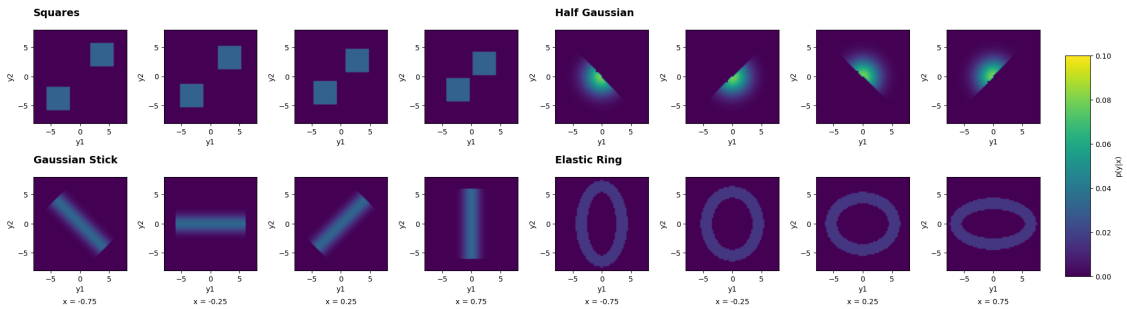


Figure 2: Ground truth conditional density of simulation examples with bivariate outcome

in Appendix G.4. Incorporating rotations appears to help our method capture the non-smoothness of the conditional distribution with a boundary rotating with the value of x . An illustration of this effect can be seen in the half-Gaussian scenario presented in Figure 5 in Appendix G.4.

Table 1: SSE between ground truth and estimated conditional densities, averaged over four x values (-0.75, -0.25, 0.25, 0.75). The standard error of our method is calculated based on 20 runs. Lower SSE indicates better performance. The SSEs of the other methods being compared are obtained from (Chen et al., 2021), where the standard errors are not provided.

	Squares	Half-Gaussian	Gaussian Stick	Elastic Ring
DDN	0.070	0.099	0.065	0.056
MAF	0.224	0.088	0.106	0.172
MDN	0.273	0.219	0.256	0.424
NSF	0.149	0.173	0.077	0.235
RNF	0.151	0.134	0.052	0.075
ours (no rotations)	0.071±0.002	0.111±0.002	0.061±0.002	0.057±0.001
ours (12 rotations)	0.055±0.001	0.071±0.001	0.041±0.001	0.044±0.001

3.3 Real-world tasks with multivariate outcomes

We also evaluated our proposed method by comparing it with eight neural network approaches for conditional density estimation on UCI benchmark datasets involving multivariate outcomes. We did not include the gradient boosting methods evaluated in the univariate tasks (NGBoost, RoNGBa, and PGBM) in this comparison because their software implementations are designed only for univariate outcomes. The characteristics of the UCI datasets with multivariate outcomes are shown in Table 4 in Appendix G. Following Chen et al. (2021), in each trial, each dataset is split into a training set and a test set with a ratio of 3:7 to create a data deficiency scenario, and both the covariates and outcomes are standardized using z-score normalization.

The average log-likelihood of the test set is compared in Table 2. For our method, 12 equi-spaced rotations are applied to datasets with 2-dimensional y , and for “air” and “skillcraft,” 6 equi-spaced rotations are applied to each pair of coordinates of y . \mathcal{X} is partitioned into 8 bins to average the rotations. (Based on our observations, the results are to some extent robust to the way of partitioning \mathcal{X} . See Table 7 in Appendix G for an example.) Table 2 shows that our method achieves competitive performance. The results further demonstrate that rotations help our method adapt to real-world multivariate distributions, even when it is unknown whether there is an intrinsic rotation determined by \mathcal{X} . The ensemble of rotations not only improves the average log-likelihood of our method but also enhances the stability and reduces the standard error of the estimated densities in both real-world tasks and the simulation examples. Similar to the experiments with univariate outcomes, our method achieves competitively low standard errors among the methods compared. (Full details on the datasets and the hyperparameter settings are available in Appendix F.)

A comparison of the results obtained from different c_0 and γ values is provided in Table 8 in Appendix G. The results align with our expectation that a smaller c_0 and scale-specific shrinkage with a reasonably large γ , which impose stronger regularization, would enhance the performance of our proposed method under this data deficiency scenario.

The linear time complexity for training the tree flow is empirically confirmed across 10 UCI benchmark datasets, as shown in Figure 3. Deviations from the linear trend are due to the varying number of trees required for each dataset. Based on our observations, tens to hundreds of trees are sufficient for the datasets used in this paper. The training process depicted in Figure 3 does not utilize parallelization, and further improvement is expected because training the binary classifiers on the nodes within the same level of a tree can be completed in parallel.

Table 2: Comparison of log-likelihood on real-world tasks (mean±standard error). Methods with the best results are in bold; multiple bold methods indicate no significant differences. MDN+ and KMN+ results were obtained by running the respective software. Results for MDN, MAF, NSF, RNF, MLP, and DDN are from (Chen et al., 2021); “NA” indicates results not provided in (Chen et al., 2021), and “-Inf” indicates $-\infty$ log-likelihood in multiple runs. η is a tuning parameter that controls the l_1 penalty on imbalanced splits in our method, detailed in Appendix B.

	Energy	Parkinsons	Temperature	Air	Skillcraft
MDN+	1.33±0.02	-0.97±0.01	-0.64±0.01	-1.01±0.01	-Inf*
KMN+	1.16±0.03	-0.60±0.01	-0.91±0.01	-1.65±0.01	-Inf*
MDN	-8.28±0.91	-3.82±0.08	-4.24±0.04	-2.16±0.06	-8.54±0.14
MAF	-125±51	-20.1±1.7	-14.0±0.4	-14.5±1.4	-81.1±8.2
NSF	-2.87±0.11	-1.81±0.03	-2.95±0.04	0.47±0.11	-8.68±0.09
RNF	-19.4±4.2	-4.01±0.25	-7.51±0.62	-0.81±0.26	-26.8±2.2
MLP	-3.48±0.04	-4.86±0.06	-14.01±0.04	NA	NA
DDN	0.14±0.32	-0.14±0.01	-0.71±0.02	1.22±0.02	-1.56±0.02
DDN (no VL)	-1.56±0.27	-0.17±0.02	-0.84±0.02	1.32±0.02	-1.59±0.03
ours ($\eta = 0.1$)	1.84±0.04	-0.54±0.01	-0.68±0.01	-0.67±0.01	-1.66±0.02
ours ($\eta = 0.01$)	1.86±0.04	-0.56±0.01	-0.72±0.01	-0.62±0.01	-1.57±0.02
ours ($\eta = 0.1$, no rot.)	1.45±0.07	-0.77±0.01	-0.82±0.01	-0.83±0.01	-1.95±0.02

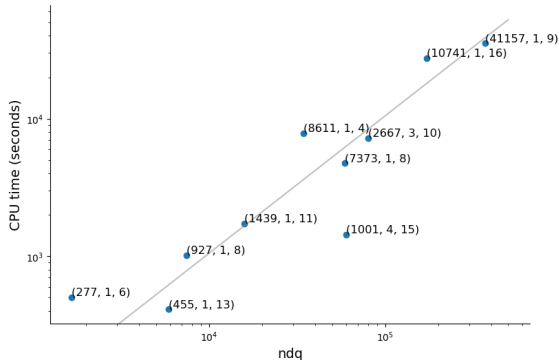


Figure 3: Training time of our method on a single CPU core versus ndq on log-log scale for 10 UCI datasets—boston, concrete, power, wine, yacht, naval, kin8nm, protein, air, and skillcraft. Points are annotated with (n, d, q) values. A linear trend with slope 1 (gray line) indicates $O(ndq)$ complexity.

3.4 Data generation

We demonstrate the data generation capabilities of our proposed model using microbiome compositional data from 16S sequencing experiments. The DIABIMMUNE dataset (Kostic et al., 2015) includes microbiome compositions from 777 stool samples collected from 33 infants over a period of three years. For each observation (x_i, y_i) , the covariate x_i is the age at collection, and the outcome y_i is the 17-dimensional microbiome composition aggregated at the class level. The outcomes are normalized to relative abundances, i.e., the elements of each y_i sum to 1. The proposed model was trained on the full dataset with $c_0 = 0.05$, $\gamma = 0.5$, $\eta = 0.1$, and maximum depth of the trees is set to 6. No rotations were applied. With the trained model, one sample is generated for each x_i , mimicking the conditions under which the original data were collected.

Figure 4 displays a principal coordinate analysis (PCoA) of the Bray-Curtis similarity of training and

simulated samples. The simulated samples show similar marginal and conditional distributions to the training data, particularly in the lower-dimensional subspaces defined by the first four main axes of the PCoA. For additional visual comparison, a scatterplot matrix of the training and simulated data can be found in Figure 9 in Appendix G.

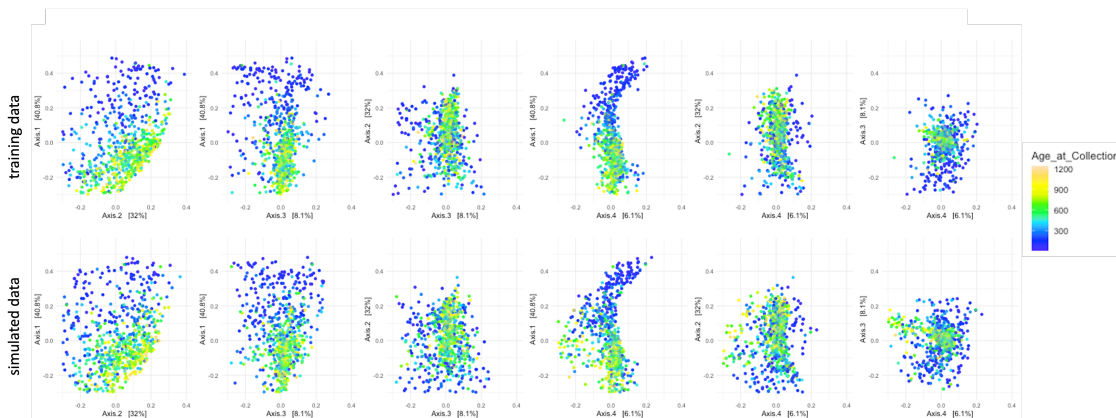


Figure 4: Principal coordinate analysis (PCoA) of Bray-Curtis similarity of training (upper row) and simulated (lower row) samples. The first 4 PCoA axes account for 85% of the variability in the data. The color of the points indicates the age (in days) of the infant, which is the covariate in this example.

4 Conclusion

We proposed a generative model for conditional densities based on a normalizing flow with tree-CDF transforms. We demonstrated conditional density estimation with our proposed model and compared with other conditional density estimation methods with simulated data and real-world UCI datasets. We note that the performance of our method in the experiments is achieved with Logistic Regression and MLP(4,4), and expect a wider class of classifiers may provide further improvements. We also demonstrated the use of the proposed method in generative sampling in a microbiome context. Among many possible applications, the trained generative model can be used to provide uncertainty quantification on summary statistics computed on the microbiome data given the covariates.

A limitation of our approach, which is common for tree-based approaches adopting axis-aligned partitions, is that it may not approximate well high-dimensional distributions (i.e., those with hundreds or more features) especially in the presence of high-order correlation structure. So far our experiments have focused on tabular data with < 100 dimensions, and so the available empirical evidence is limited to this domain. Possible extensions to overcome high-dimensional problems include adopting non-axis-aligned partitions, which will incur computational challenges. We leave this to future work.

Acknowledgment

This research is partly supported by NSF grant DMS-1749789 and NIGMS grant R01-GM135440.

References

Awaya, N. and L. Ma (2023). Unsupervised tree boosting for learning probability distributions.

- Bui, T., D. Hernández-Lobato, J. Hernandez-Lobato, Y. Li, and R. Turner (2016). Deep gaussian processes for regression using approximate expectation propagation. In *International conference on machine learning*, pp. 1472–1481. PMLR.
- Chen, B., M. Islam, J. Gao, and L. Wang (2021). Deconvolutional density network: Modeling free-form conditional distributions. In *AAAI Conference on Artificial Intelligence*.
- Depeweg, S., J. M. Hernández-Lobato, F. Doshi-Velez, and S. Udluft (2017). Learning and policy search in stochastic dynamical systems with bayesian neural networks.
- Duan, T., A. Avati, D. Y. Ding, K. K. Thai, S. Basu, A. Y. Ng, and A. Schuler (2020). Ngboost: Natural gradient boosting for probabilistic prediction.
- Gal, Y. and Z. Ghahramani (2016). Dropout as a Bayesian approximation: Representing model uncertainty in deep learning. In *Proceedings of the 33rd International Conference on Machine Learning (ICML-16)*.
- Grinsztajn, L., E. Oyallon, and G. Varoquaux (2022). Why do tree-based models still outperform deep learning on tabular data?
- Inouye, D. and P. Ravikumar (2018, 10–15 Jul). Deep density destructors. In *Proceedings of the 35th International Conference on Machine Learning*, Volume 80 of *Proceedings of Machine Learning Research*, pp. 2167–2175. PMLR.
- Kostic, A. D., D. Gevers, H. Siljander, T. Vatanen, T. Hyötyläinen, A.-M. Hämäläinen, A. Peet, V. Tillmann, P. Pöhö, I. Mattila, H. Lähdesmäki, E. A. Franzosa, O. Vaarala, M. de Goffau, H. Harmsen, J. Ilonen, S. M. Virtanen, C. B. Clish, M. Orešič, C. Huttenhower, M. Knip, and R. J. Xavier (2015). The dynamics of the human infant gut microbiome in development and in progression toward type 1 diabetes. *Cell Host & Microbe* 17(2), 260–273.
- Markelle Kelly, Rachel Longjohn, K. N. The uci machine learning repository.
- Papamakarios, G. and I. Murray (2016). Fast ϵ -free inference of simulation models with bayesian conditional density estimation. In D. Lee, M. Sugiyama, U. Luxburg, I. Guyon, and R. Garnett (Eds.), *Advances in Neural Information Processing Systems*, Volume 29. Curran Associates, Inc.
- Ren, L., G. Sun, and J. Wu (2019). Rongba: A robustly optimized natural gradient boosting training approach with leaf number clipping.
- Rothfuss, J., F. Ferreira, S. Walther, and M. Ulrich (2019). Conditional density estimation with neural networks: Best practices and benchmarks.
- Sprangers, O., S. Schelter, and M. de Rijke (2021, August). Probabilistic gradient boosting machines for large-scale probabilistic regression. In *Proceedings of the 27th ACM SIGKDD Conference on Knowledge Discovery & Data Mining*, KDD '21. ACM.
- Trippe, B. L. and R. E. Turner (2018). Conditional density estimation with bayesian normalising flows.
- Wielopolski, P. and M. Zięba (2023). Treeflow: Going beyond tree-based gaussian probabilistic regression.

Appendix

A Tree-CDF and its inverse

The multi-scale decomposition of tree-CDFs and their inverses, along with their properties, are detailed in Awaya and Ma (2023). Here, we summarise these in the context of conditional density estimation.

Suppose a probability measure G_x on $(0, 1]^d$ is defined by a binary tree T with splitting probabilities $G_x(A_l|A) = c(A)p_{\theta_A}(x) + (1 - c(A))\left(\frac{\mu(A_l)}{\mu(A)}\right)$ for $A \in I(T)$, and its corresponding tree-CDF is \mathbf{G}_x . Then, for a d -dimensional vector y within $(0, 1]^d$, where the path from the leaf containing y to the root is represented as $y \in A_R \subset A_{R-1} \subset \dots \subset A_1 = (0, 1]^d$, applying \mathbf{G}_x to y involves a sequence of linear transforms along this path:

$$\mathbf{G}_x(y) = \mathbf{G}_{x,A_1} \circ \dots \circ \mathbf{G}_{x,A_{R-1}}(y),$$

where each $\mathbf{G}_{x,A}$ is defined based on the probability assignments at node A . For a node $A = (a_1, b_1] \times \dots \times (a_d, b_d]$ split along the j -th axis into $A_l = (a_1, b_1] \times \dots \times (a_j, s_j] \times \dots \times (a_d, b_d]$ and $A_r = (a_1, b_1] \times \dots \times (s_j, b_j] \times \dots \times (a_d, b_d]$, the transformation $\mathbf{G}_{x,A}$ is given by:

$$\begin{aligned} \mathbf{G}_{x,A}(y)[j'] &= y_{j'} \quad \text{for } j' \neq j, \\ \mathbf{G}_{x,A}(y)[j] &= \frac{G_x(A_l|A)}{(s_j - a_j)/(b_j - a_j)} y_j + \left(1 - \frac{G_x(A_l|A)}{(s_j - a_j)/(b_j - a_j)}\right) b_j \quad \text{for } y \in A_l, \\ \mathbf{G}_{x,A}(y)[j] &= \frac{1 - G_x(A_l|A)}{(b_j - s_j)/(b_j - a_j)} y_j + \left(1 - \frac{1 - G_x(A_l|A)}{(b_j - s_j)/(b_j - a_j)}\right) b_j \quad \text{for } y \in A_r. \end{aligned}$$

Let $z_j = \frac{y_j - a_j}{b_j - a_j}$. The inverse node-level transform, $\mathbf{G}_{x,A}^{-1}(y)$, is given by

$$\begin{aligned} \hat{\mathbf{G}}_{x,A}^{-1}(y)[j'] &= y_{j'} \quad \text{for } j' \neq j, \\ \hat{\mathbf{G}}_{x,A}^{-1}(y)[j] &= a_j + \frac{c_j - a_j}{G_x(A_l|A)} z_j \quad \text{if } z_j \leq G_x(A_l|A), \\ \hat{\mathbf{G}}_{x,A}^{-1}(y)[j] &= c_j + \frac{b_j - c_j}{1 - G_x(A_l|A)} (z_j - G_x(A_l|A)) \quad \text{if } z_j > G_x(A_l|A). \end{aligned}$$

It can be seen from the above formula that the time complexity of applying \mathbf{G}_x or \mathbf{G}_x^{-1} is equivalent to that of calculating $p_{\theta_A}(x)$ if the maximum depth of the trees is fixed.

B Justification of optimization procedure in 2.2

For an observation (x_i, y_i) where y_i belongs to a leaf node L , we have $g_{x_i}(y_i) = \frac{G_{x_i}(L)}{\mu(L)}$.

$G_{x_i}(L)$ and $\mu(L)$ can be decomposed on the tree as a product of splitting probabilities:

$$G_{x_i}(L) = \prod_{A \in I(T), y_i \in A} G_{x_i}(A_l|A)^{\mathbf{1}(y_i \in A_l)} G_{x_i}(A_r|A)^{\mathbf{1}(y_i \in A_r)},$$

and

$$\mu(L) = \prod_{A \in I(T), y_i \in A} \left(\frac{\mu(A_l)}{\mu(A)}\right)^{\mathbf{1}(y_i \in A_l)} \left(\frac{\mu(A_r)}{\mu(A)}\right)^{\mathbf{1}(y_i \in A_r)}.$$

Therefore,

$$\begin{aligned}
l(T, \theta) &= \sum_i \log g_{x_i}(y_i) \\
&= \sum_i \sum_{y_i \in A \in I(T)} \mathbf{1}(y_i \in A_l) \log G_{x_i}(A_l|A) + \mathbf{1}(y_i \in A_r) \log G_{x_i}(A_r|A) - \mathbf{1}(y_i \in A_l) \log \frac{\mu(A_l)}{\mu(A)} - \mathbf{1}(y_i \in A_r) \log \frac{\mu(A_r)}{\mu(A)} \\
&= \sum_{A \in I(T)} \sum_{i: y_i \in A} (\mathbf{1}(y_i \in A_l) \log G_{x_i}(A_l|A) + \mathbf{1}(y_i \in A_r) \log G_{x_i}(A_r|A)) - n(A_l) \log \frac{\mu(A_l)}{\mu(A)} - n(A_r) \log \frac{\mu(A_r)}{\mu(A)} \\
&= \sum_{A \in I(T)} \left(\sum_{i: y_i \in A} \mathbf{1}(y_i \in A_l) \log p_{\theta_A}(x_i) + \mathbf{1}(y_i \in A_r) \log(1 - p_{\theta_A}(x_i)) \right) + \left(-n(A_l) \log \frac{\mu(A_l)}{\mu(A)} - n(A_r) \log \frac{\mu(A_r)}{\mu(A)} \right) \\
&= \sum_{A \in I(T)} (l_{A, \text{bin}}(T, \theta_A) + C_A(T)).
\end{aligned}$$

This proves Eq 2 in Section 2.2.

We use a greedy, root-to-leaf tree learning algorithm, where the tree is expanded by splitting one node at a time based on maximizing $l(T, \theta)$ after the current splitting. Following the notations in Section 2.2, the tree is initialized as T_0^* with only the root node, and θ_0^* is an empty set. Suppose the current tree and corresponding node-level parameters are (T_j^*, θ_j^*) , then T_j^* is chosen among the M candidates $T_{j,1}, \dots, T_{j,M}$ to maximize $l(T, \theta)$:

$$(T_j^*, \theta_j^*) = \arg \max_{T \in \{T_{j,1}, \dots, T_{j,M}\}, \theta} l(T, \theta).$$

Since $T_{j,1}, \dots, T_{j,M}$ only differ by the way of splitting A , with the decomposition of the log-likelihood shown above, we have

$$\arg \max_{T \in \{T_{j,1}, \dots, T_{j,M}\}, \theta} l(T, \theta) = \arg \max_{T \in \{T_{j,1}, \dots, T_{j,M}\}, \theta} l_{A, \text{bin}}(T, \theta_A) + C_A(T).$$

Given the tree structure T , since $C_A(T)$ does not involve θ , we have

$$\arg \max_{\theta} (l_{A, \text{bin}}(T, \theta_A) + C_A(T)) = \arg \max_{\theta} l_{A, \text{bin}}(T, \theta_A) \quad \text{for any } T.$$

Let $\theta_A^*(T) = \arg \max_{\theta} l_{A, \text{bin}}(T, \theta_A)$. We have

$$\begin{aligned}
\max_{T \in \{T_{j,1}, \dots, T_{j,M}\}, \theta} l_{A, \text{bin}}(T, \theta_A) + C_A(T) &= \max_{T \in \{T_{j,1}, \dots, T_{j,M}\}} (\max_{\theta} l_{A, \text{bin}}(T, \theta_A) + C_A(T)) \\
&= \max_{T \in \{T_{j,1}, \dots, T_{j,M}\}} l_{A, \text{bin}}(T, \theta_A^*(T)) + C_A(T),
\end{aligned}$$

therefore

$$T_j^* = \arg \max_{T \in \{T_{j,1}, \dots, T_{j,M}\}} l_{A, \text{bin}}(T, \theta_A^*(T)) + C_A(T),$$

and

$$\theta_A^* = \theta_A^*(T_j^*).$$

This justifies the two-step training algorithm described in Section 2.2.

In practice, one can incorporate further penalty terms on the complexity of tree into $C_A(T)$ without affecting the decomposition of $l(T, \theta)$. In our implementation, we used an l_1 penalty on imbalanced splits. Specifically, if A is split along the j -th axis at s_j , and $A = (a_1, b_1] \times \dots \times (a_j, b_j] \times \dots \times (a_d, b_d]$, then an l_1 penalty term on imbalanced split is defined as

$$L_{\eta}(s_j) = -\eta |s_j - (a_j + b_j)/2|,$$

where $n(A) = \sum_{i=1}^n \mathbf{1}(y_i^{(k)} \in A)$ is the number of samples within node A , η is a hyperparameter. With such penalty term, $C_A(T)$ becomes

$$C_A(T) = -n(A_l) \log \frac{\mu(A_l)}{\mu(A)} - n(A_r) \log \frac{\mu(A_r)}{\mu(A)} + L_{\eta}(s_j)$$

if the node A of T is split at s_j .

C Algorithms for training the tree flow and a single tree

The algorithm for training the tree flow \mathbf{G}_x is given in Algorithm 1.

Algorithm 1 Training the tree flow

```

1: input: training data  $\{(x_i, y_i)\}_{i=1}^n$ , validation data  $\{(x_{i, val}, y_{i, val})\}_{i=1}^n$ , maximum number of trees  $K_{max}$ ,
   window size  $w$ , shrinkage parameters  $(c_0, \gamma)$ 
2: Output:  $\{\mathbf{G}_{k,x}\}_{k=1}^K$ 
3: Initialize  $LL^{(0)} \leftarrow 0$ 
4: for  $i = 1$  to  $n$  do
5:    $y_i^{(0)} \leftarrow y_i$ 
6:    $y_{i, val}^{(0)} \leftarrow y_{i, val}$ 
7: end for
8: for  $k = 1$  to  $K_{max}$  do
9:   Train  $G_{k,x}$  on  $\{(x_i, y_i^{(k-1)})\}$  using Algorithm 2
10:  Shrink  $G_{k,x}$  ▷ As described in Section 2.3
11:   $\mathbf{G}_{k,x} \leftarrow$  tree-CDF of  $G_{k,x}$ 
12:   $LL^{(k)} \leftarrow LL^{(k-1)} + \sum_{i=1}^n \log g_{k,x_i}(y_{i, val}^{(k-1)})$  ▷ Update log-likelihood
13:  for  $i = 1$  to  $n$  do
14:     $y_i^{(k)} \leftarrow \mathbf{G}_{k,x_i}(y_i^{(k-1)})$ 
15:     $y_{i, val}^{(k)} \leftarrow \mathbf{G}_{k,x_i, val}(y_{i, val}^{(k-1)})$  ▷ Update observations
16:  end for
17:  if  $LL^{(k)} - LL^{(k-w)} \leq 0$  then ▷ Early stopping
18:    break
19:  end if
20: end for

```

Algorithm 2 summarizes the algorithm for fitting a single tree-CDF.

D Time complexity analysis

To fit a tree-CDF, the optimal splitting at each internal node is selected from $S \times d$ possible splits (with S cutpoints per axis). When evaluating each candidate split, the fitting process for a node-level binary classifier—whether using Logistic Regression or a Multilayer Perceptron with two hidden layers of 4 nodes each as in our implementation—has a time complexity of $O(nq)$. Therefore, the overall complexity for fitting each tree-CDF is $O(ndq)$.

Applying a tree-CDF to one observation indeed has a complexity of $O(q)$. As demonstrated in previous work (Awaya and Ma, 2023), a tree-CDF can be represented by a series of linear transformations at each level of the tree, with each transformation costing $O(q)$ due to the evaluation of the splitting probability with the trained node-level binary classifier. Since the maximum depth R of the trees is fixed, there are at most R of these $O(q)$ operations, thus applying a tree-CDF to a d -dimensional vector is $O(q)$. (Detailed information about the multi-scale decomposition of tree-CDFs and their inverses are provided in the Appendix A.)

With the fitted conditional tree flow, evaluating the density of a test sample is $O(q)$ because it avoids any computationally expensive steps such as evaluating Jacobians. Instead, the following equation is used for density evaluation of a sample (x, y) :

$$f_x(y) = \prod_{k=1}^K g_{k,x}(y^{(k-1)})$$

where $y^{(k)} = G_{k,x}(y^{(k-1)})$ and $y^{(0)} = y$. Updating $y^{(k-1)}$ to $y^{(k)}$ is $O(q)$, and calculating $g_{k,x}(y^{(k-1)})$ involves just the product of splitting probabilities along the path from the root to the leaf that contains $y^{(k-1)}$ divided by the volume of the leaf, which is also at most $O(q)$.

Sampling from the fitted conditional tree flow given x involves applying the inverse tree-CDFs, $\mathbf{G}_{K,x}^{-1}, \dots, \mathbf{G}_{1,x}^{-1}$, to a uniform random variable. The inverse tree-CDF employs a similar multi-scale decomposition as the tree-CDF, and

Algorithm 2 Training a single tree-CDF

```
1: procedure TRAINTREECDF(maxDepth, min_samples, { $x_i, y_i$ }, root, treeCandidates)
2:   queue  $\leftarrow$  [root]
3:   currentDepth  $\leftarrow$  0
4:   while currentDepth < maxDepth do
5:     levelSize  $\leftarrow$  len(queue)
6:     for  $i \leftarrow 1$  to levelSize do
7:        $A \leftarrow$  queue.pop(0)
8:       if n( $A$ ) < min_samples then
9:         continue
10:      end if
11:       $T \leftarrow$  optimalSplit( $A$ , treeCandidates) ▷ Update  $A_l, A_r$  accordingly
12:       $\theta_A \leftarrow$  fitBinaryClassification( $T, A, \{x_i, y_i\}$ )
13:      queue.append( $A_l$ )
14:      queue.append( $A_r$ )
15:    end for
16:    currentDepth  $\leftarrow$  currentDepth + 1
17:  end while
18:  return root
19: end procedure
20: function fitBinaryClassification( $T, A, \{x_i, y_i\}$ ) return  $\arg \max_{\theta_A} l_{A, \text{bin}}(T, \theta_A)$  ▷ Defined in Section 2.2
21: end function
22: function optimalSplit( $A$ , treeCandidates, { $x_i, y_i$ })
23:  $LL_{\max} \leftarrow -\infty, T^* \leftarrow \text{None}$ 
24: for  $T$  in treeCandidates[ $A$ ] do
25:    $\theta_A \leftarrow$  fitBinaryClassification( $T, A, \{x_i, y_i\}$ )
26:    $LL \leftarrow l_{A, \text{bin}}(T, \theta_A) + C_A(T)$  ▷ Defined in Section 2.2
27:   if  $LL > LL_{\max}$  then
28:      $LL_{\max} \leftarrow LL$ 
29:      $T^* \leftarrow T$ 
30:   end if
31: end for
32: return  $T^*$ 
33: end function
```

applying an inverse tree-CDF to a d -dimensional vector is $O(q)$ due to the $O(q)$ time complexity of evaluating the splitting probabilities given x . Therefore, drawing one sample also has a time complexity of $O(q)$.

E Rotation ensemble of tree flows

Suppose the y_i 's in the original training data are rotated to generate J distinct data sets, denoted as D_1, \dots, D_J , where $D_j = \{(x_i, y_i R_j)\}$, R_j is a rotation matrix applied to each data set. Training the conditional tree flow on D_j yields $f_x^{(j)}$. Note that rotations are orthogonal transformations, the resulting conditional density is defined as

$$f_x(y) = \sum_{j=1}^J w_x^{(j)} f_x^{(j)}(y R_j), \quad (3)$$

The weights $w_x^{(j)}$ are dependent on x and are calculated based on the partitioning of the feature space \mathcal{X} into disjoint regions $X_1, \dots, X_{K'}$. We assume that within each region X_k , the weights remain constant for all points x . Thus, for any $x \in X_k$, the weight is computed by

$$w_x^{(j)} = \frac{\prod_{x_i \in X_k} f_{x_i}^{(j)}(y_i R_j)}{\sum_{j'=1}^J \prod_{x_i \in X_k} f_{x_i}^{(j')}(y_i R_{j'})}.$$

F Full experimental details

F.1 Experiment settings and details

Data dimensions. Dimensions of the UCI datasets used in Section 3 are shown in Table 3 and Table 4.

Table 3: Characteristics of UCI datasets with univariate outcome

Dataset	n	q
boston	506	13
concrete	1030	8
energy	768	8
power	9568	4
wine	1599	11
yacht	308	6
kin8nm	8192	8
naval	11934	17
protein	45730	9

Table 4: Characteristics of UCI datasets with multivariate outcome

	n	q	d
Energy	768	8	2
Parkinsons	5875	16	2
Temperature	7588	21	2
Air	8891	10	3
Skillcraft	3338	15	4

Data splits. For UCI datasets with univariate y , we use the train test splits provided by <https://github.com/yaringal/DropoutUncertaintyExps>. For UCI datasets with multivariate y , we use the same train

test splits as Chen et al. (2021). For simulation examples, training set and test set are generated independently from the ground truth. In each run, a random subset of the training data (comprising 10% of the training data) is used as the validation set to determine early stopping.

Simulation settings (bivariate outcome). Four conditional distributions of $y_1, y_2|x$ are considered:

Squares: $x \sim U(-1, 1)$, $\lambda \sim \text{Bern}(0.5)$, $a_1, a_2 \stackrel{iid}{\sim} U(x - 5, x - 1)$, $b_1, b_2 \stackrel{iid}{\sim} U(1 - x, 5 - x)$,

$$y_1 = \lambda a_1 + (1 - \lambda)b_1, y_2 = \lambda a_2 + (1 - \lambda)b_2.$$

Half Gaussian: $x \sim U(-1, 1)$, $a, b \stackrel{iid}{\sim} N(0, 2)$,

$$y_1 = |a| \cos x\pi - b \sin x\pi, y_2 = |a| \sin x\pi + b \cos x\pi.$$

Gaussian Stick: $x \sim U(-1, 1)$, $a \sim N(0, 1)$, $b \sim U(-6, 6)$, $c = (-0.75 + x)/2$,

$$y_1 = a \cos c\pi - b \sin c\pi, y_2 = a \sin c\pi + b \cos c\pi.$$

Elastic Ring: $x \sim U(-1, 1)$, $d \sim U(0, 2)$, $\theta \sim U(0, 2\pi)$,

$$y_1 = (4 + 2x + d) \cos \theta, y_2 = (4 - 2x + d) \sin \theta.$$

Hyperparameters. For our method, the choice of c_0, γ is based on the recommendations in (Awaya and Ma, 2023). We set $c_0 = 0.05, \gamma = 0.5$ for the experiments in the main paper, and the results obtained with other values of c_0, γ is included in Appendix G.3. The splitting point is obtained by grid search over 20 equally-spaced gridpoints per axis. Maximum number of trees for training the flow with each type of binary classifiers is set to 1000 as an upper limit. In our experiments, the resulting K from early stopping ranges from tens to hundreds. The early stopping window is set to 10. The minimum number of samples per node is set to 10. We observed in the experiments that the results are generally robust to the early stopping window and the minimum number of samples per node.

For KMN+ and MDN+, We adopted the hyperparameter specifications `x_noise_std=0.2`, `y_noise_std=0.1` as recommended in the experiments in Rothfuss et al. (2019).

Implementation details. Within our model, the binary classifiers are the only components that need the use of optimization techniques for effective training. These classifiers are implemented using the sklearn library, with specific settings for each:

- Logistic Regression: Fitted using `sklearn.linear_model.LogisticRegression`, with the following configuration: `random_state=42, max_iter=1000, solver='lbfgs'`, and all other arguments are set to default.
- Multilayer perceptron (MLP): Fitted using `sklearn.neural_network.MLPClassifier`, with the following configuration: `random_state=42, max_iter=1000, solver='lbfgs', hidden_layer_sizes=(4,4)`, and all other arguments are set to default.

Source of experimental results. For the univariate experiments, the results of NGBoost (Duan et al., 2020), RoNGBa (Ren et al., 2019), and TreeFlow (Wielopolski and Zięba, 2023) are obtained from their original papers. The results of PGBM (Sprangers et al., 2021) is obtained from Wielopolski and Zięba (2023). The results of Dropout, LV, MDN, MF, RNF are obtained from Trippe and Turner (2018). For the simulation examples and multivariate experiments, the results of MAF, MDN, NSF, RNF, MLP and DDN are obtained from (Chen et al., 2021).

Source of existing code and datasets used in this work. The experiment results of KMN+ and MDN+ Rothfuss et al. (2019) are obtained using the code provided at https://github.com/freelunchtheorem/Conditional_Density_Estimation. The simulation examples with bivariate outcome are generated with code available at <https://github.com/NBICLAB/DDN>. For the UCI benchmark datasets, the original datasets are available at <https://archive.ics.uci.edu/>. We used the code at <https://github.com/yaringal/DropoutUncertaintyExps> to preprocess and split datasets for the experiments in Section 3.1. Code for preprocessing and splitting datasets used in Section 3.3 is provided by the authors of (Chen et al., 2021).

F.2 Experiments compute resources

All experiments were conducted on a computing cluster where each experimental run utilized a single CPU; no experiments were performed using GPUs. The memory allocation for all runs was set to 2GB, which served as a generous upper limit and allowed for caching all intermediate results, although this was not necessary for producing the results presented in the paper.

The full research project did not require more compute than the experiments reported in the paper.

G Additional experimental results

G.1 Effect of flexible splitting and combination of classifiers

We aim to understand the contribution of flexible splitting and the combination of binary classifiers. We set $c_0 = 0.05, \gamma = 0.5, \eta = 0.1$, and set maximum depth of trees to 6, and assess the following variants of our methods: (1) The *full* model, where splits are obtained by grid search at each node, and node-level classification first uses Logistic Regression until early stopping criteria is met, then switches to MLP. (2) All nodes are constrained to be split in the *middle*. Same as the full model, both LR and MLP are used. (3) Only use *LR* at internal nodes. (4) Only use *MLP* at internal nodes.

Table 5: Average log likelihood (mean±standard error) of univariate tasks. Larger values indicate better performance.

	full	middle	LR	MLP
boston	-2.47±0.05	-2.53±0.05	-2.55±0.04	-2.61±0.04
concrete	-2.67±0.05	-2.77±0.04	-3.47±0.02	-2.75±0.05
energy	-0.75±0.04	-0.78±0.03	-1.45±0.03	-0.86±0.04
power	-2.69±0.01	-2.73±0.01	-2.84±0.01	-2.65±0.01
wine	2.42±0.09	1.60±0.08	1.20±0.03	1.82±0.08
yacht	-0.53±0.07	-0.88±0.07	-1.05±0.06	-1.56±0.09

G.2 Results shown in Figure 1

Table 6: Comparison on UCI benchmark datasets, measured by the log-likelihood of the test set (mean ± standard error). Mean and standard error of the log-likelihood are calculated based on 20 runs, except for "protein", which is based on 5 runs. NA indicates that the results are not provided in the original paper.

	boston	concrete	energy	power	wine	yacht	protein	kin8nm	naval
Ours	-2.44±0.04	-2.72±0.04	-0.72±0.03	-2.66±0.01	1.98±0.06	-0.45±0.07	-2.20±0.01	1.05±0.01	6.29±0.01
NGBoost	-2.43±0.15	-3.04±0.17	-0.60±0.45	-2.79±0.11	-0.91±0.06	-0.20±0.26	-2.81±0.03	0.49±0.02	5.34±0.04
PGBM	-2.67±0.10	-2.75±0.21	-1.74±0.04	-2.60±0.02	-0.97±0.20	-0.05±0.28	-2.79±0.01	0.54±0.04	3.44±0.04
RoNGBa	-2.48±0.16	-2.94±0.18	-0.37±0.28	-2.65±0.08	-0.91±0.08	-1.03±0.44	-2.76±0.03	0.60±0.03	5.49±0.04
KMN+	-2.38±0.03	-3.33±0.01	-1.56±0.02	-2.88±0.01	0.61±0.02	-2.02±0.03	-2.44±0.01	0.95±0.01	3.16±0.01
MDN+	-2.34±0.05	-3.15±0.02	-1.34±0.01	-2.80±0.01	0.52±0.03	-1.84±0.02	-2.43±0.01	1.16±0.01	3.21±0.01
TreeFlow	NA	-3.02±0.15	-0.85±0.35	-2.65±0.06	0.56±0.62	-0.72±0.40	-2.02±0.02	1.03±0.06	5.54±0.16
Dropout	-2.46±0.25	-3.04±0.09	-1.99±0.09	-2.89±0.01	-0.93±0.06	-1.55±0.12	-2.89±0.01	0.95±0.01	3.80±0.01
HMC	-2.27±0.03	-2.72±0.02	-0.93±0.01	-2.70±0.01	-0.91±0.02	-1.62±0.02	-2.77±0.01	1.35±0.01	7.31±0.01
LV-15	-2.64±0.05	-3.06±0.03	-0.74±0.03	-2.81±0.01	-0.98±0.02	-1.01±0.04	NA	NA	NA
LV-5	-2.56±0.05	-3.08±0.02	-0.79±0.02	-2.82±0.01	-0.96±0.01	-1.15±0.05	NA	NA	NA
MDN-2	-2.65±0.03	-3.23±0.03	-1.60±0.04	-2.73±0.01	-0.91±0.04	-2.70±0.05	NA	NA	NA
MDN-20	-2.74±0.03	-3.27±0.02	-1.48±0.04	-2.68±0.01	1.21±0.06	-2.76±0.07	NA	NA	NA
MDN-5	-2.73±0.04	-3.28±0.03	-1.63±0.06	-2.70±0.01	1.43±0.07	-2.54±0.10	NA	NA	NA
MF	-2.62±0.06	-3.00±0.03	-0.57±0.04	-2.79±0.01	-0.97±0.01	-1.00±0.10	NA	NA	NA
RNF-2	-2.40±0.06	-3.03±0.05	-0.44±0.04	-2.73±0.01	-0.87±0.02	-0.30±0.04	NA	NA	NA
RNF-5	-2.37±0.04	-2.97±0.03	-0.67±0.15	-2.68±0.01	-0.76±0.10	-0.21±0.09	NA	NA	NA

G.3 Additional results

7 shows the average test log-likelihood of the UCI datasets with multivariate outcome with different number of bins for X for rotations. The hyperparameters for our model are configured as follows: $c_0 = 0.05, \gamma = 0.5$, and $\eta = 0.01$. The maximum depth of the trees, R , is set to 6 when using Logistic Regression and reduced to 4 when using Multilayer Perceptrons (MLP). The results are robust to the way of partitioning \mathcal{X} .

The average test log likelihood on these datasets with different values of c_0, γ is shown in Table 8. For this comparison, $\eta = 0.1$, maximum depth of trees is 6 for Logistic Regression and reduced to 4 for MLP. The datasets are not rotated.

Table 7: Sensitivity analysis of partitions of X .


data	partition of X	average test log-likelihood (mean \pm SE)
energy	kmeans, k=4	1.865 \pm 0.043
energy	kmeans, k=8	1.863 \pm 0.042
energy	HDBSCAN	1.864 \pm 0.043
parkinsons	kmeans, k=4	-0.561 \pm 0.007
parkinsons	kmeans, k=8	-0.561 \pm 0.007
parkinsons	HDBSCAN	-0.560 \pm 0.007
temperature	kmeans, k=4	-0.721 \pm 0.006
temperature	kmeans, k=8	-0.721 \pm 0.006
temperature	HDBSCAN	-0.722 \pm 0.006
air	kmeans, k=4	-0.621 \pm 0.006
air	kmeans, k=8	-0.621 \pm 0.006
air	HDBSCAN	-0.621 \pm 0.006
skillcraft	kmeans, k=4	-1.577 \pm 0.017
skillcraft	kmeans, k=8	-1.576 \pm 0.017
skillcraft	HDBSCAN	-1.577 \pm 0.017

c_0	γ	Energy	Parkinsons	Temperature	Air	Skillcraft
0.05	0.5	1.48 \pm 0.06	-0.76 \pm 0.01	-0.80 \pm 0.01	-0.78 \pm 0.01	-1.88 \pm 0.02
0.05	0.1	1.36 \pm 0.06	-0.76 \pm 0.01	-0.84 \pm 0.01	-0.92 \pm 0.01	-2.16 \pm 0.02
0.1	0.1	1.18 \pm 0.06	-0.83 \pm 0.01	-0.86 \pm 0.01	-0.96 \pm 0.01	-2.30 \pm 0.02

Table 8: Average test log-likelihood (mean \pm SE) of UCI datasets under different c_0, γ

G.4 Additional figures

This section contains additional figures for the experiments. Specifically, the ground truth and estimated density for the simulation examples are provided in 6-8, and the scatterplot matrix of training data and simulated data in the DIABIMMUNE example is visualized in Figure 9 in Appendix G.

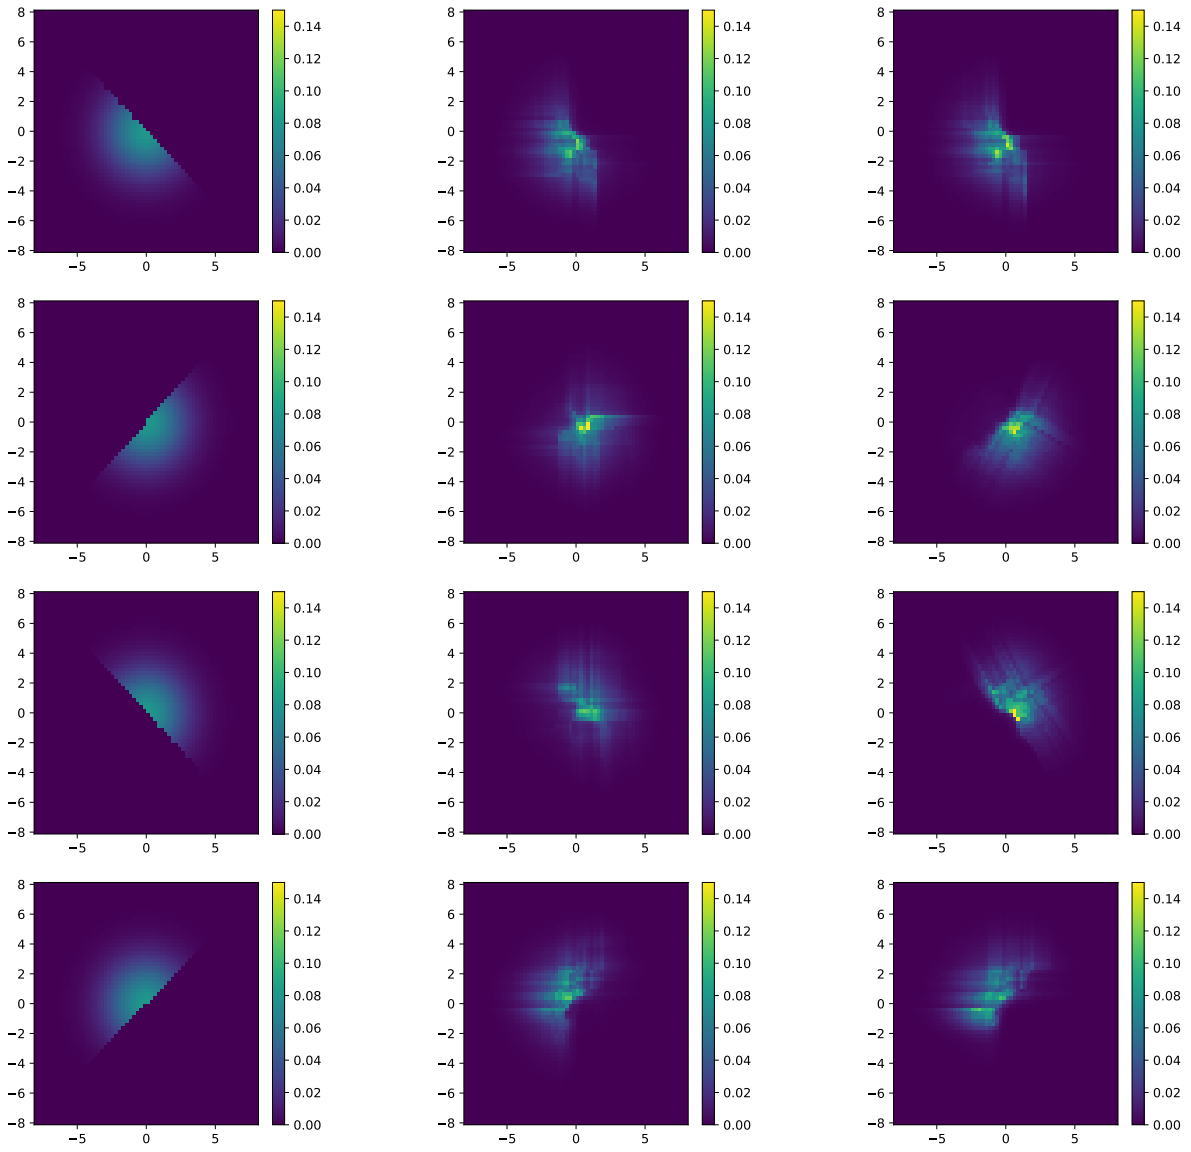


(a) Ground truth

(b) Estimated density (no rotations)

(c) Estimated density (with rotations)

Figure 5: Half Gaussian. From top to bottom, the rows correspond to $x = -0.75, -0.25, 0.25, 0.75$ respectively.

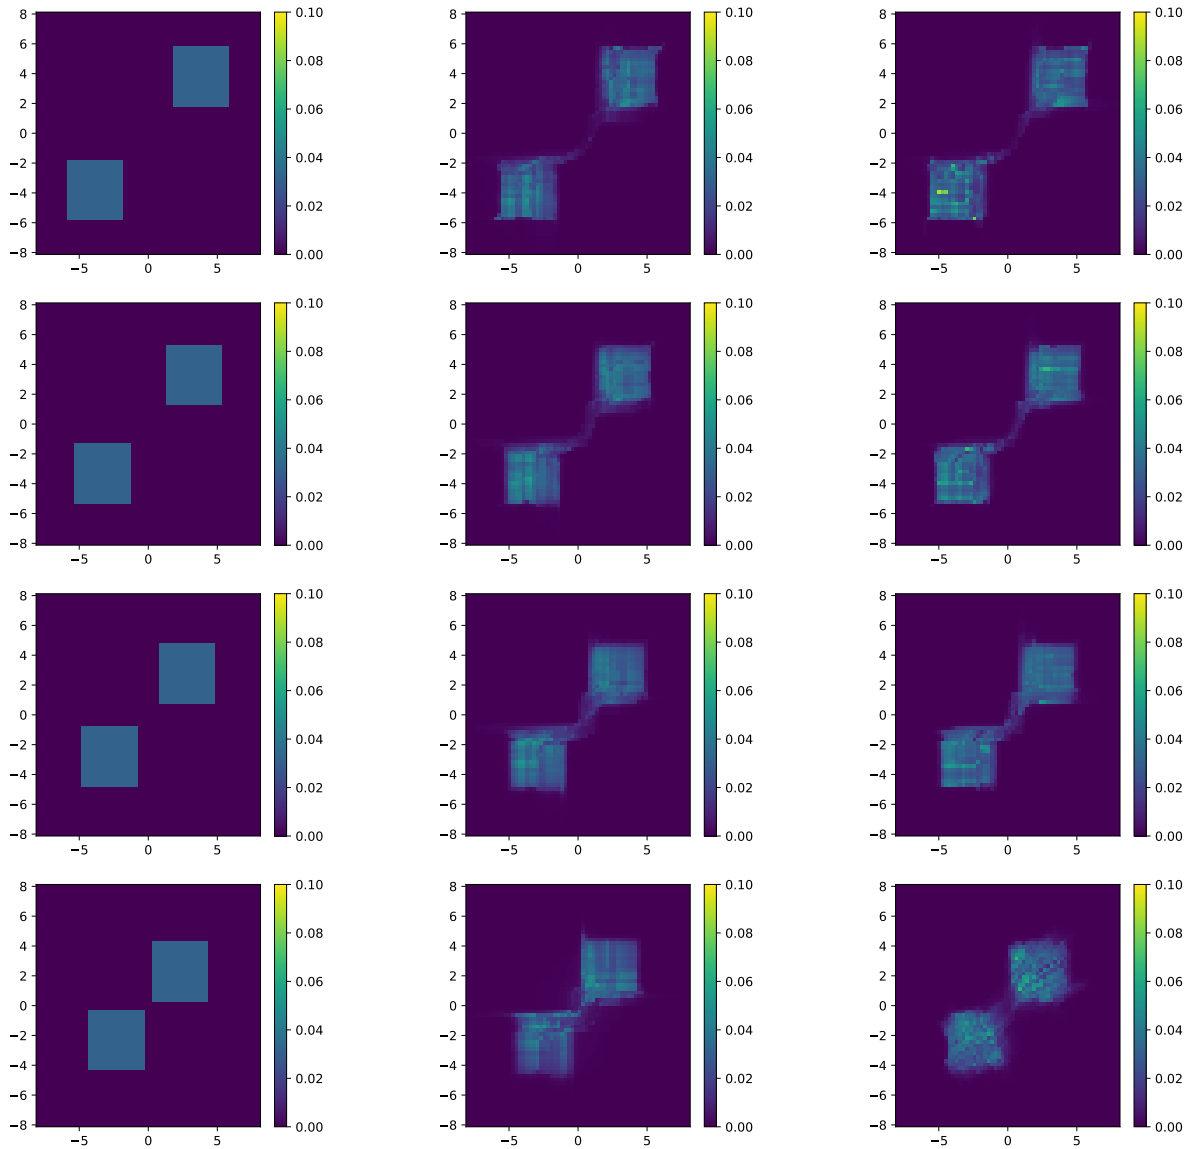


(a) Ground truth

(b) Estimated density (no rotations)

(c) Estimated density (with rotations)

Figure 6: Squares. From top to bottom, the rows correspond to $x = -0.75, -0.25, 0.25, 0.75$ respectively.

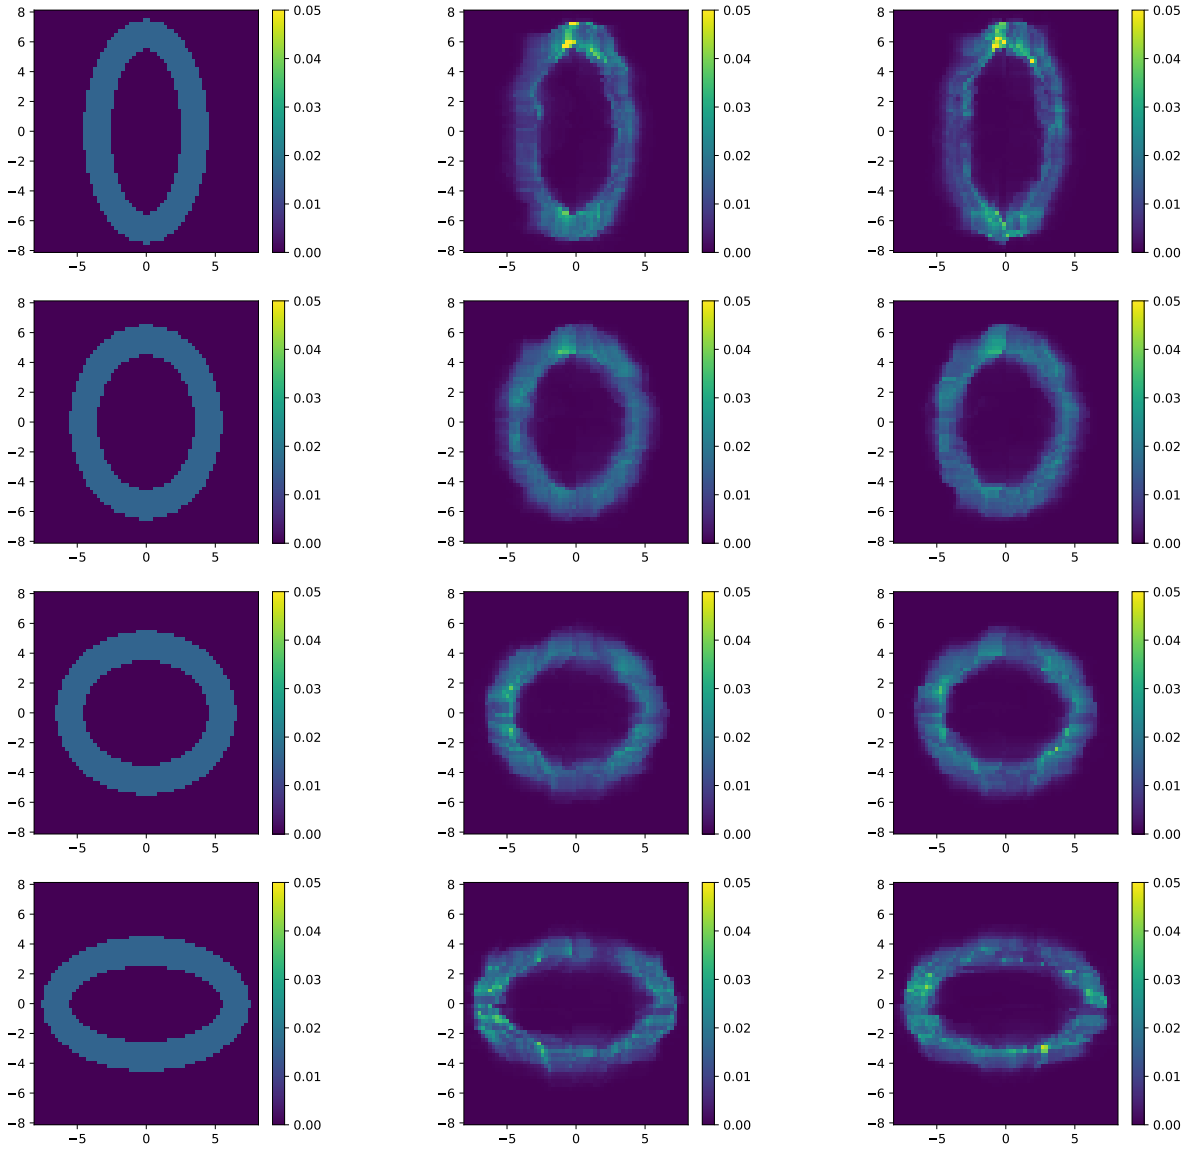


(a) Ground truth

(b) Estimated density (no rotations)

(c) Estimated density (with rotations)

Figure 7: Elastic Ring. From top to bottom, the rows correspond to $x = -0.75, -0.25, 0.25, 0.75$ respectively.

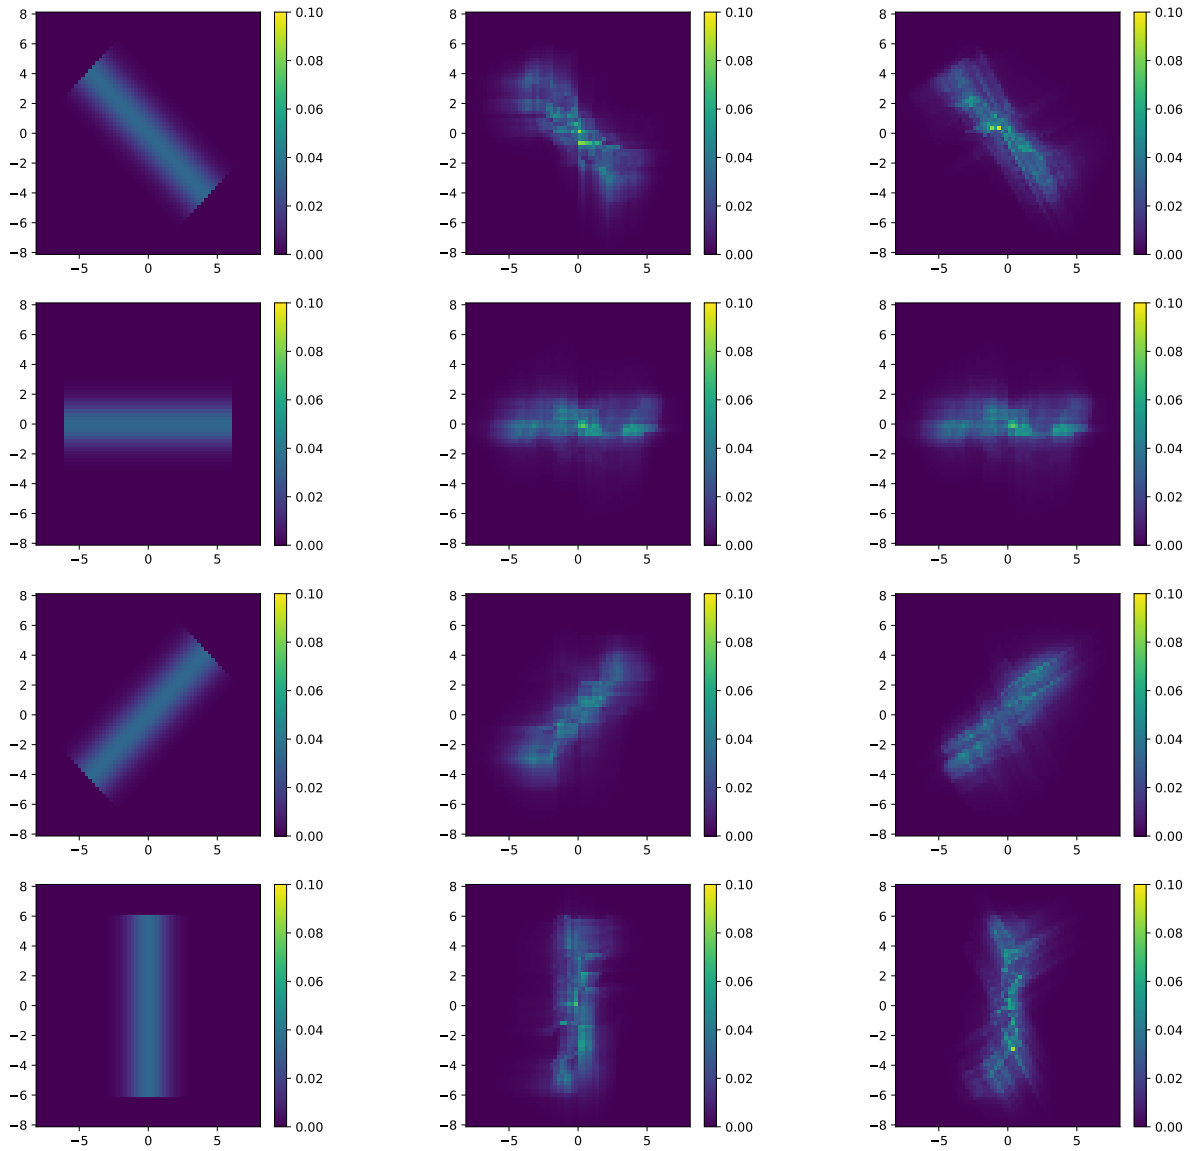

(a) Ground truth

(b) Estimated density (no rotations)

(c) Estimated density (with rotations)

Figure 8: Gaussian stick. From top to bottom, the rows correspond to $x = -0.75, -0.25, 0.25, 0.75$ respectively.

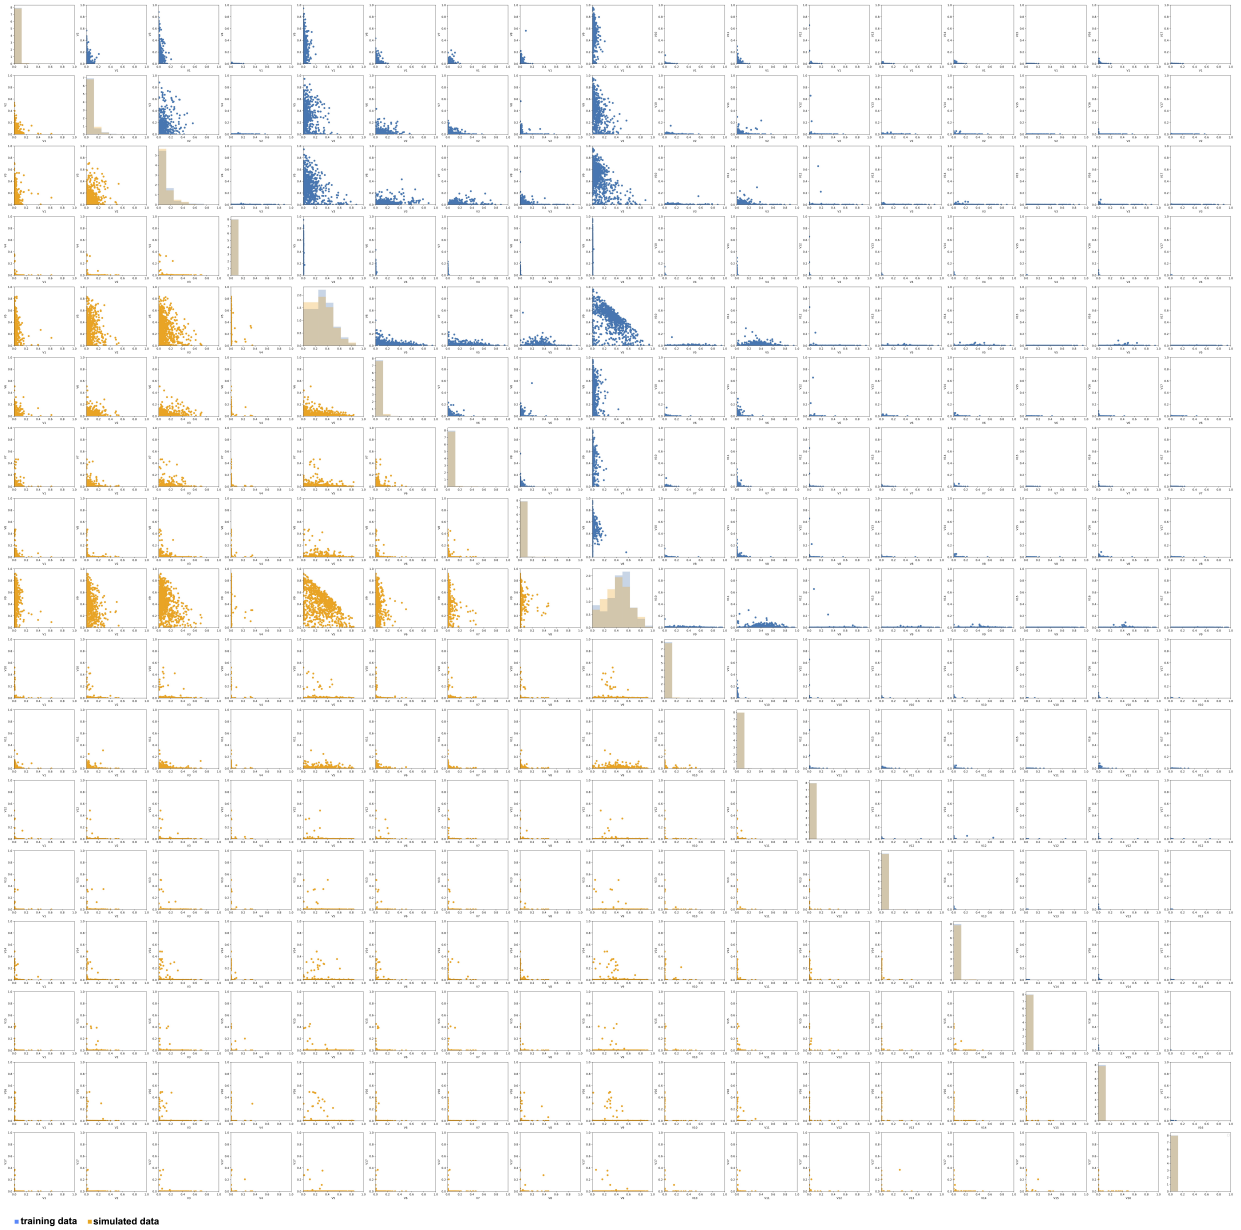


Figure 9: Training data and simulated data for the microbiome data generation in section 3.4.