MS-HuBERT: Mitigating Pre-training and Inference Mismatch in Masked Language Modelling methods for learning Speech Representations

Hemant Yadav¹, Sunayana Sitaram², Rajiv Ratn Shah¹

¹IIIT Delhi, India ²Microsoft Research Banglore, India

{hemantya,rajivratn}@iiitd.ac.in, sunayana.sitaram@microsoft.com

Abstract

In recent years, self-supervised pre-training methods have gained significant traction in learning and encoding high-level information from speech data. Among these methods, HuBERT has demonstrated state-of-theart performance in automatic speech recognition (ASR). However, HuBERT's performance lags behind data2vec due to disparities in pre-training strategies. In this paper, we propose MulticlusterSwap-HuBERT (MS-HuBERT), which integrates a Swap method to address pre-training and inference mismatch observed in HuBERT and incorporates Multicluster masked prediction loss for more effective utilization of the models capacity. MS-HuBERT, an end-to-end self-supervised pre-training method for robust speech representation learning, beat vanilla Hu-BERT on the ASR Librispeech benchmark by a large margin. Additionally, we demonstrate that the embeddings obtained during pre-training encode essential information for improving ASR performance.

Index Terms: Automatic speech recognition, Multicluster masked prediction loss, HuBERT

1. Introduction

In the recent years, there has been a significant interest in studying self-supervised pre-training methods to learn/encode high level information present in the speech data [1, 2, 3, 4, 5]. These SSL methods utilize the input data itself to learn to encode useful information, with the choice of pretext task playing a pivotal role in the encoded information. The most popular pretext task used is masked predictive coding (MPC) [6, 1, 7, 8, 9]. Hu-BERT [2] is one such model that popularized the masked language modelling (MLM) technique to learn highlevel speech representations from raw audio by achieving SOTA on the automatic speech recognition (ASR) task. The underlying concept of HuBERT revolves around iterative pre-training: starting with a raw audio/pseudo-label pair (x/y), the model undergoes successive training iterations where the trained model updates the pseudo-labels, iteratively refining its representations until a predefined stopping criterion is reached. I However, despite its success, HuBERT falls short compared to data2vec [10] in ASR performance for two primary reasons: firstly, during pre-training, data2vec accesses the full context to generate continuous labels, which are updated after each gradient update step, as opposed to the fixed discrete labels utilized in HuBERT for the each iteration; and secondly, the output is averaged from multiple layers for loss calculation.

To bridge this gap, we propose two modifications to the HuBERT framework. Firstly, we introduce the "Swap" method to enable full context access during pretraining, thus addressing the pre-training and inference mismatch observed in HuBERT and other MLM-based methods by using both the masked and unmasked views during pre-training. Swap is motivated by a simple idea, used heavily in the field of computer vision [11, 12, 13]. Where two augmented views of the input are used to learn a high level representation. Given e layers in a encoder, it is a general practice to add a similarity loss on the output embeddings of the encoder after each layer, as seen in works using U-net type architectures [14, 15, 16]. In contrast, we propose a Swap method which swaps the output embeddings, at certain indices, after each layer of the encoder between the masked and unmasked view of the input. This is motivated by the simple fact, that the learned model is expected to generate exactly the same output regardless of the two views.

Secondly, inspired by the work of Yadav et al. [17], we adopt a Multicluster masked prediction loss (MPL) approach. Using multiple cluster centers, also called multiple resolutions, has been investigated by [18, 19, 17]. In [19], the author introduces down-sampling and upsampling modules within the transformer encoder after each layer to facilitate learning features at multiple resolutions. On the other hand, [18] explores parallel and hierarchical variations of HuBERT with findings indicating the superiority of the hierarchical approach. This involves training multiple models, each model adds almost same parameters as the original HuBERT, at various resolutions using CNN as a down-sampling module. Lastly [17] uses the fact that MPL is applied at multiple layers of encoder at different resolutions. This method does not introduce any additional parameters to the original Hu-BERT model, except the linear layers used for loss calculation which are discarded after the pre-training. In this work, we adopt this approach and modify it for our use case for loss calculation.

These changes align HuBERT more closely towards data2vec, primarily differing in their loss functions for pre-training and other minor changes. The goal is study how much HuBERT can be improved, with these changes, on the ASR task.

Based on these observations. In this work, we propose MulticlusterSwap-HuBERT (MS-HuBERT) method, which incorporates (i) the Swap method to address the pre-training and inference mismatch issue, as the [MASK] symbol never appears during the inference, and (ii) the Multicluster MPL similar to [17]. Our contributions are as follows:

- 1. We propose MS-HuBERT, an end-to-end self supervised pre-training method to learn robust speech representations. It combines the Swap method and Multicluster MPL with HuBERT as shown in Figure 1.
- 2. We show that MS-HuBERT outperforms the original HuBERT on the ASR Librispeech benchmark with a big margin. And matches the performance of data2vec in high-resource setting.
- We showcase that the embeddings acquired during pretraining encode crucial information essential for addressing the ASR task. Thus utilizes the model capacity very effectively.

2. Method

2.1. Background

HuBERT is an iterative pre-training SSL method comprising of two encoders based on CNN (1st) and transformer (2nd), in that order, architectures. The CNN encoder serves the dual purpose of down-sampling the input data. The resulting output is passed, denoted as U, to the transformer encoder and its output is used for loss calculation. During the pre-training stage, raw audio is passed to the CNN encoder and approximately 50% of the output is masked, using the masking token [M] and is subsequently passed to the transformer encoder. The network is then trained to optimize to output a discrete target sequence by minimizing the masked prediction loss. The complete details can be found in the original paper [2].

2.2. MS-HuBERT

MS-HuBERT augments HuBERT model in two ways (i) the Swap method and (ii) the Multicluster MPL as shown in Figure 1. Swap method is introduced to address the pre-training and inference mismatch phase in HuBERT i.e, during inference the model does not use masking. Swap method modifies the 2nd encoder of HuBERT, such that the updated model now encounters, two views of the input, both masked and unmasked inputs during pre-training. Lastly, our proposed method uses modified Multicluster MPL as proposed by [17], because of its

enhanced model capacity utilization in learning features suitable for the ASR task. These changes aim to improve the ASR performance, as shown in the Table 1.

2.2.1. Swap

Given a raw audio as an input, of batch of size 1, to the 1st encoder (CNN), its output is denoted as $X=x_1,x_2,...,x_{t-1},x_t$, where t represents the total number of output tokens. Two views of X are created: (i) masked view, where on average, around 50% of these tokens are masked, meaning that half of these tokens are replaced with the [m] token, resulting in an updated output $X^m=x_1,[m],...,[m],x_t$ (view 1) and (ii) unmasked view, a duplicate of the original X, denoted as $X^c=x_1^c,x_2^c,...,x_{t-1}^c,x_t^c$ (view 2). These two views are combined, to form a batch of size 2, and is passed to the 2nd encoder.

The second encoder has N layers, each composed of a transformer layer followed by a Swap layer as shown in Figure 1. The transformer layer is exactly similar to the original HuBERT method. The proposed Swap method's function is to swap the outputs, at the masked indices, of the transformer layer between the two views. This updated output serves as input to the next block of encoder layer, and the process repeats till the last layer. For example, the output of the transformer layer is $H_m = h_1, h_2, ..., h_{t-1}, h_t$ and $H^c = h_1^c, h_2^c, ..., h_{t-1}^c, h_t^c$ for the masked and unmasked input respectively. The outputs at the masked indices are now swapped using the swap method i.e., the updated output are $H^m = h_1, h_2^c, ..., h_{t-1}^c, h_t$ and $H^c = h_1^c, h_2, ..., h_{t-1}, h_t^c$ for the masked and unmasked input, respectively.

It's important to note that there is no associated loss with the "Swap" layer. This technique indirectly encourages the model to output the same embeddings irrespective of the masked and unmasked view.

2.2.2. Multicluster MPL

The Multicluster MPL, inspired from [17], involves the computation of masked prediction loss (MPL) across multiple layers of the transformer encoder, using multiple set of cluster centers as labels. These encoder layers are selected equidistant in between the last layer and one intermediate layer. For instance, consider a scenario with three sets of labels as (500, 250, 100), where the last layer index is 12 and the intermediate layer index is 8, the multiple layers are (12, 10, 8).

The Multicluster MPL is then formulated as the summation of MPL over a, where a=(12,500), (10,250), (8,100) is a dictionary of which label set to use with which transformer encoder layer 1 . MPL is computed over the masked indices only, as de-

 $^{^{1}}$ In the original paper a would be calculated in reverse order i.e., (8,500), (10,250), (12,100).

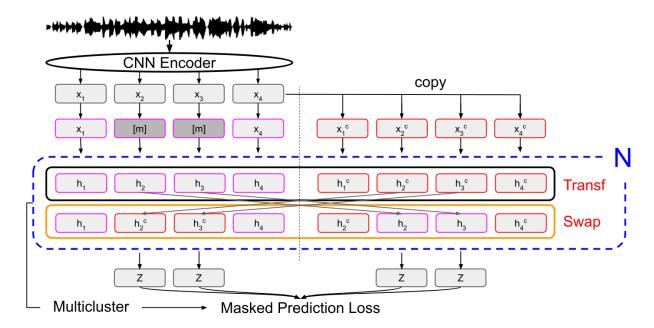


Figure 1: Proposed MS-HuBERT approach, an end-to-end self supervised pre-training method to learn robust speech representations. The input raw audio is passed to a CNN encoder. Two copies of the output is created i.e., masked and unmasked. Which is passed through the Swap modified 2nd encoder. Multicluster Masked prediction loss is calculated, masked indices only, on the output embeddings from different blocks of the modified 2nd encoder.

picted in Figure 1. Furthermore, given the GPU memory constraints, we randomly drop d items from the dictionary a for every forward pass.

 $Multicluster\ loss = \sum_{a} (MPL).$

3. Experimental Details

For all the experiments, similar to the HuBERT base model configuration [2], the MS-HuBERT model comprises a CNN encoder and 12 encoder transformer layers consisting of 768-dimensional hidden states and 8 attention heads. There is no large model used for training or comparison purposes.

Datasets: The ASR Librispeech benchmark dataset [20], which is derived from the LibriVox project, is used for pre-training and supervised finetuning purposes. It has 3 splits (i) Training, comprising train-clean-100, train-clean-360, and train-other-500, (ii) Development including dev-other and dev-clean, and (iii) Testing consists test-other and test-clean. Each data instance comprises an audio and its corresponding transcript. For pre-training MS-HuBERT, we use only the raw audios from the combined training split resulting in a total 960 hours audios. For supervised fine-tuning, three sets of Libri-Light [21]: 1 hour, 10 hour, 100 hour and the full Librispeech 960 hours dataset is used.

pseudo-labels: Six sets of pseudo-labels with varying numbers of clusters/resolutions are generated using first iteration HuBERT [2]. Initially, a K-means model with

1000 cluster centers is trained using latent features extracted from the 6th layer of the first iteration HuBERT base. Subsequently, another K-means model with 500 cluster centers is trained using the 1000 cluster centers as features obtained in the prior step. This process is iteratively repeated four times to train four more K-means models with 250, 125, 50, and 25 cluster centers (in that order) utilizing the cluster centers extracted from the previous step. This results in a total of 6 set of pseudo labels used to calculate the Multicluster MPL.

Pre-training: Unlike HuBERT, MS-HuBERT base incorporates 6 classification heads instead of just 1. This is because of the Multicluster MPL. This results in a total parameter count of 96.01 million, representing an increment of around 1.25 million parameters compared to HuBERT. MS-HuBERT is trained for 400,000 iterations on 32 GPUs with a batch size of at most 87.5 seconds of audio per GPU. The best model checkpoint is determined using the dev-other subset. Pre-trained models and training configurations will be made available after the acceptance.

Given the memory constraints and to avoid the out-ofmemory error, we randomly drop 2 clusters, and their respective layer indices, in each gradient update step. Furthermore, the intermediate layer index is chosen using the formula: 0.25*12, where 12 is the number of transformer encoder layers.

Supervised Fine-tuning and inference: We follow the Wav2Vec 2.0 [1] strategy to fine-tune MS-HuBERT to minimize the Connectionist Temporal Classification [22]

loss using 8 GPUs. The total batch size is of 200 seconds of audio per GPU and the best model checkpoint is determined by the lowest Word Error Rate (WER) achieved on the dev-other split. For inference, 4-gram language model (LM) is used with a beam width of 500 for devother, dev-clean and 1500 for test-clean and test-other. We do a conservative hyper-parameter search for the 1 hour and 10 hour splits and fixed hyper-parameter are used for the 100 and 960 hours training splits during fine-tuning. The inference hyper-parameters are searched with Ax, a Bayesian optimization toolkit ² with a beamwidth of 500 using 32 trials.

4. Results

4.1. Main Results: Supervised Fine-tuning and Inference

Table 1 presents the outcomes on the Librispeech ASR benchmark, where MS-HuBERT is compared with two similar approaches, HuBERT and WavLM. It is evident that MS-HuBERT yields superior results. The margin of improvement increase and the size of dataset used for fine-tuning has a direct proportionality. This is a desired property of any training framework i.e., as the dataset increase the performance should increase.

Notably, upon the removal of the Swap concept, we observed a degradation in performance, particularly in low-resource settings. This proves that the Swap method does indeed contribute positively to the performance gains.

4.2. MS-HuBERT as a Feature Extractor

To study the information encoded/learnt at different layers of the MS-HuBERT model and how it compares to the original HuBERT, we conduct two experiments: (i) SUPERB benchmark [23] and (ii) canonical correlation analysis (CCA) similarity with word labels [24, 25].

SUPERB Benchmark: The SUPERB benchmark is designed to evaluate the efficacy of a pre-trained model without fine-tuning i.e., using the frozen encoder as a feature extractor. Specifically, a linear weighted sum of the output embeddings of all the encoder layers serves as a feature for solving any particular downstream task. In our study, we aim to assess the quality of 2nd encoder embeddings, from the MS-HuBERT, for tackling the speech recognition task. Thus, we employ the ASR and phoneme-recognition (PR) tasks within the SUPERB benchmark. The evaluation is on the clean split of the ASR Librispeech benchmark. The results are reported in Table 2. Clearly MS-HuBERT surpasses HuBERT and similar models by a significant margin. This shows the model's capability in encoding information crucial in solving the ASR and PR task. Except on the ASR task

Table 1: ASR Librispeech benchmark finetuning results using a 4-gram language model. wav2vec 2.0 and data2vec are not a direct comparison to MS-HuBERT and is shown only such that the reader has a broader picture. The readers should ignore these two models until the Discussion section 5.

Method	dev-clean	dev-other	test-clean	test-other	
wav2vec 2.0 [1]	5.0	10.8	5.5	11.3	
HuBERT [2]	5.6	10.9	6.1	11.3	
WavLM [9]	-	-	5.7	10.8	
data2vec [10]	4.0	8.5	4.6	9.1	
MS-HuBERT	5.6	10.9	5.9	11.3	
- Swap	5.9	11.6	6.2	12.3	
10hr					
wav2vec 2.0	3.8	9.1	4.3	9.5	
HuBERT	3.9	9.0	4.3	9.4	
WavLM	-	-	4.3	9.2	
data2vec	3.3	7.5	3.9	8.1	
MS-HuBERT	3.6	8.5	4.1	8.8	
- Swap	3.8	8.6	4.1	9.2	
100hr					
wav2vec 2.0	2.7	7.9	3.4	8.0	
HuBERT	2.7	7.8	3.4	8.1	
WavLM	-	-	3.4	7.7	
data2vec	2.2	6.4	2.8	6.8	
MS-HuBERT	2.4	7.1	3.0	7.2	
- Swap	2.6	6.9	3.1	7.4	
960hr					
wav2vec 2.0	2.0	5.9	2.6	6.1	
data2vec	-	-	-	5.5	
MS-HuBERT	1.8	5.1	2.4	5.5	

using data2vec.

CCA Similarity with Word Labels: Following the layer-wise analysis conducted by Pasad et al. [24, 25], we use a modified version of canonical correlation analysis (CCA). Specifically, a projection-weighted CCA (PWCCA) [26]. The plots are shown in Figure 2. It is clear that MS-HuBERT significantly enhances the performance of word-level information across the transformer encoder layers. Additionally, we compute the area under the curve (AUC) and observe that it consistently surpasses that of Hubert. This increases the model capacity utilization compared to HuBERT. We also plot the M-HuBERT (MS-HuBERT - Swap) to study the effect the of Swap method. We found that combining Swap with the Multicluster loss slightly increases the AUC compared to not using it.

4.3. 3rd iteration models

We compare 3rd iteration MS-HuBERT (iter 3) to the 3rd iteration WavLM base+ which is trained on 960 and 94,000 hours of dataset respectively. WavLM is trained for 1 million steps. 3rd iteration MS-HuBERT is trained using the six set pseudo labels generated from the 7th layer of 2nd iteration MS-HuBERT. As shown in Table 3, MS-HuBERT (iter 3) achieves comparable performance

²https://github.com/facebook/Ax

Table 2: SUPERB fine-tuning results.

Method	PR	ASR
wav2vec 2.0 [1]	5.74	6.43
HuBERT [2]	5.41	6.42
WavLM [9]	4.84	6.21
data2vec [10]	4.69	4.94
MS-HuBERT	4.42	5.60
MS-HuBERT (iter 3)	4.17	5.32




Figure 2: Solid lines show the CCA similarity with the word labels. Dotted lines show the AUC area under the curv for different models.

to WavLM base +, even though pre-trained using 100 times less data. Which again shows that MS-HuBERT utilizes the model capacity most effectively.

5. Discussion

In comparison to data2vec [10], our performance on the ASR Librispeech benchmark, as illustrated in Table 1, still falls short, particularly evident in low resource scenarios. This difference may stem from the inherent nature of the MLM pre-text task utilizing discrete tokens. For instance, WER metric for HuBERT and WavLM in a 1-hour setting lag behind even wav2vec 2.0. However, as the fine-tuning dataset increases, the performance gap diminishes. When leveraging the entire 960 hours of the Librispeech dataset, our performance matches that of data2vec. On the SUPERB benchmark, for the PR task, MS-HuBERT outperforms data2vec and is comparable in the context of ASR.

Given MS-HuBERT is trained using the pseudo labels generated from the the first iteration HuBERT, there could be a scope for performance improvements as is evident from the MS-HuBERT (iter 3). Or the number of layers used in between the Multicluster MPL may restrict the capacity to learn higher level embeddings. However,

Table 3: 3rd iteration results using a 4-gram language model. WavLM + is model trained on 90k hours of dataset with data augmentation and 1 million steps.

Method	test-clean	test-other			
1hr					
WavLM Base + (iter 3) (90k) [9]	5.4	9.8			
Ms-HuBERT	5.9	11.3			
Ms-HuBERT (iter 3)	5.4	10.8			
10hr					
WavLM Base + (iter 3) (90k)	4.2	8.8			
Ms-HuBERT	4.1	8.8			
Ms-HuBERT (iter 3)	3.9	8.4			
100hr					
WavLM Base + (iter 3) (90k)	2.9	6.8			
Ms-HuBERT	3.0	7.1			
Ms-HuBERT (iter 3)	3.0	7.0			

larger models may alleviate this limitation by offering more layers in between the MPL calculation.

6. Conclusion

Our results highlight the potential of MS-HuBERT in bridging the performance gap between HuBERT and data2vec on the ASR Librispeech benchmark and content based tasks, ASR and PR, on the SUPERB benchmark. MS-HuBERT is aimed at mitigating the pretraining and inference mismatch in masked language modeling for learning. Building upon the HuBERT framework, MS-HuBERT incorporates two key modifications: the Swap method, enabling full context access during pre-training, and the Multicluster loss approach for more effective training. Through empirical evaluation on the ASR Librispeech benchmark, MS-HuBERT demonstrates significant performance improvements over the original HuBERT model, achieving state-of-the-art results and matching the performance of data2vec in highresource settings. Future research could explore further enhancements to the MS-HuBERT methodology to avoid iterative pre-training or improving the quality pseudo labels altogether. Lastly, scaling the model size is also an open question.

7. Limitations

Complexity and Computational Cost: MS-HuBERT introduces additional complexity to the pre-training process, particularly with the incorporation of the Swap method and Multicluster loss approach. This increased complexity may result in higher computational costs during both pre-training, limiting its practicality in resource-constrained environments.

8. References

- [1] A. Baevski, Y. Zhou, A. Mohamed, and M. Auli, "wav2vec 2.0: A framework for self-supervised learning of speech representations," *Advances in Neural Information Processing Systems*, vol. 33, pp. 12449–12460, 2020.
- [2] W.-N. Hsu, B. Bolte, Y.-H. H. Tsai, K. Lakhotia, R. Salakhutdinov, and A. Mohamed, "Hubert: Self-supervised speech representation learning by masked prediction of hidden units," *IEEE/ACM Transactions on Audio, Speech, and Language Pro*cessing, vol. 29, pp. 3451–3460, 2021.
- [3] T. Brown, B. Mann, N. Ryder, M. Subbiah, J. D. Kaplan, P. Dhariwal, A. Neelakantan, P. Shyam, G. Sastry, A. Askell et al., "Language models are few-shot learners," Advances in neural information processing systems, vol. 33, pp. 1877–1901, 2020.
- [4] Y.-A. Chung, W.-N. Hsu, H. Tang, and J. Glass, "An unsupervised autoregressive model for speech representation learning," arXiv preprint arXiv:1904.03240, 2019.
- [5] A. v. d. Oord, Y. Li, and O. Vinyals, "Representation learning with contrastive predictive coding," arXiv preprint arXiv:1807.03748, 2018
- [6] S. Schneider, A. Baevski, R. Collobert, and M. Auli, "wav2vec: Unsupervised pre-training for speech recognition," arXiv preprint arXiv:1904.05862, 2019.
- [7] Y.-A. Chung, Y. Zhang, W. Han, C.-C. Chiu, J. Qin, R. Pang, and Y. Wu, "W2v-bert: Combining contrastive learning and masked language modeling for self-supervised speech pre-training," in 2021 IEEE Automatic Speech Recognition and Understanding Workshop (ASRU). IEEE, 2021, pp. 244–250.
- [8] A. Baevski, M. Auli, and A. Mohamed, "Effectiveness of selfsupervised pre-training for speech recognition," arXiv preprint arXiv:1911.03912, 2019.
- [9] S. Chen, C. Wang, Z. Chen, Y. Wu, S. Liu, Z. Chen, J. Li, N. Kanda, T. Yoshioka, X. Xiao et al., "Wavlm: Large-scale selfsupervised pre-training for full stack speech processing," *IEEE Journal of Selected Topics in Signal Processing*, 2022.
- [10] A. Baevski, W.-N. Hsu, Q. Xu, A. Babu, J. Gu, and M. Auli, "Data2vec: A general framework for self-supervised learning in speech, vision and language," in *International Conference on Machine Learning*. PMLR, 2022, pp. 1298–1312.
- [11] T. Chen, S. Kornblith, M. Norouzi, and G. Hinton, "A simple framework for contrastive learning of visual representations," in *International conference on machine learning*. PMLR, 2020, pp. 1597–1607.
- [12] K. He, H. Fan, Y. Wu, S. Xie, and R. Girshick, "Momentum contrast for unsupervised visual representation learning," in *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, 2020, pp. 9729–9738.
- [13] J.-B. Grill, F. Strub, F. Altché, C. Tallec, P. Richemond, E. Buchatskaya, C. Doersch, B. Avila Pires, Z. Guo, M. Gheshlaghi Azar et al., "Bootstrap your own latent-a new approach to self-supervised learning," Advances in neural information processing systems, vol. 33, pp. 21 271–21 284, 2020.
- [14] O. Ronneberger, P. Fischer, and T. Brox, "U-net: Convolutional networks for biomedical image segmentation," in *Medical Image Computing and Computer-Assisted Intervention–MICCAI 2015:* 18th International Conference, Munich, Germany, October 5-9, 2015, Proceedings, Part III 18. Springer, 2015, pp. 234–241.
- [15] A. Riahi and É. Plourde, "Single channel speech enhancement using u-net spiking neural networks," in 2023 IEEE Canadian Conference on Electrical and Computer Engineering (CCECE). IEEE, 2023, pp. 111–116.
- [16] C. Macartney and T. Weyde, "Improved speech enhancement with the wave-u-net," *arXiv preprint arXiv:1811.11307*, 2018.
- [17] H. Yadav, S. Sitaram, and R. R. Shah, "Analysing the masked predictive coding training criterion for pre-training a speech representation model," in *ICASSP 2023-2023 IEEE International Con*ference on Acoustics, Speech and Signal Processing (ICASSP). IEEE, 2023, pp. 1–5.

- [18] J. Shi, Y. Tang, H. Inaguma, H. GOng, J. Pino, and S. Watanabe, "Exploration on hubert with multiple resolutions," arXiv preprint arXiv:2306.01084, 2023.
- [19] J. Shi, H. Inaguma, X. Ma, I. Kulikov, and A. Sun, "Multi-resolution hubert: Multi-resolution speech self-supervised learning with masked unit prediction," arXiv preprint arXiv:2310.02720, 2023.
- [20] V. Panayotov, G. Chen, D. Povey, and S. Khudanpur, "Librispeech: an asr corpus based on public domain audio books," in 2015 IEEE international conference on acoustics, speech and signal processing (ICASSP). IEEE, 2015, pp. 5206–5210.
- [21] J. Kahn, M. Rivière, W. Zheng, E. Kharitonov, Q. Xu, P. E. Mazaré, J. Karadayi, V. Liptchinsky, R. Collobert, C. Fuegen, T. Likhomanenko, G. Synnaeve, A. Joulin, A. Mohamed, and E. Dupoux, "Libri-light: A benchmark for asr with limited or no supervision," in ICASSP 2020 2020 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP), 2020, pp. 7669–7673, https://github.com/facebookresearch/libri-light.
- [22] A. Graves, S. Fernández, F. Gomez, and J. Schmidhuber, "Connectionist temporal classification: labelling unsegmented sequence data with recurrent neural networks," in *Proceedings of the 23rd international conference on Machine learning*, 2006, pp. 369–376.
- [23] S.-w. Yang, P.-H. Chi, Y.-S. Chuang, C.-I. J. Lai, K. Lakhotia, Y. Y. Lin, A. T. Liu, J. Shi, X. Chang, G.-T. Lin et al., "Superb: Speech processing universal performance benchmark," arXiv preprint arXiv:2105.01051, 2021.
- [24] A. Pasad, B. Shi, and K. Livescu, "Comparative layer-wise analysis of self-supervised speech models," in ICASSP 2023-2023 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP). IEEE, 2023, pp. 1–5.
- [25] A. Pasad, J.-C. Chou, and K. Livescu, "Layer-wise analysis of a self-supervised speech representation model," in 2021 IEEE Automatic Speech Recognition and Understanding Workshop (ASRU). IEEE, 2021, pp. 914–921.
- [26] A. Morcos, M. Raghu, and S. Bengio, "Insights on representational similarity in neural networks with canonical correlation," *Advances in neural information processing systems*, vol. 31, 2018.