

Async Learned User Embeddings for Ads Delivery Optimization

Mingwei Tang*, Meng Liu, Hong Li, Junjie Yang, Chenglin Wei, Boyang Li, Dai Li, Rengan Xu, Yifan Xu, Zehua Zhang, Xiangyu Wang, Linfeng Liu, Yuelei Xie, Chengye Liu, Labib Fawaz, Li Li,

Hongnan Wang, Bill Zhu, Sri Reddy
Corresponding_author:*mingwt@meta.com
Meta Platforms, Inc
United States

ABSTRACT

User representation is crucial for recommendation systems as it helps to deliver personalized recommendations by capturing user preferences and behaviors in low-dimensional vectors. High-quality user embeddings can capture subtle preferences, enable precise similarity calculations, and adapt to changing preferences over time to maintain relevance. The effectiveness of recommendation systems depends significantly on the quality of user embedding. We propose to asynchronously learn high fidelity user embeddings for billions of users each day from sequence based multimodal user activities in Meta platforms through a Transformer-like large scale feature learning module. The async learned user representations embeddings (ALURE) are further converted to user similarity graphs through graph learning and then combined with user realtime activities to retrieval highly related ads candidates for the entire ads delivery system. Our method shows significant gains in both offline and online experiments.

CCS CONCEPTS

• **Information systems** → **Top-k retrieval in databases**; **Similarity measures**; **Novelty in information retrieval**; *Content match advertising*; **Social networks**; **Personalization**.

KEYWORDS

Transformer, multimodal, user representation, retrieval, graph

ACM Reference Format:

Mingwei Tang*, Meng Liu, Hong Li, Junjie Yang, Chenglin Wei, Boyang Li, Dai Li, Rengan Xu, Yifan Xu, Zehua Zhang, Xiangyu Wang, Linfeng Liu, Yuelei Xie, Chengye Liu, Labib Fawaz, Li Li, Hongnan Wang, Bill Zhu, Sri Reddy. 2024. Async Learned User Embeddings for Ads Delivery Optimization. In *Proceedings of July 14–18, 2024 (Workshop on Multimodal Representation and Retrieval at SIGIR 2024)*. ACM, New York, NY, USA, 5 pages. <https://doi.org/10.1145/nnnnnnn.nnnnnnn>

1 INTRODUCTION

High fidelity user representation lies at the core of recommendation retrieval and ranking [1, 5, 8, 10, 19–21]. By accurately capturing user preferences, behaviors, and interactions, these representations

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than the author(s) must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.

Workshop on Multimodal Representation and Retrieval at SIGIR 2024, Washington, DC, © 2024 Copyright held by the owner/author(s). Publication rights licensed to ACM. ACM ISBN 978-x-xxxx-xxxx-x/YY/MM
<https://doi.org/10.1145/nnnnnnn.nnnnnnn>

empower recommendation systems to deliver personalized, relevant, and timely recommendations that enhance user satisfaction and engagement. User representations condense the complex user information into low-dimensional vectors. The quality of user embedding directly impacts the effectiveness and accuracy of recommendation systems. High-fidelity user embeddings can capture nuanced user preferences and contribute to more precise similarity computations, e.g. identify similar users and recommend ads that are engaged by the similar users. Recommendation systems also need to adapt to user preference changes over time to maintain relevance and effectiveness [10, 21]. High-quality user embeddings capture temporal dynamics and evolving user preferences, enabling recommendation models to continuously update and refine user representations based on the most recent interactions and feedback. Recent advances in Transformer based structures [17] have demonstrated its effectiveness in capturing both the content and temporal information from sequential inputs and graph based learning algorithms are also proven to be useful in improving recommendation systems [3, 14, 16, 18], which motivates us to combine a custom Transformer-like structure with graph learning to improve user representations and ads delivery system.

In this paper, we introduce how to generate high fidelity compact user representations and leverage it to improve retrieval performance. In Meta, we use a multi-stage ads delivery system [2, 15] as shown in Figure 1. Our user representations can be used in all stages,

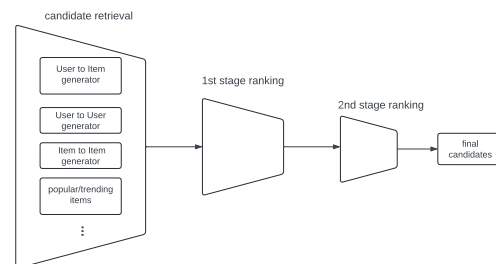


Figure 1: Ads delivery funnel with multi-stage ranking

but we will mainly focus on improving the candidate retrieval stage with a user-to-user (u2u) generator retrieving ads based on similar users. At a high level, we propose to improve the retrieval stage with the following components (see Figure 2):

- Multimodal event based features describing various user activities, such as user comments, user clicked ads or user viewed pictures and short form videos.

- A custom designed Transformer-like model to fuse multimodal sequence based inputs into a few high fidelity user embeddings. These embeddings are async updated to support large scale models up to over 10 GFLOPS.
- User similarity graphs based on user representations. These graphs are also async updated to support billions of users.
- During ads delivery, ads candidates are retrieved based on a combination of user similarity graph and other graphs sources such as social graphs, as well as user historical interactions with ads.

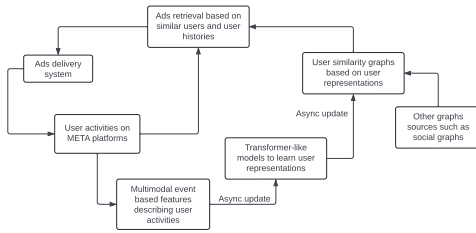


Figure 2: The feedback loop for User Representation Learning in Meta's ads delivery system

2 ASYNC LEARNED USER REPRESENTATION EMBEDDING

In this section, we will explain how we leverage multimodal user history inputs to compute user embeddings in async fashion.

2.1 Multimodal and sequence based user history inputs

The proposed system utilizes multimodal user history events from various sources. Representative event based features include user clicked ads ids or metadata information such as categories, encoded user generated texts such as comments and Residual-Quantized Variational Autoencoder (RQ-VAE) [7] encoded user viewed images or short form videos.

These signals are encoded as sequential data together with the corresponding timestamp for each event. An example of sequence based feature is shown in Figure 3.

2.2 Customized Transformer-like user representation module

To better process the sequential data and learn the higher order interactions among different event embeddings, we design a multi-layer Transformer-like user representation module. To better capture multimodal information from K different data sources, at each layer, we use K independent modules in parallel, one module for each source. User embeddings can be extracted from any intermediate layers of our multi-layer user representation module. (See Figure 4)

Figure 5 shows the detailed design of each Transformer-like user representation module. Compared to the traditional Transformer implementation, our modules have several key differences

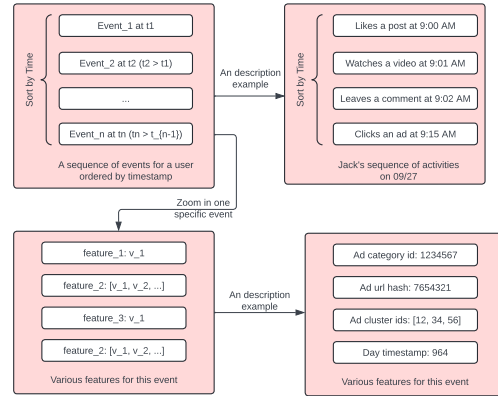


Figure 3: An example of user sequence feature

- Our module can handle user history sequences in different lengths without any padding. This can help scale our system to include user history information from months or even years ago.
- Besides the standard position encoding used in standard Transformer, our module uses a complex feature enrichment encoder (CFEE), which takes the raw timestamp sequence as inputs and encodes it through various encoding methods. Our current CFEE module includes:
 - Absolute position encoder [13]. We apply absolute position encoder to information such as user engagement frequencies and user engagement order.
 - Temporal decay encoder [9]. To model the importance of the past user ads engagement events decreasing over time, we apply the temporal decay encoder using a logarithmic transformation of time.
 - Cyclic pattern encoder [12]: user ads engagement shows a cyclical pattern. For instance, the level of engagement varies throughout the day, with different engagement densities at different times. Additionally, the engagement pattern differs between weekdays and weekends.. We adopt such idea and use a similar encoder to capture the cyclic patterns.
 - Relative position encoder [11]: Calculating relative distance poses a challenge in neural networks because position indices become invisible within the network after vector embedding. Discrete position indices must be embedded as vectors in order to be incorporated into the gradient during backpropagation.
- Unlike standard Transformer, where the encoded information is directly added to the content embeddings, we also compute pairwise relative timestamp encoding through CFEE module and add it to the attention weights matrix as attention bias.
- Besides the standard self attention, our module can also take additional context information such as ads embeddings as queries to further learn the interactions between users and ads.

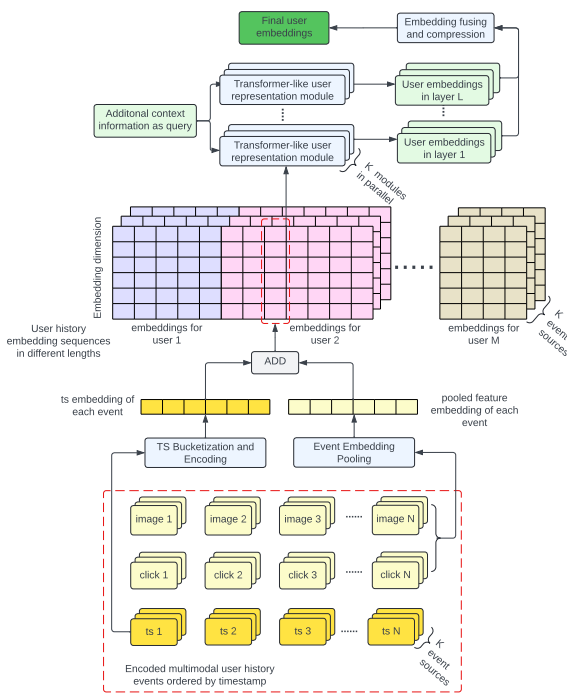


Figure 4: Illustration of user representation embedding learning architecture

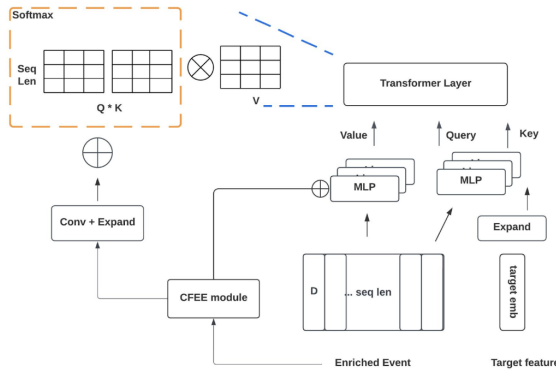


Figure 5: One layer of our custom Transformer-like architecture

2.3 Effective embedding compression

By default, the Transformer-like user representation module will produce hundreds of user embeddings, hence an effective embedding compression arch is designed to compress them into just a few to achieve storage saving and computation saving in the later stage of building user graphs, as well as fusing embeddings from different layers and sources. Our compression arch can either (1) use ResNet [6] style skip connection to combine compressed information from

dot product and linear compressed user embeddings (2) use another Transformer-like interaction module.

2.4 Async updates and user embedding logging

To provide better scalability, the user embeddings are not computed in realtime, but precomputed and updated in async fashion. During evaluation, we will not evaluate the entire model. Instead, we only evaluate the parts that are responsible for user embedding generation (see red box in Figure 6). This can either increase our evaluation speed by 50% or reduce the number of GPUs needed by 75%. Depending on the complexity of the model, the refresh latency can be tuned from minutes to days based on the application, infra capacity and other considerations.

3 USER SIMILARITY CONSTRUCTION

This section explains how to construct user similarity graph from async learned user representation embeddings (ALURE). User similarity is characterized by cosine distance in the user embedding space. Figure 6 provides an illustration of the end-to-end process.

- A model with a Transformer-like feature arch performs recurring training using the training data with user history input. New model checkpoints are generated on a daily basis.
- The Transformer-like feature arch is extracted from the model checkpoint to perform evaluation using new user history input data, which eventually generates user representation embeddings.
- We reduce the similar user search space using clustering:
 - Users within the same country will be clustered through K-means method with k_1 clusters based on the cosine distance of in user representation embedding space.
 - The search space is reduced to a small subset of k'_1 ($k'_1 \ll k_1$) nearest clusters based on the cosine distance to the cluster centroid.
- We search k_2 nearest neighbors from the k'_1 nearest clusters. The FAISS KNN [4] library is applied to accelerate to nearest neighbor search.
- A direct graph is constructed by forming edges from users to their corresponding nearest neighbors. The graph construction pipeline will be executed daily to reflect the latest user behaviors.

4 IMPROVE ADS DELIVERY WITH USER GRAPHS

The similarity graph from ALURE is used as a u2u generator at the candidate retrieval stage in figure 1. In this process, related ads from one user’s engagement history will be retrieved as the ads candidate for his/her similar users at the retrieval stage. Related ads can be

- the exact ads that the user has click/conversion behaviors
- a list of relevant ads under the ad account where the user has engaged with that ad account

Figure 7 on the left shows the first scenario, where the ad1 and ad2 that have been clicked by u1 is retrieved as ads candidates for similar users u2 and u3. Figure 7 on the right depicts the second scenario in which u1 has a conversion event related to the ad or

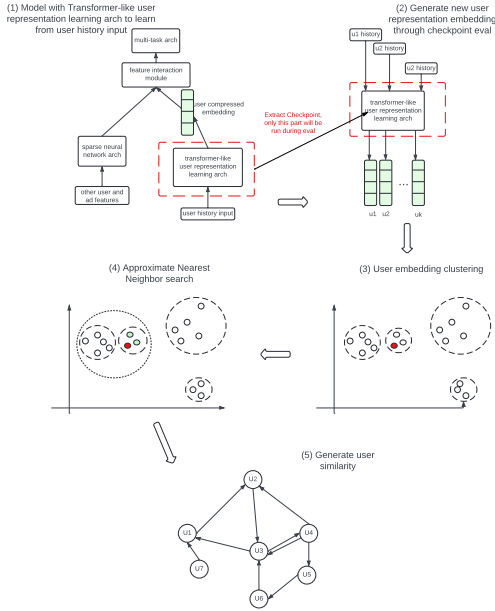


Figure 6: User similarity construction through user representation embedding learning

product under an account, for example, purchasing a T-shirt. Then other ads under the same ad account like shoe or pants can be retrieved to similar users u_2 and u_3 .

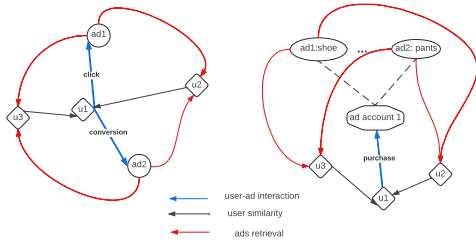


Figure 7: Retrieval Related Ads to similar users

5 EXPERIMENTS

Table 1: Model improvement from using asynchronous learned user representation embedding (ALURE) as feature

Model type	Prediction task	NE gain
Mobile feed	CTR	0.12%
Mobile feed	CVR	0.37%
Instagram	CTR	0.1%

5.1 Results in offline experiments

We first verify the quality of generated user embeddings by directly using them as features in production ads ranking models. In our experiments, we find that these embeddings can provide 0.1 ~ 0.3% Normalized Cross Entropy (NE) statistically significant gain on important tasks of production ads ranking models such as CTR or CVR, proving the effectiveness of these embeddings.

5.2 Results in online experiments

We set up online A/B testing experiments to measure the performance of ALURE in delivery optimization. The experiment consists of one control version reflecting the current system and two test versions with additional u_2u generators at the retrieval stage. In test version 1, we use (1) user similarity based on user following relationship (BFF) and (2) user similarity learned from Personalized PageRank (PPR). Version 2 is built on the top of version 1 with additional ads retrieved based on user graph using ALURE. The user graph is constructed by searching $k_2 = 15$ similar users from $k_1' = 50$ nearest clusters out of the $k_1 = 400$ clusters from K-means. The total number of retrieved ads for each user from ALURE is capped to 1500. Figure 8 demonstrates the distribution of the retrieved related ads for each user.

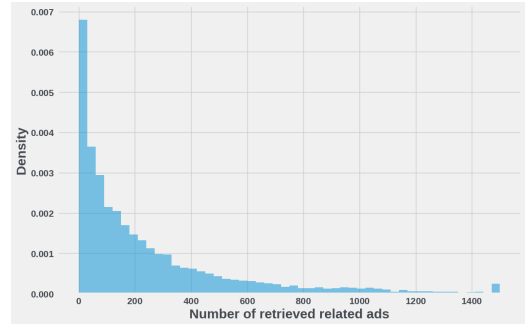


Figure 8: Distribution of user level number of retrieved related ads

Table 2: Online performance from using ALURE for delivery optimization

Experiment version	User similarity graph	Online metric change
control		0%
Version 1	BFF + PPR	-0.05%
Version 2	BFF + PPR + ALURE	0.28%

The performance is measured with on an online metric calculated from the total value generated from both advertisers and people based on the ads shown and engaged with. We report the relative online metric change using

$$(metric_{test} - metric_{control}) / metric_{control} \times 100\%. \quad (1)$$

Version 1 with BFF and PPR graph shows -0.05% online metric change compared with the control group, which is within the $\pm 0.15\%$ statistical significant threshold and should be considered as neutral. Version 2 with additional ads from ALURE demonstrates 0.28% statistically significant improvement on ads online metric, indicating the strong performance of ALURE in ads delivery optimization.

6 ACKNOWLEDGMENTS

This work would not be possible without collaboration from hundreds of people. Especially, we want to thank (in alphabetical order) Baichuan Yuan, Ben Wang, Danel Li, Doris Wang, Esam Abdel Rhman, Hong Yan, Hung Duong, Jiaqi Zhai, Joy Mu, Lang Yu, Leo Ding, Pan Chen, Peng Sun, Pushkar Tripathi, Qiao Yang, Qian Ge, Rocky Liu, Santanu Kolay, Sandeep Pandey, Xiaoyu Chen, Xing Liu, Xuanting Cai.

7 SUMMARY

REFERENCES

- [1] Paul Baltescu, Haoyu Chen, Nikil Pancha, Andrew Zhai, Jure Leskovec, and Charles Rosenberg. 2022. Itemsage: Learning product embeddings for shopping recommendations at pinterest. In *Proceedings of the 28th ACM SIGKDD Conference on Knowledge Discovery and Data Mining*. 2703–2711.
- [2] Paul Covington, Jay Adams, and Emre Sargin. 2016. Deep neural networks for youtube recommendations. In *Proceedings of the 10th ACM conference on recommender systems*. 191–198.
- [3] Zahra Zamanzadeh Darban and Mohammad Hadi Valipour. 2022. GHRS: Graph-based hybrid recommendation system with application to movie recommendation. *Expert Systems with Applications* 200 (2022), 116850.
- [4] Matthijs Douze, Alexandr Guzhva, Chengqi Deng, Jeff Johnson, Gergely Szilvasy, Pierre-Emmanuel Mazaré, Maria Lomeli, Lucas Hosseini, and Hervé Jégou. 2024. The Faiss library. (2024). arXiv:2401.08281 [cs.LG]
- [5] Mihajlo Grbovic and Haibin Cheng. 2018. Real-time personalization using embeddings for search ranking at airbnb. In *Proceedings of the 24th ACM SIGKDD international conference on knowledge discovery & data mining*. 311–320.
- [6] Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. 2016. Deep residual learning for image recognition. In *Proceedings of the IEEE conference on computer vision and pattern recognition*. 770–778.
- [7] Doyun Lee, Chiheon Kim, Saehoon Kim, Minsu Cho, and Wook-Shin Han. 2022. Autoregressive image generation using residual quantization. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 11523–11532.
- [8] Aditya Pal, Chantat Eksombatchai, Yitong Zhou, Bo Zhao, Charles Rosenberg, and Jure Leskovec. 2020. Pinnerpage: Multi-modal user embedding framework for recommendations at pinterest. In *Proceedings of the 26th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining*. 2311–2320.
- [9] Nikil Pancha, Andrew Zhai, Jure Leskovec, and Charles Rosenberg. 2022. PinnerFormer: Sequence Modeling for User Representation at Pinterest. In *Proceedings of the 28th ACM SIGKDD Conference on Knowledge Discovery and Data Mining*. 3702–3712.
- [10] Qi Pi, Weijie Bian, Guorui Zhou, Xiaoqiang Zhu, and Kun Gai. 2019. Practice on long sequential user behavior modeling for click-through rate prediction. In *Proceedings of the 25th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining*. 2671–2679.
- [11] Peter Shaw, Jakob Uszkoreit, and Ashish Vaswani. 2018. Self-attention with relative position representations. *arXiv preprint arXiv:1803.02155* (2018).
- [12] Jianlin Su, Yu Lu, Shengfeng Pan, Ahmed Murtadha, Bo Wen, and Yunfeng Liu. 2021. Roformer: Enhanced transformer with rotary position embedding. *arXiv preprint arXiv:2104.09864* (2021).
- [13] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. 2017. Attention is all you need. *Advances in neural information processing systems* 30 (2017).
- [14] Shoujin Wang, Liang Hu, Yan Wang, Xiangnan He, Quan Z Sheng, Mehmet A Orgun, Longbing Cao, Francesco Ricci, and Philip S Yu. 2021. Graph learning based recommender systems: A review. *arXiv preprint arXiv:2105.06339* (2021).
- [15] Xuewei Wang, Qiang Jin, Shengyu Huang, Min Zhang, Xi Liu, Zhengli Zhao, Yukun Chen, Zhengyu Zhang, Jiyan Yang, Ellie Wen, et al. 2023. Towards the Better Ranking Consistency: A Multi-task Learning Framework for Early Stage Ads Ranking. *arXiv preprint arXiv:2307.11096* (2023).
- [16] Shiwen Wu, Fei Sun, Wentao Zhang, Xu Xie, and Bin Cui. 2022. Graph neural networks in recommender systems: a survey. *Comput. Surveys* 55, 5 (2022), 1–37.
- [17] Xue Xia, Pong Eksombatchai, Nikil Pancha, Dhruvil Deven Badani, Po-Wei Wang, Neng Gu, Saurabh Vishwas Joshi, Nazanin Farahpour, Zhiyuan Zhang, and Andrew Zhai. 2023. Transact: Transformer-based realtime user action model for recommendation at pinterest. In *Proceedings of the 29th ACM SIGKDD Conference on Knowledge Discovery and Data Mining*. 5249–5259.
- [18] Kaige Yang and Laura Toni. 2018. Graph-based recommendation system. In *2018 IEEE Global Conference on Signal and Information Processing (GlobalSIP)*. IEEE, 798–802.
- [19] Fajie Yuan, Guoxiao Zhang, Alexandros Karatzoglou, Joemon Jose, Beibei Kong, and Yudong Li. 2021. One Person, One Model, One World: Learning Continual User Representation without Forgetting. In *Proceedings of the 44th International ACM SIGIR Conference on Research and Development in Information Retrieval (Virtual Event, Canada) (SIGIR '21)*. Association for Computing Machinery, New York, NY, USA, 696–705. <https://doi.org/10.1145/3404835.3462884>
- [20] Junqi Zhang, Bing Bai, Ye Lin, Jian Liang, Kun Bai, and Fei Wang. 2020. General-Purpose User Embeddings Based on Mobile App Usage. In *Proceedings of the 26th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining (Virtual Event, CA, USA) (KDD '20)*. Association for Computing Machinery, New York, NY, USA, 2831–2840. <https://doi.org/10.1145/3394486.3403334>
- [21] Wei Zhang, Dai Li, Chen Liang, Fang Zhou, Zhongke Zhang, Xuewei Wang, Ru Li, Yi Zhou, Yaning Huang, Dong Liang, Kai Wang, Zhangyuan Wang, Zhengxing Chen, Min Li, Fenggang Wu, Minghai Chen, Huayu Li, Yunman Wu, Zhan Shu, Mindi Yuan, and Sri Reddy. 2023. Scaling User Modeling: Large-scale Online User Representations for Ads Personalization in Meta. arXiv:2311.09544 [cs.IR]

Received 20 April 2024; accepted 23 May 2024