

Output-sensitive Conjunctive Query Evaluation

SHALEEN DEEP, Microsoft, USA

HANGDONG ZHAO, University of Wisconsin-Madison, USA

AUSTEN Z. FAN, University of Wisconsin-Madison, USA

PARASCHOS KOUTRIS, University of Wisconsin-Madison, USA

Join evaluation is one of the most fundamental operations performed by database systems and arguably the most well-studied problem in the Database community. A staggering number of join algorithms have been developed, and commercial database engines use finely tuned join heuristics that take into account many factors including the selectivity of predicates, memory, IO, etc. However, most of the results have catered to either full join queries or non-full join queries but with degree constraints (such as PK-FK relationships) that make joins *easier* to evaluate. Further, most of the algorithms are also not output-sensitive. In this paper, we present a novel, output-sensitive algorithm for the evaluation of acyclic Conjunctive Queries (CQs) that contain arbitrary free variables. Our result is based on a novel generalization of the Yannakakis algorithm and shows that it is possible to improve the running time guarantee of Yannakakis algorithm by a polynomial factor. Importantly, our algorithmic improvement does not depend on the use of fast matrix multiplication, as a recently proposed algorithm does. The upper bound is complemented with matching lower bounds conditioned on two variants of the k -clique conjecture. The application of our algorithm recovers known prior results and improves on known state-of-the-art results for common queries such as paths and stars.

ACM Reference Format:

Shaleen Deep, Hangdong Zhao, Austen Z. Fan, and Paraschos Koutris. 2024. Output-sensitive Conjunctive Query Evaluation. 1, 1 (June 2024), 22 pages. <https://doi.org/10.1145/nnnnnnn.nnnnnnn>

1 INTRODUCTION

Join query evaluation is the workhorse of commercial database systems to support complex data analytics, data science, and machine learning tasks, to name a few. Decades of research in the database community (both theoretical and practical) have sought to improve join query evaluation performance to scale up processing to large-scale datasets.

In terms of the theoretical guarantees offered by the state-of-the-art algorithms, several existing results are known for acyclic and cyclic queries. For acyclic queries, Yannakakis proposed an elegant framework for query evaluation [27]. Yannakakis showed that for a database \mathcal{D} of size $|\mathcal{D}|$ and any acyclic Conjunctive Query (CQ) $Q(\mathbf{x}_{\mathcal{F}})$ with output $\text{OUT} = Q(\mathcal{D})$ and free variables $\mathbf{x}_{\mathcal{F}}$, we can evaluate the query result in time $O(|\mathcal{D}| + |\mathcal{D}| \cdot |\text{OUT}|)$ in terms of data complexity. Depending on the structure of free variables in the query, it is possible to obtain a better runtime bound for the algorithm. For example, for the class of *free-connex acyclic* CQs, the algorithm is optimal with running time $O(|\mathcal{D}| + |\text{OUT}|)$. Beyond acyclic queries, worst-case optimal joins (WCOJs) provide worst-case guarantees on query evaluation time for any full CQ (i.e., all variables are free). For non-full CQs, WCOJs are combined with the notion of tree decompositions to obtain tighter guarantees on the running time. In particular, [24] showed that any CQ can be evaluated in $O(|\mathcal{D}|^w + |\text{OUT}|)$ time, where w generalizes the fractional hypertree width from Boolean to CQs with arbitrary free

Authors' addresses: Shaleen Deep, Jim Gray Systems Lab, Microsoft, USA, shaleen.deep@microsoft.com; Hangdong Zhao, Department of Computer Sciences, University of Wisconsin-Madison, Madison, USA, hangdong@cs.wisc.edu; Austen Z. Fan, Department of Computer Sciences, University of Wisconsin-Madison, Madison, USA, afan@cs.wisc.edu; Paraschos Koutris, Department of Computer Sciences, University of Wisconsin-Madison, Madison, USA, paris@cs.wisc.edu.

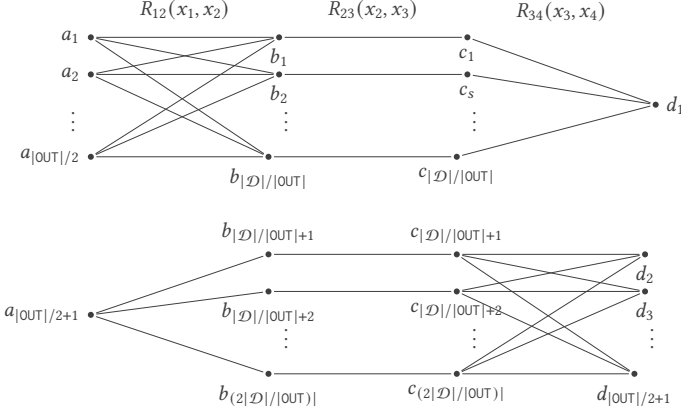


Fig. 1. Database instance showing relations $R_{12}(x_1, x_2)$, $R_{23}(x_2, x_3)$, and $R_{34}(x_3, x_4)$ for the three path query.

variables. Abo Khamis et al. [3] showed that using the PANDA algorithm and combining it with the Yannakakis framework, any CQ can be evaluated in $\tilde{O}(|\mathcal{D}| + |\mathcal{D}|^{\text{subw}} \cdot |\text{OUT}|)$ time¹. Notably, the PANDA algorithm itself uses the Yannakakis algorithm as the final step for join evaluation once the cyclic query has been transformed into a set of acyclic queries.

Despite its fundamental importance, no known improvements have been made to Yannakakis result until very recently. In an elegant result, Hu [16] showed that using fast matrix multiplication (i.e., a matrix multiplication algorithm that multiplies two $n \times n$ matrices in $O(n^\omega)$ time, $\omega < 3$), we can evaluate any acyclic CQ in $O(|\mathcal{D}| + |\text{OUT}| + |\mathcal{D}| \cdot |\text{OUT}|^{5/6})$ (if $\omega = 2$, which gives the strongest result in their framework). The key insight is to use the star query as a fundamental primitive that benefits from fast matrix multiplication, an insight also explored by prior work [5, 11], and evaluate any acyclic CQ in a bottom-up fashion by repeatedly applying the star query primitive. However, Hu’s result has two principal limitations. First, the runtime guarantee of the algorithm degenerates to $O(|\mathcal{D}| + |\mathcal{D}| \cdot |\text{OUT}|)$ for $\omega = 3$, which is the same guarantee as that of Yannakakis’s algorithm. Second, the algorithm does not support general aggregations (aka FAQs cf. Section 5), a common usecase in SQL [10]. It is also open whether the upper bound obtained is optimal. Therefore, the tantalizing question of whether Hu’s upper bound can be improved and whether the improvement can be made using a combinatorial² algorithm remains open.

In this paper, we show that it is possible to evaluate any acyclic CQ Q combinatorially in time $O(|\mathcal{D}| + |\text{OUT}| + |\mathcal{D}| \cdot |\text{OUT}|^{1-\epsilon})$ where $0 < \epsilon \leq 1$ is a query-dependent constant. An important class of queries that we consider is the path query $P_k(x_1, x_{k+1}) \leftarrow R_{12}(x_1, x_2) \wedge R_{23}(x_2, x_3) \wedge \dots \wedge R_{k,k+1}(x_k, x_{k+1})$. To give the reader an overview of our key ideas, we show our techniques on the three path query $P_3(x_1, x_4)$.

Example 1.1. Consider the database instance as shown in Figure 1. This example instance was also used by Hu to show the limitations of Yannakakis algorithm. For any $1 \leq |\text{OUT}| \leq |\mathcal{D}|$, Hu showed that any join order chosen by the Yannakakis algorithm for evaluating the query must incur a materialization cost of $\Omega(|\mathcal{D}| \cdot |\text{OUT}|)$. However, their argument assumes that the entire relation is used to do the join.

¹ \tilde{O} notation hides a polylogarithmic factor in terms of $|\mathcal{D}|$

²Although combinatorial algorithm does not have a formal definition, it is intuitively used to mean that the algorithm does not use any algebraic structure properties. A key property of combinatorial algorithms is that they are practically efficient [25]. Nearly all practical/production join algorithms known to date are combinatorial in nature.

We demonstrate an algorithm for this query that bypasses the assumption. First, partition $R_{12}(x_1, x_2)$ into $R_{12}^H(x_1, x_2)$ and $R_{12}^L(x_1, x_2)$ based on the degree threshold of x_2 values. In particular, for any choice of $\Delta > 1$, we define

$$R_{12}^L(x_1, x_2) = \{t \in R_{12} \mid |\sigma_{x_2=t(x_2)}R_{12}| \leq \Delta\}$$

Let $R_{12}^H(x_1, x_2) = R \setminus R_{12}^L(x_1, x_2)$. Now, the original query can be answered by unioning the output of $P_4^H = \pi_{x_1, x_4}(R_{12}^H(x_1, x_2) \wedge R_{23}(x_2, x_3) \wedge R_{34}(x_3, x_4))$ and $P_4^L = \pi_{x_1, x_4}(R_{12}^L(x_1, x_2) \wedge R_{23}(x_2, x_3) \wedge R_{34}(x_3, x_4))$.

Both of the join queries can be evaluated in $O(|\mathcal{D}|)$ time, regardless of the value of $|\text{OUT}|$. For both queries, we first apply a semijoin filter to remove all tuples from the input that do not participate in the join, a linear time operation. P_4^L is evaluated by first joining $R_{12}^L(x_1, x_2) \wedge R_{23}(x_2, x_3)$, materializing the intermediate result, and then join the result with $R_{34}(x_3, x_4)$. P_4^H is evaluated in the opposite order by first joining $R_{23}(x_2, x_3) \wedge R_{34}(x_3, x_4)$, followed by joining with $R_{12}^H(x_1, x_2)$.

Building upon the idea in Example 1.1, we show that by carefully partitioning the input and evaluating queries in a specified order, it is possible to improve the running complexity of join evaluation for a large class of CQs.

Our Contribution. In this paper, we develop a combinatorial algorithm for evaluating any CQ Q . We present a recursive algorithm that generalizes the Yannakakis algorithm and obtains a provable improvement in running time. The generalization is clean enough for teaching at a graduate level. Our results are easily extensible to support aggregations and commutative semirings. To characterize the running time of CQs, we also present a new simple width measure that we call the *projection width*, $\text{pw}(Q)$, that closely relates to existing width measures known for acyclic queries. As an example, our generalized algorithm when applied to the path query $P_k(x_1, x_{k+1})$ can evaluate it in time $O(|\mathcal{D}| + |\text{OUT}| + |\mathcal{D}| \cdot |\text{OUT}|^{1-1/k})$. Rather surprisingly, this result (which is combinatorial and thus, assumes $\omega = 3$) is already polynomially better than Hu’s result for $k \leq 5$ even if we assume that $\omega = 2$ to obtain the strongest possible result in their setting. At the heart of our main algorithm is a technical result (which may be of independent interest) that allows tighter bounding of the cost of materializing intermediate results when executing Yannakakis. We demonstrate the usefulness of our tighter bounding by proving that for path queries, we can further improve the running time to $O(|\mathcal{D}| + |\text{OUT}| + |\mathcal{D}| \cdot |\text{OUT}|^{1-1/\lceil (k+1)/2 \rceil})$. For $k = 3$, this result matches the lower bound of $\Omega(|\mathcal{D}| + |\text{OUT}| + |\mathcal{D}| \cdot \sqrt{|\text{OUT}|})$ that holds for evaluating any P_k for $k \geq 2$.

Further, we establish tightness of our results by demonstrating a matching lower bound on the running time for a class of acyclic and cyclic queries. Our lower bounds are applicable to both join processing (aka Boolean semiring) and FAQs.

2 PRELIMINARIES AND NOTATION

Conjunctive Queries. We associate a Conjunctive Query (CQ) Q to a hypergraph $\mathcal{H} = (\mathcal{V}, \mathcal{E})$, where $\mathcal{V} = [n] = \{1, \dots, n\}$ and \mathcal{E} is a set of hyperedges; each hyperedge is a subset of $[n]$. The relations of the query are $R_J(\mathbf{x}_J)$, $J \in \mathcal{E}$, where $\mathbf{x}_J = (x_j)_{j \in J}$ is the schema (or variables) of R_J , for any $J \subseteq [n]$. The CQ is:

$$Q(\mathbf{x}_{\mathcal{F}}) \leftarrow \bigwedge_{J \in \mathcal{E}} R_J(\mathbf{x}_J) \quad (1)$$

The variables in the head of the query $\mathbf{x}_{\mathcal{F}}$ ($\mathcal{F} \subseteq [n]$) are the *free* variables (or the projection variables). A CQ is *full* if $\mathcal{F} = [n]$, and it is *Boolean* if $\mathcal{F} = \emptyset$, simply written as $Q()$. The size $|R_J|$ of a relation R_J is the number of its tuples. A database \mathcal{D} is a finite set of relations and the size of a database $|\mathcal{D}|$ is the sum of the sizes of its relations.

We will say that a variable $x \in \mathcal{V}(\mathcal{H})$ that is present in at least two relations is a *join variable*, while a variable that is present in exactly one relation is *isolated*.

Tree Decomposition. A tree decomposition of a hypergraph $\mathcal{H} = ([n], \mathcal{E})$ is a pair (\mathcal{T}, χ) where \mathcal{T} is a tree and $\chi : V(\mathcal{T}) \rightarrow 2^{[n]}$ maps each node t of the tree to a subset $\chi(t)$ of vertices such that

- (1) Every hyperedge $F \in \mathcal{E}$ is a subset of some $\chi(t)$, $t \in V(\mathcal{T})$,
- (2) For every vertex $v \in [n]$, the set $\{t \mid v \in \chi(t)\}$ is a non-empty (connected) sub-tree of \mathcal{T} .

The sets $e = \chi(t)$ are called the *bags* of the tree decomposition. We use $\chi^{-1}(e)$ to recover the node of the tree with bag e . A query is said to be α -acyclic³ if there exists a tree decomposition such that every bag B of the tree decomposition corresponds uniquely to an input relation R_B . Such a tree decomposition is referred to as the *join tree* of the query. It is known that an α -acyclic query can be evaluated in time $O(|\mathcal{D}| + |\text{OUT}|)$. For simplicity, we will sometimes refer to the node of a join tree through the relation assigned to the node since there is a one-to-one mapping. A *rooted tree decomposition* is a tree decomposition that is rooted at some node $r \in V(\mathcal{T})$ (denoted by (\mathcal{T}, χ, r)). Different choices of r change the orientation of the tree. We will use $\mathcal{L}(\mathcal{T}) \subseteq V(\mathcal{T})$ to denote the set of leaf nodes of a rooted tree decomposition and $\mathcal{I}(\mathcal{T}) = V(\mathcal{T}) \setminus \mathcal{L}(\mathcal{T})$ as the set of internal nodes (i.e. all non-leaf nodes) of the rooted tree decomposition. For any node $t \in V(\mathcal{T})$ in a rooted tree decomposition, we use \mathcal{F}_t to denote the set of free variables that appear in the subtree rooted at t (including free variables in $\chi(t)$). The subtree rooted at t is denoted via \mathcal{T}_t .

A CQ Q with free variables \mathcal{F} is called *free-connex acyclic* if it is α -acyclic and the hypergraph $([n], \mathcal{E} \cup \{\mathcal{F}\})$ is also α -acyclic.

Valuations and Operators. A valuation v over a set of variables \mathbf{x} is a total function that maps each variable $x \in \mathbf{x}$ to a value $v(x) \in \mathbf{dom}$, where \mathbf{dom} is a domain of constants. Given a tuple t over schema $\mathcal{S} \subseteq \mathbf{x}$, $t(\mathcal{S})$ is the restriction of t onto \mathcal{S} . For a relation R_J over variables \mathbf{x}_J , a schema $\mathcal{S} \subseteq \mathbf{x}_J$, and a tuple $s = v(\mathcal{S})$, we define $\sigma_{\mathcal{S}=s}(R) = \{t \mid t \in R_J \wedge t[\mathcal{S}] = s\}$ as the set of tuples in R_J that agree with s over variables in \mathcal{S} , and $\pi_{\mathcal{S}}(R_J) = \{t(\mathcal{S}) \mid t \in R_J\}$ as the set of restriction of the tuples in R_J to the variables in \mathcal{S} . The output or result of evaluating a CQ Q over \mathcal{D} (denoted $Q(\mathcal{D})$) can be defined as $\pi_{\mathbf{x}_{\mathcal{F}}}(\{v(\mathbf{x}_{[n]}) \mid v(\mathbf{x}_J) \in R_J, \forall J \in \mathcal{E}\})$. We denote by OUT the result of running Q over database \mathcal{D} (i.e., $\text{OUT} = Q(\mathcal{D})$) and we use $|\text{OUT}|$ to denote the number of tuples in $Q(\mathcal{D})$.

For relation R_J over variables \mathbf{x}_J , a threshold Δ , and a set $\mathcal{S} \subseteq \mathbf{x}_J$, we say that a valuation $v(\mathcal{S})$ is *heavy* if $|\sigma_{\mathcal{S}=v(\mathcal{S})}(R_J)| > \Delta$, and *light otherwise*. We will use $d(v, \mathcal{S}, R_J)$ to denote the degree of the restriction of valuation v on \mathcal{S} (i.e. $v(\mathcal{S})$) in relation R_J (i.e. $|\sigma_{\mathcal{S}=v(\mathcal{S})}(R_J)|$).

Model of Computation. We use the standard RAM model with uniform cost measure. For an instance of size N , every register has length $O(\log N)$. Any arithmetic operation (such as addition, subtraction, multiplication and division) on the values of two registers can be done in $O(1)$ time. Sorting the values of N registers can be done in $O(N \log N)$ time.

3 PROJECTION WIDTH

Consider a CQ Q with hypergraph \mathcal{H} and free variables $\mathbf{x}_{\mathcal{F}}$. We first define the *reduced query* of Q , denoted $\text{red}[Q]$ (in [16], this is called a cleansed query) via Algorithm 1. The while-loop of the procedure essentially follows the GYO algorithm [23, 28], with the difference that we can remove isolated variables only if they are not free. The reduced query is well-defined because the resulting hypergraph after the while-loop terminates is the same independent of the sequence of vertex and hyperedge removals. If $\mathcal{F} = V(\mathcal{H})$, the procedure does not remove any variables (but may potentially remove hyperedges). If $\mathcal{F} = \emptyset$, the while-loop is identical to the GYO algorithm and will return the hypergraph $(\emptyset, \{\{\}\})$.

We say that Q is *reduced* if $Q = \text{red}[Q]$, i.e., the query cannot be further reduced.

³Throughout the paper, we will use acyclic to mean α -acyclic.

Algorithm 1: Reduced CQ

Input : acyclic Q with hypergraph \mathcal{H} and free variables $\mathbf{x}_{\mathcal{F}}$
Output : $\text{red}[Q]$

- 1 $\mathcal{H}' \leftarrow$ multihypergraph of \mathcal{H} /* Edges \mathcal{E}' in \mathcal{H}' are a multiset */
- 2 **while** \mathcal{H}' has changed **do**
- 3 **if** \exists isolated variable $x \notin \mathbf{x}_{\mathcal{F}}$ **then**
- 4 $V(\mathcal{H}') \leftarrow V(\mathcal{H}) \setminus \{x\}$
- 5 **if** $\exists e, f \in E(\mathcal{H}')$ such that $e \subseteq f$ **then**
- 6 $E(\mathcal{H}') \leftarrow E(\mathcal{H}') \setminus \{e\}$
- 7 **return** $\mathcal{H}', \mathcal{F}$

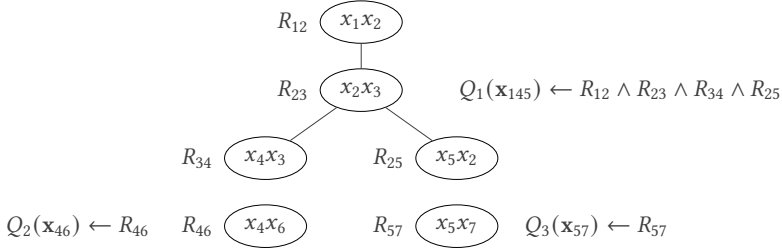


Fig. 2. Depiction of the graph G_Q^{\exists} and the decomposition of the running example query $Q(\mathbf{x}_{14567}) \leftarrow R_{12}(\mathbf{x}_{12}) \wedge R_{23}(\mathbf{x}_{23}) \wedge R_{34}(\mathbf{x}_{34}) \wedge R_{25}(\mathbf{x}_{25}) \wedge R_{46}(\mathbf{x}_{46}) \wedge R_{57}(\mathbf{x}_{57})$

The following two properties of reduced queries will be important in this section.

Proposition 3.1. *An acyclic Q is free-connex acyclic if and only if all the variables of $\text{red}[Q]$ are free.*

Proposition 3.2. *Let Q be a reduced acyclic CQ, and \mathcal{T} be a join tree of Q . Then, every leaf node of \mathcal{T} has an isolated free variable.*

PROOF. Suppose there exists a leaf node t that violates the desired property. First, we establish that $\chi(t)$ contains free variable(s). For the sake of contradiction, let us assume that $\chi(t)$ contains no free variable. Since all isolated variables have already been removed, it must be the case that all remaining variables in $\chi(t)$ are also present in its parent and thus are join variables. However, such hyperedges are removed by line 6 of Algorithm 1. Therefore, $\chi(t)$ must contain free variable(s).

Next, suppose that the free variable is not isolated. Then, it must be the case that the free variable is also present in the parent (otherwise it would be isolated). By the same argument as before, since all other variables in $\chi(t)$ are also present in the parent, we get a contradiction since such hyperedges are removed by Algorithm 1. This concludes the proof. \square

Second, we define the *decomposition* of a CQ Q following [16]. Define the graph G_Q^{\exists} , where each hyperedge is a vertex, and there is an edge between e, e' if they share a non-free variable. Let E_1, \dots, E_k be the connected components of G_Q^{\exists} . Then, the decomposition of Q , denoted $\text{decomp}(Q)$, is a set of queries $\{Q_1, \dots, Q_k\}$, where Q_i is the CQ with hypergraph $(\bigcup_{e \in E_i} e, E_i)$ and free variables $\mathcal{F} \cap \bigcup_{e \in E_i} e$. If the decomposition of Q has exactly one query, we say that Q is *existentially connected*.

Definition 3.1 (Projection Width). Consider an acyclic CQ Q . Then, $\text{pw}(Q)$ is the maximum number of relations across all queries in $\text{decomp}(\text{red}[Q])$.

Example 3.2. Consider the query

$$Q_\ell^*(x_1, \dots, x_\ell) \leftarrow R_1(x_1, y) \wedge \dots \wedge R_k(x_\ell, y).$$

One can observe that $\text{red}[Q_\ell^*] = Q_\ell^*$. The decomposition of the reduced query has only one connected component with ℓ atoms, hence $\text{pw}(Q_\ell^*) = \ell$.

Example 3.3. Consider the query $Q(\mathbf{x}_{14567}) \leftarrow R_{12}(\mathbf{x}_{12}) \wedge R_{23}(\mathbf{x}_{23}) \wedge R_{34}(\mathbf{x}_{34}) \wedge R_{25}(\mathbf{x}_{25}) \wedge R_{46}(\mathbf{x}_{46}) \wedge R_{57}(\mathbf{x}_{57})$. Note the query is already reduced since there are no isolated variables or any hyperedges that are contained in another. To compute the projection width of the query, Figure 2 shows the graph G_Q^\exists where each atom of the query becomes a vertex. Note that there is no edge between R_{34} and R_{46} because x_4 is a free variable. This graph has three connected components, and the largest connected component contains four hyperedges, hence $\text{pw}(Q(\mathbf{x}_{14567})) = 4$. Figure 2 also shows the three queries corresponding to each connected component of G_Q^\exists .

We observe that $1 \leq \text{pw}(Q) \leq |E(\mathcal{H})|$, and also that $\text{pw}(Q)$ is always an integer. When Q is full, every hyperedge of the reduced hypergraph forms its own connected component of size one; in this case, $\text{pw}(Q) = 1$. More generally:

Proposition 3.3. *An acyclic CQ Q is free-connex acyclic if and only if $\text{pw}(Q) = 1$.*

PROOF. Suppose that Q is free-connex. From Proposition 3.1, $\text{red}[Q]$ has only free variables. Hence, in the decomposition every hyperedge forms a connected component of size one. Thus, $\text{pw}(Q) = 1$.

For the other direction, suppose that $\text{pw}(Q) = 1$. Let us examine the reduced query $Q' = \text{red}[Q]$. Then, every query in the decomposition of Q' has size one. However, this implies in turn that all variables of Q' are free; indeed, if there exists a non-free variable x , the variable x would be isolated and that would violate the fact that Q' is reduced. From Proposition 3.1, we now have that Q is free-connex acyclic. \square

Hu [16] defined a notion similar to $\text{pw}(Q)$, called free-width, $\text{freew}(Q)$. To compute free-width, we define the free-width of an existentially connected query to be the size of the smallest set of hyperedges that covers all isolated variables in. Then, $\text{freew}(Q)$ is the maximum freewidth over all queries in the decomposition of Q . It is easy to see that $\text{freew}(Q) \leq \text{pw}(Q)$.

4 MAIN RESULT

In this section, we describe our main result that builds upon the celebrated Yannakakis's algorithm. First, we recall the algorithm and its properties as outlined in [27]. Yannakakis showed two key properties of Algorithm 2. First, when the processing of a node s is over (i.e. when the algorithm has finished execution of line 8 for node s), it holds that

$$T_{\mathcal{X}(s)} = \pi_{\mathcal{F}_s \cup \mathcal{X}(s)}(\bigwedge_{B \in V(\mathcal{T}_s)} R_{\mathcal{X}(B)})$$

Therefore, when only node r is left in the tree, then $T_{\mathcal{X}(r)} = \pi_{\mathcal{F}_r \cup \mathcal{X}(r)}(\bigwedge_{B \in V(\mathcal{T})} R_{\mathcal{X}(B)})$, and thus, $\pi_{\mathbf{x}_{\mathcal{F}}}(T_{\mathcal{X}(r)})$ gives the desired result. Second, Yannakakis showed that the entire algorithm takes time $O(|\mathcal{D}| + |\mathcal{D}| \cdot |\text{OUT}|)$, which is the time taken to execute line 8 in each iteration.

4.1 Output-sensitive Yannakakis

This section presents a general lemma that forms the basis of our main result. In particular, we will show that under certain restrictions of the instance and the root of the join tree, Algorithm 2

Algorithm 2: Yannakakis Algorithm [27]

Input : acyclic query $Q(\mathbf{x}_{\mathcal{F}})$, database instance \mathcal{D} , rooted join tree (\mathcal{T}, χ, r)
Output : $Q(\mathcal{D})$

- 1 $\mathcal{D} \leftarrow$ **apply** a full reducer for \mathcal{D}
- 2 $K \leftarrow$ a queue of $V(\mathcal{T})$ following a post-order traversal of \mathcal{T}
- 3 **while** $K \neq \emptyset$ **do**
- 4 $s \leftarrow K.pop()$
- 5 **if** s is a leaf **then**
- 6 $T_{\chi(s)}(\mathbf{x}_{\chi(s)}) \leftarrow R_{\chi(s)}(\mathbf{x}_{\chi(s)})$
- 7 **else**
- 8 $T_{\chi(s) \cup \mathcal{F}_s}(\mathbf{x}_{\chi(s) \cup \mathcal{F}_s}) \leftarrow R_{\chi(s)} \wedge (\bigwedge_{(s,t) \in E(\mathcal{T})} \pi_{F_t \cup (\chi(s) \cap \chi(t))} T_{\chi(t)})$
- 9 $\chi(s) \leftarrow \chi(s) \cup \mathcal{F}_s$
- 10 **return** $\pi_{\mathcal{F}}(T_{\chi(r)})$

(Yannakakis algorithm) achieves a better runtime by a factor of Δ . In the next section, we will present an algorithm that takes advantage of this observation.

The first condition is that the root node must contain an isolated free variable. This is not necessarily true for any node in the join tree, but we can make it happen by choosing the root to be a leaf (recall that in a reduced instance, every leaf node has an isolated free variable). The second condition is that all valuations in the root node over the join variables are heavy w.r.t. a degree threshold Δ . This is not generally true (unless $\Delta = 1$), so we will need to partition the instance to achieve this requirement.

For a join tree (\mathcal{T}, χ) , we define $\chi^{\text{is}}(s) \subseteq \chi(s)$ to return only the join variables of $\chi(s)$.

Lemma 4.1. *Let $Q(\mathbf{x}_{\mathcal{F}})$ be a reduced acyclic CQ, (\mathcal{T}, χ, r) a rooted join tree of Q , and \mathcal{D} be a database instance. Suppose that*

- (1) $R_{\chi(r)}$ has at least one isolated free variable
- (2) for every $v \in R_{\chi(r)}$, we have $d(v, \chi^{\text{is}}(r), R_{\chi(r)}) > \Delta$ for some integer $\Delta \geq 1$.

Then, Algorithm 2 runs in time $O(|\mathcal{D}| + (\sum_{t \in \mathcal{I}(\mathcal{T})} |R_{\chi(t)}|) \cdot |\text{OUT}|/\Delta)$.

Discussion. Observe that Lemma 4.1 degenerates to the standard bound of Yannakakis algorithm for $\Delta = 1$. However, as we will show in the next part, choosing $\Delta > 1$ can lead to better overall join processing algorithms. It is also interesting to note that the running time bound obtained in Lemma 4.1 can only be achieved when the root of the decomposition is a relation with the two properties as outlined in the statement. It can be shown that no other choice of the root node achieves a time better than $O(|\mathcal{D}| \cdot |\text{OUT}|)$.

4.2 Our Algorithm

In this section, we will present the algorithm for our main result. We will first consider a CQ Q that is existentially connected and reduced.

Algorithm 3 shows the improved procedure. It processes the nodes of the join tree in a leaf-to-root order just like Yannakakis algorithm. However, our algorithm departs in its processing of each leaf. In particular, we start from node s whose children are all leaves. For every leaf node t that is a child of s , we partition the relation R_t assigned to the node into two disjoint partitions (the heavy partition R_t^H and the light partition R_t^L) using a chosen degree threshold. Then, we use Lemma 4.1 to process R_t^H and add the produced output into a set \mathcal{J} . This processing is done in

lines 13-16 of the while loop. The crucial detail is that the processing of the heavy partition is done by reorienting the join tree to be rooted at t , and then applying Yannakakis in a bottom-up fashion.

Once all heavy sub-relations of the leaf nodes are processed, we are left with all light parts of the relations for the children of node s . At this point, we join the relations in the subtree rooted at s (line 18) and then remove the nodes for children of s from the join tree \mathcal{T} (line 20). These two steps are identical to the steps in line 8 and line 16 of the Yannakakis algorithm respectively. We next state and prove the main result.

Algorithm 3: Generalized Yannakakis Algorithm

Input : acyclic query $Q(\mathbf{x}_{\mathcal{F}})$, instance \mathcal{D} , join tree (\mathcal{T}, χ) , $1 \leq \Delta \leq |\mathcal{D}|$
Output : $Q(\mathcal{D})$, (\mathcal{T}, χ) , \mathcal{D}

- 1 **choose** an arbitrary root r for \mathcal{T}
- 2 $\mathcal{D} := (T_{\chi(s)})_{s \in V(\mathcal{T})} \leftarrow$ **apply** a full reducer for \mathcal{D}
- 3 $N \leftarrow |\mathcal{D}|$ /* storing the size of the input */
- 4 $K \leftarrow$ a stack of $s \in V(\mathcal{T})$ following a post-order traversal of \mathcal{T}
- 5 **while** $K \neq \emptyset$ **do**
- 6 | $s \leftarrow K.pop()$
- 7 | **if** s is a leaf **then**
- 8 | | **if** $s \neq r$ /* every leaf contains isolated free variable(s) */
- 9 | | **then**
- 10 | | $\Delta_s \leftarrow \Delta \cdot (|T_{\chi(s)}| + N) / N$
- 11 | | $T_{\chi(s)}^H \leftarrow \{v \in T_t \mid |\sigma_{v[\chi^{\#}(t)]}(R_t)| > \Delta_s\}$, $T_{\chi(s)}^L \leftarrow T_{\chi(s)} \setminus T_{\chi(s)}^H$
- 12 | | $\mathcal{D}_s^H \leftarrow (\mathcal{D} \setminus T_{\chi(s)}) \cup T_{\chi(s)}^H$
- 13 | | **let** $Q_s(\mathcal{D}_s^H)$ be the output of Algorithm 2 with input as \mathcal{D}_s^H and \mathcal{T} rooted at s
- 14 | | $\mathcal{J} \leftarrow \mathcal{J} \cup Q_s(\mathcal{D}_s^H)$
- 15 | | $T_{\chi(s)} \leftarrow T_{\chi(s)}^L$
- 16 | | $\mathcal{D} \leftarrow$ **apply** a full reducer for $(\mathcal{D} \setminus T_{\chi(s)}) \cup T_{\chi(s)}^L$
- 17 | **else**
- 18 | | $T_{\chi(s) \cup \mathcal{F}_s}(\mathbf{x}_{\chi(s) \cup \mathcal{F}_s}) \leftarrow T_{\chi(s)} \wedge (\bigwedge_{(s,t) \in E(\mathcal{T})} \pi_{F_t \cup (\chi(s) \cap \chi(t))} T_{\chi(t)})$
- 19 | | $\chi(s) \leftarrow \chi(s) \cup \mathcal{F}_s$
- 20 | | **truncate** all children of s and directed edges $(s, t) \in E(\mathcal{T})$ from \mathcal{T}
- 21 | | **if** $K \neq \emptyset$ **then**
- 22 | | | $K.push(s)$ /* s is now a leaf, process s in the next iteration */
- 23 | | **else**
- 24 | | | $\mathcal{J} \leftarrow \mathcal{J} \cup \pi_{\mathcal{F}}(T_{\chi(r)})$ /* s is the only node left */
- 25 **return** $\mathcal{J}, (\mathcal{T}, \chi), \mathcal{D}$ /* Return output, tree decomposition, and instance */

Lemma 4.2. *Given an acyclic join query $Q(\mathbf{x}_{\mathcal{F}})$ that is existentially connected and reduced, database \mathcal{D} , and an integer threshold $1 \leq \Delta \leq |\mathcal{D}|$, Algorithm 3 computes the join result $Q(\mathcal{D})$ in time $O(|\mathcal{D}| \cdot \Delta^{k-1} + |\mathcal{D}| \cdot |\text{OUT}|/\Delta)$, where k is the number of atoms in Q .*

Example 4.1. We use the query Q_1 shown in Figure 3a as an example to demonstrate the execution of Algorithm 3. The join tree will be visited in the order $K = \{\chi^{-1}(\mathbf{x}_{34}), \chi^{-1}(\mathbf{x}_{25}), \chi^{-1}(\mathbf{x}_{23}), \chi^{-1}(\mathbf{x}_{12})\}$. We first visit node for R_{34} and since it is a leaf node, we apply Lemma 4.1 with the root node as

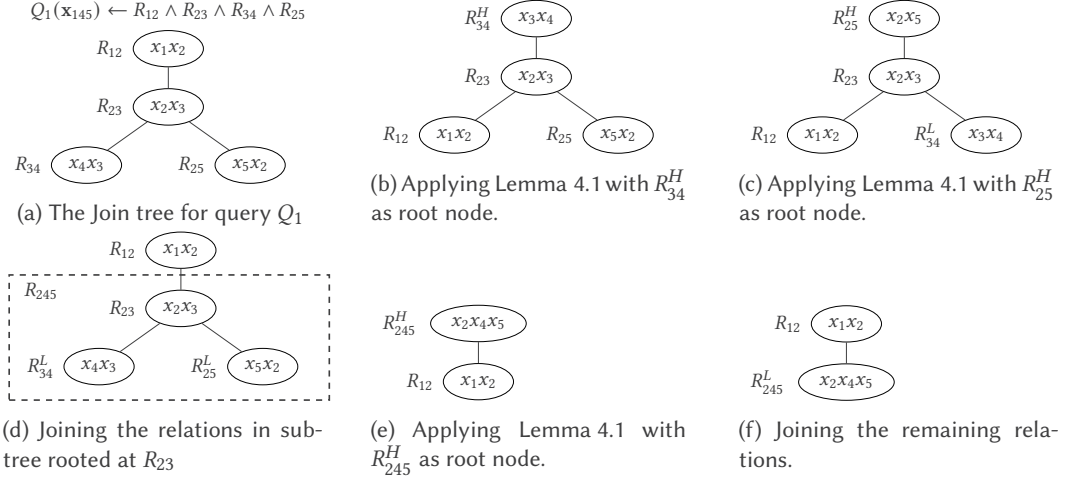


Fig. 3. Evaluating the running example query using Algorithm 3. Each figure shows a rooted join tree.

the heavy partition R_{34}^H as shown in Figure 3b. Once the heavy partition has been processed, we replace R_{34} with R_{34}^L in the input database (line 16), which will be used in all subsequent iterations of the algorithm. Next, we process leaf node R_{25} by again calling Lemma 4.1 with heavy partition R_{25}^H as the root. R_{25} is then replaced by R_{25}^L in \mathcal{D} .

Now, both leaf nodes have their relations replaced by the light partitions. When we process node R_{23} , a non-leaf relation, we join all relations in the subtree rooted at R_{23} (shown in dashed rectangle in Figure 3d). Thus, the query $Q'(\mathbf{x}_{245}) \leftarrow R_{34}^L \wedge R_{25}^L \wedge R_{23}$ is evaluated, the variables in the bag for the node are replaced with \mathbf{x}_{245} and the relation is the output of the query $Q'(\mathbf{x}_{245})$. Leaf nodes R_{25}^L and R_{34}^L are deleted, and R_{245} becomes a leaf node. $\chi^{-1}(\mathbf{x}_{245})$ is added to the front of K on line 22. Therefore, in the next iteration, we take the heavy partition R_{245}^H and apply Lemma 4.1. Finally, we visit the node for R_{12} , process the join $Q''(\mathbf{x}_{145}) \leftarrow R_{12} \wedge R_{245}^L$ (Figure 3f) and the root node bag is modified to \mathbf{x}_{145} with relation as the result $R_{145} = Q''(\mathbf{x}_{145})$. R_{245}^L is deleted. At this point $K = \emptyset$, and we union $Q''(\mathbf{x}_{145})$ and \mathcal{J} on line 24. Since the entire tree is now processed, the while loop terminates, and the final result \mathcal{J} is returned.

Finding the optimal threshold Δ . To find the optimal threshold that minimizes the running time of Algorithm 3, we can equate the two terms in the running time expression of Lemma 4.2 to obtain $\Delta = |\text{OUT}|^{1/k}$, giving us the running time as $O(|\mathcal{D}| \cdot |\text{OUT}|^{1-1/k})$. However, the value of $|\text{OUT}|$ is not known a priori. To remedy this issue, we use the oft-used *doubling trick* [6] that was first introduced in the context of multi-armed bandit algorithms. The key idea is to guess the value of $|\text{OUT}|$. Suppose the guessed output size is T and let α be a constant value that is an upper bound of the constant hidden in the big-O runtime complexity of Algorithm 3. We start with an estimate of $T_1 = 2^0$ in the first round and run the algorithm. If the algorithm does not finish execution in $\alpha \cdot |\mathcal{D}| \cdot T_i^{1-1/k}$ steps, then we terminate the algorithm and pick the new estimate to be $T_{i+1} = 2 \cdot T_i$ and re-run the algorithm. However, if the algorithm finishes, then we have successfully computed the query result. Note that α can be determined by doing an analysis of the program and counting the number of RAM model operations required for each line. It is easy to see that the algorithm will terminate within $2 \cdot |\text{OUT}|$ rounds and the total running time is

$\alpha \cdot |\mathcal{D}| \cdot \sum_{i \in [\lceil \log_2(2 \cdot |\text{OUT}|) \rceil]} T_i^{1-1/k} = \alpha \cdot |\mathcal{D}| \cdot \sum_{i \in [\lceil \log_2(2 \cdot |\text{OUT}|) \rceil]} 2^{i \cdot (1-1/k)} = O(|\mathcal{D}| \cdot |\text{OUT}|^{1-1/k})$ for any $k \geq 2$. Formally:

Theorem 4.2. *Given an reduced and existentially connected acyclic query $Q(\mathbf{x}_{\mathcal{F}})$, and a database \mathcal{D} , we can compute $Q(\mathcal{D})$ in time $O(|\mathcal{D}| + |\mathcal{D}| \cdot |\text{OUT}|^{1-1/k})$, where k is the number of atoms in Q .*

We note that the doubling trick argument for join evaluation is not a novelty and it has been used in prior works as well [5, 12]. This idea can also be applied to the results obtained in [16], allowing us to shave the polylog factors theoretically in the total running time and removing the need to estimate the output size via sophisticated algorithms.

General CQs. Finally, we discuss what happens for a general acyclic CQ that may not be reduced or existentially connected. In this case, we can relate the runtime of the algorithm to the projection width we defined in the previous section. Note that for a CQ that is reduced and existentially connected, pw is exactly the number of atoms in the query.

Theorem 4.3. *Given an acyclic CQ Q and a database \mathcal{D} , we can compute the output $Q(\mathcal{D})$ in time $O(|\mathcal{D}| + |\text{OUT}| + |\mathcal{D}| \cdot |\text{OUT}|^{1-1/\text{pw}(Q)})$.*

5 EXTENSION TO AGGREGATION

Semirings. A tuple $\sigma = (D, \oplus, \otimes, \mathbf{0}, \mathbf{1})$ is a (commutative) *semiring* if \oplus and \otimes are binary operators over D for which:

- (1) $(D, \oplus, \mathbf{0})$ is a commutative monoid with additive identity $\mathbf{0}$ (i.e., \oplus is associative and commutative, and $a \oplus \mathbf{0} = a$ for all $a \in D$);
- (2) $(D, \otimes, \mathbf{1})$ is a (commutative) monoid with multiplicative identity $\mathbf{1}$ for \otimes ;
- (3) \otimes distributes over \oplus , i.e., $a \otimes (b \oplus c) = (a \otimes b) \oplus (a \otimes c)$ for $a, b, c \in D$; and
- (4) $a \otimes \mathbf{0} = \mathbf{0}$ for all $a \in D$.

Such examples include the Boolean semiring $\mathbb{B} = (\{\text{false}, \text{true}\}, \vee, \wedge, \text{false}, \text{true})$, the natural numbers semiring $(\mathbb{N}, +, \cdot, 0, 1)$, and the *tropical semiring* $\text{Trop}^+ = (\mathbb{R}_+ \cup \{\infty\}, \min, +, \infty, 0)$.

Functional Aggregate Queries. Green et al. [15] developed the idea of using annotations of a semiring to reason about provenance over natural joins. That is, every relation R_J is now a σ -relation, i.e., each tuple in R_J is annotated by an element from the domain D of σ . Tuples not in the relation are annotated by $\mathbf{0} \in D$ implicitly. Standard relations are essentially \mathbb{B} -relations. Abo Khamis et al. [2] introduced the functional aggregate queries (FAQ) that express join-aggregate queries via semiring annotations. A FAQ φ (over a semiring σ) is the following:

$$\varphi(\mathbf{x}_{\mathcal{F}}) \leftarrow \bigoplus_{\mathbf{x}_{[n] \setminus \mathcal{F}}} \bigotimes_{J \in \mathcal{E}} R_J(\mathbf{x}_J), \quad (2)$$

where (i) $([n], \mathcal{E})$ is the *associated hypergraph* of φ (the hyperedges $\mathcal{E} \subseteq 2^{[n]}$), (ii) $\mathbf{x}_{\mathcal{F}}$ are the head variables ($\mathcal{F} \subseteq [n]$), and (iii) each R_J is an input σ -relation of schema \mathbf{x}_J and we use $\mathcal{D} = (R_J)_{J \in \mathcal{E}}$ to denote an input database instance. The acyclicity notion for FAQs is identical to CQs, through its associated hypergraph. Similar to $Q(\mathcal{D})$, we use $\varphi(\mathcal{D})$ to denote the query result of $\varphi(\mathbf{x}_{\mathcal{F}})$ evaluated with input \mathcal{D} , i.e. the resulting σ -relation of schema $\mathbf{x}_{\mathcal{F}}$. A modification of Yannakakis algorithm (Algorithm 2) can handle acyclic FAQs [27], by lifting the natural joins at line 8 to multiplications over the semiring domains, i.e.,

$$T_{\chi(s) \cup F_s} \leftarrow R_{\chi(s)}(\mathbf{x}_{\chi(s)}) \otimes \bigoplus_{\chi(t) \setminus (F_t \cup (\chi(s) \cap \chi(t)))} T_{\chi(t)}(\mathbf{x}_{\chi(t)}). \quad (3)$$

In this following, we show that our algorithm (Algorithm 3) can be similarly extended to evaluate acyclic FAQs. We obtain the following result.

Theorem 5.1. *Given an acyclic FAQ query $\varphi(\mathbf{x}_{\mathcal{F}})$ over a semiring σ , database \mathcal{D} , we can compute the output $\varphi(\mathcal{D})$ in time $O(|\mathcal{D}| + |\text{OUT}| + |\mathcal{D}| \cdot |\text{OUT}|^{1-1/\text{pw}(Q)})$.*

The algorithm needs three simple augmentations from Algorithm 3. First, for processing a heavy leaf at line 7, call the modified Yannakakis algorithm for the sub-FAQ. Second, use (3) again for line 18 instead of the natural joins. Lastly, we replace the unions for line 14 and 24 by \oplus to aggregate back the query results of $\varphi(\mathbf{x}_{\mathcal{F}})$. The correctness of this algorithm stems from the disjoint partitions of relations corresponding to each leaf on line 11 of Algorithm 3. In other words, it holds that $T_{\chi(s)} = T_{\chi(s)}^H \oplus T_{\chi(s)}^L$ and by distributivity, we have

$$\varphi(\mathcal{D}) = \varphi\left((\mathcal{D} \setminus T_{\chi(s)}) \cup T_{\chi(s)}^H\right) \oplus \varphi\left((\mathcal{D} \setminus T_{\chi(s)}) \cup T_{\chi(s)}^L\right),$$

where the first sub-query is evaluated upfront at line 13. For the latter sub-query, if the leaf s is the last leaf of its parent being processed, the sub-query is directly evaluated in the next for-loop iteration at its parent level (i.e. the else branch at line 17). Otherwise, the relations in the database $(\mathcal{D} \setminus T_{\chi(s)}) \cup T_{\chi(s)}^L$ will be further partitioned by the next sibling of s in the post-order traversal. The runtime argument follows exactly from the proof of Theorem 4.2.

6 APPLICATIONS

In this section, we we apply our framework to recover state-of-the-art results, as well as obtain new results, for queries of practical interest.

6.1 Path Queries

We will first study the *path queries*, a class of queries that has immense practical importance. The projection width of a path query $P_k(x_1, x_{k+1})$ is k . Therefore, applying our main result, we get:

Theorem 6.1. *Given a path query $P_k(x_1, x_{k+1})$ and a database \mathcal{D} , there exists an algorithm that can evaluate the path query in time $O(|\mathcal{D}| \cdot |\text{OUT}|^{1-1/k})$.*

For $k = 2$, our result matches the bound shown in [5]. Comparing our result to Hu, the bound obtained in Theorem 6.1 strictly improves the results obtained by Hu for $3 \leq k \leq 5$ and matches for $k = 6$ even if we assume $\omega = 2$. This result suggests there is room for further improvement in the use of fast matrix multiplication to obtain tighter bounds. For $k = 7$, our running time is better than the one obtained by Hu assuming the current best known value of $\omega = 2.371552$ [26].

6.2 Hierarchical Queries

We show here the application of our result to *hierarchical queries*. A CQ is *hierarchical* if for any two of its variables, either their sets of atoms are disjoint or one is contained in the other. All hierarchical queries are acyclic, and all star queries Q_ℓ^* are hierarchical queries. They have $\text{pw}(Q_\ell^*) = \ell$, thus:

Theorem 6.2. *Given a star query $Q_\ell^*(x_{[\ell]})$ and a database \mathcal{D} , the star query can be evaluated in time $O(|\mathcal{D}| + |\mathcal{D}| \cdot |\text{OUT}|^{1-1/\ell})$.*

Theorem 6.2 recovers the bound from [5] for star queries and thus, provides an alternate proof of the combinatorial result in [5] for star queries. We note that for star queries the results merely improve the *analysis* of the Yannakakis algorithm. In other words, Yannakakis algorithm also achieves the time bound as specified by Theorem 6.2 but the routinely used upper bound of $O(|\mathcal{D}| \cdot |\text{OUT}|)$ does not reflect that.

As another example, consider the query $Q(\mathbf{x}_{1234}) \leftarrow R_{124}(\mathbf{x}_{124}) \wedge R_{125}(\mathbf{x}_{125}) \wedge R_{136}(\mathbf{x}_{136}) \wedge R_{137}(\mathbf{x}_{137})$ formed by the relations shown in Figure 4. For this query, the projection width is four

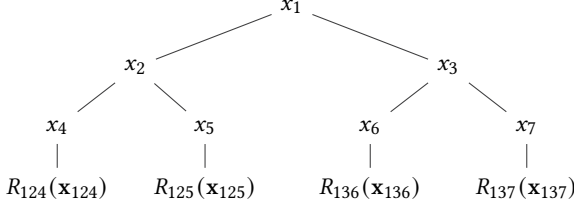


Fig. 4. Relations formed by variables arranged as a complete binary tree. Every root-to-leaf path forms a relation (labeled).

and thus, we obtain an evaluation time of $O(|\mathcal{D}| + |\mathcal{D}| \cdot |\text{OUT}|^{3/4})$. [20] proposed an algorithm for enumerating the results of any hierarchical query (not necessarily full) with delay guarantees after preprocessing the input. Any algorithm with preprocessing and delay guarantees can be converted into a join evaluation algorithm. Our algorithm matches the time required to evaluate hierarchical queries by converting the enumeration with delay guarantees results of [20] into an evaluation algorithm.

6.3 General Queries

Submodular width. A function $f : 2^{\mathcal{V}} \mapsto \mathbb{R}_+$ is a non-negative *set function* on \mathcal{V} ($\ell \geq 1$). The set function is *monotone* if $f(X) \leq f(Y)$ whenever $X \subseteq Y$, and is *submodular* if $f(X \cup Y) + f(X \cap Y) \leq f(X) + f(Y)$ for all $X, Y \subseteq \mathcal{V}$. A non-negative, monotone, submodular set function h such that $h(\emptyset) = 0$ is a *polymatroid*. Let Q be a CQ and let Γ_ℓ be the set of all polymatroids h on \mathcal{V} such that $h(J) \leq 1$ for all $J \in \mathcal{E}$. The *submodular width* of Q is

$$\text{subw}(Q) \stackrel{\text{def}}{=} \max_{h \in \Gamma_\ell} \min_{(\mathcal{T}, \chi) \in \mathfrak{F}} \max_{t \in V(\mathcal{T})} h(\chi(t)), \quad (4)$$

where \mathfrak{F} is the set of all *non-redundant* tree decompositions of Q . A tree decomposition is *non-redundant* if no bag is a subset of another. Abo Khamis et al. [21] proved that non-redundancy ensures that \mathfrak{F} is finite, hence the inner minimum is well-defined.

Prior work [21] showed that given any CQ Q and database \mathcal{D} , the PANDA algorithm can decompose the query and database instance into a constant number of pairs (Q_i, \mathcal{D}_i) such that $Q(\mathcal{D}) \leftarrow \bigcup_i Q_i(\mathcal{D}_i)$. Further, it is also guaranteed that each Q_i is acyclic, $|\mathcal{D}_i| = |\mathcal{D}|^{\text{subw}(Q)}$ (each \mathcal{D}_i can be computed in $\tilde{O}(|\mathcal{D}|^{\text{subw}(Q)})$ time), and $|Q_i(\mathcal{D}_i)| \leq |Q(\mathcal{D})|$. Since each Q_i is acyclic, we can apply our main result and obtain the following theorem.

Theorem 6.3. *Given a CQ Q and database \mathcal{D} , there exists an algorithm to evaluate $Q(\mathcal{D})$ in time $\tilde{O}(|\mathcal{D}|^{\text{subw}(Q)} + |\mathcal{D}|^{\text{subw}(Q)} \cdot |\text{OUT}|^{1-1/\max_i \text{pw}(Q_i)})$, where (Q_i, \mathcal{D}_i) is the set of decomposed queries generated by PANDA.*

Example 6.4. Consider the 4-cycle query $Q^\circ(\mathbf{x}_{123}) \leftarrow R_{12}(\mathbf{x}_{12}) \wedge R_{23}(\mathbf{x}_{23}) \wedge R_{34}(\mathbf{x}_{34}) \wedge R_{14}(\mathbf{x}_{14})$. For this query, $\text{subw}(Q^\circ(\mathbf{x}_{123})) = 3/2$ and PANDA partitions $Q^\circ(\mathbf{x}_{123})$ into two queries, $Q_1^\circ(\mathbf{x}_{123}) \leftarrow S_{123}(\mathbf{x}_{123}) \wedge S_{134}(\mathbf{x}_{134})$ and $Q_2^\circ(\mathbf{x}_{123}) \leftarrow S_{124}(\mathbf{x}_{124}) \wedge S_{234}(\mathbf{x}_{234})$. It is easy to see that $\text{pw}(Q_1^\circ) = 1$ and $\text{pw}(Q_2^\circ) = 2$. Thus, the query can be evaluated in time $\tilde{O}(|\mathcal{D}|^{3/2} \cdot |\text{OUT}|^{1/2})$. We note that [16] requires $\tilde{O}(|\mathcal{D}|^{3/2} \cdot |\text{OUT}|^{5/6})$ time for the 4-cycle query $Q^\circ(\mathbf{x}_{123})$.

7 A FASTER ALGORITHM FOR PATH QUERIES

In this section, we show a better algorithm that improves upon Theorem 6.1. Algorithm 4 shows the steps for evaluating a path query P_k . The key idea of the algorithm is to carefully choose the

Algorithm 4: Improved Path Query Evaluation

Input : Path query P_k , database instance \mathcal{D}
Output : $P_k(\mathcal{D})$

- 1 $\mathcal{D} \leftarrow$ **apply** a full reducer for \mathcal{D}
- 2 $K, K' \leftarrow$ empty stack; $N \leftarrow |\mathcal{D}|$; $\mathcal{J}_1, \mathcal{J}_2, \mathcal{J}_3, \mathcal{J}_4 \leftarrow \emptyset$; $(\mathcal{T}, \chi) \leftarrow$ join tree for P_k
- 3 **foreach** $i \in \{\lfloor k/2 \rfloor, \dots, 1\}$ **do**
- 4 | $K.\text{push}(\chi^{-1}(\mathbf{x}_{i,i+1}))$
- 5 **foreach** $i \in \{\lfloor \frac{k}{2} \rfloor + 1, \dots, k\}$ **do**
- 6 | $K'.\text{push}(\chi^{-1}(\mathbf{x}_{i,i+1}))$
- 7 $\mathcal{J}_1, (\mathcal{T}', \chi'), \mathcal{D}' \leftarrow$ Call Algorithm 3 with K as bag order, $(\mathcal{T}, \chi), \mathcal{D}$, root node as bag $\chi^{-1}(\mathbf{x}_{k,k+1})$, and threshold Δ
/* $R_{1, \lfloor k/2 \rfloor + 1}$ is the relation assigned to the leaf node in \mathcal{T}' */
- 8 $\Delta' \leftarrow |R_{1, \lfloor k/2 \rfloor + 1}(\mathbf{x}_{1, \lfloor k/2 \rfloor + 1})| \cdot \Delta / |\text{OUT}|$
/* Partition $R_{1, \lfloor k/2 \rfloor + 1}$ into heavy and light subrelations */
- 9 $R_{1, \lfloor k/2 \rfloor + 1}^H(\mathbf{x}_{1, \lfloor k/2 \rfloor + 1}) \leftarrow \{\mathbf{v} \in R_{1, \lfloor k/2 \rfloor + 1} \mid |\sigma_{\mathbf{v}[\mathbf{x}_1]}(R_{1, \lfloor k/2 \rfloor + 1})| > \Delta'\}$
- 10 $\mathcal{D}^H \leftarrow (\mathcal{D}' \setminus R_{1, \lfloor k/2 \rfloor + 1}) \cup R_{1, \lfloor k/2 \rfloor + 1}^H$
- 11 $\mathcal{J}_2 \leftarrow$ Call Algorithm 2 on (\mathcal{T}', χ') with root node as $\chi'^{-1}(\mathbf{x}_{k,k+1})$ and \mathcal{D}^H
- 12 $R_{1, \lfloor k/2 \rfloor + 1}^L(\mathbf{x}_{1, \lfloor k/2 \rfloor + 1}) \leftarrow R_{1, \lfloor k/2 \rfloor + 1} \setminus R_{1, \lfloor k/2 \rfloor + 1}^H$
- 13 $\mathcal{D}^L \leftarrow (\mathcal{D}' \setminus R_{1, \lfloor k/2 \rfloor + 1}) \cup R_{1, \lfloor k/2 \rfloor + 1}^L$
- 14 $\mathcal{J}_3, (\mathcal{T}'', \chi''), \mathcal{D}'' \leftarrow$ Call Algorithm 3 with K' as bag order, $(\mathcal{T}', \chi'), \mathcal{D}^L$, root node as bag $\chi'^{-1}(\mathbf{x}_{1, \lfloor k/2 \rfloor + 1})$, and threshold Δ
- 15 $\mathcal{J}_4 \leftarrow \pi_{\mathbf{x}_{1,k+1}}(R_{1, \lfloor k/2 \rfloor + 1}^L(\mathbf{x}_{1, \lfloor k/2 \rfloor + 1}) \wedge R_{\lfloor k/2 \rfloor + 1, k+1}(\mathbf{x}_{\lfloor k/2 \rfloor + 1, k+1}))$
- 16 **return** $\bigcup_{i \in [4]} \mathcal{J}_i$

ordering of how the nodes in a join tree are processed. This is in contrast with Algorithm 3 and the Yannakakis algorithm where any leaf-to-root order is sufficient to get join time guarantees. Before we present the result, we note that the improved result is only applicable to path queries and its generalization to arbitrary acyclic CQs is non-trivial due to the branching structure in an acyclic CQ, which creates technical challenges for bounding intermediate result sizes. Nevertheless, the result is an exciting development for reasons outlined at the end of the section.

Theorem 7.1. *Given query P_k and database \mathcal{D} , there exists an algorithm to evaluate $P_k(\mathcal{D})$ in time $O(|\mathcal{D}| + |\mathcal{D}| \cdot |\text{OUT}|^{1-1/\lceil (k+1)/2 \rceil})$ for any $k \geq 1$.*

Example 7.2. Consider the $P_4(x_1, x_5) \leftarrow R_{12}(x_{12}) \wedge R_{23}(x_{23}) \wedge R_{34}(x_{34}) \wedge R_{45}(x_{45})$. The algorithm sets $K = \{\chi^{-1}(\mathbf{x}_{12}), \chi^{-1}(\mathbf{x}_{23})\}$ and $K' = \{\chi^{-1}(\mathbf{x}_{45}), \chi^{-1}(\mathbf{x}_{34})\}$. First, line 7 computes the join output when variable x_2 is heavy and stores it in \mathcal{J}_1 and the returned join tree \mathcal{T}' contains \mathbf{x}_{13} as the leaf node bag with a materialized relation that corresponds to the join of $R_{12}(\mathbf{x}_{12})$ and $R_{23}(\mathbf{x}_{23})$ but when x_2 is light in R_{12} . In other words, we get the relation R_{13} of size $|\mathcal{D}| \cdot \Delta$. Then, we partition R_{13} into two sub-relations: R_{13}^H and R_{13}^L based on degree of x_1 with degree threshold $\Delta' = |\mathcal{D}| \cdot \Delta^2 / |\text{OUT}|$. Once the partitioning is done, we compute $\mathcal{J}_2 = \pi_{x_1, x_5}(R_{13}^H(\mathbf{x}_{13}) \wedge R_{34}(\mathbf{x}_{34}) \wedge R_{45}(\mathbf{x}_{45}))$ using Yannakakis algorithm. In the third step, we take the join tree of the subquery $\pi_{x_1, x_5}(R_{13}^L(\mathbf{x}_{13}) \wedge R_{34}(\mathbf{x}_{34}) \wedge R_{45}(\mathbf{x}_{45}))$ rooted at bag \mathbf{x}_{13} and generate output \mathcal{J}_3 when x_4 is heavy in relation R_{45} . This step takes $O(|\mathcal{D}| \cdot |\text{OUT}| / \Delta)$ time according to Lemma 4.1. For all light x_4 valuations in R_{45} , Algorithm 3 will compute the join of $R_{34}(\mathbf{x}_{34})$ and $R_{45}(\mathbf{x}_{45})$, and store the materialized result in $R_{35}(\mathbf{x}_{35})$ in time

$O(|\mathcal{D}| \cdot \Delta)$. The final step is to compute $\pi_{\mathbf{x}_1, \mathbf{x}_5}(R_{13}^L(\mathbf{x}_{13}), R_{35}(\mathbf{x}_{35}))$ which takes $O(|\text{OUT}| \cdot \Delta')$ time. Balancing all the costs, we obtain $\Delta = |\text{OUT}|^{1/3}$ and a total running time of $O(|\mathcal{D}| \cdot |\text{OUT}|^{2/3})$.

Theorem 7.1 has important implications in the evaluation of path queries. Observe that for $k = 3$, we get the running time as $O(|\mathcal{D}| + |\mathcal{D}| \cdot \sqrt{|\text{OUT}|})$, matching the lower bound shown by Hu. It is also remarkable that the optimal algorithm does *not* require fast matrix multiplication. Using the same ideas from Section 5, it is straightforward to adapt Algorithm 4 to allow FAQs over path queries as well.

8 LOWER BOUNDS

In this section, we demonstrate several lower bounds that show optimality for a subclass of CQs. To do this, we will use the following well-established conjectures from fine-grained complexity.

Definition 8.1 (Boolean k -Clique Conjecture). There is no real $\epsilon > 0$ such that computing the k -clique problem (with $k \geq 3$) over the Boolean semiring in an (undirected) n -node graph requires time $O(n^{k-\epsilon})$ using a combinatorial algorithm.

Definition 8.2 (Min-Weight k -Clique Conjecture). There is no real $\epsilon > 0$ such that computing the k -clique problem (with $k \geq 3$) over the tropical semiring in an (undirected) n -node graph with integer edge weights can be done in time $O(n^{k-\epsilon})$.

Our first lower bound tells us that the dependence in the bound of Theorem 6.3 on both the submodular width and projection width is somewhat necessary.

Theorem 8.3. *Take any integer $\ell \geq 2$ and any rational $w \geq 1$ such that $\ell \cdot w$ is an integer. Then, there exists a query Q with projection width ℓ and submodular width w such that no combinatorial algorithm can compute it over input \mathcal{D} in time $O(|\mathcal{D}|^w \cdot |\text{OUT}|^{1-1/\ell-o(1)})$ assuming the Boolean k -Clique Conjecture.*

We next prove a general result that gives output-sensitive lower bounds for arbitrary CQs. To this end, we introduce the notion of *clique embedding* [14]. We say that two sets of vertices $X, Y \subseteq V(H)$ *touch* in \mathcal{H} if either $X \cap Y \neq \emptyset$ or there is a hyperedge $e \in E(\mathcal{H})$ that intersects both X and Y .

Definition 8.4 (Clique Embedding). Let $k \geq 3$ and \mathcal{H} be a hypergraph. A k -clique embedding, denoted as $C_k \mapsto \mathcal{H}$, is a mapping ψ that maps every $v \in \{1, \dots, k\}$ to a non-empty subset $\psi(v) \subseteq V(\mathcal{H})$ such that the following hold:

- (1) $\psi(v)$ induces a connected subgraph;
- (2) for any two $u \neq v \in \{1, \dots, k\}$ then $\psi(u), \psi(v)$ *touch* in \mathcal{H} .

It is often convenient to describe a clique embedding ψ by the reverse mapping $\psi^{-1}(x) = \{i \mid x \in \psi(i)\}$, for $x \in V(\mathcal{H})$. For a hyperedge $J \in E(\mathcal{H})$, its *weak edge depth* is $d_\psi(J) := |\{v \mid \psi(v) \cap J \neq \emptyset\}|$, i.e., the number of vertices from $V(\mathcal{H})$ that map to some variable in J . We also define the *edge depth* of $J \in E(\mathcal{H})$ as $d_\psi^+(J) := \sum_{v \in J} d_\psi(v)$, i.e. weak edge depth but counting multiplicity. For an embedding ψ and a hyperedge $\mathcal{F} \in E(\mathcal{H})$, the \mathcal{F} -*weak edge depth* of ψ is defined as $\text{wed}^\mathcal{F}(\psi) := \max_{J \in E(\mathcal{H}) \setminus \mathcal{F}} d_\psi(J)$, i.e. the maximum of weak edge depths excluding \mathcal{F} .

Theorem 8.5. *Given any CQQ $(\mathbf{x}_\mathcal{F}) \leftarrow \bigwedge_{J \in \mathcal{E}} R_J(\mathbf{x}_J)$ and database \mathcal{D} , let ψ be a k -clique embedding of the hypergraph $\mathcal{H}' = ([n], E(\mathcal{H}) \cup \{\mathcal{F}\})$ such that $x \cdot \text{wed}^\mathcal{F}(\psi) + y \cdot d_\psi^+(\mathcal{F}) \leq k$ for positive $x, y > 0$. Then, there is no combinatorial algorithm with running time $O(|\mathcal{D}|^{x-\epsilon} \cdot |\text{OUT}|^{y-\epsilon'})$ for evaluating $Q(\mathcal{D})$ assuming the Boolean k -Clique Conjecture, where ϵ, ϵ' are non-negative with $\epsilon + \epsilon' > 0$.*

We can show an analogous result for FAQ queries over the tropical semiring.

Theorem 8.6. *Given any FAQ $\varphi(\mathbf{x}_{\mathcal{F}})$ as (2) and database \mathcal{D} , let ψ be a k -clique embedding of the hypergraph $\mathcal{H}' = ([n], E(\mathcal{H}) \cup \{\mathcal{F}\})$ such that $x \cdot \text{wed}^{\mathcal{F}}(\psi) + y \cdot d_{\psi}^+(\mathcal{F}) \leq k$ for positive $x, y > 0$. Then, there exists no algorithm that evaluates $\varphi(\mathcal{D})$ over the tropical semiring in time $O(|\mathcal{D}|^{x-\epsilon} \cdot |\text{OUT}|^{y-\epsilon'})$ assuming the Min-Weight k -Clique Conjecture, where ϵ, ϵ' are non-negative with $\epsilon + \epsilon' > 0$.*

Hu defined the notion of freew of any acyclic query and proved that any "semiring algorithm" requires $\Omega(|\mathcal{D}| \cdot |\text{OUT}|^{1 - \frac{1}{\text{freew}(Q)}} + |\text{OUT}|)$ [16]. Our lower bound results subsume Hu's lower bound results. Specifically, our technique gives meaningful lower bounds for any CQ, not necessarily acyclic, where Hu's freew(Q) is not defined for non-acyclic CQs. Moreover, we can show that, when specializing $x = 1$, there always exists a clique embedding for Q' such that $y = 1 - \frac{1}{\text{freew}(Q)}$, matching Hu's lower bound (see Proposition C.1). We now apply Theorem 8.5 and Theorem 8.6 to get tight lower bounds for star queries (and can be extended to hierarchical queries easily).

Theorem 8.7. *Consider a star query Q_{ℓ}^* with ℓ relations. Then, there exists a database \mathcal{D} such that no algorithm can have runtime of $O(|\mathcal{D}| \cdot |Q_{\ell}^*(\mathcal{D})|^{1-1/\ell-o(1)})$ subject to the Boolean k -clique conjecture.*

Theorem 8.8. *Consider the star query Q_{ℓ}^* with ℓ relations over the tropical semiring. Then, there exists a database \mathcal{D} such that no algorithm can have runtime of $O(|\mathcal{D}| \cdot |Q_{\ell}^*(\mathcal{D})|^{1-1/\ell-o(1)})$ subject to the Min-Weight k -Clique Conjecture.*

While star and hierarchical query evaluation is optimal as shown by our lower bounds, results in Section 7 show that it is possible to further improve the query evaluation runtime for other subclasses of queries. We leave the exciting problem of improving both upper and lower bounds for arbitrary CQ as an open problem.

9 RELATED WORK

Several prior works have investigated problems related to output sensitive evaluation. Deng et al. [13] presented a dynamic index structure for output sensitive join sampling. Riko and Stöckel [17] studied output-sensitive matrix multiplication (which is the two path query), a result that built upon the join-project query evaluation results from [5]. Deng et al. [12] presented output-sensitive evaluation algorithms for set similarity, an important practical class of queries used routinely in recommender systems, graph analytics, etc. An alternate way to evaluate join queries is to use *delay* based algorithms. In particular, given an algorithm with preprocessing time T_p and allows for δ delay enumeration (i.e. the time difference between any two consecutive output tuples is at most δ) of the query result, one can obtain an evaluation algorithm that takes time $O(T_p + \delta \cdot |\text{OUT}|)$ time. As we saw in Section 5, our result is able to match the join running time obtained via [20] for star queries. Recent work [4] has also studied the problem of reporting t patterns in graphs when the input is temporal, i.e., the input is changing over time. Output-sensitive algorithms has also been developed for the problem of maximal clique enumeration [8, 9, 22]. Outside the database community, several interesting results have been known for listing k -cliques and k -cycles in output-sensitive way. [7] designed output-sensitive algorithms for listing t triangles, the simplest k -clique, using fast matrix multiplication. The work of [19] and [1] show algorithms for list t 4-cycles, and [18] shows how to list t 6-cycles. The upper bounds were shown to be tight under the 3SUM hypothesis.

10 CONCLUSION

In this paper, we presented a novel generalization of Yannakakis algorithm that is provably faster for a large class of CQs. We show several applications of the generalized algorithm (which is combinatorial in nature) to recover state-of-the-art results known in existing literature, as well as new results for popular queries such as star queries and path queries. At the heart of our technical development is a novel lemma that allows for a tighter bound on the intermediate result size as we process the join tree in a bottom-up fashion. Surprisingly, our results show that for several queries, our combinatorial algorithm is better than known results that use fast matrix multiplication. We complement our upper bounds with matching lower bounds for a class of queries for both Boolean semirings (a.k.a joins) as well as aggregations.

REFERENCES

- [1] Amir Abboud, Seri Khoury, Oree Leibowitz, and Ron Safier. 2022. Listing 4-cycles. *arXiv preprint arXiv:2211.10022* (2022).
- [2] Mahmoud Abo Khamis, Hung Q. Ngo, and Atri Rudra. 2016. FAQ: Questions Asked Frequently (*PODS '16*). Association for Computing Machinery, New York, NY, USA.
- [3] Mahmoud Abo Khamis, Hung Q. Ngo, and Dan Suciu. 2017. What do Shannon-type inequalities, submodular width, and disjunctive datalog have to do with one another?. In *Proceedings of the 36th ACM SIGMOD-SIGACT-SIGAI Symposium on Principles of Database Systems*. 429–444.
- [4] Pankaj K Agarwal, Xiao Hu, Stavros Sintos, and Jun Yang. 2024. On reporting durable patterns in temporal proximity graphs. *Proceedings of the ACM on Management of Data* 2, 2 (2024), 1–26.
- [5] Rasmus Resen Amossen and Rasmus Pagh. 2009. Faster join-projects and sparse matrix multiplications. In *Proceedings of the 12th International Conference on Database Theory*. 121–126.
- [6] Peter Auer, Nicolo Cesa-Bianchi, Yoav Freund, and Robert E Schapire. 1995. Gambling in a rigged casino: The adversarial multi-armed bandit problem. In *Proceedings of IEEE 36th annual foundations of computer science*. IEEE, 322–331.
- [7] Andreas Björklund, Rasmus Pagh, Virginia Vassilevska Williams, and Uri Zwick. 2014. Listing triangles. In *International Colloquium on Automata, Languages, and Programming*. Springer, 223–234.
- [8] Lijun Chang, Jeffrey Xu Yu, and Lu Qin. 2013. Fast maximal cliques enumeration in sparse graphs. *Algorithmica* 66 (2013), 173–186.
- [9] Alessio Conte, Roberto Grossi, Andrea Marino, and Luca Versari. 2016. Sublinear-space bounded-delay enumeration for massive network analytics: Maximal cliques. In *43rd International Colloquium on Automata, Languages, and Programming (ICALP 2016)*, Vol. 148. 1–148.
- [10] Chris J Date. 1989. *A Guide to the SQL Standard*. Addison-Wesley Longman Publishing Co., Inc.
- [11] Shaleen Deep, Xiao Hu, and Paraschos Koutris. 2020. Fast Join Project Query Evaluation using Matrix Multiplication. In *Proceedings of the 2020 ACM SIGMOD International Conference on Management of Data (Portland, OR, USA) (SIGMOD '20)*. Association for Computing Machinery, New York, NY, USA, 1213–1223. <https://doi.org/10.1145/3318464.3380607>
- [12] Dong Deng, Yufei Tao, and Guoliang Li. 2018. Overlap set similarity joins with theoretical guarantees. In *Proceedings of the 2018 International Conference on Management of Data*. 905–920.
- [13] Shiyuan Deng, Shangqi Lu, and Yufei Tao. 2023. On join sampling and the hardness of combinatorial output-sensitive join algorithms. In *Proceedings of the 42nd ACM SIGMOD-SIGACT-SIGAI Symposium on Principles of Database Systems*. 99–111.
- [14] Austen Z. Fan, Paraschos Koutris, and Hangdong Zhao. 2023. The Fine-Grained Complexity of Boolean Conjunctive Queries and Sum-Product Problems. In *ICALP (LIPICs, Vol. 261)*. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 127:1–127:20.
- [15] Todd J. Green, Grigoris Karvounarakis, and Val Tannen. [n. d.]. Provenance semirings. In *Proceedings of the Twenty-Sixth ACM SIGMOD-SIGACT-SIGART Symposium on Principles of Database Systems (PODS '07)*. Association for Computing Machinery, New York, NY, USA.
- [16] Xiao Hu. 2024. Fast Matrix Multiplication for Query Processing. *Proceedings of the ACM on Management of Data* 2, 2 (2024), 1–25.
- [17] Riko Jacob and Morten Stöckel. 2015. Fast output-sensitive matrix multiplication. In *Algorithms-ESA 2015: 23rd Annual European Symposium, Patras, Greece, September 14–16, 2015, Proceedings*. Springer, 766–778.
- [18] Ce Jin, Virginia Vassilevska Williams, and Renfei Zhou. 2024. Listing 6-Cycles. In *2024 Symposium on Simplicity in Algorithms (SOSA)*. SIAM, 19–27.

- [19] Ce Jin and Yinzhan Xu. 2023. Removing additive structure in 3sum-based reductions. In *Proceedings of the 55th Annual ACM Symposium on Theory of Computing*. 405–418.
- [20] Ahmet Kara, Milos Nikolic, Dan Olteanu, and Haozhe Zhang. 2020. Trade-offs in static and dynamic evaluation of hierarchical queries. In *Proceedings of the 39th ACM SIGMOD-SIGACT-SIGAI Symposium on Principles of Database Systems*. 375–392.
- [21] Mahmoud Abo Khamis, Hung Q. Ngo, and Dan Suciu. 2017. What Do Shannon-type Inequalities, Submodular Width, and Disjunctive Datalog Have to Do with One Another?. In *PODS*. ACM, 429–444.
- [22] Kazuhisa Makino and Takeaki Uno. 2004. New algorithms for enumerating all maximal cliques. In *Algorithm Theory-SWAT 2004: 9th Scandinavian Workshop on Algorithm Theory, Humlebæk, Denmark, July 8-10, 2004. Proceedings 9*. Springer, 260–272.
- [23] HG Marc. 1979. *On the universal relation*. Technical Report. Technical report, University of Toronto.
- [24] Dan Olteanu and Jakub Závodný. 2015. Size bounds for factorised representations of query results. *ACM Transactions on Database Systems (TODS)* 40, 1 (2015), 1–44.
- [25] Virginia Vassilevska Williams and R Ryan Williams. 2018. Subcubic equivalences between path, matrix, and triangle problems. *Journal of the ACM (JACM)* 65, 5 (2018), 1–38.
- [26] Virginia Vassilevska Williams, Yinzhan Xu, Zixuan Xu, and Renfei Zhou. 2024. New bounds for matrix multiplication: from alpha to omega. In *Proceedings of the 2024 Annual ACM-SIAM Symposium on Discrete Algorithms (SODA)*. SIAM, 3792–3835.
- [27] Mihalis Yannakakis. 1981. Algorithms for acyclic database schemes. In *VLDB*, Vol. 81. 82–94.
- [28] Clement Tak Yu and Meral Z Ozsoyoglu. 1979. An algorithm for tree-query membership of a distributed query. In *COMPSAC 79. Proceedings. Computer Software and The IEEE Computer Society's Third International Applications Conference, 1979*. IEEE, 306–312.
- [29] Hangdong Zhao, Shaleen Deep, Paraschos Koutris, Sudeepa Roy, and Val Tannen. 2024. Evaluating Datalog over Semirings: A Grounding-based Approach. *Proceedings of the ACM on Management of Data* 2, 2 (2024), 1–26.

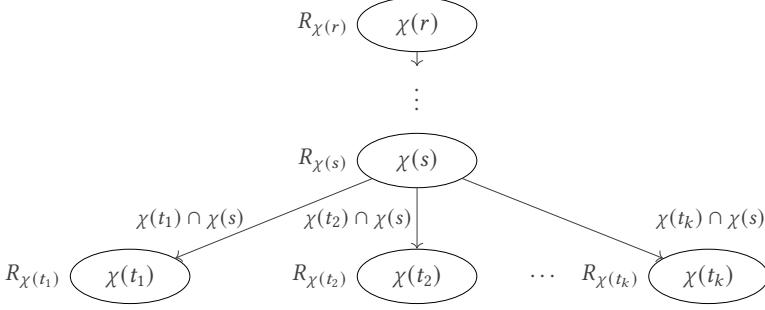


Fig. 5. A join tree with root node r . Edge labels show the common variables between bag $\chi(s)$ and bag $\chi(t_i)$.

A PROOFS FOR SECTION 4 (MAIN RESULT)

Lemma 4.1. *Let $Q(\mathbf{x}_{\mathcal{F}})$ be a reduced acyclic CQ, (\mathcal{T}, χ, r) a rooted join tree of Q , and \mathcal{D} be a database instance. Suppose that*

- (1) $R_{\chi(r)}$ has at least one isolated free variable
- (2) for every $v \in R_{\chi(r)}$, we have $d(v, \chi^{\text{m}}(r), R_{\chi(r)}) > \Delta$ for some integer $\Delta \geq 1$.

Then, Algorithm 2 runs in time $O(|\mathcal{D}| + (\sum_{t \in \mathcal{I}(\mathcal{T})} |R_{\chi(t)}|) \cdot |\text{OUT}|/\Delta)$.

PROOF. To prove this result, we will show that the size of the intermediate result that is materialized in line 8 for an internal node s is bounded by $|\text{OUT}| \cdot (|R_{\chi(s)}|/\Delta)$.

Consider the point in the algorithm where we join the node s with its children nodes t_1, \dots, t_k , as shown in Figure 5. Let v be any valuation over the variables \mathbf{x} such that $v(\mathbf{x}_{\mathcal{F}}) \in Q(\mathcal{D})$. We first claim the following inequality:

$$\prod_{i \in [k]} d(v, \chi(t_i) \cap \chi(s), R_{\chi(t_i)}) \leq |\text{OUT}|/\Delta$$

To show this, let Z be the set of all variables except for the isolated free variables in the nodes r, t_1, \dots, t_k . Then, the number of output tuples that agree with valuation v on Z is:

$$A_v = d(v, \chi^{\text{m}}(r), R_{\chi(r)}) \cdot \prod_{i \in [k]} d(v, \chi(t_i) \cap \chi(s), R_{\chi(t_i)})$$

To see why this holds, note that $R_{\chi(r)}$ has at least one isolated free variable, and Z fixes all join variables in the relation, hence we can extend $v(Z)$ in node r exactly $d(v, \chi^{\text{m}}(r), R_{\chi(r)})$ times. Additionally, Z fixes all join variables in $R_{\chi(t_i)}$, which are $\chi(t_i) \cap \chi(s)$. Since the query is reduced, every leaf node has an isolated free variable; hence, we can extend $v(Z)$ in node t_i exactly $d(v, \chi(t_i) \cap \chi(s), R_{\chi(t_i)})$ times. To finish the claim, note that $|A_v| \leq |\text{OUT}|$ and also from assumption (2) of the lemma, we have that $d(v, \chi^{\text{m}}(r), R_{\chi(r)}) > \Delta$.

To complete the proof, let $W = \chi(s) \cap (\bigcup_{t \in [k]} \chi(t_i))$. We observe that the size of the intermediate bag $\pi_{\chi(s) \cup \mathcal{F}_s}(R_{\chi(s)} \wedge R_{\chi(t_1)} \wedge \dots \wedge R_{\chi(t_k)})$ can be bounded by

$$\begin{aligned} & \sum_{v \in \pi_W(R_{\chi(s)})} d(v, W, R_{\chi(s)}) \cdot \prod_{i \in [k]} d(v, \chi(t_i) \cap \chi(s), R_{\chi(t_i)}) \\ & \leq \frac{|\text{OUT}|}{\Delta} \cdot \sum_{v \in \pi_W(R_{\chi(s)})} d(v, W, R_{\chi(s)}) \leq \frac{|\text{OUT}|}{\Delta} \cdot |R_{\chi(s)}| \end{aligned}$$

Here, the first inequality holds since we argued that for the degree product bound holds for all valuations. Observe that the time bound requires only using the size of the relation assigned to the parent of the leaf nodes (and not the sizes of the relations in the leaf nodes itself). \square

Lemma 4.2. *Given an acyclic join query $Q(\mathbf{x}_{\mathcal{F}})$ that is existentially connected and reduced, database \mathcal{D} , and an integer threshold $1 \leq \Delta \leq |\mathcal{D}|$, Algorithm 3 computes the join result $Q(\mathcal{D})$ in time $O(|\mathcal{D}| \cdot \Delta^{k-1} + |\mathcal{D}| \cdot |\text{OUT}|/\Delta)$, where k is the number of atoms in Q .*

PROOF. We begin with a simple observation: the only step in the algorithm that modifies the join tree is the join operation on line 18. In any given iteration of the while loop, once the join on line 18 is computed, node s becomes a leaf node in the join tree since we delete all its children right after. Let N denote the size of the input database⁴. Then, we get the following.

OBSERVATION 1. *After every iteration of the while loop, it holds that all relations corresponding to the internal nodes of the join tree have size $O(N)$.*

Let us now bound the time required to process all leaf nodes. Fix a leaf node s . Except the operation on line 13, all other operations take at most $O(N)$ time (note that \mathcal{D} is also modified in every iteration of the inner loop). We claim that line 13 takes time $O(N \cdot |\text{OUT}|/\Delta)$. By our choice of root node (which is s) for calling Lemma 4.1, \mathcal{T} is rooted at s . Further, note that the leaves of (\mathcal{T}, s) are the same leaves as (\mathcal{T}, r) (except for s , which is now the root). Further, by Proposition 3.2, it is also guaranteed that the bag of s contains isolated free variable(s). Thus, the conditions of applying Lemma 4.1 are satisfied. Since our choice of threshold for the partition is Δ_s , Lemma 4.1 tells us that the evaluation time required is at most big- O of

$$\left(\sum_{B \in \mathcal{I}(\mathcal{T})} |T_{\chi(B)}| \right) \cdot |\text{OUT}|/\Delta_s = (|T_{\chi}(s)| + N) \cdot |\text{OUT}|/\Delta_s = N \cdot |\text{OUT}|/\Delta$$

Here, the first equality holds because of Observation 1 which guarantees that only s can have $\Omega(N)$ size. The reader can verify that $\Delta \leq \Delta_s$, and thus, is well-defined.

Next, we will bound the time required for the join operation on line 18. For any node s , let $\#s$ denote the number of nodes in the subtree rooted at s (including s). We will show by induction that time required for the join is $O(N \cdot \Delta^{\#s-1})$.

Base Case. In the base case, consider the leaf nodes with relations of size N . Consider such a leaf ℓ and note that the relation size satisfies $O(N \cdot \Delta^{\#\ell-1}) = O(N)$ since the number of nodes a subtree rooted at a leaf is one (the leaf itself).

Inductive Case. Now, consider a node s that is not a leaf. The size of the relation for its child node t is $O(N \cdot \tau^{\#t-1})$. For t , the degree threshold for partitioning the relation is $\Delta_t = \Delta \cdot (N \cdot \Delta^{\#t-1} + N)/N \leq 2\Delta^{\#t}$. Therefore, by making the same argument as in the proof of Lemma 4.1, we get the degree product as $\prod_{t \in \text{child of } s} \Delta_t = O(\Delta^{\sum_{t \in \text{child of } s} \#t}) = \Delta^{\#s-1}$. Thus, the join time and the size of $R_{\chi(s)}$ is $O(N \cdot \Delta^{\#s-1})$. Since the tree contains $|\mathcal{T}|$ number of nodes, the total time required is dominated by the last iteration, giving us $O(N \cdot \Delta^{|\mathcal{T}|-1})$.

In each iteration of the while loop, one node of the tree is processed. Thus, the total number of iterations is $|\mathcal{T}| = k$ and the total running time of the algorithm is $O(N \cdot \Delta^{k-1} + N \cdot |\text{OUT}|/\Delta)$. \square

Theorem 4.3. *Given an acyclic CQ Q and a database \mathcal{D} , we can compute the output $Q(\mathcal{D})$ in time $O(|\mathcal{D}| + |\text{OUT}| + |\mathcal{D}| \cdot |\text{OUT}|^{1-1/\text{pw}(Q)})$.*

⁴We do not use $|\mathcal{D}|$ in the proof to avoid any confusion since the algorithm modifies \mathcal{D} repeatedly.

PROOF. This result follows exactly the argument in [16], which shows that the runtime of an evaluation algorithm for Q can be reduced to the computation of each query in $\text{decomp}(\text{red}[Q])$. In particular, as a first step it can be shown that we can compute in linear time an instance \mathcal{D}' such that $Q(\mathcal{D}) \leftarrow \text{red}[Q](\mathcal{D}')$; this is done by doing semijoins in the same order as the GYO algorithm.

As a second step, we use Theorem 4.2 to compute each query $Q_i \in \text{decomp}(\text{red}[Q])$ in time $O(|\mathcal{D}| + |\mathcal{D}| \cdot |Q_i(\mathcal{D})|^{1-1/k_i})$, where k_i is the number of atoms in Q_i . Then, we materialize each query and compute $Q(\mathcal{D})$ by doing the join $\bigwedge_i Q_i(\mathcal{D})$. This join query corresponds to a free-connex acyclic CQ, so it can be evaluated in time $O(|\mathcal{D}| + \sum_i |Q_i(\mathcal{D})| + |Q(\mathcal{D})|) = O(|\mathcal{D}| + |\text{OUT}|)$. The desired claim follows from the fact that projection width is defined as the maximum number of atoms in any query Q_i of the decomposition. \square

B PROOFS FOR SECTION 7 (A FASTER ALGORITHM FOR PATH QUERIES)

Theorem 7.1. *Given query P_k and database \mathcal{D} , there exists an algorithm to evaluate $P_k(\mathcal{D})$ in time $O(|\mathcal{D}| + |\mathcal{D}| \cdot |\text{OUT}|^{1-1/\lceil(k+1)/2\rceil})$ for any $k \geq 1$.*

PROOF. We analyze the running time of Algorithm 4. It is easy to see that other than line 7, line 11, line 14, and line 15, all other steps take at most $O(|\mathcal{D}|)$ time.

To compute \mathcal{J}_1 , it takes $O(|\mathcal{D}| \cdot |\text{OUT}|/\Delta + |\mathcal{D}| \cdot \Delta^{\lfloor k/2 \rfloor - 1})$ since K restricts the processing to only $\lfloor k/2 \rfloor$ relations. After \mathcal{J}_1 has been computed, the leaf bag of the join tree \mathcal{T}' will contain variables $\{1, \lfloor k/2 \rfloor + 1\}$ and the assigned relation will be $R_{1, \lfloor k/2 \rfloor + 1}$. The size of the relation is $O(|\mathcal{D}| \cdot \Delta^{\lfloor k/2 \rfloor - 1})$.

Next, we partition relation $R_{1, \lfloor k/2 \rfloor + 1}$ on variable x_1 with degree threshold $\Delta' = |R_{1, \lfloor k/2 \rfloor + 1}| \cdot \Delta / |\text{OUT}| = O(|\mathcal{D}| \cdot \Delta^{\lfloor k/2 \rfloor} / |\text{OUT}|)$. After partitioning, the active domain of x_1 in heavy-partition $R_{1, \lfloor k/2 \rfloor + 1}^H$ is $O(|R_{1, \lfloor k/2 \rfloor + 1}^H| / \Delta') = O(|\text{OUT}| / \Delta)$ and thus, calling Yannakakis algorithm on line 11 takes time $O(|\mathcal{D}| \cdot |R_{1, \lfloor k/2 \rfloor + 1}^H| / \Delta') = O(|\mathcal{D}| \cdot |\text{OUT}| / \Delta)$.

At this point, all valuations for variable x_1 in $R_{1, \lfloor k/2 \rfloor + 1}^L$ have degree at most Δ' . The next call on line 14 requires time $O(|\mathcal{D}| \cdot |\text{OUT}|/\Delta + |\mathcal{D}| \cdot \Delta^{\lceil k/2 \rceil - 1})$. This is because except the root node, all other relations are of size $O(|\mathcal{D}|)$ and thus, when Algorithm 3 invokes Lemma 4.1, $R_{1, \lfloor k/2 \rfloor + 1}$ becomes a leaf node and its size is not used in the running time expression (recall that Lemma 4.1 only uses the sum of sizes of internal nodes of the join tree in its time complexity analysis). Further, observe that by the choice of K' , when the algorithm terminates, the join tree \mathcal{T}'' returned will contain $R_{\lfloor k/2 \rfloor + 1, k}$ as the leaf relation and $R_{1, \lfloor k/2 \rfloor + 1}$ as the root relation.

Finally, line 15 joins the two remaining relations in \mathcal{T}'' and returns the output to the user. The key insight here is that since x_1 is light, the join time can be bound as $O(|\text{OUT}| \cdot \Delta') = O(|\mathcal{D}| \cdot \Delta^{\lfloor k/2 \rfloor})$. Putting all things together, the total running time is big-O of

$$|\mathcal{D}| \cdot |\text{OUT}|/\Delta + |\mathcal{D}| \cdot \Delta^{\lceil k/2 \rceil - 1} + |\mathcal{D}| \cdot \Delta^{\lfloor k/2 \rfloor}$$

By using the fact that $\lceil k/2 \rceil - 1 \leq \lfloor k/2 \rfloor$ and minimizing the expression, we get the optimal value of $\Delta = |\text{OUT}|^{1/(\lfloor k/2 \rfloor + 1)} = |\text{OUT}|^{1/\lceil(k+1)/2\rceil}$ since $\lceil(k+1)/2\rceil = \lfloor k/2 \rfloor + 1$ for any positive integer k . Observe that for the optimal choice of Δ , $1 \leq \Delta' = |\mathcal{D}|/|\text{OUT}|^{1/(1+\lfloor k/2 \rfloor)} \leq |\mathcal{D}|$ for all values of k and $|\text{OUT}|$, and therefore is well-defined. Thus, the total running time of the algorithm is $O(|\mathcal{D}| \cdot |\text{OUT}|^{1-1/\lceil(k+1)/2\rceil})$. \square

C PROOFS FOR SECTION 8 (LOWER BOUNDS)

Theorem 8.3. *Take any integer $\ell \geq 2$ and any rational $w \geq 1$ such that $\ell \cdot w$ is an integer. Then, there exists a query Q with projection width ℓ and submodular width w such that no combinatorial algorithm can compute it over input \mathcal{D} in time $O(|\mathcal{D}|^w \cdot |\text{OUT}|^{1-1/\ell - o(1)})$ assuming the Boolean k -Clique Conjecture.*

PROOF. Consider the graph $G = (V, E)$ for which we need to decide whether there exists a clique of size $k = (\ell - 1) + \ell \cdot w$. Let $n = |V|$. It will be helpful to distinguish the k variables of the clique into ℓ variables x_1, \dots, x_ℓ and the remaining $k - \ell$ variables $y_1, \dots, y_{k-\ell}$. Note that $k - \ell = \ell \cdot w - 1$ is an integer ≥ 1 ; hence, there exists at least one y -variable.

We will first compute all the cliques of size ℓ in G and store them in a relation $C(v_1, \dots, v_\ell)$; this forms the input database \mathcal{D} . Note that this step needs $O(n^\ell)$ time, and moreover the size of C is n^ℓ . Now, consider the following query:

$$Q(x_1, \dots, x_\ell) = U_1[x_1, y_1, \dots, y_{k-\ell}] \wedge U_2[x_2, y_1, \dots, y_{k-\ell}] \wedge \dots \wedge U_\ell[x_\ell, y_1, \dots, y_{k-\ell}]$$

where $U_i[x_i, y_1, \dots, y_{k-\ell}]$ stands for the join of following atoms:

$$\{C(v_1, \dots, v_\ell) \mid v_1, \dots, v_\ell \text{ are all possible sets of size } \ell \text{ from } \{x_i, y_1, \dots, y_{k-\ell}\}\}$$

This is a well-defined expression, since $k - \ell = \ell \cdot w - 1$ and $w \geq 1$. The submodular width of this query is w , as proved in [29]. It is also easy to see that its projection width is ℓ .

Suppose now we can compute Q in time $O(|\mathcal{D}|^{\text{subw}} \cdot |\text{OUT}|^{1-\ell/\ell-\epsilon})$ for some $\epsilon > 0$. Note that $|\mathcal{D}| \leq n^\ell$ and $|\text{OUT}| \leq n^\ell$. Hence, this implies that we can compute Q on the above input in time $O(n^{w \cdot \ell + \ell - 1 - \epsilon}) = O(n^{k-\epsilon})$.

Once the output has been evaluated, for each tuple $t \in Q(x_1, \dots, x_\ell)$, we can verify in constant time that any two vertices $t(i)$ and $t(j)$ ($1 \leq i, j \leq \ell$) are connected via an edge. Thus, in $O(n^\ell)$ time, we can verify whether the vertices form an ℓ -clique. Further, by our join query construction, each of the ℓ vertices is guaranteed to connect with a common vertex v' (which corresponds to a valuation of the remaining variables $y_1, \dots, y_{k-\ell}$).

All together, this obtains a (combinatorial) algorithm that computes whether a k -clique exists in time $O(n^{k-\epsilon} + n^\ell) = O(n^\ell)$, contradicting the lower bound conjecture. \square

Theorem 8.5. *Given any CQQ $Q(\mathbf{x}_{\mathcal{F}}) \leftarrow \bigwedge_{J \in \mathcal{E}} R_J(\mathbf{x}_J)$ and database \mathcal{D} , let ψ be a k -clique embedding of the hypergraph $\mathcal{H}' = ([n], E(\mathcal{H}) \cup \{\mathcal{F}\})$ such that $x \cdot \text{wed}^{\mathcal{F}}(\psi) + y \cdot d_{\psi}^+(\mathcal{F}) \leq k$ for positive $x, y > 0$. Then, there is no combinatorial algorithm with running time $O(|\mathcal{D}|^{x-\epsilon} \cdot |\text{OUT}|^{y-\epsilon'})$ for evaluating $Q(\mathcal{D})$ assuming the Boolean k -Clique Conjecture, where ϵ, ϵ' are non-negative with $\epsilon + \epsilon' > 0$.*

PROOF. Construct the instance as Theorem 11 in [14] and observe that there exists a k -clique if and only if there exists a tuple in the output that is consistent with the domains in variables \mathcal{F} . By a consistent tuple, we mean a tuple whose values associated to the same partitions of the input graph for finding k -clique are the same. The time and size to construct such instance \mathcal{D} is bounded by $O(n^{\text{wed}^{\mathcal{F}}(\psi)})$, and observe the size of $|\text{OUT}|$ is bounded by $O(n^{d_{\psi}^+(\mathcal{F})})$. Thus, such output-sensitive combinatorial algorithm will yield a combinatorial algorithm for k -clique that runs in time $O(n^{x \cdot (\text{wed}^{\mathcal{F}}(\psi) - \epsilon)} \cdot n^{y \cdot (d_{\psi}^+(\mathcal{F}) - \epsilon')}) = O(n^{k-\epsilon''})$ for some $\epsilon'' > 0$, contradicting the Boolean k -Clique Conjecture. \square

Theorem 8.6. *Given any FAQ $\varphi(\mathbf{x}_{\mathcal{F}})$ as (2) and database \mathcal{D} , let ψ be a k -clique embedding of the hypergraph $\mathcal{H}' = ([n], E(\mathcal{H}) \cup \{\mathcal{F}\})$ such that $x \cdot \text{wed}^{\mathcal{F}}(\psi) + y \cdot d_{\psi}^+(\mathcal{F}) \leq k$ for positive $x, y > 0$. Then, there exists no algorithm that evaluates $\varphi(\mathcal{D})$ over the tropical semiring in time $O(|\mathcal{D}|^{x-\epsilon} \cdot |\text{OUT}|^{y-\epsilon'})$ assuming the Min-Weight k -Clique Conjecture, where ϵ, ϵ' are non-negative with $\epsilon + \epsilon' > 0$.*

PROOF. Construct the instance as Theorem 11 in [14]. Given the output tuples, we simply check for the consistency of domains in variables $\mathbf{x}_{\mathcal{F}}$ and return the smallest annotation among consistent tuples after sorting. Observe that this procedure correctly solves the Min-Weight k -clique problem. The time analysis is then identical as the proof of Theorem 8.5. \square

Proposition C.1. *Given any CQ $Q(\mathbf{x}_{\mathcal{F}}) \leftarrow \bigwedge_{J \in \mathcal{E}} R_J(\mathbf{x}_J)$, define $Q'(\mathbf{x}_{\mathcal{F}}) \leftarrow \bigwedge_{J \in \mathcal{E}} R_J(\mathbf{x}_J) \wedge R(\mathbf{x}_{\mathcal{F}})$. Then, there exists a k -clique embedding ψ such that $\frac{k - \text{wed}^{\mathcal{F}}(\psi)}{d_{\psi}^+(\mathcal{F})} = 1 - \frac{1}{\text{freew}(Q)}$.*

PROOF. It suffices to construct a clique embedding on the connected components that achieves $\text{freew}(Q)$ after Hu's cleanse and decomposition steps [16]. It is straightforward to see that one can assign each element in S an isolated output variable [16]. Consider the $(\text{freew}(Q) + 1)$ -clique embedding ψ where ψ maps $\text{freew}(Q)$ distinct colors to each one of those distinguished isolated output variables, and map an additional fresh color to all other variables (including all join variables and possibly some isolated output variables that are not assigned to S). Clearly, ψ is a $(\text{freew}(Q) + 1)$ -clique embedding for Q' . Moreover, $\text{wed}^{\mathcal{F}}(\psi) = 2$ and $d_{\psi}^+(\mathcal{F}) = \text{freew}(Q)$, and thus $\frac{k - \text{wed}^{\mathcal{F}}(\psi)}{d_{\psi}^+(\mathcal{F})} = \frac{\text{freew}(Q) + 1 - 2}{\text{freew}(Q)} = 1 - \frac{1}{\text{freew}(Q)}$, completing the proof. \square

Theorem 8.7. *Consider a star query Q_{ℓ}^* with ℓ relations. Then, there exists a database \mathcal{D} such that no algorithm can have runtime of $O(|\mathcal{D}| \cdot |Q_{\ell}^*(\mathcal{D})|^{1-1/\ell-o(1)})$ subject to the Boolean k -clique conjecture.*

PROOF. The star query Q_{ℓ}^* is defined as $Q_{\ell}^*(x_1, \dots, x_{\ell}) = R_1(x_1, y) \wedge \dots \wedge R_{\ell}(x_{\ell}, y)$. Consider the query $(Q_{\ell}^*)'(x_1, \dots, x_{\ell}) = R_1(x_1, y) \wedge \dots \wedge R_{\ell}(x_{\ell}, y) \wedge R(x_1, x_2, \dots, x_{\ell})$. Observe that $\psi(i) = x_i$ for $1 \leq i \leq \ell$ and $\psi(\ell + 1) = y$ is a $(\ell + 1)$ -clique embedding of $(Q_{\ell}^*)'$. This has $\text{wed}^{\mathcal{F}}(\psi) = 2$ and $d_{\psi}^+(\mathcal{F}) = \ell$. For $x = 1$ and $y = 1 - 1/\ell$, we have $x \cdot \text{wed}^{\mathcal{F}}(\psi) + y \cdot d_{\psi}^+(\mathcal{F}) \leq \ell + 1$. Now apply Theorem 8.5. \square