# Wiki Entity Summarization Benchmark

### Saeedeh Javadi\*

# Atefeh Moradan\*

Polytechnic University of Turin saeedeh.javadi@studenti.polito.it

Aarhus University atefeh.moradan@cs.au.dk

Mohammad Sorkhpar\*
Indiana State University

msorkhpar@sycamores.indstate.edu

Klim Zaporojets Aarhus University klim@cs.au.dk Davide Mottin Aarhus University davide@cs.au.dk

Ira Assent Aarhus University ira@cs.au.dk

# **Abstract**

Entity summarization aims to compute concise summaries for entities in knowledge graphs. Existing datasets and benchmarks are often limited to a few hundred entities and discard graph structure in source knowledge graphs. This limitation is particularly pronounced when it comes to ground-truth summaries, where there exist only a few labeled summaries for evaluation and training. We propose WIKES (Wiki Entity Summarization Benchmark), a comprehensive benchmark comprising of entities, their summaries, and their connections. Additionally, WIKES features a dataset *generator* to test entity summarization algorithms in different areas of the knowledge graph. Importantly, our approach combines graph algorithms and NLP models, as well as different data sources such that WIKES does not require human annotation, rendering the approach cost-effective and generalizable to multiple domains. Finally, WIKES is scalable and capable of capturing the complexities of knowledge graphs in terms of topology and semantics. WIKES features existing datasets for comparison. Empirical studies of entity summarization methods confirm the usefulness of our benchmark. Data, code, and models are available at: https://github.com/msorkhpar/wiki-entity-summarization.

# 1 Introduction

Knowledge Graphs (KGs) are a valuable information representation: interconnected networks of entities and their relationships enable machine reasoning to empower question answering [6, 7], recommender systems [17], information retrieval [12]. KGs may comprise millions of entities representing real-world objects, concepts, or events.

Yet, the size and complexity of these KGs progressively expand, rendering it increasingly challenging to convey the essential information about an entity in a concise and meaningful way [15, 20]. This is where entity summarization becomes relevant. *Entity summarization* (ES) [18] is the process of generating a concise and informative summary that captures the most salient aspects of the entity description, based on the information available in the KGs. In ES, the entity *description* refers to all the triples involving such an entity. For instance, Figure 1 illustrates a set of relationships surrounding the entity Ellen Johnson Sirleaf in a KG, along with a possible summary for this entity. Extensive descriptions can overwhelm users and exceed the capacity of typical user interfaces,

<sup>\*</sup>Equal contribution

making it challenging to identify the most relevant triples. Entity summarization addresses this issue by computing an optimal compact summary for an entity, selecting a size-constrained subset of triples [18].

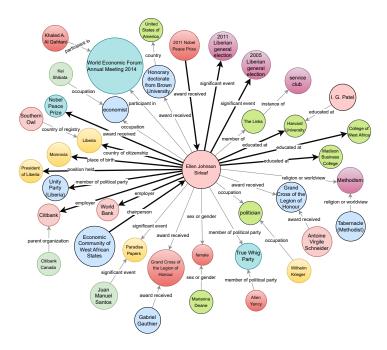


Figure 1: KG subgraph of entity Ellen Johnson Sirleaf: arrows depict the subgraph of relationships to other entities, and labels indicate their roles. Selecting the bold edges as entity summaries of the most relevant triples may reduce information overload while concisely describing the entity.

Despite advances in entity summarization techniques [18], the development and evaluation of these methods are hindered by a number of limitations in the benchmarks and datasets [19, 2]. The first limitation of the current benchmarks is the small dataset size, encompassing only a few hundred entities. Second, the generation of ground-truth summaries for testing mostly relies on expensive and lengthy manual annotation. Moreover, the dependence on a few human annotators often biases the data towards the annotators' preferences and knowledge. Third, existing benchmarks often disregard the wealth of information in the knowledge graph structure.

To address the above limitations, we propose:

- Novel WIKES benchmark for ES based on summaries and graphs from Wikidata and Wikipedia.
- Subgraph extraction method preserving the complexity of real-world KGs; subsampling using random walks and proportionally preserving node degrees, WIKES captures the structure of the entities up to the second-hop neighborhood, thereby ensuring that the connections in WIKES accurately reflect those in the source KG.
- Comprehensive summaries for *any* entity in the KG, ensuring that summaries are both relevant and contextually rich by deriving them directly from corresponding Wikipedia abstracts, minimizing human bias, as these abstracts are created and reviewed by several experts. In this manner, WIKES is scalable, enabling it to generate large benchmark resources efficiently with high-quality annotation.
- Automatic entity summarization dataset generator allows for the creation of arbitrarily large datasets, encompassing various domains of knowledge.

# 2 Existing Datasets

Here, we review the existing datasets for entity summarization. Table 1 provides an overview and statistics of the current datasets in this field. FACES and INFO datasets have a higher density than the entities in the Entity Summarization Benchmark (ESBM). It is also clear that LMDB and

FACES are not connected graphs, that challenge graph-based learning methods where the information cannot easily propagate in disconnected networks. Specifically, FACES consists of 12 connected components, which complicates the learning process for graph embedding methods by limiting the richness of information that can be leveraged from the graph.

Table 1: Entity summarization datasets in terms of number of entities  $|\mathcal{V}|$ , triples  $|\mathcal{E}|$ , number of ground-truth summaries (target entities), density as  $|\mathcal{E}|/\binom{|\mathcal{V}|}{2}$ , graph connectivity, number of components, sampling method to select entities and subgraph, and minimum / maximum node degree.

Metric	DBpedia (ESBM)	LMDB (ESBM)	FACES	INFO
Entities $( \mathcal{V} )$	2721	1 853	1 379	1 410
Relations ( $ \mathcal{E} $ )	4 4 3 6	2 148	2 152	2 0 1 9
Target Entities	125	50	50	100
Density	0.0005	0.0006	0.0011	0.0010
Sampling method	Not specified	Not specified	Not specified	Not specified
Connected-graph	Yes	No	No	Yes
Num-comp	1	2	12	1
Min Degree	1	1	1	1
Max Degree	125	208	88	100

We provide here a comprehensive description of each dataset or benchmark:

- ESBM [19]: The Entity Summarization Benchmark (ESBM) is the first benchmark to evaluate the performance of entity summarization methods. ESBM has three versions; v1.2 is the latest and most extensive version. This version comprises 175 entities, with 150 from DBpedia [9] and 25 from LinkedMDB [5]. The summaries comprise triples selected by 30 "researchers and students" annotators. Each entity has exactly 6 summaries. Despite encompassing two datasets, ESBM has several limitations. First, the entity sampling method is not explained. In particular, some triples in the neighborhood of the entity are missing in the datasets. Second, there are no connections among the entities in the neighborhood, nor any two-hop neighborhood. Third, the expertise and background of the annotators are not assessed nor disclosed. Due to the expensive annotation process, the dataset size is small.
- FACES [4] is a dataset from DBpedia (version 3.9) [?] and includes 50 randomly selected entities, each with at least 17 different types of relations. Similar to ESBM, the FACES ground-truth is also generated manually.
- INFO [2] contains 100 randomly selected entities from 10 classes in DBpedia. It comprises two sets of ground-truth summaries, REF-E and REF-W. REF-E summaries comprise a selection of triples from five experts adhering to a 140-character limit, similar to typical Google search result snippets. REF-W summaries are obtained by one expert who reads the abstract sections of the respective entities on Wikipedia and selects neighboring entities that closely match the Wikipedia abstracts. The number of ground-truth summaries per entity varies, as some experts evaluate multiple entities. This inconsistency complicates the evaluation process. The expertise of the annotators remains unspecified.

In contrast, our benchmark uses Wikidata to automatically map entities from Wikipedia to Wikidata. This automation allows us to efficiently generate summaries for any number of entities. Unlike previous work, we use the Wikipedia abstract as a summary instead of manual annotators. Each abstract is a collaboration of many users; as such, it should not introduce obvious biases. Additionally, with this process, we ensure high-quality and cost-effective summaries. Furthermore, we present the characteristics of our dataset in Table 3. The WIKES benchmark includes a larger number of entities and relations than existing datasets. It is a connected graph containing approximately 500 seed nodes. Further details regarding the specific characteristics of our dataset are provided in Section 3.4.

# 3 The WIKES Benchmark

A Knowledge Graph  $\mathcal{KG} = (\mathcal{V}, \mathcal{R}, \mathcal{T})$  is a directed multigraph consisting of entities  $\mathcal{V} = \{v_1, \ldots, v_n\}$ , relationships  $\mathcal{R}$ , and triples  $\mathcal{T} \subseteq \mathcal{V} \times \mathcal{R} \times \mathcal{V}$ . The set of edges  $\mathcal{E} = \{(i, j) \mid v_i, v_j \in \mathcal{V} \land \exists r \in \mathcal{R} \text{ s.t. } (v_i, r, v_j) \in \mathcal{T}\}$  contains pairs of nodes connected by a relationship.

The t-hop neighborhood  $\mathcal{N}_t(v_i)$  of node  $v_i$  is the set of nodes reachable from  $v_i$  within t edges when ignoring edge directions.

A summary for an entity  $v_i$  is a subset  $S(v_i) \subseteq \Delta_t(v_i)$  of triples from the t-description of  $v_i$ , where the t-description of an entity  $v_i \in \mathcal{V}$  in a knowledge graph  $\mathcal{KG}$  is the set  $\Delta_t(v_i) = \{(s, p, o) \in \mathcal{T} \mid s \in \mathcal{N}_t(v_i) \lor o \in \mathcal{N}_t(v_i) \}$  of triples in which one of the entities is in the t-hop neighborhood of  $v_i$ .

**Entity summarization** for an entity  $v_i \in \mathcal{V}$  in a knowledge graph  $\mathcal{KG}$  aims to find a summary  $\mathcal{S}(v_i)$  that maximizes some score among all possible summaries for  $v_i$ , i.e.,

$$\underset{\mathcal{S}(v_i) \subseteq \Delta_t(v_i)}{\arg \max} \operatorname{score}(\mathcal{S}(v_i)),$$

$$\underset{|\mathcal{S}(v_i)| = k}{\bowtie}$$

$$(1)$$

# 3.1 Extracting Summaries from Wikidata using Wikipedia Abstracts

We extract summaries for each Wikidata item using Wikipedia abstracts and infoboxes. Each abstract is a joint effort of many users and experts, which ensures quality and accuracy. Leveraging Wikipedia, we avoid time-consuming manual annotation and enable the automatic generation of large-scale datasets.

Wikidata is a free and collaborative knowledge base that collects structured data to support Wikipedia and other Wikimedia projects. It includes descriptions and labels for entities. The descriptions offer in-depth details, while the labels serve as concise identifiers, facilitating efficient data retrieval and integration in subsequent steps. We load all Wikidata items XML dump files published on  $2023/05/01^2$  as entities  $\mathcal V$  alongside their properties as relationships  $\mathcal R$  into a graph database<sup>3</sup>. The result is a graph that connects all Wikidata items and statements. We include items if they (1) are not marked as redirects, (2) belong to the main Wikidata namespace, and (3) have an English label or description. Additionally, we load metadata for each Wikidata item and property, including labels and descriptions, into a relational database<sup>4</sup>.

**Wikipedia** pages contain infoboxes, abstracts, page content, categories, references, and more. Links to other Wikipedia pages are referred to as mentions. We detect these mentions in the abstracts and infoboxes of Wikipedia pages to use them later for labeling the summaries in Wikidata. We extract and load all the content from the XML dump files of Wikipedia pages, published on 2023/05/01<sup>5</sup>, into a relational database under the same conditions as Wikidata: the pages must be in English and not redirected.

**Summary annotation.** We annotate the summaries in Wikidata using the corresponding Wikipedia pages. For each Wikipedia page corresponding to a Wikidata entity, we iterate through all connected Wikidata items using Wikidata properties. If a connected Wikidata item is mentioned in the Wikipedia abstract and infobox, we annotate the Wikidata item with the corresponding Wikidata property as part of the summary.

Wikidata is a directed multigraph, which means that each entity (Wikidata item) can be connected to another entity via multiple relations (Wikidata properties). Yet, links in Wikipedia are not labeled; as such, we need to select one of the relations for the summary. To annotate the correct Wikidata property as part of the summary, we employ the DistilBERT model [13]. DistilBERT is a fast and lightweight model with a reduced number of parameters compared to the original BERT model. This way, we can efficiently process large amounts of data while maintaining high-quality embeddings for accurate relation selection.

Concretely, we first embed the abstract of the Wikidata item for which we are generating summaries using DistilBERT. We then calculate the cosine similarity between the embedding of the abstract and the embeddings of each candidate relation. Finally, we add the relation with the highest cosine similarity to the abstract embedding to the summary. This approach ensures that the most relevant Wikidata property is selected for the summary based on its semantic similarity to the Wikipedia abstract.

<sup>&</sup>lt;sup>2</sup>https://dumps.wikimedia.org/wikidatawiki/

<sup>3</sup>https://neo4j.com

<sup>4</sup>https://www.postgresql.org/

<sup>&</sup>lt;sup>5</sup>https://dumps.wikimedia.org/enwiki/

#### 3.2 Capturing the Graph Structure

Here we introduce the WIKES generator algorithm. The main idea is to sample a connected graph that preserves the original graph structure. To this end, we employ random walks [11].

A random walk is a stochastic process defined as a sequence of steps, where the direction and magnitude of each step are determined by the random variable  $X_{t+1} = X_t + S_t$  where  $X_t$  represents the position at time t, and  $S_t$  is the step taken from position  $X_t$ .

The process is a Markov process, characterized by its memoryless property:

$$P(X_{t+1} = x | X_t = x_t, X_{t-1} = x_{t-1}, \dots, X_0 = x_0) = P(X_{t+1} = x | X_t = x_t)$$
(2)

In adapting this concept to our work, we redefine the number of random walks assigned to nodes based on their degrees, ensuring the distribution remains proportional to real data. This is achieved through logarithmic transformation and normalization. The logarithmic transformation is applied to reduce the impact of high-degree nodes and also low-degree nodes, making it more manageable for the random walk. Given a graph with node degrees  $\{d_1, d_2, \ldots, d_i\}$ , the log-transformed degree for node i is  $L_i = \log(d_i)$ . These values are then normalized:

$$N_i = \frac{L_i - \min(\{L\})}{\max(\{L\}) - \min(\{L\})}$$
(3)

where  $N_i$  is the normalized logarithmic degree of node i. Finally, the number of random walks  $R_i$  assigned to each node is:

$$R_i = \text{round} \left( \min RW + N_i \times (\max RW - \min RW) \right) \tag{4}$$

Here, minRW and maxRW are the user-defined minimum and maximum limits for random walks. This adaptation ensures that the random walks are proportional to the normalized logarithmic degree of each node, reflecting the true structure of the network. For a small dataset we set minRW = 100 and maxRW = 300; for a medium dataset minRW = 150 and maxRW = 600; for a large dataset, minRW = 300 and maxRW = 1800. This ensures that the random walks are tailored to both the scale and the complexity of the dataset. Importantly, our approach can be used to extract further subgraphs at the scale needed for benchmarking in a given scenario.

Moreover, the random walk sampling process requires a set of seed nodes as a starting point. In our case, the seed nodes represent the target entities we are interested in. The seed nodes can be any Wikidata Item Identifier, Wikipedia title, or Wikipedia ID of the Wikipedia pages. We collect the seed nodes on the condition that they have at least k (default k=5) common entities with the abstract section and the infobox in the Wikipedia pages. Therefore, this model is flexible, allowing you to choose any seed nodes from any domain as an input. In the datasets that we generated, we collect seed nodes from [8]. This paper has published information about individuals from various domains. The authors collected data from multiple Wikipedia editions and Wikidata, using deduplication and crossverification techniques to compile a database of 1.6 million individuals with English Wikipedia pages. The seed nodes that we use include actor, athletic, football, journalist, painter, player, politician, singer, sport, writer, lawyer, film, composer, novelist, poet, and screenwriter. Using combinations of these seed nodes, we generate four sets of datasets, with each set having small, medium, and large versions. In Table 9 in Section A in the supplementary material, we present the seed nodes and their proportions for each dataset and their corresponding train-test-val splits.

# 3.3 WIKES Generator

We discuss how WIKES is created, and how further benchmarks can be generated without the need for manual annotators. Algorithm 1 details the generator, which consists of the following steps.

**Step1:** Retrieve summaries of each seed node (explained in Section 3.1)

**Step2:** Expand the graph using the random walk method in Section 3.2. Set the random walk's length n (default n = 2), which means it explores up to the n-hop neighborhood of each seed node.

**Step3:** Check if the graph is connected. If it is, done. If not, identify all disconnected components and sort them by size, from largest to smallest. In each iteration, connect smaller components to the largest component using h connections. Utilize the shortest path method, selecting paths that are equal to or less than a minimum path length l. Continue connecting nodes from the smaller component

to the larger one until h nodes are connected. After each iteration, check graph connectivity again. If all components are connected to the largest component, the algorithm ends. Otherwise, re-sort components and increase l by 1. Repeat until the graph is a single connected component.

# Algorithm 1 WIKES Generator

```
1: Input: Graph G, seed nodes S, random walk length n, minimum path length l
 2: Output: A connected graph
 3: procedure GENERATEGRAPH(G, S, n, l)
        summaries \leftarrow RetrieveSummaries(S)
 5:
        G \leftarrow \text{RANDOMWALKEXPANSION}(G, S, n) mentioned in section 3.2
 6:
        is\_connected \leftarrow CheckConnectivity(G)
 7:
        while not is connected do
 8:
           components \leftarrow FINDCOMPONENTS(G)
 9:
           Sort components by size in descending order
10:
           largest \gets components[0]
11:
           for comp in components[1:] do
12:
               Connect comp to largest using h connections via shortest paths \leq l
13:
               G \leftarrow \text{UPDATEGRAPH}(G, comp, largest)
14:
               is\_connected \leftarrow CheckConnectivity(G)
15:
               if is\_connected then
16:
                   break
               end if
17:
           end for
18:
19:
           l \leftarrow l + 1
20:
        end while
21:
        return G
22: end procedure
```

#### 3.4 WIKES Datasets

We generate three sizes for each of the four datasets, obtaining 12 datasets. We present their characteristics in Table 3 in section A. The number of entities in the small datasets ranges from approximately 70k to 85k, and the number of relations ranges from around 120k to 135k. In the medium datasets, the number of entities ranges from 100k to 130k, and the number of relations ranges from 195k to 220k. The number of entities in the large datasets ranges from approximately 185k to 250k, and the number of relations ranges from around 397k to 470k. The average runtime for generating small graphs is approximately 128 seconds; for medium-sized graphs, it is approximately 216 seconds; and for large graphs, it is approximately 512 seconds. We construct the train-test-validation split for each dataset with 70% for training, 15% for testing, and 15% for validation. Detailed information about the run time, as well as the number of nodes and relations for these splits, is available on our GitHub repository. All graphs in each train-test-validation splits are connected.

# 4 Empirical Evaluation

We study the quality of WIKES using the following metrics:

**F-Score.** Let  $S_m$  the summary obtained by a summarization method and  $S_h$  the ground-truth summary. We compare  $S_m$  with  $S_h$  using the F1-score based on precision P and recall R:

$$F1 = \frac{2 \cdot P \cdot R}{P + R}, \text{ where } P = \frac{|\mathcal{S}_m \cap \mathcal{S}_h|}{|\mathcal{S}_m|} \text{ and } R = \frac{|\mathcal{S}_m \cap \mathcal{S}_h|}{|\mathcal{S}_h|}$$
 (5)

The F1 score lies within [0,1]. High F1 indicates that  $S_m$  is closer to the ground-truth  $S_h$ .

**Mean Average Precision (MAP).** This metric is particularly suitable for evaluating ranking tasks because it takes into account the order of the predicted triples. MAP calculates precision at each position i in the predicted summary and averages these values over all relevant summary triples. It reflects both the relevance and the ranking quality of the predicted summaries. MAP, unlike F1-score, does not depend on a specific value of k. This makes it a robust metric for assessing how well a

summarization method ranks the relevant triples.

$$MAP = \frac{1}{N} \sum_{n=1}^{N} \frac{\sum_{i=1}^{|\mathcal{S}_{m}^{(n)}|} \begin{cases} Precision@i(\mathcal{S}_{h}^{(n)}) & \text{if } Rel(n, i) \\ 0 & \text{otherwise} \end{cases}}{|\mathcal{S}_{h}^{(n)}|}$$
(6)

where N is the total number of entities,  $\mathcal{S}_h^{(n)}$  is the set of ground-truth summary triples for a particular entity  $v_n$ ,  $\mathcal{S}_m^{(n)}$  is the set of predicted summary triples for the entity  $v_n$ , Precision@i is the precision at the i-th position in the predicted summary, and  $\operatorname{Rel}(n,i)$  indicates whether the i-th predicted triple for entity  $v_n$  is relevant (i.e., it belongs to  $\mathcal{S}_h^{(n)}$ ). MAP scores are in the range [0,1], where a higher MAP indicates better performance in terms of correctly predicting relevant summary triples. To account for the varying lengths of the ground-truth summaries in real-world data, we also calculate MAP and F-score (which we refer to as dynamic MAP and dynamic F-score) by setting the length of the generated summary ( $|\mathcal{S}_m|$ ) equal to the length of the corresponding ground-truth summary ( $|\mathcal{S}_h|$ ).

We analyze our dataset and compare it with the ESBM benchmark using statistical measures such as frequency and inverse frequency of entities and relations. We calculate the F-score and MAP score for the top-5 and top-10 of both the ESBM dataset and our WikiProFem. We choose top-5 and top-10 because we only have ground-truth summaries for top-5 and top-10 in the ESBM dataset. The F-score and MAP results for ESBM are presented in Figure 2. The statistics show that for DBpedia, the F-score using inverse relation frequency outperforms the random baseline by 0.15 for top-5 and by 0.34 for top-10. Furthermore, when using inverse entity frequency, DBpedia achieves an even higher F-score, surpassing the random baseline by 0.07 for top-5 and by 0.15 for top-10. For LMDB, we observe a similar trend when using inverse frequency. The F-score surpasses the random baseline by 0.10 for top-5 and by approximately 0.15 for top-10. Additionally, when employing entity frequency, LMDB achieves an F-score that is around 0.17 higher than the baseline for top-5 and 0.07 higher for top-10. The results demonstrate that ESBM exhibits a strong bias towards entity, reverse entity, and relation frequency. For Map score, we are exactly observing the same behavior for ESBM. We believe that the bias comes from the fact that the datasets are small, their second-hop neighborhood is not considered, and the relations between their first-hop neighbors are not considered. On the other hand, Figure 11 shows the F-score for top-5, top-10 and dynamic F-score on WIKES. Since the length of summaries varies with the abstract, we calculate the F-score for each seed node based on its summary length. Results show that WIKES F-score is close to random for different statistics, thus rejecting the hypothesis of obvious biases. We observe a minor bias towards node frequency in small datasets. Yet, as we increase the size of the dataset, this bias disappears. We observe a similar behavior with MAP in Figure 12 Furthermore, we use the entire Wikidata to measure the F-score for our seed nodes. Thus, importantly, we observe that our dataset's F-score trend is comparable to that of the entire data, especially our large dataset. We also extracted the first-hop neighborhood of all our seed nodes and observed a small bias in the F-score top-5 and dynamic F-score. We conclude that adding the two-hop neighborhood makes the sample follow the graph distribution. Thus, WIKES is an unbiased benchmark that retains the source KG distribution.

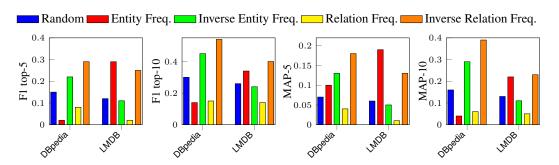


Figure 2: F1 score and MAP for frequency statistics on ESBM datasets.

We evaluate the performance of different entity summarization methods on our benchmark, and provide all implementations in the WIKES GitHub repository.

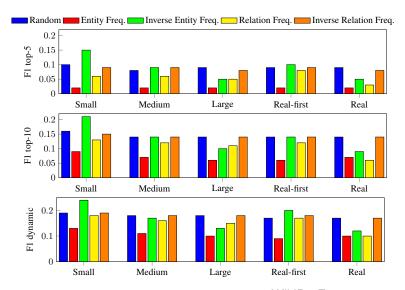


Figure 3: F1 for frequency statistics on WikiProFem.

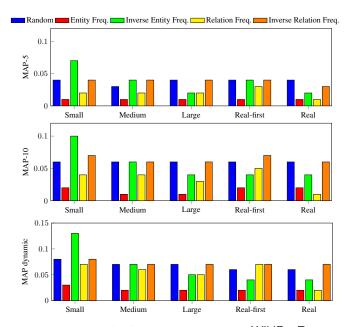


Figure 4: MAP for frequency statistics on WikiProFem.

- PageRank [10] ranks nodes in a graph based on the structure of incoming links, with the idea that more important nodes are likely to receive more links from other nodes.
- **RELIN** [3] is a weighted PageRank algorithm that evaluates the relevance of triples within a graph structure. We have re-implemented this model according to the specifications in the referenced paper. On our smaller dataset version, RELIN takes approximately 6 hours to compute all summaries.
- LinkSum [16] is a two-step, relevance-centric method that combines PageRank with an adaptation of the Backlink algorithm to identify relevant connected entities. We have re-implemented it according to the paper. The LinkSum method initially takes 10 hours to compute the backlinks for each node in the small version of our dataset. By parallelizing the implementation, we reduced this to one hour. Additionally, the Backlink algorithm itself initially takes 100 minutes, but with parallelization, this was reduced to 10 minutes for the small version of our dataset.

Due to the inefficiency of the methods, we use a smaller version of WIKES for evaluation. The results in Table 2 show that LinkSum outperforms both RELIN and PageRank. These findings suggest that models capable of exploiting the graph structure while handling large-scale datasets and maintaining high accuracy in entity summarization are valuable for such real-world KGs, such as WIKES.

		topK	= 5	topK :	= 10	Dyna	mic
Model	Dataset	F-Score	MAP	F-Score	MAP	F-Score	MAP
PageRank	WikiLitArt	0.024	0.01	0.081	0.02	0.175	0.046
	WikiCinema	0.003	0.001	0.041	0.005	0.146	0.028
	WikiPro	0.060	0.02	0.169	0.049	0.288	0.109
	WikiProFem	0.032	0.01	0.093	0.024	0.145	0.036
RELIN	WikiLitArt	0.093	0.035	0.148	0.054	0.208	0.080
	WikiCinema	0.071	0.023	0.127	0.038	0.209	0.068
	WikiPro	0.125	0.053	0.200	0.086	0.273	0.127
	WikiProFem	0.111	0.050	0.179	0.081	0.219	0.095
LinkSum	WikiLitArt	0.184	0.080	0.239	0.109	0.225	0.127
	WikiCinema	0.119	0.048	0.152	0.060	0.135	0.068
	WikiPro	0.249	0.127	0.347	0.190	0.350	0.242
	WikiProFem	0.195	0.097	0.236	0.127	0.213	0.136

Table 2: Performance comparison of entity summarization models on the small version of WIKES. The models are evaluated with different topK values (5 and 10) and a dynamic setting.

# 5 Conclusion

We introduce WIKES (Wiki Entity Summarization Benchmark), a benchmark for KG entity summarization which provides a scalable dataset generator that eschews the need for costly human annotation. WIKES uses Wikipedia abstracts for automatic summary generation, ensuring contextually rich and unbiased summaries. It preserves the complexity and integrity of real-world KGs through a random walk sampling method that captures the structure of entities down to their second-hop neighborhoods. Empirical evaluations demonstrate that WIKES provides high-quality large-scale datasets for entity summarization tasks, and that it captures the complexities of knowledge graphs in terms of topology, making it a valuable resource for evaluating and improving entity summarization algorithms.

#### References

- [1] Alan Akbik, Duncan Blythe, and Roland Vollgraf. Contextual string embeddings for sequence labeling. In *Proceedings of the 2018 International Conference on Computational Linguistics*, pages 1638–1649, 2018.
- [2] Gong Cheng, Qingxia Liu, and Yuzhong Qu. Generating characteristic summaries for entity descriptions. *TKDE*, 35(5):4825–4835, 2023.
- [3] Gong Cheng, Thanh Tran, and Yuzhong Qu. Relin: Relatedness and informativeness-based centrality for entity summarization. In *The Semantic Web ISWC 2011*, pages 114–129, 2011.
- [4] Kalpa Gunaratna, Krishnaprasad Thirunarayan, and Amit P Sheth. Faces: diversity-aware entity summarization using incremental hierarchical conceptual clustering. In *Proceedings of the AAAI Conference on Artificial Intelligence (AAAI)*, pages 116–122, 2015.
- [5] Oktie Hassanzadeh and Mariano P Consens. Linked movie data base. In LDOW, 2009.
- [6] Sen Hu, Lei Zou, Jeffrey Xu Yu, Haixun Wang, and Dongyan Zhao. Answering natural language questions by subgraph matching over knowledge graphs. *IEEE Transactions on Knowledge and Data Engineering*, 30(5):824–837, 2018.
- [7] Yunshi Lan, Shuohang Wang, and Jing Jiang. Multi-hop knowledge base question answering with an iterative sequence matching model. In 2019 IEEE International Conference on Data Mining (ICDM), pages 359–368, 2019.
- [8] Morgane Laouenan, Palaash Bhargava, Jean-Benoît Eyméoud, Olivier Gergaud, Guillaume Plique, and Etienne Wasmer. A cross-verified database of notable people, 3500bc-2018ad. *Scientific Data*, 9(1):290, 2022.
- [9] Jens Lehmann, Robert Isele, Max Jakob, Anja Jentzsch, Dimitris Kontokostas, Pablo N Mendes, Sebastian Hellmann, Mohamed Morsey, Patrick Van Kleef, Sören Auer, et al. Dbpedia–a large-scale, multilingual knowledge base extracted from wikipedia. *Semantic Web*, 6(2):167–195, 2015.
- [10] Nan Ma, Jiancheng Guan, and Yi Zhao. Bringing pagerank to the citation analysis. *Information Processing & Management*, 44(2):800–810, 2008.
- [11] Karl Pearson. The problem of the random walk. *Nature*, 72(1867):342–342, 1905.
- [12] Hadas Raviv, Oren Kurland, and David Carmel. Document retrieval using entity-based language models. In *Proceedings of the 39th International ACM SIGIR Conference on Research and Development in Information Retrieval*, SIGIR '16, page 65–74, New York, NY, USA, 2016. Association for Computing Machinery.
- [13] Victor Sanh, Lysandre Debut, Julien Chaumond, and Thomas Wolf. Distilbert, a distilled version of bert: smaller, faster, cheaper and lighter. *ArXiv*, abs/1910.01108, 2019.
- [14] Giorgos Stoilos, Giorgos Stamou, and Stefanos Kollias. A string metric for ontology alignment. In *The Semantic Web ISWC 2005*, pages 624–637, 2005.
- [15] Fabian M. Suchanek, Gjergji Kasneci, and Gerhard Weikum. Yago: a core of semantic knowledge. In *Proceedings of the 16th International Conference on World Wide Web*, WWW '07, page 697–706, New York, NY, USA, 2007. Association for Computing Machinery.
- [16] Andreas Thalhammer, Nelia Lasierra, and Achim Rettinger. Linksum: Using link analysis to summarize entity data. In *ICWE*, pages 244–261, 2016.
- [17] Hongwei Wang, Fuzheng Zhang, Xing Xie, and Minyi Guo. Dkn: Deep knowledge-aware network for news recommendation. In *Proceedings of the 2018 World Wide Web Conference*, page 1835–1844. International World Wide Web Conferences Steering Committee, 2018.
- [18] Qingxia Liu, Gong Cheng, Kalpa Gunaratna, and Yuzhong Qu. Entity summarization: State of the art and future challenges. *Journal of Web Semantics*, 69:100647, 2021.

- [19] Qingxia Liu, Gong Cheng, Kalpa Gunaratna, and Yuzhong Qu. ESBM: an entity summarization benchmark. In *The Semantic Web: 17th International Conference, ESWC 2020, Heraklion, Crete, Greece, May 31–June 4, 2020, Proceedings 17*, pages 548–564. Springer, 2020.
- [20] Denny Vrandečić and Markus Krötzsch. Wikidata: a free collaborative knowledgebase. *Communications of the ACM*, 57(10):78–85, 2014.

# A Appendix

Table 3: Generated Datasets in terms of number of entities  $|\mathcal{V}|$ , triples  $|\mathcal{E}|$ , ground-truth summaries, density as  $|\mathcal{E}|/\binom{|\mathcal{V}|}{2}$ , graph connectivity, number of components, sampling method to select the entities and the subgraph, minimum and maximum node degree and, running time.

#### (a) Small Datasets

Metric	WikiLitArt	WikiCinema	WikiPro	WikiProFem	
Entities ( $ \mathcal{V} $ )	85 346	70753	79 825	79 926	
Relations ( $ \mathcal{E} $ )	136 950	126 915	125 912	123 193	
Target Entities	494	493	493	468	
Density	0.000018	0.000018	0.000019	0.000019	
Sampling method	Random Walk	Random Walk	Random Walk	Random Walk	
Connected-graph	Yes	Yes	Yes	Yes	
Num-comp	1	1	1	1	
Min Degree	1	1	1	1	
Max Degree	2172	3005	2060	3142	
Run-time (seconds)	91.934	118.014	126.119	177.63	

#### (b) Medium Datasets

Metric	WikiLitArt	WikiCinema	WikiPro	WikiProFem
Entities ( $ \mathcal{V} $ )	128 061	101 529	119 305	122 728
Relations ( $ \mathcal{E} $ )	220 263	196 061	198 663	196 838
Target Entities	494	493	493	468
Density	0.000013	0.000019	0.000014	0.000013
Sampling method	Random Walk	Random Walk	Random Walk	Random Walk
Connected-graph	Yes	Yes	Yes	Yes
Num-comp	1	1	1	1
Min Degree	1	1	1	1
Max Degree	3726	5124	3445	5282
Run-time (seconds)	155.36	196.413	208.157	301.718

# (c) Large Datasets

Metric	WikiLitArt	WikiCinema	WikiPro	WikiProFem	
Entities $( \mathcal{V} )$	239 491	185 098	230 442	248 012	
Relations ( $ \mathcal{E} $ )	466 905	397 546	412 766	413 895	
Target Entities	494	493	493	468	
Density	0.000008	0.00001	0.000008	0.000007	
Sampling method	Random Walk	Random Walk	Random Walk	Random Walk	
Connected-graph	Yes	Yes	Yes	Yes	
Num-comp	1	1	1	1	
Min Degree	1	1	1	1	
Max Degree	8599	12189	7741	12939	
Run-time (seconds)	353.113	475.679	489.409	768.99	

#### A.1 Additional WIKES details

- Dataset and Metadata: The dataset is available at https://github.com/msorkhpar/wiki-entity-summarization. We generate four datasets in three sizes: small, medium, and large. Each size has a train-test-validation split. In Table 9, we provide information on the proportion of seed nodes in each of the datasets. Moreover, Table 3 provides detailed information such as the number of entities  $|\mathcal{V}|$ , triples  $|\mathcal{E}|$ , ground-truth summaries, density, graph connectivity, number of components, sampling method used to select the entities and the subgraph, minimum and maximum node degree, and running time for each of the datasets. Moreover, metadata is also in the same github repository.
- WIKES toolkits: We offer a comprehensive toolkit designed to facilitate working with our datasets. This toolkit includes features for downloading, loading, and manipulating pre-generated graph datasets. You can access our toolkit at https://pypi.org/project/wikes-toolkit/
- **Dataset Formats:** We generate our dataset in CSV format. The entity files are formatted according to Table 4. Additionally, we provide a file that contains the categories of the target entities, as detailed in Table 8. The predicate files, described in Table 6, contain predicates along with their corresponding labels and descriptions. The triple file, presented in Table 7, includes the subject, object, and predicate IDs of the nodes (Wikidata items) and edges (Wikidata predicates). The ground-truth file, shown in Table 8, contains the subject, object, and predicate. Predicates in groun-truth entities are also marked as ground-truth. Moreover, we provide the graph version of our dataset in GraphML and PKL formats in our release https://github.com/msorkhpar/wiki-entity-summarization/releases/tag/1.0.5.
- URL to metadata record: Since we have several datasets, in our GitHub Repository, we provide the Crossiant URL metadata. The metadata for WikiLitArt small dataset is https://github.com/msorkhpar/wiki-entity-summarization/releases/download/1.0.5/WikiLitArt-m.json. The metadata format is consistent across all datasets. The metadata files are included alongside the datasets in the GitHub release.
- **Preprocessing URL:** You can find our preprocessing code for cleaning and preparing Wikipedia and Wikidata at the following link: https://github.com/msorkhpar/wiki-entity-summarization-preprocessor. Access and loading of preprocessed:
  - Neo4j database: https://github.com/msorkhpar/ wiki-entity-summarization-preprocessor/releases/tag/Neo4j-1.0.0.
  - PostgreSQL: https://github.com/msorkhpar/
    wiki-entity-summarization-preprocessor/releases/tag/PostgreSQL-1.
    0.0.
- Authors responsibility statement and License: The authors are held responsible for copyright infringement, but assume no responsibility or liability for any misuse of the data. This project is licensed under the CC BY 4.0 License. See here https://github.com/msorkhpar/wiki-entity-summarization/blob/main/LICENSE
- WIKES Generator Code: The code for running the WIKES generator is available in the GitHub repository at https://github.com/msorkhpar/wiki-entity-summarization. The code allows to generate the same datasets in the paper or create your own custom datasets.
- Maintenance and Long Term Preservation The authors of WIKES are dedicated to the ongoing maintenance and preservation of this dataset. This includes tracking and resolving issues identified by the community post-release. We will closely monitor user feedback through the GitHub issue tracker. The data is hosted on GitHub, ensuring reliable and stable storage.
- **Intended users:** The intended users are NLP and knowledge graph researchers who wish to generate summaries using the textual information of the entities (nodes) in knowledge graphs. The suitable use case for this dataset is evaluating entity summarization models to determine their ability to accurately detect summaries.

Field	Description	Datatype
id	Incremental integer starting by zero	int
entity	Wikidata qid, e.g. 'Q76'	string
wikidata_label	Wikidata label (nullable)	string
wikidata_desc	Wikidata description (nullable)	string
wikipedia_title	Wikipedia title (nullable)	string
wikipedia_id	Wikipedia page id (nullable)	long

Table 4: {variant}-{size}-{dataset\_type}-entities.csv file contains entities. An entity is a Wikidata item (node) in our dataset. variant\_index refers to the dataset id (detailed information is in our Github).

Field	Description	Datatype
entity	id key in Table 4	int
category	category	string

Table 5: {variant}-{size}-{dataset\_type}-root-entities.csv contains root entities. A root entity is a seed node described previously.variant\_index refers to the dataset id (detailed infomation is in our Github).

Dataset	Seed Nodes Categories	
	Entire graph: actor=150, composer=35, film=41, novelist=24, painter=59,	
WikiLitArt	poet=39, screenwriter=17, singer=72, writer=57	
VVIKILILAIT	<b>Train:</b> actor=105, composer=24, film=29, novelist=17, painter=42, poet=27,	
	screenwriter=12, singer=50, writer=40	
	Val: actor=23, composer=5, film=6, novelist=4, painter=9, poet=6, screen-	
	writer=2, singer=11, writer=8	
	<b>Test:</b> actor=22, composer=6, film=6, novelist=3, painter=8, poet=6, screen-	
	writer=3, singer=11, writer=9	
	Entire graph: actor=405, film=88	
WikiCinema	<b>Train:</b> actor=284, film=61	
VIINOITICITIA	Val: actor=59, film=14	
	<b>Test:</b> actor=62, film=13	
	<b>Entire graph:</b> actor=58, football=156, journalist=14, lawyer=16, painter=23,	
WikiPro player=25, politician=125, singer=27, sport=21, writer=28		
VVIIXII 10	<b>Train:</b> actor=41, football=109, journalist=10, lawyer=11, painter=16, player=17,	
	politician=87, singer=19, sport=15, writer=20	
	<b>Val:</b> actor=9, football=23, journalist=2, lawyer=3, painter=3, player=4, politi-	
	cian=19, singer=4, sport=3, writer=4	
	<b>Test:</b> actor=8, football=24, journalist=2, lawyer=2, painter=4, player=4, politi-	
	cian=19, singer=4, sport=3, writer=4	
	<b>Entire graph:</b> actor=141, athletic=25, football=24, journalist=16, painter=16,	
WikiProFem	player=32, politician=81, singer=69, sport=18, writer=46	
WIKII TOT CITI	<b>Train:</b> actor=98, athletic=18, football=17, journalist=9, painter=13, player=22,	
	politician=57, singer=48, sport=14, writer=34	
	<b>Val:</b> actor=21, athletic=4, football=3, journalist=4, painter=1, player=5, politi-	
	cian=13, singer=11, sport=1, writer=5	
	<b>Test:</b> actor=22, athletic=3, football=4, journalist=3, painter=2, player=5, politi-	
	cian=11, singer=10, sport=3, writer=7	

Table 9: Seed nodes categories for each dataset. "Entire graph" refers to using the seed nodes and generating the data without train-test-val splits. In train-test-val, each of the datasets is a single weakly connected graph.

Field	Description	Datatype
id	Incremental integer starting by zero	int
predicate	Wikidata Property id, e.g. 'P121'	string
predicate_label	Wikidata Property label (nullable)	string
predicate_desc	Wikidata Property description (nullable)	string

Table 6: {variant}-{size}-{dataset\_type}-predicates.csv contains predicates. A predicate is a Wikidata property or a describing a connection. variant\_index refers to the dataset id (detailed information is in our Github).

Field	Description	Datatype
subject	id key in Table 4	int
predicate	id key in Table 6	int
object	id key in Table 4	int

Table 7: {variant}-{size}-{dataset\_type}-triples.csv contains triples. A triple is an edge between two entities with a predicate. variant\_index refers to the dataset id (detailed information is in our Github).

# A.2 Parameters for Running the WIKES Generator

Table 10 shows the parameters required for running the WIKES Generator. The table provides a description of the parameters and their default values, where applicable. A detailed explanation on how to run the generator can be found in our GitHub repository.

# A.3 Technologies

Table 11 presents the versions of the technologies and configurations that we use in this work.

Table 11: Technology and Configuration Details for Daatset Generations

(a) Technologies Used: Software Versions and Data Sources

Technology	Version/Details
Java	Version 21
Spring Boot	Version 3
Docker	Version 24.0.8
Python	Version 3.10
PostgreSQL	Version 16.3
Neo4j	Version 5.20.0-community
Wikipedia XML Article Dump Files	Published by Wikimedia on 2023/05/01
Wikidata XML Article Dump Files	Published by Wikimedia on 2023/05/01

(b) Hardware- Spec: Specifications of the AWS EC2 Instance (r5a.4xlarge)

Specification	Details
vCPU	16 (AMD EPYC 7571, 16 MiB cache, 2.5 GHz)
Memory	128 GB (DDR4, 2667 MT/s)
Storage	500 GB (EBS, 2880 Max Bandwidth)

# **B** Datasheet

#### **B.1** Motivation

1. For what purpose was the dataset created? The motivation behind this dataset generator is to foster research on entity summarization and provide a tool to generate arbitrary-size datasets eschewing the cost of human annotation. We create an easy-to-use executable generator, in

Field	Description	Datatype
root_entity	entity in Table 4	int
subject	id key in Table 4	int
predicate	id key in Table 6	int
object	id key in Table 4	int

Table 8: {variant}-{size}-{dataset\_type}-ground-truths.csv contains ground truth triples. A ground truth triple is an edge marked as a summary for a root entity.

Parameter	Description	Default Value
min_valid_summary_edges	Minimum number of valid summaries for a	5
	seed node	
random_walk_depth_len	Depth length of random walks (number of	3
	nodes in each random walk)	
bridges_number	Number of connecting path bridges be-	5
	tween components	
max_threads	Maximum number of threads	4
min_random_walk_number	Minimum number of random walks for	100 for small, 150 for medium, and
	each seed node, explained	300 for large
max_random_walk_number	Maximum number of random walks for	300 for small, 600 for medium, and
	each seed node	1800 for large

Table 10: Parameters for Running WIKES Generator

which users can create connected graphs by passing their desired seed nodes. Furthermore, we provide some curated datasets because there has not been a large dataset in this field, and consequently, scalable models have not been developed in this area. To address this issue, we generate large datasets alongside their medium and small versions for research. By running the current models using our generated datasets, we can pinpoint scalability issues of current models and nurture research in this area. Unlike previous benchmarks, we were interested in generating datasets that follow the patterns of real-world graphs and do not have a bias towards any metric that does not exist in real data. In Section 4, we study our dataset for different biases and compare it to the ESBM benchmark, which is the most recent entity summarization benchmark to date.

2. Who created the dataset and on behalf of which entity? The dataset is fully created by the authors of this paper.

#### **B.2** Distribution

- 1. Will the dataset be distributed to third parties outside of the entity (e.g., company, institution, organization) on behalf of which the dataset was created? Yes, the dataset is open and fully accessible.
- 2. How will the dataset be distributed (e.g., tarball on website, API, GitHub)? The WIKES generator, WIKES benchmark and, the code for developing the baselines will be distributed through our GitHub repository.
- 3. Have any third parties imposed IP-based or other restrictions on the data associated with the instances? No.
- 4. Do any export controls or other regulatory restrictions apply to the dataset or to individual instances? No.

#### **B.3** Maintenance

- 1. Who will be supporting/hosting/maintaining the dataset? The authors of the paper.
- 2. How can the owner/curator/manager of the dataset be contacted (e.g., email address)? The owner/curator/manager(s) of the dataset can be contacted through the following emails: Mohammad Sorkhpar (msorkhpar@sycamores.indstate.edu), Saeedeh Javadi (saeedeh.javadi@studenti.polito.it), and Atefeh Moradan (atefeh.moradan@cs.au.dk).

- 3. *Is there an erratum?* No, but the users can submit github issues or contact the authors. If errors are found in the future, we will release errata on the main web page for the dataset (https://github.com/msorkhpar/wiki-entity-summarization).
- 4. Will the dataset be updated (e.g., to correct labeling errors, add new instances, delete instances)? Yes, the datasets will be updated whenever necessary to ensure accuracy, with announcements made accordingly. These updates will be posted on the main webpage for the dataset (https://github.com/msorkhpar/wiki-entity-summarization).
- 5. If the dataset relates to people, are there applicable limits on the retention of the data associated with the instances (e.g., were the individuals in question told that their data would be retained for a fixed period of time and then deleted?) N/A.
- 6. Will older versions of the dataset continue to be supported/hosted/maintained? Yes, older versions of the dataset will continue to be maintained and hosted
- 7. If others want to extend/augment/build on/contribute to the dataset, is there a mechanism for them to do so? Yes, as described above.

# **B.4** Composition

- 1. What do the instances that comprise the dataset represent (e.g., documents, photos, people, countries)? Each instance is a document of a Wikidata item, containing some of its immediate neighbours sampled from the Wikidata Knowledge Graph.
- 2. How many instances are there in total (of each type, if appropriate)? See Section 3.4
- 3. Does the dataset contain all possible instances or is it a sample of instances from a larger set? It is a sample of instance of a larger dataset from Wikipedia and Wikidata. See section 3.2
- 4. *Is there a label or target associated with each instance?* Yes, each target entity includes target variables.
- 5. *Is any information missing from individual instances?* No, we include all the information from the intersection of Wikipedia with Wikidata.
- 6. Are there recommended data splits (e.g., training, development/validation, testing)? We have generate a train-validation-test for each of the graphs that we generate. See section 3.4
- 7. Are there any errors, sources of noise, or redundancies in the dataset? Not that we are aware of.
- 8. Is the dataset self-contained, or does it link to or otherwise rely on external resources (e.g., websites, tweets, other datasets)? The dataset is self-contained.
- 9. Does the dataset contain data that might be considered confidential? No.
- 10. Does the dataset contain data that, if viewed directly, might be offensive, insulting, threatening, or might otherwise cause anxiety? No.

#### **B.5** Collection Process

- 1. How was the data associated with each instance acquired? Each instance in this dataset is acquired from raw XML data dumps published by the Wikimedia Foundation on 2023/05/01. The data is then cleaned and processed by our pre-processing module to extract entities, their relations, and their associated summaries. For more information on the summary annotation process, please refer to Section 3.1, "Summary Annotation."
- 2. What mechanisms or procedures were used to collect the data (e.g., hardware apparatus or sensor, manual human curation, software program, software API)? We utilized an AWS EC2 r5a.4xlarge machine to clean the data and build the datasets using a fully automated pipeline. However, Wikipedia admins and contributors can be considered indirect annotators of this dataset.
- 3. Who was involved in the data collection process (e.g., students, crowdworkers, contractors) and how were they compensated (e.g., how much were crowdworkers paid)? Regular employees and two master students were involved in the data collection process. However, the annotation process was fully automated, utilizing publicly available information.

- 4. Does the dataset relate to people? No.
- 5. Did you collect the data from the individuals in question directly, or obtain it via third parties or other sources (e.g., websites)? We sample the dataset from Wikimedia organization dump files on 2023/05/01.

#### B.6 Uses

- 1. *Has the dataset been used for any tasks already?* We have solely used the dataset for training and evaluating entity summarization baselines in the paper.
- 2. What (other) tasks could the dataset be used for? Even though, the main target of this dataset is the Entity summarization task it might also be used for link prediction tasks in knowledge graphs.
- 3. Is there anything about the composition of the dataset or the way it was collected and preprocessed/cleaned/labeled that might impact future uses? This dataset is based on cleaned and annotated pre-processed information from Wikimedia published dump files on 2023/05/01. Using this pre-processed dump, one can generate a new dataset based on their desired seed node. However, to generate an updated version of the Wikidata knowledge graph, the pre-processing dumps should be regenerated from updated dump files. The instructions and code for this task are publicly available in our preprocessing URL.
- 4. Are there tasks for which the dataset should not be used? No.

# **C** Experiments

We include the experiments in Section 4 for all of our datasets below.

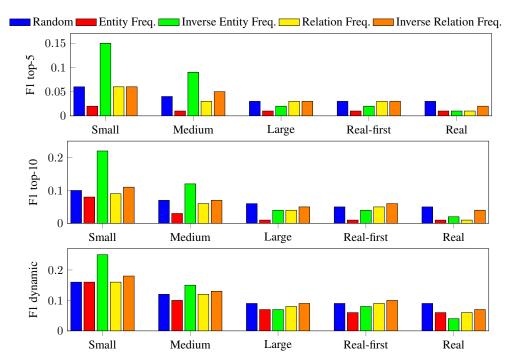


Figure 5: F1 for frequency statistics on WikiLitArt.

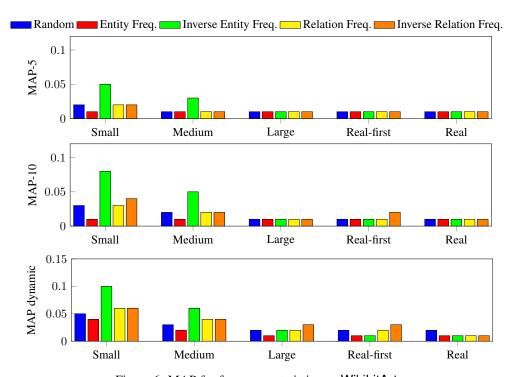


Figure 6: MAP for frequency statistics on WikiLitArt.



Figure 7: F1 for frequency statistics on WikiCinema.

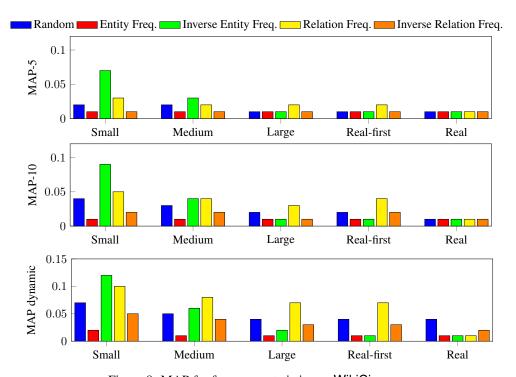


Figure 8: MAP for frequency statistics on WikiCinema.

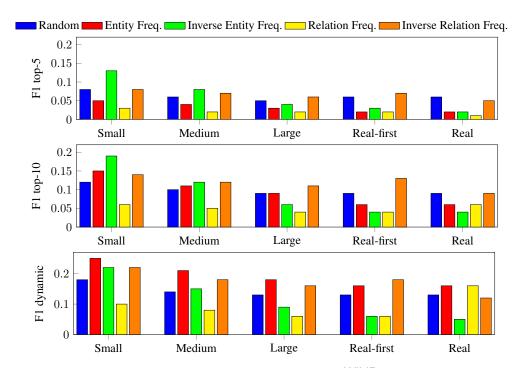


Figure 9: F1 for frequency statistics on WikiPro.

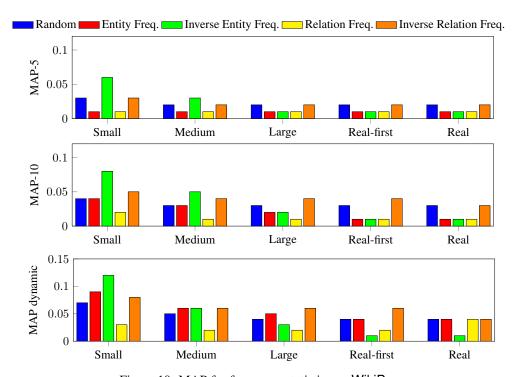


Figure 10: MAP for frequency statistics on WikiPro.

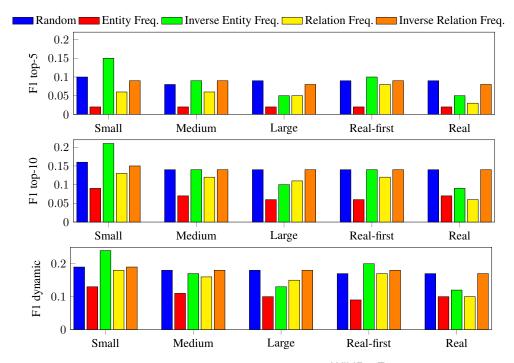


Figure 11: F1 for frequency statistics on WikiProFem.

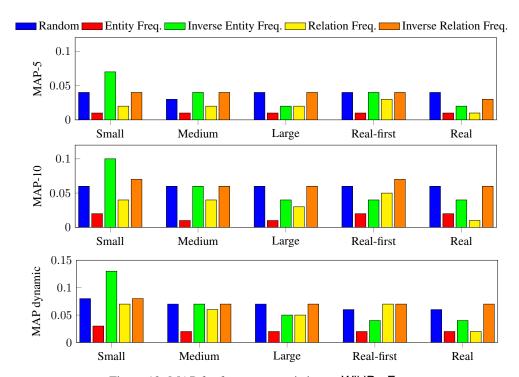


Figure 12: MAP for frequency statistics on WikiProFem.