

PSN: Persian Social Norms Dataset for Cross-Cultural AI

Hamidreza Saffari*
Politecnico di Milano
Milan, Italy

Mohammadamin Shafiei*
Università degli Studi di Milano
Statale
Milan, Italy

Francesco Pierri
Politecnico di Milano
Milan, Italy

ABSTRACT

Datasets capturing cultural norms are essential for developing globally aware AI systems. We present Persian Social Norms (PSN) a novel dataset of over 1.7k Persian social norms, including environments, contexts, and cultural labels, alongside English translations. Leveraging large language models and prompt-engineering techniques, we generated potential norms that were reviewed by native speakers for quality and ethical compliance. As the first Persian dataset of its kind, this resource enables computational modeling of norm adaptation, a crucial challenge for cross-cultural AI informed by diverse cultural perspectives.

CCS CONCEPTS

• Information Systems → Data mining; • Computing methodologies → Machine learning; Natural language processing.

KEYWORDS

Cross-cultural AI, LLMs, Persian Social Norms, Dataset

ACM Reference Format:

Hamidreza Saffari, Mohammadamin Shafiei, and Francesco Pierri. 2024. PSN: Persian Social Norms Dataset for Cross-Cultural AI. In *Proceedings of 33rd ACM International Conference on Information and Knowledge Management (CIKM '24)*. ACM, New York, NY, USA, 5 pages. <https://doi.org/XXXXXXX.XXXXXXX>

1 INTRODUCTION

Social norms are unwritten rules that govern societies [8]. They have various impacts on our lives, from daily routines to long-lasting effects such as diet or gender identity [6, 7]. Moreover, different contexts and cultures can perceive the same action differently, which is the essence of social norms [25]. For example, people in countries such as India consider eating with their hands as a normal habit, but many other places also consider it an abnormal habit [3, 13].

As novel generative AI based on Large Language Models (LLM) is becoming an integral part of our everyday lives, their adherence to social norms requires special scrutiny [4, 16]. Biased LLMs [18] can result in miscommunication and perpetuating stereotypes, calling for a systematic approach to evaluate their knowledge of social

*Both authors contributed equally to this research.

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than the author(s) must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.

CIKM '24, October 21–25, 2024, Boise, Idaho

© 2024 Copyright held by the owner/author(s). Publication rights licensed to ACM.

ACM ISBN 978-1-4503-XXXX-X/18/06

<https://doi.org/XXXXXXX.XXXXXXX>

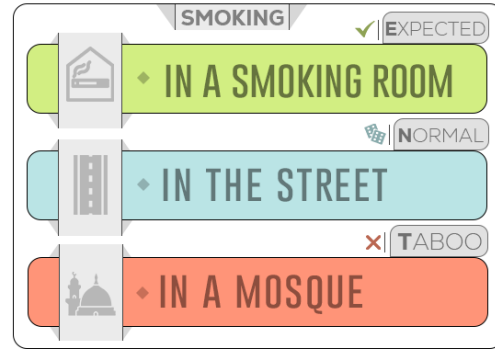


Figure 1: An example of social norms within different contexts

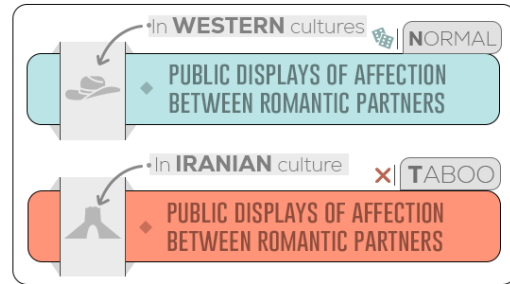


Figure 2: An example of the difference between Western cultures and Iranian culture.

norms [5, 17, 19, 23]. This evaluation is especially more challenging for cultures that are expressed in low-resource languages, as LLMs have less access to this knowledge in their training data [1, 11, 20].

When it comes to studying Iranian culture and Persian norms, there is a unique blend of Modernism and Traditionalism [2] making Persian culture a difficult phenomenon to align with for AI systems. Farsi language, which is considered a low-resource language [21], also adds to the difficulty of AI alignment with Iranian culture. While some researchers have tried to remove the barriers by publishing research on the Persian language [10, 14], Persian culture has remained neglected.

In this paper, we present a dataset of over 1.7K human-annotated Iranian social norms, specific to the culture of Iran, which draws inspiration from the Normbank dataset [26] that cataloged social norms within an English context. We consider context and environment to define a social norm, as the same action can trigger different reactions depending on the context and environment [25, 26]. For example, as shown in Figure 1, people consider smoking a normal activity for a person in the street, a Taboo for a person in a mosque,

and an expected action for individuals inside the smoking room of a restaurant. To the best of our knowledge, our work represents the first effort to document cultural norms about Iranian society. By referring to NormBank, researchers can draw comparisons and contrasts between Iranian social norms and Western cultures, enhancing the global understanding of social behaviors. Figure 2 provides an example of differences between Iranian and Western cultures. Our Persian Social Norms (PSN) dataset complements existing resources by providing culturally specific insights that can inform cross-cultural studies and the development of more inclusive AI systems. The dataset also includes the English version of Persian social norms so that Western academic and industry scholars can use it to evaluate models on Iranian culture for the models that do not support Farsi.

The outline of this paper is as follows: in the next section, we review existing public data resources related to our work. Then, we describe the data construction procedures carried out to build the dataset. This is followed by a detailed presentation of our experimental results. Next, we discuss a few potential applications of the collected data. Finally, we conclude and outline directions for future work.

2 RELATED WORK

We can identify two groups of papers related to the present work. The first comprises those that are focused on gathering and creating social norm datasets, and the second contains Persian language datasets that are not necessarily related to Iranian culture.

Ziems et al. [26] collect 155K labeled social norms in various situations generated through human annotation and Large Language Models. Their Normbank dataset assists AI systems with reasoning about social situations by providing them with a dataset for non-monotonic reasoning. Non-monotonic reasoning enables AI to update inferences based on different social contexts.

Shi et al. [22] provide a framework for gathering cultural knowledge from online social communities. The authors also gathered 12K cultural descriptors collected from TikTok in informal language to set the stage for overcoming the current limitations of AI systems on non-western cultures and capture nuanced cultural details and present knowledge while acknowledging intra-cultural variations.

Li et al. [15] build a synthetic dataset containing dyadic dialogues annotated for social norms in Chinese and American cultures. It leverages large language models and expert annotation to create 4,231 dialogues with a total of 29,550 conversational turns.

Fung et al. [9] introduce a framework for acquiring a multi-cultural knowledge base from Wikipedia documents on cultural topics. The dataset gathered using this method is called CultureAtlas, which covers a wide range of sub-country geographical regions and ethnolinguistic groups, ensuring the self-containment of textual assertions and extracting detailed cultural profiles. While CultureAtlas includes Iranian culture, there are only around 100 samples for Iranian culture, calling for more dedicated efforts to capture its nuances.

Han et al. [12] introduce NORMLENS, a multimodal benchmark designed to study AI systems' alignment with human judgment. NORMLENS includes 10K human judgments with explanations

across 2K multimodal situations, focusing on actions within visual contexts.

Forbes et al. [8] presents SOCIAL CHEMISTRY 101, a dataset with 292K rules-of-thumb, each analyzed across 12 dimensions, such as social judgment, cultural pressure, and legality. The corpus is intended to serve as a resource for training AI models with social norm reasoning abilities.

Zhou et al. [25] provide a dataset for understanding the offensiveness of statements by considering their social and situational context. It especially emphasizes on the importance of the context in which the statements are being said and how changing contexts can affect the offensiveness of a statement.

ParsiNLU [14] is a natural language understanding (NLU) benchmark for the Persian language. The benchmark provides datasets for 6 unique tasks such as reading comprehension, textual entailment, sentiment analysis, question paraphrasing, etc.

Ghahroodi et al. [10] focused on creating an Massive Multitask Language Understanding (MMLU) benchmark to overcome the limitations of directly translated benchmarks. The Khayyam Challenge includes four-choice questions from school books in Persian across 38 subjects including math, science, humanities, etc.

GEOMLAMA [24] contains over 3K prompts in English, Chinese, Hindi, Persian, and Swahili, covering concepts shared by people from American, Chinese, Indian, Iranian, and Kenyan cultures. For each language and culture, there are around 100 masked prompts, where models are supposed to fill out the mask based on their culture-specific knowledge.

Unlike previous datasets usually focused on Western cultures in English [8, 22, 25, 26], we present a dataset of 1.7K carefully annotated social norms specific to Iranian culture as some researchers have gathered similar datasets for other cultures like Chinese [15]. Compared to previous Persian datasets, our resource is not limited to educational [10] or general-purpose items [14]. The dataset also contains at least 15x more samples than previous culture-related datasets. [9, 24]

3 DATASET

Here, we describe our Persian Social Norms (PSN) dataset, which aims to capture cultural norms in Iranian society across different environments and contexts. We first present the construction process, then we provide a description and some statistics. Our dataset adheres to FAIR principles: it is Findable, Accessible, and Reusable. It is publicly available on GitHub,¹ providing comprehensive instructions on how to access and utilize it. The dataset is released in ".csv" format, ensuring interoperability across different platforms and systems.

3.1 Data Construction

We constructed the dataset using LLMs and various prompt engineering techniques (see Appendix). Initially, we crafted a series of prompts to generate a diverse array of norms. We employed few-shot learning to guide the model, providing it with a handful of examples² to illustrate the desired output format and content.

¹<https://github.com/hamidds/PSND>

²The main authors are Persian native speakers.

Norm	Environment	Context	Label
Showing respect toward elders	Grandmother’s Home	A youth conversing with grandmother	Expected
Tipping service staff	Restaurant	A customer in a restaurant	Normal
Public displays of affection	Park	A young couple in the park	Taboo

Table 1: Sample Entries from the Dataset

We favored Claude, an AI assistant developed by Anthropic³, for its capacity to generate norms more specific to the Iranian context. We carried out a qualitative analysis of the output generated by ChatGPT 3.5, Gemini and Claude, using a set of 100 generated samples. We concluded that Claude consistently generated content more attuned to the cultural nuances of Iran compared to other models.

To ensure diversity and richness in the dataset, we utilized multiple versions of prompts. These versions included varied sets of notes to steer the generation process. For example, we designed some prompts to generate norms whose labels might change depending on the context or environment. Others aimed to produce norms that, while common in Iran, might surprise or seem unexpected to people from other cultures. Additionally, we provided a list of environments in the prompt, ranging from general contexts to those specific to Iran, such as mosques, to ensure a comprehensive coverage of diverse environments and cultural contexts.

After the initial generation phase, we employed a rigorous annotation process to ensure the cultural accuracy and relevance of the norms. We had two main annotators who are native Persian speakers review each generated sample and its corresponding label. The annotators independently provided their label assessment for the given sample. If the two annotators assigned conflicting labels to a sample, a third annotator who was also a native Persian speaker was brought in to determine the most appropriate label. This multi-annotator review process was crucial to validate that the norms accurately reflected authentic Iranian social expectations and to correct any inconsistencies or errors in the initial outputs. The annotation step reinforced the cultural authenticity of the dataset entries.

To enhance the dataset’s accessibility and utility, we translated all norms into English. This will facilitate research by non-Persian-speaking scholars interested in Iranian social norms and enable the development of more culturally aware AI models in English, fostering better cross-cultural understanding and interaction.

3.2 Data Description

The **Norm** column contains concise statements representing specific social norms or cultural expectations. For instance, a norm might be ‘Showing respect for elders’.

The **Environment** column describes the general setting or location where the norm is typically observed. Understanding the environment in which a norm occurs is crucial, as social expectations can vary significantly depending on the context. For example, the norms observed in family gatherings may differ from those in public spaces or workplace settings. By including the environment

³Claude is an AI assistant developed by Anthropic. More information is available at <https://www.anthropic.com/>

column, we provide researchers with valuable contextual information to better interpret and analyze social norms within different social spheres.

The **Context** column provides additional details or specific circumstances surrounding the norm. Context can play a crucial role in determining the appropriateness or acceptance of a norm within a particular environment. For example, the age, gender, and social status of individuals involved, as well as the occasion or event, may influence the application of a norm. Understanding the contextual factors that shape social norms allows for a more nuanced analysis of cultural expectations.

The **Label** column indicates whether the described norm is considered ‘Expected’, ‘Normal’, or ‘Taboo’ in Iranian culture. The labels are defined as follows: ‘Expected’ norms are widely accepted and aligned with cultural norms in Iran; ‘Normal’ norms are tolerated and permissible but not necessarily common or preferred; ‘Taboo’ norms are uncommon, atypical, and contradict prevalent cultural norms in Iran.

We chose the labels ‘Expected’, ‘Normal’, and ‘Taboo’ to better align with the capabilities of large language models (LLMs). This decision was inspired by the labeling schema used in the Normbank dataset [26], which we referenced in the introduction. While ‘Expected’ can be seen as analogous to ‘Common’ and ‘Taboo’ to ‘Uncommon’, these specific labels help LLMs generate more accurate and contextually appropriate outputs. Our comparisons confirmed that this three-level labeling scheme produced more consistent and reliable annotations than alternative labeling strategies.

We chose this three-level labeling scheme to balance granularity with simplicity in annotation. Two labels (e.g. Common vs Uncommon) would oversimplify the cultural spectrum, while too many would introduce ambiguity. Our scheme strikes a balance between nuance and clarity, allowing consistent annotation. While finer distinctions were possible, three levels capture key differences effectively, enabling quantitative analysis.

The dataset contains a total of 1,760 samples, encompassing 334 unique environments. The distribution of labels is as follows: 51.5% of the norms are labeled as ‘Expected’, 27.4% are labeled as ‘Normal’, and 21.1% are labeled as ‘Taboo’. We present sample entries from the dataset in Table 1.

4 EXPERIMENTS

We conducted preliminary experiments to evaluate the effectiveness of the PSN dataset for building culturally-aware language models. We evaluated the performance of several language models on the task of predicting cultural norm labels (“Expected”, “Normal”, “Taboo”). Models were tested both in a zero-shot setting and fine-tuned on the dataset. In Table 2, you can find the F1 scores across the three label classes, along with the weighted average F1 score.

Model	Data Version	Expected	Normal	Taboo	Weighted Average
bert-base-multilingual-cased – Zeroshot		0.21	0.44	0.00	0.23
bert-base-multilingual-cased – Finetuned		0.75	0.43	0.75	0.66
HooshvareLab/bert-fa-base-uncased – Zeroshot	Persian	0.00	0.43	0.03	0.12
HooshvareLab/bert-fa-base-uncased – Finetuned		0.78	0.50	0.78	0.70
meta-llama/Llama-2-7b-chat-hf		0.68	0.21	0.52	0.52
meta-llama/Meta-Llama-3-8b-Instruct		0.78	0.10	0.78	0.59
roberta-base – Zeroshot		0.48	0.46	0.07	0.38
roberta-base – Finetuned		0.81	0.56	0.75	0.73
bert-base-uncased – Zeroshot	English	0.00	0.45	0.10	0.15
bert-base-uncased – Finetuned		0.82	0.59	0.72	0.72
meta-llama/Meta-Llama-3-8b-Instruct		0.79	0.06	0.82	0.59
meta-llama/Llama-2-7b-chat-hf		0.73	0.35	0.75	0.63

Table 2: F1-score of models in zero-shot and fine-tuned settings.

The results show the significant performance gains achieved by fine-tuning models on our dataset. In the zero-shot setting, models like bert-base-multilingual-cased, HooshvareLab/bert-fa-base-uncased, roberta-base, and bert-base-uncased struggled with low weighted F1 scores between 0.12 – 0.38. This highlights the challenge of this cultural norm understanding task for models lacking explicit training on such data. However, after fine-tuning on our dataset, we observed substantial improvements across all models. bert-base-multilingual-cased reached 0.66 weighted F1, HooshvareLab/bert-fa-base-uncased achieved 0.70, while RoBERTa and bert-base-uncased scored 0.73 and 0.72 respectively.

These promising results validate the efficacy of our dataset in providing language models with deeper cultural competence for the Iranian context. Notably, some models performed well on certain labels but struggled with others. For example, most were able at identifying the "Expected" widely-accepted norms but had more difficulty with the nuanced "Normal" permitted-but-not-preferred behaviors.

The open-source Meta Llama models also showcased reasonable zero-shot performance, with the Meta-Llama-3-8b-Instruct version achieving 0.59 weighted F1 on both Persian and English data. However, their lower performance on the "Normal" label again highlights the need for better alignment on explicit cultural norm data to attain the highest performance across all categories.

5 POTENTIAL APPLICATIONS

Our PSN dataset enables several important applications by providing structured data on Iranian cultural norms. Firstly, it significantly advances Natural Language Processing (NLP) research, facilitating cross-cultural analysis by allowing researchers to compare and contrast Iranian norms with those from other societies, leading to a deeper understanding of how cultures vary globally. Secondly and most crucially, the dataset paves the way for developing culturally-aware AI systems capable of tailoring their behavior based on the relevant cultural context. For applications operating in Iranian contexts, it allows training models aligned with local norms and values.

Additionally, the dataset aids in identifying and mitigating cultural biases prevalent in AI trained primarily on data from some

cultures. It provides an explicit representation of underrepresented cultural norms, enabling auditing for misalignments and mitigation of biases when deploying AI cross-culturally. In the longer term, a longitudinal expansion of the dataset could shed light on the evolution of cultural norms over time. Overall, this unique resource serves as a bridge between modern computational techniques and anthropological studies of culture, fostering interdisciplinary research at the intersection of AI and social sciences.

6 CONCLUSION

We released and described PSN, the first resource explicitly capturing cultural norms within Iranian society, codifying concise norms paired with environmental contexts and native cultural attitudes, providing a rich taxonomy of Iranian cultural values. The study of cultural norms is becoming increasingly vital as our world grows more globally connected. There is a growing need for resources that document cultural diversity across societies, aligning with the field of computational social science. Our dataset enables cross-cultural analyses, shedding light on how values vary across contexts. Moreover, as large language models become more widespread and influential, having datasets like ours allows fine-tuning these models to be culturally-aware and aligned with norms across different societies. Creating culturally-aware large language models is an important step towards developing inclusive AI systems that respect global cultural diversity.

Our dataset is not without limitations. While we have endeavored to capture a diverse range of norms, there may be nuances and subtleties that are not fully represented. Additionally, cultural norms are dynamic and subject to change over time, necessitating ongoing updates and revisions to ensure the dataset remains relevant and accurate. We envision this dataset benefiting research areas like cultural studies, social psychology, and the development of inclusive AI. Looking ahead, we hope this work catalyzes further interdisciplinary research bridging computational social science and AI to develop robust and inclusive systems respecting cultural diversity.

REFERENCES

- [1] Jaimeen Ahn and Alice Oh. 2021. Mitigating language-dependent ethnic bias in BERT. *arXiv preprint arXiv:2109.05704* (2021).

- [2] Mohsen Alini and M Bijan. 2013. Tradition, modernity and Iranian society. *Life Science Journal* 10, 6 (2013), 335–341.
- [3] Kainat Ansari and Nisha Gharti Magar. 2023. *Violation of Eating Norms and Disgust Response: A Cross-cultural Study on Eating Norms and Disgust*. Ph.D. Dissertation. Whitman College.
- [4] Lorenzo Bertetto, Francesca Bettinelli, Alessio Buda, Marco Da Mommio, Simone Di Bari, Claudio Savelli, Elena Baralis, Anna Bernasconi, Luca Cagliero, Stefano Ceri, et al. 2024. Towards an Explorable Conceptual Map of Large Language Models. In *International Conference on Advanced Information Systems Engineering*. Springer, 82–90.
- [5] Chahat Raj1 Anjishnu Mukherjee1 Aylin Caliskan and Antonios Anastasopoulos1 Ziwei Zhu. [n. d.]. A Psychological View to Social Bias in LLMs: Evaluation and Mitigation. ([n. d.]).
- [6] Helen Croker, KL Whitaker, Lucy Cooke, and Jane Wardle. 2009. Do social norms affect intended food choice? *Preventive medicine* 49, 2-3 (2009), 190–193.
- [7] Lidia Farré, Christina Felfe, Libertad González, and Patrick Schneider. 2023. Changing gender norms across generations: Evidence from a paternity leave reform. (2023).
- [8] Maxwell Forbes, Jena D Hwang, Vered Shwartz, Maarten Sap, and Yejin Choi. 2020. Social chemistry 101: Learning to reason about social and moral norms. *arXiv preprint arXiv:2011.00620* (2020).
- [9] Yi Fung, Ruining Zhao, Jae Doo, Chenkai Sun, and Heng Ji. 2024. Massively multi-cultural knowledge acquisition & lm benchmarking. *arXiv preprint arXiv:2402.09369* (2024).
- [10] Omid Ghahroodi, Marzia Nouri, Mohammad Vali Sanian, Alireza Sahebi, Doratossadat Dastgheib, Ehsaneddin Asgari, Mahdieh Soleymani Baghshah, and Mohammad Hossein Rohban. 2024. Khayyam Challenge (PersianMMLU): Is Your LLM Truly Wise to The Persian Language? *arXiv preprint arXiv:2404.06644* (2024).
- [11] Sourojit Ghosh and Aylin Caliskan. 2023. Chatgpt perpetuates gender bias in machine translation and ignores non-gendered pronouns: Findings across bengali and five other low-resource languages. In *Proceedings of the 2023 AAAI/ACM Conference on AI, Ethics, and Society*. 901–912.
- [12] Seungju Han, Junhyeok Kim, Jack Hessel, Liwei Jiang, Jiwan Chung, Yejin Son, Yejin Choi, and Youngjae Yu. 2023. Reading Books is Great, But Not if You Are Driving! Visually Grounded Reasoning about Defeasible Commonsense Norms. *arXiv preprint arXiv:2310.10418* (2023).
- [13] Shweta Hegde, Leena P Nair, Haritha Chandran, and Haroon Irshad. 2018. Traditional Indian way of eating—an overview. *Journal of ethnic foods* 5, 1 (2018), 20–23.
- [14] Daniel Khashabi, Arman Cohan, Siamak Shakeri, Pedram Hosseini, Pouya Pezeshkpour, Malihe Alikhani, Moin Aminnaseri, Marzieh Bitaab, Faeze Brahman, Sarik Ghazarian, et al. 2021. Parsinlu: a suite of language understanding challenges for persian. *Transactions of the Association for Computational Linguistics* 9 (2021), 1147–1162.
- [15] Oliver Li, Mallika Subramanian, Arkadiy Saakyan, Sky CH-Wang, and Smaranda Muresan. 2023. NormDial: A comparable bilingual synthetic dialog dataset for modeling social norm adherence and violation. *arXiv preprint arXiv:2310.14563* (2023).
- [16] Geng Liu, Pietro Pinoli, Stefano Ceri, and Francesco Pierri. 2024. A comparison of online search engine autocompletion in Google and Baidu. *arXiv preprint arXiv:2405.01917* (2024).
- [17] Roberto Navigli, Simone Conia, and Björn Ross. 2023. Biases in large language models: origins, inventory, and discussion. *ACM Journal of Data and Information Quality* 15, 2 (2023), 1–21.
- [18] Gianluca Nogara, Francesco Pierri, Stefano Cresci, Luca Luceri, Petter Törnberg, and Silvia Giordano. 2023. Toxic bias: Perspective api misreads german as more toxic. *arXiv preprint arXiv:2312.12651* (2023).
- [19] Debora Nozza, Federcio Bianchi, Dirk Hovy, et al. 2022. Pipelines for social bias testing of large language models. In *Proceedings of BigScience Episodes# 5—Workshop on Challenges & Perspectives in Creating Large Language Models*. Association for Computational Linguistics.
- [20] Walelign Tewabe Sewunetie, Atnafu Lambebo Tonja, Tadesse Destaw Belay, Hellina Hailu Nigatu, Gashaw Kidanu, Zewdie Mossie, Hussien Seid, Eshete Derb, and Seid Muhie Yimam. 2024. Evaluating Gender Bias in Machine Translation for Low-Resource Languages. In *5th Workshop on African Natural Language Processing*. <https://openreview.net/forum?id=9BTp1rhfx7>
- [21] Mehrnoush Shamsfard. 2019. Challenges and opportunities in processing low resource languages: A study on persian. In *International Conference Language Technologies for All (LT4All)*.
- [22] Weiyang Shi, Ryan Li, Yutong Zhang, Caleb Ziems, Raya Horesh, Rogério Abreu de Paula, Diyi Yang, et al. 2024. CultureBank: An Online Community-Driven Knowledge Base Towards Culturally Aware Language Technologies. *arXiv preprint arXiv:2404.15238* (2024).
- [23] Amir Taubenfeld, Yaniv Dover, Roi Reichart, and Ariel Goldstein. 2024. Systematic biases in LLM simulations of debates. *arXiv preprint arXiv:2402.04049* (2024).
- [24] Da Yin, Hritik Bansal, Masoud Monajatipoor, Liunan Harold Li, and Kai-Wei Chang. 2022. GeoMLAMA: Geo-Diverse Commonsense Probing on Multilingual Pre-Trained Language Models. In *EMNLP*.
- [25] Xuhui Zhou, Hao Zhu, Akhila Yerukola, Thomas Davidson, Jena D Hwang, Swabha Swayamdipta, and Maarten Sap. 2023. Cobra frames: Contextual reasoning about effects and harms of offensive statements. *arXiv preprint arXiv:2306.01985* (2023).
- [26] Caleb Ziems, Jane Dwivedi-Yu, Yi-Chia Wang, Alon Halevy, and Diyi Yang. 2023. NormBank: A knowledge bank of situational social norms. *arXiv preprint arXiv:2305.17008* (2023).

APPENDIX

In this section, we provide the specific prompt used in our experiments. The prompt is designed to instruct the model clearly and effectively.

You should generate a Persian social norm dataset for Iran. The dataset is composed of 4 columns with names ['Norm', 'Environment', 'Context', 'Label']. Generate norms that their label will change in response to changes in their environment. Column descriptions are as follows: Norm: The specific social norm or cultural expectation being represented, stated clearly and concisely (e.g., 'Showing respect for elders'). Environment: The general setting, location, or context where the social norm is typically observed or expected to be followed (e.g., 'family gatherings', 'public spaces', 'workplace'). Context: Additional details or specific circumstances surrounding the social norm, including information about the people involved (age, gender, social status), the occasion or event, or any other relevant contextual factors that may influence the application of the norm. Label: A categorical label ['Expected', 'Normal', 'Taboo'] that indicates whether the described social norm is considered appropriate, inappropriate, encouraged, or discouraged within the given environment and context in Iranian culture.

The labeling should be according to the following instructions: Expected: Widely accepted, aligned with cultural norms in Iran. Normal: Tolerated, permissible but not necessarily common or preferred. Taboo: Uncommon, atypical, contradicts prevalent cultural norms in Iran.

Here is a list of possible environments/settings :

Generate 20 norms in Persian, with each row formatted as follows using the pipe character | as the separator: Norm|Environment|Context|Label

Here are some examples:

We created diverse norms by adding the following notes to the prompt:

Generate norms for the 'Expected' class. It is important to consider norms that may not be good, but are common/expected, as well as norms that may be good, but are common/expected.

Generate norms that are surprising to people from other countries.

Generate norms that their label will change in response to changes in their environment.