
Chain of Preference Optimization: Improving Chain-of-Thought Reasoning in LLMs

Xuan Zhang^{*12}, Chao Du^{†1}, Tianyu Pang¹, Qian Liu¹, Wei Gao², Min Lin¹

¹Sea AI Lab, Singapore

²School of Computing and Information Systems, Singapore Management University

xuanzhang.2020@phdcs.smu.edu.sg; weigao@smu.edu.sg;

{duchao, liuqian, tianyupang, linmin}@sea.com

Abstract

The recent development of chain-of-thought (CoT) decoding has enabled large language models (LLMs) to generate explicit logical reasoning paths for complex problem-solving. However, research indicates that these paths are not always deliberate and optimal. The tree-of-thought (ToT) method employs tree-searching to extensively explore the reasoning space and find better reasoning paths that CoT decoding might overlook. This deliberation, however, comes at the cost of significantly increased inference complexity. In this work, we demonstrate that fine-tuning LLMs leveraging the search tree constructed by ToT allows CoT to achieve similar or better performance, thereby avoiding the substantial inference burden. This is achieved through *Chain of Preference Optimization (CPO)*, where LLMs are fine-tuned to align each step of the CoT reasoning paths with those of ToT using the inherent preference information in the tree-search process. Extensive experimental results show that CPO significantly improves LLM performance in solving a variety of complex problems, including question answering, fact verification, and arithmetic reasoning, demonstrating its effectiveness. Our code is available at <https://github.com/sail-sg/CPO>.

1 Introduction

Recent advances in large language models (LLMs) have shown that constructing reasoning chains is critical to improving their problem-solving capabilities [40, 39, 54, 47, 53]. A representative method is chain-of-thought (CoT) [40], which prompts LLMs to generate intermediate reasoning steps, i.e., thoughts, thereby constructing explicit reasoning paths (as depicted in Figure 1(a)). While straightforward and intuitive, recent research observes that CoT can often overlook optimal reasoning paths and exhibit an unconscious style of answering due to its single-path focus [48, 7]. To foster a more deliberate and conscious reasoning style, Yao et al. [48] propose tree-of-thought (ToT), which generates multiple branching thoughts at each step of the reasoning process and conducts self-evaluation for pruning and planning to search for an optimal reasoning path (as shown in Figure 1(b)). However, despite improving reasoning quality, ToT significantly increases computational complexity, which limits its practical application. This raises the question: Can the strategic depth of ToT be integrated into CoT to enhance its effectiveness while maintaining efficiency?

Existing research has initially provided a positive answer to the above question [21, 14, 36]. A natural strategy is to treat the reasoning path discovered by ToT for each instance as a target for supervision, and then fine-tune LLMs to improve their CoT reasoning abilities [14, 36]. Several methods have been proposed to improve this approach, including using advanced tree-search techniques like Monte

^{*}Work done during Xuan Zhang’s associate membership at Sea AI Lab. [†]Correspondence to Chao Du.

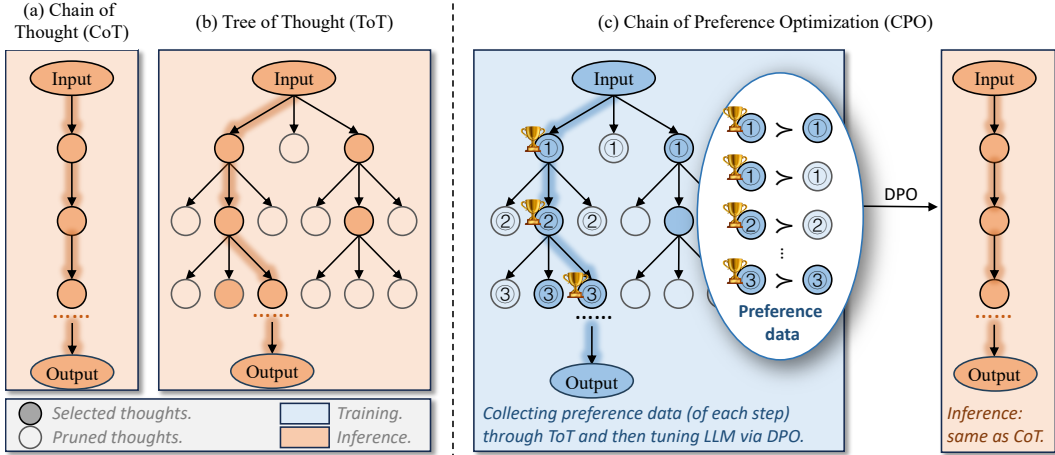


Figure 1: Comparison of CoT, ToT, and CPO methods, where each node illustrates a step in the reasoning process, forming coherent language sequences aimed at solving a problem. The highlighted path indicates the chosen reasoning trajectory. In the CoT method, the LLM generates only one new node at each step, and all generated nodes are used to build the final reasoning path. For ToT, the LLM produces k new nodes at each step, but only the top n -best nodes are kept, with the rest being pruned. In CPO, nodes marked with a trophy represent preferred thoughts, while those marked with numbers are nodes that can be utilized to create preference data. This method uses the search tree structure from ToT to develop paired preference data, subsequently training LLMs to align with these preferences through DPO.

Carlo tree-search (MCTS) and employing external reward models [36, 21] for pruning and planning to gather better reasoning paths as supervision. The effectiveness of these approaches is therefore largely dependent on the quality of the best-discovered reasoning path.

In this paper, we identify a limitation in these approaches: they overlook the non-optimal reasoning thoughts generated during the tree-search process, which naturally provides additional preference information. Specifically, ToT inherently generates multiple alternative thoughts at each reasoning step, and pruning is performed according to their evaluated qualities. Intuitively, this tree-search process constitutes a preference over all *intermediate* thought candidates—thoughts appearing in the best-discovered reasoning path should be preferred over those that do not. Moreover, this could shed even more insights than the final best-discovered reasoning path, as non-optimal reasoning paths (and thus preferences) exist at each step in the tree-search.

Inspired by recently developed reinforcement learning from human feedback (RLHF) techniques like direct preference optimization (DPO) [32], we propose *Chain-of-Preference Optimization* (CPO) to fully exploit the inherent preference information. Specifically, we construct paired preference thoughts at each reasoning step according to the search tree of ToT and then train LLMs to align with these preferences using the DPO algorithm (as illustrated in Figure 1(c)). The paired preference thoughts are constructed based on the above intuition: at each reasoning step, we categorize thoughts as preferred or dispreferred based on their inclusion in the final paths chosen by ToT. With such preference data, CPO enables LLMs to generate the path preferred by ToT using CoT decoding at inference time.

We conduct extensive experiments to evaluate the effectiveness of CPO. Experiments on seven datasets using LLaMA [37] and Mistral [20] as base models demonstrate that CPO is highly effective in teaching LLMs the preferred thoughts of ToT at each reasoning step, leading to an average accuracy improvement of up to 4.3% compared to the base models. Additionally, the experiments reveal that CPO can achieve comparable or even superior performance to the ToT method, which on average requires more than 50 times longer for inference.

2 Related Work

Reasoning with LLMs. LLMs have been shown to perform better when prompted to engage in multi-step reasoning [40, 39, 54]. Many studies have focused on improving the generated reasoning

paths by post-editing [53] or accessing external knowledge [54, 31]. A distinct approach, more relevant to our interests, transforms the linear reasoning structure into a non-linear format such as a tree or graph [49, 27, 48, 7, 17], which combines thought evaluation with search algorithms like depth-first search (DFS) [12]. Different from our proposed CPO, these methods require searching during inference, which significantly increases latency.

LLM self-improving. Reinforcement learning (RL) has increasingly been applied to LLMs by treating them as RL agents for alignment with human feedback [28, 43, 5, 42]. Recent advances demonstrate the potential of using LLMs for self-generating data to augment fine-tuning processes [6, 50, 11]. For instance, reinforced self-training methods [16, 1, 45] introduce mechanisms to curate new high-quality examples and iteratively enrich the training dataset for enhancing model performance. Nevertheless, these methods typically rely on either an external reward model [45, 1] or labeled data [16]. In contrast, approaches like self-rewarding [11, 24] utilize LLMs themselves to evaluate the generated content, aligning more closely with our method. However, these strategies still require initial seed data [11, 24], necessitating human annotation. Our work differs from previous methods as it does not rely on any ground-truth data, allowing LLMs to self-learn from their own feedback. Additionally, our approach constructs feedback in a chain fashion, focusing on reasoning steps, an aspect overlooked by prior works.

Monte Carlo tree-search for LLMs. Monte Carlo tree-search (MCTS) is a robust algorithm for navigating complex decision-making environments, commonly employed in strategic board games such as AlphaGo [8, 23, 41, 10, 34]. MCTS methodically constructs a search tree, balancing exploration and exploitation, simulates various outcomes, and updates utility estimates based on these simulations. Recent studies have shown that MCTS can enhance the decoding process in LLMs [14, 25, 13, 17, 36]. However, the primary challenge with MCTS for LLM is the high latency during inference. While some approaches have attempted to optimize LLMs by leveraging reasoning paths identified through MCTS [14, 36], these methods still rely on labeled data and require separate policy and value models to explore and evaluate potential moves at the tree’s leaves. In contrast, our CPO approach eliminates the need for human annotations and simplifies the tuning of LLMs without the necessity for additional models.

3 Background

In this section, we formalize our notation and provide a brief overview of key prior knowledge for our method. We denote language sequences by lowercase letters, e.g., x, y, z , to represent a sequence of tokens. The output distribution of an LLM parameterized by θ is denoted by π_θ .

3.1 Chain-of-Thought Prompting

Chain-of-thought (CoT) [40] is a method that prompts LLMs to generate a chain of reasoning steps before the final answer, as shown in Figure 1. It introduces a series of intermediate thoughts, denoted as z_1, \dots, z_n , that link an input x to an output y , where n is the total number of reasoning steps. For instance, if x is a combination of demonstration examples and the input question and y is the final answer, each intermediate thought z_i forms a coherent language sequence representing a part of the overall reasoning path toward the final answer. The demonstration examples consist of a set of CoT demonstrations, which serve as exemplars in the prompting process. The intermediate reasoning thoughts are sequentially sampled from the distribution $z_i \sim \pi_\theta(\cdot | x, z_1, \dots, z_{i-1})$ and the output is then derived from $y \sim \pi_\theta(\cdot | x, z_1, \dots, z_n)$.

3.2 Tree-of-Thought Prompting

Tree-of-thought (ToT) [48] enables LLMs to explore multiple reasoning paths before answering a given question, as illustrated in Figure 1. This approach models the LLM reasoning task as a search over a tree, where each node represents a thought step in the reasoning path. ToT comprises two main components, both implemented through prompting LLMs: 1) the *thought generator* and 2) the *state evaluator*. The *thought generator* constructs several new thoughts for the next step based on the current state. Subsequently, the *state evaluator* generates scores for each new thought and selects the

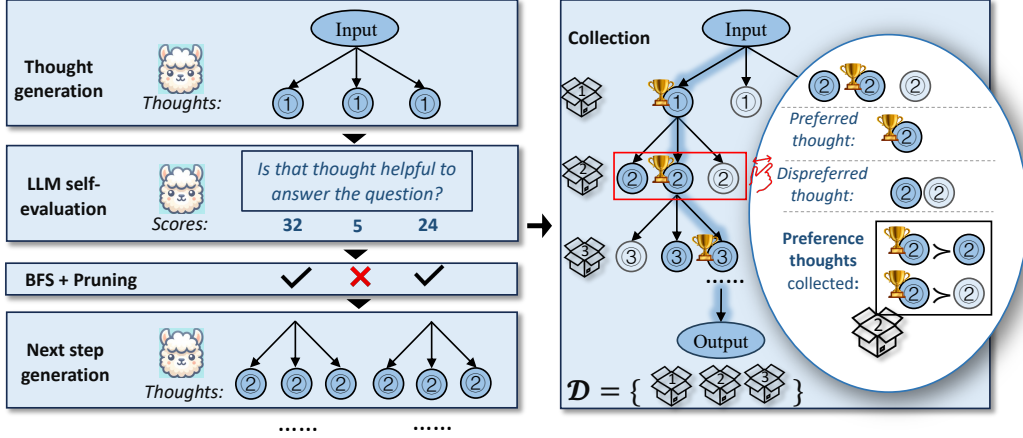


Figure 2: The framework of our CPO method. The left part illustrates the process of generating, evaluating, and pruning thoughts, while the right part demonstrates the collection of preference thoughts. The shaded path represents the final selected reasoning path. Thoughts marked with a trophy indicate preferred data, and their sibling nodes are dispreferred.

n-best thoughts for further search. The final result is determined by the search algorithm (e.g., BFS or DFS) applied over the selected thoughts until the reasoning process reaches a conclusion.

3.3 Direct Preference Optimization

Direct preference optimization (DPO) is a method for directly optimizing an LLM to align with preference data [32], e.g., human feedback [32, 52, 26]. More specifically, RLHF traditionally frames the application of human feedback to enhance the performance of an LLM within the context of an RL problem. However, DPO reformulates the reward modeling and RL fine-tuning phases in RLHF to a single optimization problem. The objective function of DPO aims to maximize the ratio of probabilities for the preferred responses and optimize the LLM to imitate human preferences.

Given the generations $(\hat{y}_1, \hat{y}_2) \sim \pi(\hat{y}|x)$ conditioned on input x , these pairs are evaluated and ranked according to specific criteria. Preference data is then constructed from these ranked pairs, denoted by $\hat{y}_w \succ \hat{y}_l|x$, where \hat{y}_w and \hat{y}_l denote the preferred (winning) and dispreferred (losing) completions between \hat{y}_1 and \hat{y}_2 , respectively. The DPO objective is formulated as follows:

$$\mathcal{L}_{\text{DPO}}(\pi_\theta; \pi_{\text{ref}}) = -\log \sigma \left(\beta \log \frac{\pi_\theta(\hat{y}_w|x)}{\pi_{\text{ref}}(\hat{y}_w|x)} - \beta \log \frac{\pi_\theta(\hat{y}_l|x)}{\pi_{\text{ref}}(\hat{y}_l|x)} \right), \quad (1)$$

where σ is the logistic function, the hyperparameter β regulates the penalty imposed for the deviations from the base reference model π_{ref} .

4 Our Method: Chain of Preference Optimization

Unlike previous methods that train LLMs to learn the complete reasoning path [21, 38, 14, 36], our approach leverages the preferences over thoughts generated at each reasoning step, which are often discarded in prior works. Our key insight is that non-optimal thoughts generated during the tree-search process in ToT provide valuable preference information that can enhance LLM’s reasoning ability. A major advantage of our method is that it utilizes this supervision only during training, thereby avoiding high inference latency. Our approach consists of two components: synthesizing the chain of preference thoughts (i.e., the preference thoughts in a chain fashion) and training with the CPO objective.

4.1 Synthesizing the Chain of Preference Thoughts

Our procedure for synthesizing and collecting preference thought pairs closely follows the inference process of ToT [48]. An overview of our method is shown in Figure 2. Specifically, the detailed process is divided into three parts: 1) *thought generation*, which generates multiple thoughts for each

reasoning step; 2) *state evaluation*, which evaluates each thought; and 3) *search and collection*, which finalizes the preference thoughts.

Thought generation. Given a state $s_{i-1} = [x, z_1, \dots, z_{i-1}]$ representing a partial solution with the input x and the sequence of thoughts $[z_1, \dots, z_{i-1}]$ so far, we sample k thoughts for the next reasoning step:

$$z_i^{(j)} \sim \pi_\theta(z_i | s_{i-1}) = \pi_\theta(z_i | x, z_1, \dots, z_{i-1}), \quad \text{for } j = 1, \dots, k. \quad (2)$$

Conditioned on the initial input x , which contains the demonstration examples and the question to be answered, and the previous thoughts z_1, z_2, \dots, z_{i-1} , the LLM generates multiple thoughts for the next reasoning step. Specifically, it follows the format of demonstrations, starting with the prefix “Step i ,” and samples k thoughts $\{z_i^{(j)}\}_{j=1}^k$. We control the model to pause at the end of $z_i^{(j)}$ by setting the generation of the string “Step $i + 1$,” as the stop criteria.² As a result, we obtain k new states $s_i^{(j)} = [x, z_1, \dots, z_{i-1}, z_i^{(j)}]$ for $j = 1, \dots, k$.

State evaluation. Given different states $\{s_i^{(j)}\}_{j=1}^k$, we utilize the LLM to reason about the states and evaluate their progress toward solving the problem, eliminating the need for an external reward model or human annotations. To evaluate state $s_i^{(j)}$, the input to the LLM includes specific demonstration examples for the evaluation process, the input question x , and all the thoughts in the state (i.e., $[z_1, \dots, z_{i-1}, z_i^{(j)}]$). The LLM follows the format of demonstrations to generate a verbal justification first, followed by a classification result from two classes: `likely` and `impossible`. The classification results are then used to assign a score, with `likely` = 10 and `impossible` = 1.

To minimize the effects of randomness and bias, we shuffle the order of demonstration examples [3] and repeatedly sample the generated justification and evaluation results. We then calculate the average score for the state $s_i^{(j)}$. The general guideline prompt for the evaluation is as follows: Evaluate whether the thought helps in partially or directly answering the original question (likely/impossible).

Search and collection. We use BFS with pruning as the search algorithm to select the reasoning paths. After evaluation, we retain the n -best thoughts with the highest evaluation scores and proceed to the next step of generation. When the LLM generates a thought containing “so the final answer is:”, the search algorithm concludes and returns the selected paths.

As shown in the right part of Figure 2, after finalizing the reasoning paths, the thoughts within the selected paths are marked as preferred (i.e., winning) thoughts. For each preferred thought at the i -th step z_i^w , we construct corresponding dispreferred (i.e., losing) thoughts. First, we identify the parent state s_{i-1}^w , which includes all the previous thoughts leading to z_i^w . Each child thought of s_{i-1}^w that is not included in the selected path is chosen as a dispreferred thought z_i^l compared to z_i^w . This process results in the preference pair (z_i^w, z_i^l) for the state s_{i-1}^w . We highlight that the constructed dataset \mathcal{D} includes *preference data at every step of the reasoning chain*. This per-step paired preference supervision is usually overlooked in previous methods [14, 36].

4.2 Training with the CPO Objective

Once we have obtained the chain of preference thoughts \mathcal{D} , we can proceed with optimization. For the i -th step, given the previous reasoning thoughts s_{i-1}^w , the probabilities of generating z_i^w and z_i^l are denoted as $\pi_\theta(z_i^w | x, s_{i-1}^w)$ and $\pi_\theta(z_i^l | x, s_{i-1}^w)$, respectively. To optimize the LLM on this pair of preference thoughts, we can directly substitute it into Equation 1:

$$\mathcal{L}_i(\pi_\theta; \pi_{\text{ref}}) = -\log \sigma \left(\beta \log \frac{\pi_\theta(z_i^w | x, s_{i-1}^w)}{\pi_{\text{ref}}(z_i^w | x, s_{i-1}^w)} - \beta \log \frac{\pi_\theta(z_i^l | x, s_{i-1}^w)}{\pi_{\text{ref}}(z_i^l | x, s_{i-1}^w)} \right). \quad (3)$$

Thus, the objective function for the chain of preference thoughts can be formulated as follows:

$$\mathcal{L}_{\text{CPO}}(\pi_\theta; \pi_{\text{ref}}) = \mathbb{E}_{(x, z_i^w, z_i^l, s_{i-1}^w) \sim \mathcal{D}} [\mathcal{L}_i(\pi_\theta; \pi_{\text{ref}})]. \quad (4)$$

²The “stop criteria” is used to control when generation should stop, which is implemented via a function input in Hugging Face’s Transformers Library.

5 Experiments

In this section, we empirically validate that CPO improves the reasoning ability of the base models and uncover several insightful findings.

5.1 Settings

Datasets and evaluation metrics. We focus our research on three types of reasoning tasks: *Question Answering* (QA), *Fact Verification*, and *Arithmetic Reasoning*. For QA, we conduct experiments on three widely used datasets: Bamboogle [31], WikiMultiHopQA [18], and HotpotQA [44]. For fact verification, we use three datasets: Fever [35], Feverous [2], and Vitamins [33]. For arithmetic reasoning, we test on the SVAMP dataset [30]. We use 4-shot prompting for each dataset, with CoT demonstrations manually constructed by previous works [40, 31, 39]. Detailed experimental configurations can be found in Appendix A. For evaluation metrics, we report the accuracy and the average latency of generating the answer per instance.

Baselines. To validate the effectiveness of our proposed CPO, we consider the following baselines: 1) CoT [40], which prompts the LLM to generate a series of reasoning steps before producing the final answer. In our experiments, we use CoT with greedy decoding to assess the model’s reasoning capabilities without any tuning. 2) ToT [48], which requires the LLM to explore multiple reasoning paths via tree search before generating the final answer. We use ToT to select reasoning paths and construct datasets to improve LLM’s reasoning ability in the following TS-SFT baseline and our CPO method. 3) TS-SFT [14], which finds reasoning paths through tree search (i.e., ToT in our implementation) and then uses these paths during the supervised fine-tuning (SFT) process (referred to as SFT in Section 5.3 and 6).

Implementation details. Our experiments are based on widely used LLMs, specifically LLaMA2-7B/13B [37] and Mistral-7B [20]. For efficient fine-tuning, we use Low-Rank Adaptation (LoRA) adapters [19]. In all experiments, we set the regularization controller β to 0.1, generate 10 new thoughts for each state, and retain the top 5 thoughts after pruning at each step of reasoning. The temperature is set to 0.9 for SVAMP and 0.4 for the other datasets. The learning rates for DPO and SFT are $5e-6$ and $1e-5$, respectively. We use a batch size (with accumulation) of 32 and optimize the LLM with AdamW [22]. For LoRA, the rank is set to 8, and α is set to 16. All experiments are conducted on NVIDIA A100 GPUs. The latency reported in Table 1 is based on a single NVIDIA A100 40GB. Both training and inference are performed using the Accelerate [15] backend. We train the LLMs for 4 epochs with early stopping based on the performance on a randomly sampled validation set. To mitigate the influence of randomness, all experiments are repeated three times with different random seeds, and the average results are reported.

5.2 Overall Results on Reasoning

Table 1 summarizes the performance across various reasoning tasks. We have the following findings:

CPO improves LLM’s reasoning ability. As shown in Table 1, CPO enhances the reasoning ability of the base LLM, achieving an average improvement of 4.3% and a maximum improvement of 9.7% across all tasks and LLMs compared to the CoT approach. This indicates that CPO effectively improves the LLM’s reasoning capabilities. Notably, CPO achieves these improvements without requiring additional human-annotated data, which is particularly beneficial in resource-constrained settings.

CPO has lower latency than ToT while maintaining comparable performance. Although ToT consistently improves performance over CoT, it incurs high latency due to the need to generate and evaluate multiple thoughts at each reasoning step during inference. This process produces numerous tokens, resulting in significant computational and memory overhead [46]. In contrast, CPO shifts this computational burden to the training phase, maintaining the low latency of CoT (i.e., $57.5\times$ faster than ToT on average) during inference while providing comparable or superior performance. This demonstrates that our CPO can deliver enhanced reasoning capabilities without compromising efficiency.

CPO surpasses TS-LLM on average. Despite both CPO and TS-LLM using ToT to generate training data (where our implementation of ToT remains consistent), CPO exhibits an average im-

Table 1: Experimental results for ToT, CoT, TS-SFT, and our proposed CPO across complex tasks including question answering, fact verification, and arithmetic reasoning are presented. * means significantly better than the best baseline (TS-SFT) with $p < 0.01$. **Bold** denotes the best method, and the second best if the top method is ToT.

		ToT [48]		CoT [40]		TS-SFT [14]		CPO (ours)	
		Acc. (%) \uparrow	Latency (s/ins.) \downarrow	Acc. (%) \uparrow	Latency (s/ins.) \downarrow	Acc. (%) \uparrow	Latency (s/ins.) \downarrow	Acc. (%) \uparrow	Latency (s/ins.) \downarrow
LLaMA2-7B									
<i>Question Answering</i>	Bam.	33.6	1168.4	29.6	37.2	30.4	36.5	32.0*	38.2
	2Wiki.	28.6	847.6	26.3	35.7	27.6	35.5	29.7*	35.7
	Hot.	23.0	1100.7	21.0	45.5	22.7	44.8	24.0*	41.1
<i>Fact Verification</i>	FVR.	47.3	2087.1	45.8	33.8	47.5	34.0	53.2*	36.8
	FVRS.	47.5	2539.5	44.3	40.6	46.0	40.4	49.0*	41.2
	Vita.	50.7	2639.3	47.3	35.9	51.0	40.1	52.7*	40.1
<i>Arithmetic</i>	SVA.	42.7	1861.1	37.7	33.3	43.1	30.2	46.0*	32.1
<i>Average Performance</i>		39.1	1749.1	36.0	37.4	38.3	37.4	40.9*	37.9
LLaMA2-13B									
<i>Question Answering</i>	Bam.	53.8	1318.3	48.0	50.5	50.8	49.6	52.0*	50.3
	2Wiki.	36.3	1097.1	28.3	67.0	29.0	66.5	30.3*	60.4
	Hot.	32.0	1271.0	29.0	65.2	30.3	65.5	30.3	63.8
<i>Fact Verification</i>	FVR.	48.8	3139.8	48.2	45.4	48.8	44.0	49.2	43.9
	FVRS.	51.3	3433.2	50.0	61.1	48.8	58.0	50.7*	68.2
	Vita.	52.5	2933.6	46.3	48.3	49.7	51.5	54.0*	58.6
<i>Arithmetic</i>	SVA.	45.7	2115.3	40.3	46.2	44.6	46.4	50.0*	48.1
<i>Average Performance</i>		45.8	2186.9	41.4	54.8	43.1	54.5	45.2*	56.2
Mistral-7B									
<i>Question Answering</i>	Bam.	46.4	4399.6	41.6	46.2	41.6	45.0	45.6*	47.0
	2Wiki.	28.4	2356.9	26.7	45.1	31.0	44.2	31.7	46.3
	Hot.	30.0	4698.0	28.0	58.4	28.6	56.2	29.4	56.9
<i>Fact Verification</i>	FVR.	61.4	3291.3	57.9	41.8	60.2	41.7	59.9	40.6
	FVRS.	50.5	5537.8	48.0	51.0	49.7	49.5	54.0*	53.0
	Vita.	52.2	4698.2	47.7	44.8	50.3	45.9	53.7*	46.6
<i>Arithmetic</i>	SVA.	66.0	4623.7	65.3	41.4	59.0	41.3	69.3*	44.9
<i>Average Performance</i>		47.8	4229.4	45.0	47.0	45.8	46.3	49.1*	47.9

provement of 2.7% and reaches a maximum increase of 10.3%. A key factor behind this performance is the CPO’s ability to fully utilize the ToT reasoning process. Specifically, CPO effectively leverages both selected and unselected thoughts at each reasoning step, whereas TS-LLM only uses information from the selected paths, offering CPO with a clear advantage. A detailed discussion of the effectiveness of CPO is presented in Section 5.3.

5.3 Component-wise Evaluations

Effect of selection methods of dispreferred thoughts. We analyze the impact of different methods for selecting dispreferred thoughts on model performance. As shown in Figure 4, we experiment with three strategies based on evaluation scores for each thought: 1) *CPO w/ Lowest*: Only the lowest-scoring thoughts in each reasoning step are dispreferred thoughts. 2) *CPO w/ Lower*: Thoughts with evaluation scores lower than the selected paths are dispreferred thoughts. 3) *CPO w/ All*: All thoughts not in the selected paths are considered dispreferred thoughts. We ensured an equal number of training samples for each strategy. Note that the evaluation score at each intermediate reasoning step (apart from the final one) determines whether to create the next reasoning step but not which

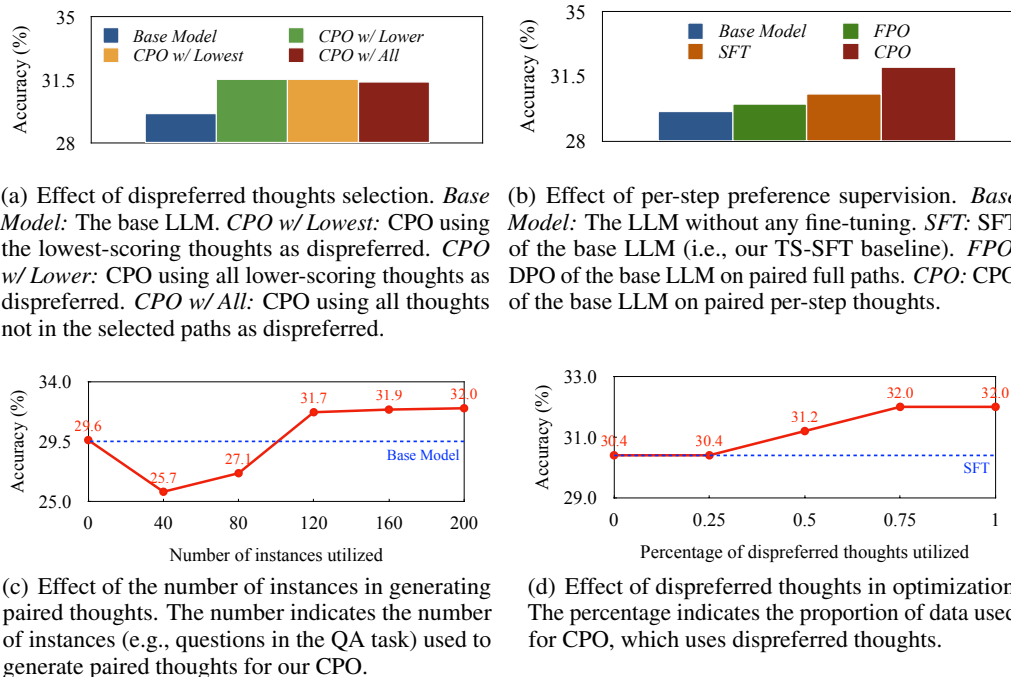


Figure 3: Component-wise evaluations and analysis on the Bamboogle dataset using the LLaMA2-7B as the base model.

thoughts are preferred. For example, as shown in the figure, even though the score of 32 is higher than 23, the thought with a score of 23 is preferred since it is part of the selected path.

The results in Figure 3(a) show that the performance differences among these strategies are minimal. This suggests that the distinction between preferred and dispreferred thoughts is better determined in the selected reasoning path rather than intermediate evaluation scores. To obtain a greater number of preferred thoughts for each instance to create paired preference thoughts, we chose the *CPO w/ All* strategy.

Effect of the number of training data. To assess the impact of the number of training data used in optimization, we conduct an ablation analysis by varying the number of instances (e.g., questions in the QA task) used to generate paired preference thoughts, ranging from 0 to 200. As illustrated in Figure 3(c), we observe that with an increase in the number of instances, the model’s performance initially declines and then rises. Specifically, when trained with data generated from less than 80 instances, the model’s performance is even worse than without any training, likely due to overfitting [4], which leads to performance degradation. However, as the number increases to 120, the model’s performance consistently improves. Optimizing with paired thoughts from 120 instances, the model’s performance surpasses that of the base model. When the number exceeds 120, the model’s performance converges, indicating a balance of data for training.

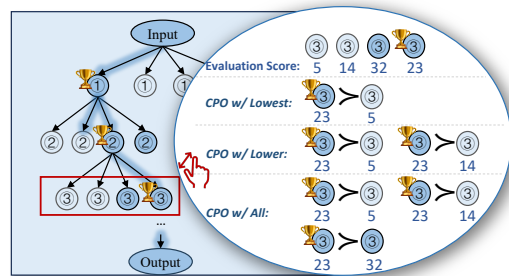


Figure 4: Different strategies for selecting dispreferred thoughts and their impact on model performance. At each reasoning step, three strategies are used to select dispreferred thoughts based on their reasoning scores: 1) *CPO w/ Lowest*: Selects only the thought with the lowest score. 2) *CPO w/ Lower*: Selects all thoughts with scores lower than the preferred thought. 3) *CPO w/ All*: Selects all thoughts as dispreferred as long as they are not the preferred thought.

Table 2: Effect of different kinds of training data on the Bamboogle dataset using the LLaMA2-7B as the base model.

Data	Description	SFT	CPO
Single-Task	Training only on specific task (Bamboogle) data.	30.4	32.0
Uniform QA	Training on 3 datasets of the same type (QA) as the test task.	31.2	35.2
Mixed-Type	Training on all 7 different types of data.	29.6	35.2

Sensitivity to data mixture. We explore the performance of the CPO method across diverse data settings to assess its adaptability and learning efficiency from various data types. As shown in Table 2, we specifically examine three different data configurations: 1) single task data, 2) uniform QA data, and 3) mixed-type data. Our findings indicate that CPO demonstrates performance improvements of 3.2% in both settings 2 and 3, suggesting its robust ability to harness diverse data sources to enhance learning outcomes. In contrast, the SFT method exhibits comparable performance across these settings, indicating a different sensitivity to data diversity. It is worth noting that, to ensure fairness, although we find that mixed data leads to better performance, the experiments in Table 1 are conducted using individual datasets for training, consistent with the baselines.

6 Analysis

Do we need dispreferred information? We explore the impact of dispreferred thoughts on model performance by gradually incorporating these thoughts into the training data. Initially, we introduce dispreferred thoughts for their corresponding preferred counterparts and apply CPO to this segment of the data. For preferred thoughts without dispreferred counterparts, we implement SFT on these data. Consequently, the percentage of dispreferred thoughts incorporated can also be viewed as the proportion of data processed using CPO. We adjust the inclusion percentage of dispreferred thoughts from 0% to 100%. An inclusion of 0% indicates that we utilize SFT solely on the preferred thoughts, i.e., the baseline TS-SFT. Conversely, an inclusion of 100% signifies our CPO, where the entire dataset includes paired preferred and dispreferred thoughts. As shown in Figure 3(d), we find that increasing the percentage of dispreferred data inclusion consistently improves model performance. This suggests that dispreferred thoughts are beneficial during the optimization process, highlighting the importance of leveraging both preferred and dispreferred thoughts for enhancing the model’s reasoning capabilities.

Why is chain level optimization important?

Unlike our CPO, an alternative approach is to construct preference data using complete reasoning paths, i.e., using the selected full reasoning paths as preferred and other paths as dispreferred data, as shown in Figure 5. This method essentially applies DPO at the full-path level, referred to here as Full-path Preference Optimization (FPO). However, FPO encounters a significant issue where the gradients of the longest common prefix (LCP) tokens in paired data cancel out, which we call the *LCP gradient cancellation* issue. For example, for the preferred path $\hat{y}_w = [5, +, 4, =, 9, \text{and}, 9, +, 2, =, 11]$ and the dispreferred path $\hat{y}_l = [5, +, 4, =, 9, \text{and}, 9, +, 2, =, 15]$, the gradient will only be computed for the last token where the two sequences diverge.

To mathematically illustrate how LCP gradient cancellation happens in FPO, consider $\hat{y}_w = [p_{1:n}, w_{n+1}]$ and $\hat{y}_l = [p_{1:n}, l_{n+1}]$, where p is the longest common prefix sequence between \hat{y}_w and \hat{y}_l . The gradient of FPO is given by:

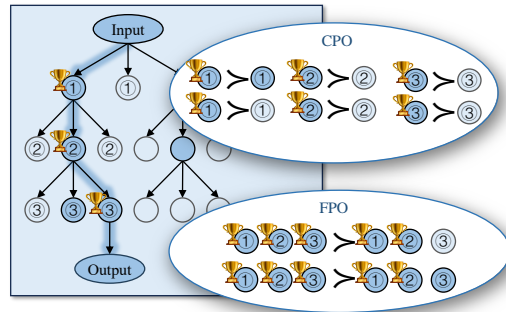


Figure 5: Illustrations of two different ways to construct paired preference data: 1) CPO: Paired preference data are constructed at each thought step. 2) FPO: Paired preference data are constructed only at the full path level.

$$\begin{aligned} \nabla_{\theta} \mathcal{L}_{\text{FPO}}(\pi_{\theta}; \pi_{\text{ref}}) &= C(\theta) \cdot \nabla_{\theta} (\log \pi_{\theta}(\hat{y}_w|x) - \log \pi_{\theta}(\hat{y}_l|x)) \\ &= C(\theta) \cdot \nabla_{\theta} \left(\boxed{\log \pi_{\theta}(p_{1:n}|x)} + \log \pi_{\theta}(w_{n+1}|x, p_{1:n}) - \boxed{\log \pi_{\theta}(p_{1:n}|x)} - \log \pi_{\theta}(l_{n+1}|x, p_{1:n}) \right), \end{aligned}$$

where $C(\theta)$ is a scalar function that does not affect the direction of the gradient and can be absorbed into the learning rate.

We can clearly see that the gradient terms of the common prefix tokens (highlighted with boxes) cancel each other out. This issue also exists in DPO training [29], but FPO suffers more frequently and severely due to the longer LCP between paired data constructed by tree search. As an empirical evidence, we observe the LCP length accounts for 28% of the total length in the Bamboogle dataset. CPO, on the other hand, constructs preference data at every step in the reasoning chain, allowing optimization of the LLM on all steps in the reasoning path. This means the common prefix can be optimized at its own step, ensuring that the gradient still exists for the common prefix.

We also compare FPO to CPO empirically in Figure 3(b), which further substantiates this observation. Switching to FPO led to a relative performance decrease of 4.6%, even worse than the baseline SFT that does not utilize any information from dispreferred data. This underscores the importance of per-step preference thoughts for CPO.

7 Conclusion

In this work, we introduce a novel method called Chain of Preference Optimization (CPO), which leverages the supervision generated by the self-reasoning process (i.e., tree-of-thoughts) to enhance the reasoning ability of LLMs. Experiments on three different LLMs across seven different datasets demonstrate that CPO can consistently improve the performance of the base model by 4.3% on average without sacrificing inference speed. Furthermore, our method also substantially outperforms the strong baseline TS-SFT and even achieves comparable performance to the ToT method, which requires approximately 57.5 times more inference time.

For future work, we aim to combine CPO with other reasoning algorithms, such as graph-of-thoughts [7]. Additionally, we are interested in exploring the potential of using a weak LLM to evaluate a strong one within the CPO framework, aiming to achieve weak-to-strong alignment [9].

References

- [1] Renat Aksitov, Sobhan Miryoosefi, Zonglin Li, Daliang Li, Sheila Babayan, Kavya Kopparapu, Zachary Fisher, Ruiqi Guo, Sushant Prakash, Pranesh Srinivasan, et al. Rest meets react: Self-improvement for multi-step reasoning llm agent. *arXiv preprint arXiv:2312.10003*, 2023.
- [2] Rami Aly, Zhijiang Guo, Michael Schlichtkrull, James Thorne, Andreas Vlachos, Christos Christodoulopoulos, Oana Cocarascu, and Arpit Mittal. Feverous: Fact extraction and verification over unstructured and structured information. *arXiv preprint arXiv:2106.05707*, 2021.
- [3] Xavier Amatriain. Prompt design and engineering: Introduction and advanced methods. *arXiv preprint arXiv:2401.14423*, 2024.
- [4] Mohammad Gheshlaghi Azar, Zhaohan Daniel Guo, Bilal Piot, Remi Munos, Mark Rowland, Michal Valko, and Daniele Calandriello. A general theoretical paradigm to understand learning from human preferences. In *International Conference on Artificial Intelligence and Statistics*, pages 4447–4455. PMLR, 2024.
- [5] Yuntao Bai, Andy Jones, Kamal Ndousse, Amanda Askell, Anna Chen, Nova DasSarma, Dawn Drain, Stanislav Fort, Deep Ganguli, Tom Henighan, et al. Training a helpful and harmless assistant with reinforcement learning from human feedback. *arXiv preprint arXiv:2204.05862*, 2022.
- [6] Yuntao Bai, Saurav Kadavath, Sandipan Kundu, Amanda Askell, Jackson Kernion, Andy Jones, Anna Chen, Anna Goldie, Azalia Mirhoseini, Cameron McKinnon, et al. Constitutional ai: Harmlessness from ai feedback. *arXiv preprint arXiv:2212.08073*, 2022.

- [7] Maciej Besta, Nils Blach, Ales Kubicek, Robert Gerstenberger, Michal Podstawski, Lukas Gianinazzi, Joanna Gajda, Tomasz Lehmann, Hubert Niewiadomski, Piotr Nyczyk, et al. Graph of thoughts: Solving elaborate problems with large language models. In *Proceedings of the AAAI Conference on Artificial Intelligence*, 2024.
- [8] Cameron B Browne, Edward Powley, Daniel Whitehouse, Simon M Lucas, Peter I Cowling, Philipp Rohlfshagen, Stephen Tavener, Diego Perez, Spyridon Samothrakis, and Simon Colton. A survey of monte carlo tree search methods. *IEEE Transactions on Computational Intelligence and AI in games*, 4(1):1–43, 2012.
- [9] Collin Burns, Pavel Izmailov, Jan Hendrik Kirchner, Bowen Baker, Leo Gao, Leopold Aschenbrenner, Yining Chen, Adrien Ecoffet, Manas Joglekar, Jan Leike, et al. Weak-to-strong generalization: Eliciting strong capabilities with weak supervision. *arXiv preprint arXiv:2312.09390*, 2023.
- [10] Guillaume Chaslot, Sander Bakkes, Istvan Szita, and Pieter Spronck. Monte-carlo tree search: A new framework for game ai. In *Proceedings of the AAAI Conference on Artificial Intelligence and Interactive Digital Entertainment*, 2008.
- [11] Zixiang Chen, Yihe Deng, Huizhuo Yuan, Kaixuan Ji, and Quanquan Gu. Self-play fine-tuning converts weak language models to strong language models. *arXiv preprint arXiv:2401.01335*, 2024.
- [12] Thomas H Cormen, Charles E Leiserson, Ronald L Rivest, and Clifford Stein. *Introduction to algorithms*. MIT press, 2022.
- [13] Ruomeng Ding, Chaoyun Zhang, Lu Wang, Yong Xu, Minghua Ma, Wei Zhang, Si Qin, Saravan Rajmohan, Qingwei Lin, and Dongmei Zhang. Everything of thoughts: Defying the law of penrose triangle for thought generation. *arXiv preprint arXiv:2311.04254*, 2023.
- [14] Xidong Feng, Ziyu Wan, Muning Wen, Ying Wen, Weinan Zhang, and Jun Wang. Alphazero-like tree-search can guide large language model decoding and training. *arXiv preprint arXiv:2309.17179*, 2023.
- [15] Sylvain Gugger, Lysandre Debut, Thomas Wolf, Philipp Schmid, Zachary Mueller, Sourab Mangrulkar, Marc Sun, and Benjamin Bossan. Accelerate: Training and inference at scale made simple, efficient and adaptable. <https://github.com/huggingface/accelerate>, 2022.
- [16] Caglar Gulcehre, Tom Le Paine, Srivatsan Srinivasan, Ksenia Konyushkova, Lotte Weerts, Abhishek Sharma, Aditya Siddhant, Alex Ahern, Miaosen Wang, Chenjie Gu, et al. Reinforced self-training (rest) for language modeling. *arXiv preprint arXiv:2308.08998*, 2023.
- [17] Shibo Hao, Yi Gu, Haodi Ma, Joshua Jiahua Hong, Zhen Wang, Daisy Zhe Wang, and Zhit-ing Hu. Reasoning with language model is planning with world model. *arXiv preprint arXiv:2305.14992*, 2023.
- [18] Xanh Ho, Anh-Khoa Duong Nguyen, Saku Sugawara, and Akiko Aizawa. Constructing a multi-hop qa dataset for comprehensive evaluation of reasoning steps. *arXiv preprint arXiv:2011.01060*, 2020.
- [19] Edward J Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. Lora: Low-rank adaptation of large language models. *arXiv preprint arXiv:2106.09685*, 2021.
- [20] Albert Q Jiang, Alexandre Sablayrolles, Arthur Mensch, Chris Bamford, Devendra Singh Chaplot, Diego de las Casas, Florian Bressand, Gianna Lengyel, Guillaume Lample, Lucile Saulnier, et al. Mistral 7b. *arXiv preprint arXiv:2310.06825*, 2023.
- [21] Fangkai Jiao, Chengwei Qin, Zhengyuan Liu, Nancy F Chen, and Shafiq Joty. Learning planning-based reasoning by trajectories collection and process reward synthesizing. *arXiv preprint arXiv:2402.00658*, 2024.
- [22] Diederik P Kingma and Jimmy Ba. Adam: A method for stochastic optimization. *arXiv preprint arXiv:1412.6980*, 2014.

- [23] Levente Kocsis and Csaba Szepesvári. Bandit based monte-carlo planning. In *European conference on machine learning*, pages 282–293. Springer, 2006.
- [24] Nicholas Lee, Thanakul Wattanawong, Sehoon Kim, Karttikeya Mangalam, Sheng Shen, Gopala Anumanchipali, Michael W Mahoney, Kurt Keutzer, and Amir Gholami. Llm2llm: Boosting llms with novel iterative data enhancement. *arXiv preprint arXiv:2403.15042*, 2024.
- [25] Jiacheng Liu, Andrew Cohen, Ramakanth Pasunuru, Yejin Choi, Hannaneh Hajishirzi, and Asli Celikyilmaz. Making ppo even better: Value-guided monte-carlo tree search decoding. *arXiv preprint arXiv:2309.15028*, 2023.
- [26] Zixuan Liu, Xiaolin Sun, and Zizhan Zheng. Enhancing llm safety via constrained direct preference optimization. *arXiv preprint arXiv:2403.02475*, 2024.
- [27] Jieyi Long. Large language model guided tree-of-thought. *arXiv preprint arXiv:2305.08291*, 2023.
- [28] Long Ouyang, Jeffrey Wu, Xu Jiang, Diogo Almeida, Carroll Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, et al. Training language models to follow instructions with human feedback. *NeurIPS*, 35:27730–27744, 2022.
- [29] Arka Pal, Deep Karkhanis, Samuel Dooley, Manley Roberts, Siddartha Naidu, and Colin White. Smaug: Fixing failure modes of preference optimisation with dpo-positive. *arXiv preprint arXiv:2402.13228*, 2024.
- [30] Arkil Patel, Satwik Bhattamishra, and Navin Goyal. Are nlp models really able to solve simple math word problems? *arXiv preprint arXiv:2103.07191*, 2021.
- [31] Ofir Press, Muru Zhang, Sewon Min, Ludwig Schmidt, Noah A Smith, and Mike Lewis. Measuring and narrowing the compositionality gap in language models. *arXiv preprint arXiv:2210.03350*, 2022.
- [32] Rafael Rafailov, Archit Sharma, Eric Mitchell, Christopher D Manning, Stefano Ermon, and Chelsea Finn. Direct preference optimization: Your language model is secretly a reward model. *Advances in Neural Information Processing Systems*, 36, 2024.
- [33] Tal Schuster, Adam Fisch, and Regina Barzilay. Get your vitamin c! robust fact verification with contrastive evidence. *arXiv preprint arXiv:2103.08541*, 2021.
- [34] David Silver, Julian Schrittwieser, Karen Simonyan, Ioannis Antonoglou, Aja Huang, Arthur Guez, Thomas Hubert, Lucas Baker, Matthew Lai, Adrian Bolton, et al. Mastering the game of go without human knowledge. *nature*, 550(7676):354–359, 2017.
- [35] James Thorne, Andreas Vlachos, Christos Christodoulopoulos, and Arpit Mittal. Fever: a large-scale dataset for fact extraction and verification. In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long Papers)*, pages 809–819, 2018.
- [36] Ye Tian, Baolin Peng, Linfeng Song, Lifeng Jin, Dian Yu, Haitao Mi, and Dong Yu. Toward self-improvement of llms via imagination, searching, and criticizing. *arXiv preprint arXiv:2404.12253*, 2024.
- [37] Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, et al. Llama 2: Open foundation and fine-tuned chat models. *arXiv preprint arXiv:2307.09288*, 2023.
- [38] Peiyi Wang, Lei Li, Zhihong Shao, RX Xu, Damai Dai, Yifei Li, Deli Chen, Y Wu, and Zhifang Sui. Math-shepherd: Verify and reinforce llms step-by-step without human annotations. *CoRR, abs/2312.08935*, 2023.
- [39] Xuezhi Wang, Jason Wei, Dale Schuurmans, Quoc V Le, Ed H Chi, Sharan Narang, Aakanksha Chowdhery, and Denny Zhou. Self-consistency improves chain of thought reasoning in language models. In *ICLR*, 2022.

- [40] Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Fei Xia, Ed Chi, Quoc V Le, Denny Zhou, et al. Chain-of-thought prompting elicits reasoning in large language models. *NeurIPS*, 35:24824–24837, 2022.
- [41] Mark HM Winands, Yngvi Björnsson, and Jahn-Takeshi Saito. Monte-carlo tree search solver. In *Computers and Games: 6th International Conference, CG 2008, Beijing, China, September 29-October 1, 2008. Proceedings 6*, pages 25–36. Springer, 2008.
- [42] Zeqiu Wu, Yushi Hu, Weijia Shi, Nouha Dziri, Alane Suhr, Prithviraj Ammanabrolu, Noah A Smith, Mari Ostendorf, and Hannaneh Hajishirzi. Fine-grained human feedback gives better rewards for language model training. *arXiv preprint arXiv:2306.01693*, 2023.
- [43] Jing Xu, Megan Ung, Mojtaba Komeili, Kushal Arora, Y-Lan Boureau, and Jason Weston. Learning new skills after deployment: Improving open-domain internet-driven dialogue with human feedback. *arXiv preprint arXiv:2208.03270*, 2022.
- [44] Zhilin Yang, Peng Qi, Saizheng Zhang, Yoshua Bengio, William W Cohen, Ruslan Salakhutdinov, and Christopher D Manning. Hotpotqa: A dataset for diverse, explainable multi-hop question answering. *arXiv preprint arXiv:1809.09600*, 2018.
- [45] Zonghan Yang, Peng Li, Ming Yan, Ji Zhang, Fei Huang, and Yang Liu. React meets actre: When language agents enjoy training data autonomy, 2024.
- [46] Jinwei Yao, Kaiqi Chen, Kexun Zhang, Jiakuan You, Binhang Yuan, Zeke Wang, and Tao Lin. Deft: Flash tree-attention with io-awareness for efficient tree-search-based llm inference. *arXiv preprint arXiv:2404.00242*, 2024.
- [47] Shunyu Yao, Jeffrey Zhao, Dian Yu, Nan Du, Izhak Shafran, Karthik Narasimhan, and Yuan Cao. ReAct: Synergizing reasoning and acting in language models. In *ICLR*, 2023.
- [48] Shunyu Yao, Dian Yu, Jeffrey Zhao, Izhak Shafran, Tom Griffiths, Yuan Cao, and Karthik Narasimhan. Tree of thoughts: Deliberate problem solving with large language models. *Advances in Neural Information Processing Systems*, 36, 2024.
- [49] Yao Yao, Zuchao Li, and Hai Zhao. Beyond chain-of-thought, effective graph-of-thought reasoning in large language models. *arXiv preprint arXiv:2305.16582*, 2023.
- [50] Weizhe Yuan, Richard Yuanzhe Pang, Kyunghyun Cho, Sainbayar Sukhbaatar, Jing Xu, and Jason Weston. Self-rewarding language models. *arXiv preprint arXiv:2401.10020*, 2024.
- [51] Richard Yuanzhe Pang, Weizhe Yuan, Kyunghyun Cho, He He, Sainbayar Sukhbaatar, and Jason Weston. Iterative reasoning preference optimization. *arXiv e-prints*, pages arXiv–2404, 2024.
- [52] Yongcheng Zeng, Guoqing Liu, Weiyu Ma, Ning Yang, Haifeng Zhang, and Jun Wang. Token-level direct preference optimization. *arXiv preprint arXiv:2404.11999*, 2024.
- [53] Ruochen Zhao, Xingxuan Li, Shafiq Joty, Chengwei Qin, and Lidong Bing. Verify-and-edit: A knowledge-enhanced chain-of-thought framework. In *ACL*, pages 5823–5840, Toronto, Canada, July 2023.
- [54] Denny Zhou, Nathanael Schärli, Le Hou, Jason Wei, Nathan Scales, Xuezhi Wang, Dale Schuurmans, Claire Cui, Olivier Bousquet, Quoc V Le, et al. Least-to-most prompting enables complex reasoning in large language models. In *ICLR*, 2022.

Inference Method	<i>SFT+CPO</i>				<i>CPO only</i>			
	<i>iter=0</i> (<i>Base</i>)	<i>iter=1</i> (<i>SFT</i>)	<i>iter=2</i> (<i>CPO</i>)	<i>iter=3</i> (<i>CPO</i>)	<i>iter=0</i> (<i>Base</i>)	<i>iter=1</i> (<i>CPO</i>)	<i>iter=2</i> (<i>CPO</i>)	<i>iter=3</i> (<i>CPO</i>)
CoT	29.6	30.4	30.4	31.2	29.6	32.0	33.6	31.2
ToT	33.6	30.4	31.2	-	33.6	34.4	33.6	-

Table 3: Effects of iterative learning on the Bamboogle dataset using the LLaMA2-7B as the base model.

Societal Impacts and Limitations

Since our CPO does not require any human annotation, it can be directly used. For example, to protect the safety of large models, one can simply provide a constitution, and then fine-tune the LLM to make it more compliant. This also introduces another issue: our method can be adjusted for malicious applications. Our limitation is that we still need to generate data through ToT, which is a time-consuming process. Additionally, we have only tested this on text language models and have not tried it on vision-language models. Moreover, ethical considerations must be taken into account, as the potential for misuse could lead to unintended consequences.

A Detailed Experiment Configurations

To maintain a reasonable budget, especially given the high computational demand of ToT, we limit each dataset to a maximum of 300 test samples through random sampling. For datasets that contain less than 300 test samples, we instead use all available samples. For training, we randomly select less than 300 instances from each dataset to construct the preference data pairs, **without** using the ground-truth labels. This is because we observe that more number of training data does not lead to performance improvement as shown in Section 5.3.

B CPO Benefits from Iterative Learning.

Inspired by the iterative improvements achieved in previous research [50, 51], in this section, we explore whether CPO can be further improved by iterative learning. Specifically, we try two distinct iterative training strategies: 1) *SFT+CPO*: in *iter=0*, Start with a base LLM that has not been fine-tuned at all; in *iter=1*, SFT the base LLM on the reasoning path selected by ToT (base model); in *subsequent iterations (iteration > 1)*, Continue to fine-tune the model using the CPO method, based on the chain of preference thoughts constructed by the model in the previous iterations. and 2) *CPO only*: in *iter=0*, same as *iter=0* in *SFT+CPO*; in *subsequent iterations (iteration > 0)*: Only use the CPO method for training in all iterations, similar to the approach in *SFT+CPO* after the first iteration.

As shown in Table 3, We find that if use CoT for inference, as the number of iterations increases, the performance of the model gradually improves. In the *CPO only* setting, the performance improves by 4% after two iterations. However, an intriguing phenomenon is noted: if we use the ToT method for inference on our fine-tuned models, the performance does not consistently rise and sometimes even declines. For instance, in the *SFT+CPO* setting, after the first round of SFT, the performance with ToT decreased by 2.7%. We hypothesize this may be related to a decrease in the diversity of the model’s outputs after fine-tuning, which reduces the search space for ToT, making it challenging to find better reasoning paths. When the performance of CoT and ToT becomes similar, further fine-tuning of the LLM leads to convergence in the *SFT+CPO* setting and even a decline in the *CPO only* setting.