
MASTER OF DISASTER: A DISASTER-RELATED EVENT MONITORING SYSTEM FROM NEWS STREAMS

Junbo Huang

Department of Computer Science
University of Hamburg
Vogt-Kölln-Straße 30, 22527 Hamburg, Germany
junbo.huang@uni-hamburg.de

Ricardo Usbeck

Head of the AI and Explainability Group
Leuphana University Lüneburg
Universitätsallee 1, 21335 Lüneburg, Germany
ricardo.usbeck@leuphana.de

June 14, 2024

ABSTRACT

The need for a disaster-related event monitoring system has arisen due to the societal and economic impact caused by the increasing number of severe disaster events. An event monitoring system should be able to extract event-related information from texts, and discriminates event instances. We demonstrate our open-source event monitoring system, namely, Master of Disaster (MoD), which receives news streams, extracts event information, links extracted information to a knowledge graph (KG), in this case Wikidata, and discriminates event instances visually. The goal of event visualization is to group event mentions referring to the same real-world event instance so that event instance discrimination can be achieved by visual screening.

Keywords Event Extraction · Knowledge Graph · Event Instance Discrimination

1 Introduction

The increased frequency and magnitude of disasters in recent years have led to significant human, environmental, and economic losses. In response to this, disaster-related event monitoring systems, such as GDELT [Leetaru and Schrod, 2013] and GDACS [De Groeve et al., 2006], have emerged as critical tools to (1) monitor events and (2) provide timely overviews for an early disaster response planning. Such large-scale systems combine manual and automated approaches in retrieving event data from sensory and raw text data. Advances in machine learning have significantly boosted predictive models' ability to extract accurate information from raw texts in the above-mentioned monitoring systems. However, a major challenge on discriminating event instances remains unsolved. In other words, how do we know if multiple news articles are referring to the same real-world event instance?

Event instance discrimination is a less research area. Existing work mainly relies on entity matching based on factors such as location and time [Rollo and Po, 2020, Zavarella et al., 2020, Ai et al., 2021], or linking event mentions to entries in a knowledge graph (KG) like Wikidata¹ [Yu et al., 2023]. However, heuristic-driven methods often suffer from poor generalization, while KG-driven approaches are limited by the inability to represent events absent from the KG. In this work, we strive for an event monitoring system that (1) receives news stream; (2) extracts event information; (3) links extracted information to a Knowledge Graph (KG), in this case, Wikidata and (4) discriminates event instances visually.

To achieve this goal, we suggest that a half-automated, human-in-the-loop event monitoring system can leverage predictive models to provide reliable information for humans. Such information includes users, geospatial and temporal information of events as well as an indication on whether two or more event mentions are referring to the same real-world event instance.

¹<https://www.wikidata.org/>

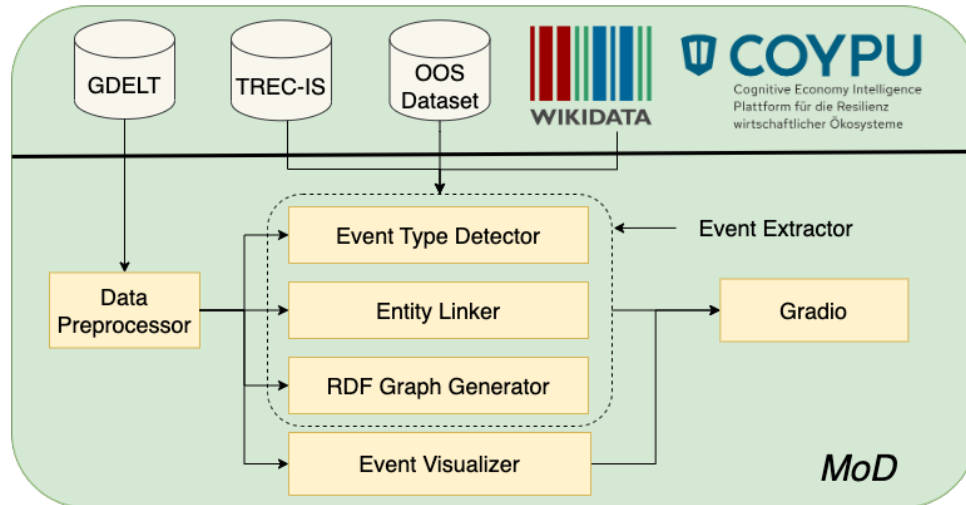


Figure 1: Overview over MoD’s Architecture.

In this work, we present Master of Disaster (MoD)², a half-automated, human-in-the-loop disaster-related event monitoring system with three key features. First, MoD receives daily news streams from GDELT³ with a keyword search. Second, MoD extracts event-related information with a transformers-based event extractor, whose output is linked to Wikidata and the CoyPu ontology⁴. Third, MoD provides a visualization of events to represent the similarity of different news in the embedding space. To compensate for the error produced by the event extractor, a visualization from an unsupervised clustering algorithm is provided as a reference for the human evaluation of event distributions.

MoD aims to provide an overview of daily events extracted from the user-provided keywords. Furthermore, it should be mentioned that the semantic output (linking to Wikidata) helps leverage downstream tasks such as knowledge validation and common sense reasoning.

2 Master of Disaster (MoD)

MoD is an open-sourced application with four components: a data preprocessor, an event extractor, an event visualizer, and a gradio-based GUI⁵. The architecture of MoD is illustrated in Figure 1.

2.1 Data preprocessor

First, the data preprocessor queries a list of articles containing the user-provided keywords with the GDELT API⁶. Furthermore, it applies a filtering method to select articles that are written in English. This is because the event extractor can only receive English inputs, currently. With the filtered articles, the data preprocessor takes the title of each article to represent an event. Additionally, all artifacts (such as white spaces around punctuation marks) are removed from the titles to retrieve the final representation of events in the textual space.

²The online demo can be found here <https://hitec.demo.skynet.CoyPu.org/>. Please ignore tabs other than Event Extraction and Event Visualization. The source code for the GUI can be found here <https://github.com/semantic-systems/SEMS-tool-suite/>. The source code for the event extractor can be found here <https://github.com/semantic-systems/CoyPu-EventExtraction>

³<https://www.gdeltproject.org/>

⁴<https://schema.coypu.org/global/>

⁵<https://gradio.app/>

⁶Note that the GDELT API restricts the maximal amount of returned articles to 250.

2.2 Event Extractor

The event extractor consists of three components, an event type detector, an entity linker and an RDF graph generator⁷. The **event type detector** is a pre-trained *RoBERTa-base* [Liu et al., 2019] model fine-tuned on the TREC-IS dataset [McCreadie et al., 2019]. The model is optimized using the supervised contrastive learning [Khosla et al., 2020] loss. In the original TREC-IS benchmark, the task was to predict information types from raw texts, such as *Request-GoodsServices* or *Report-EmergingThreats*. However, we modified the original task schema to predict the event type⁸ (such as *Earthquake* or *Shooting*). Note, the event type was considered a meta-information in the original dataset. Also, the dataset did not include an *out-of-scope* (*oos*) class describing non-events. Thus, we included data from the TweetEval dataset [Barbieri et al., 2020] to represent an *oos* class. It is worth noting that TweetEval included 7 subtasks, such as *Emotion Recognition*, *Irony Detection* and *Hate Speech Detection*. Sentences in TweetEval are all user-generated tweets, which contain a variety of topics, language styles and structures than traditional news articles. By integrating such samples in the training data, the model learned a more concentrated feature representation for the given event classes.

Next, we employed an **entity linker** to extract event-related entities. MoD presently considers two relations, namely *hasLocality* and *hasImpactOn*, following the CoyPu Event ontology⁹. Here, we leveraged a local entity linker, namely BLINK¹⁰ [Wu et al., 2020], a *BERT*-based entity linking model which links entities to Wikipedia. However, since the CoyPu ontology is based on Wikidata as background KG, the **RDF graph generator** maps from Wikipedia to Wikidata and outputs an event graph in JSON-LD (see Appendix A).

2.3 Event Visualizer

The event visualizer (1) receives a stream of filtered articles from the data preprocessor, (2) followed by the event type detector to generate sentence embeddings from the last hidden layer and make predictions on event types, and (3) visualizes the sentence embeddings in a two-dimensional coordinate. The goal of event visualizer is to group event mentions referring to the same real-world event instance. We applied a dimensionality reduction technique based on Principal Components Analysis (PCA). Two resulting two-dimensional visualizations are presented in MoD, as shown in Figure 2.

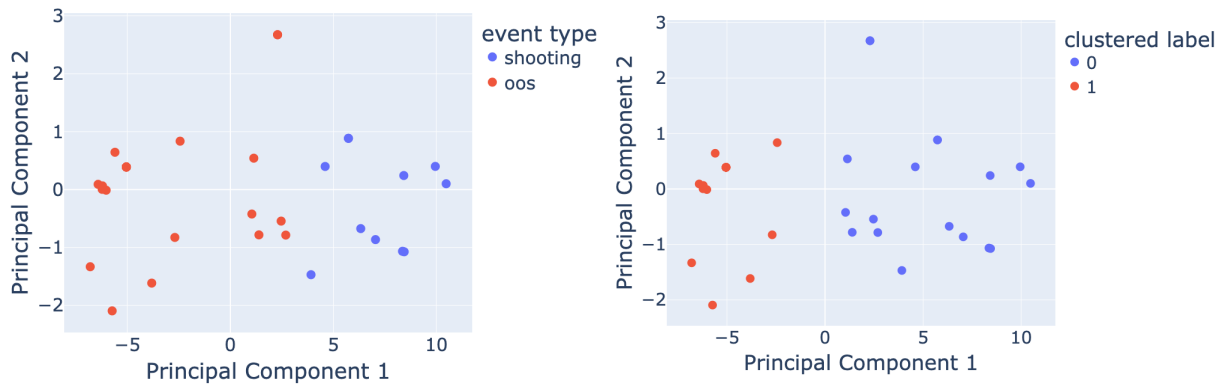


Figure 2: Event Visualization with respect to the classification (left) and clustering (right) Result. The search keyword is "Hamburg", and the date is "11. March 2023"

The first one illustrates the event type prediction by the event type detector (left-hand side in Figure 2) and the second visualization (right-hand side in Figure 2) introduces the prediction from a clustering algorithm. We used DBSCAN [Ester et al., 1996] as the clustering algorithm because DBSCAN is a density-based algorithm, where the number of clusters is not pre-defined. Therefore it can group news into an arbitrary number of event instances. From the visualization shown in Figure 2, we have observed that DBSCAN considers local structures (measured by the distance between sentence representations) of sentence embedding in the PCA-reduced two-dimensional space. This provides

⁷Resource Description Framework (RDF) is a standard model for data interchange on the Web.

⁸In total, there are 9 event types: *tropical storm*, *flood*, *shooting*, *covid*, *earthquake*, *hostage*, *fire*, *wildfire* and *explosion*

⁹<https://schema.CoyPu.org/global/2.3#Event>

¹⁰<https://github.com/facebookresearch/BLINK>

insights for human evaluators to have a direct access to event distribution, which is important to discriminate between event instances.

The final component in MoD is the **radio-based interactive GUI** which is a centralized, injective component that makes API calls to all services used in MoD. These services include an event extractor and an event visualizer.

3 Evaluation

To ensure that MoD can be practically deployed as a half-automated disaster-related event monitoring system, we conducted a survey with seven NLP researchers, among which five of the participants are frequent news readers. The only demographic that we controlled for is the expertise in NLP. We observed that six participants have expertise in knowledge graphs and three participants have expertise in event extraction. The main investigation in the survey is the usability of MoD, which consists of the following questions on a 5-point Likert scale.

1. How easy is it to use the Event Extraction tab? (1: very difficult; 5: very easy)
2. How accurate is the information provided by the event extractor? (1: very inaccurate; 5: very accurate)
3. How easy is it to use the Event Visualization tab? (1: very difficult; 5: very easy)
4. Is the overview of daily news by the Event Visualizer informative? (1: very non-informative; 5: very informative)
5. Will you use Event Visualizer for fast access to the news? (1: no; 5: yes)

As a result, we received 4.14 points on average on both the first and the third question (level of easiness to use the system); 3 points on average on the second question (accuracy by the event extractor); 3.57 points on average on the fourth question (informativeness of the event visualizer) and 3.14 point on average on the last question (practicality). Albeit with a small set of participants, we observed that the majority of the participants agreed that MoD is easy to use and the visualization is informative.

4 Conclusion and future work

In this paper, we presented MoD, a disaster-related event monitoring system. Moreover, we explained the architecture of MoD and the functionality of each component. The goal of MoD is to provide an event monitoring system that (1) receives news stream; (2) extracts event information; (3) links the extracted information to a KG and (4) discriminates event instances mentioned in the news. In future work, we aim to provide a temporal analysis of events and increase the performance of the event extractor.

Ethics Statement

To our knowledge, this work does not concern any substantial ethical issue. Corpora used in this work are preprocessed by masking all user mentions and links. Of course, the application of classification algorithms could always play a role in Dual-Use scenarios. However, we consider our work as not risk-increasing.

Acknowledgements

The authors acknowledge the financial support by the Federal Ministry for Economic Affairs and Energy of Germany in the project CoyPu (project number 01MK21007[A-L]). HITeC is “G” This work was also supported by the House of Computing and Data Science (HCDS) of the Hamburg University within the Cross-Disciplinary Lab programme, and by the Ministry of Research and Education within the project ‘RESCUE-MATE: Dynamische Lageerstellung und Unterstützung für Rettungskräfte in komplexen Krisensituationen mittels Datenfusion und intelligenten Drohnenschwärmen’ (FKZ 13N16844).

References

- Kalev Leetaru and Philip A Schrodt. Gdelt: Global data on events, location, and tone, 1979–2012. In *ISA annual convention*, volume 2, pages 1–49. Citeseer, 2013.
- Tom De Groeve, L Vernaccini, Alessandro Annunziato, B Van de Walle, and M Turoff. Global disaster alert and coordination system. In *Proceedings of the 3rd International ISCRAM Conference*, Eds. B. Van de Walle and M. Turoff., Newark, pages 1–10, 2006.
- Federica Rollo and Laura Po. Crime event localization and deduplication. In Jeff Z. Pan, Valentina A. M. Tamma, Claudia d’Amato, Krzysztof Janowicz, Bo Fu, Axel Polleres, Oshani Seneviratne, and Lalana Kagal, editors, *The Semantic Web - ISWC 2020 - 19th International Semantic Web Conference, Athens, Greece, November 2-6, 2020, Proceedings, Part II*, volume 12507 of *Lecture Notes in Computer Science*, pages 361–377. Springer, 2020. doi: 10.1007/978-3-030-62466-8_23. URL https://doi.org/10.1007/978-3-030-62466-8_23.
- Vanni Zavarella, Jakub Piskorski, Camelia Ignat, Hristo Tanev, and Martin Atkinson. Mastering the media hype: Methods for deduplication of conflict events from news reports. In Alípio Mário Jorge, Ricardo Campos, Adam Jatowt, and Akiko Aizawa, editors, *Proceedings of AI4Narratives - Workshop on Artificial Intelligence for Narratives in conjunction with the 29th International Joint Conference on Artificial Intelligence and the 17th Pacific Rim International Conference on Artificial Intelligence (IJCAI 2020), Yokohama, Japan, January 7th and 8th, 2021 (online event due to Covid-19 outbreak)*, volume 2794 of *CEUR Workshop Proceedings*, pages 29–34. CEUR-WS.org, 2020. URL <https://ceur-ws.org/Vol-2794/paper6.pdf>.
- Wei Ai, Jia Xu, Hongen Shao, Ze Wang, and Tao Meng. An entity event deduplication method based on connected subgraph. In Jianxi Yang, Kenli Li, Wanqing Tu, Zheng Xiao, and Libo Wang, editors, *7th International Conference on Systems and Informatics, ICSAI 2021, Chongqing, China, November 13-15, 2021*, pages 1–6. IEEE, 2021. doi: 10.1109/ICSAI53574.2021.9664040. URL <https://doi.org/10.1109/ICSAI53574.2021.9664040>.
- Xiaodong Yu, Wenpeng Yin, Nitish Gupta, and Dan Roth. Event linking: Grounding event mentions to wikipedia. In Andreas Vlachos and Isabelle Augenstein, editors, *Proceedings of the 17th Conference of the European Chapter of the Association for Computational Linguistics, EACL 2023, Dubrovnik, Croatia, May 2-6, 2023*, pages 2671–2680. Association for Computational Linguistics, 2023. doi: 10.18653/V1/2023.EACL-MAIN.196. URL <https://doi.org/10.18653/v1/2023.eacl-main.196>.
- Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. Roberta: A robustly optimized BERT pretraining approach. *CoRR*, abs/1907.11692, 2019. URL <http://arxiv.org/abs/1907.11692>.
- Richard McCreadie, Cody Buntain, and Ian Soboroff. TREC incident streams: Finding actionable information on social media. In Zeno Franco, José J. González, and José H. Canós, editors, *Proceedings of the 16th International Conference on Information Systems for Crisis Response and Management, Valencia, Spain, May 19-22, 2019*. ISCRAM Association, 2019. URL http://idl.iscram.org/files/richardmccreadie/2019/1867_RichardMcCreadie_et al2019.pdf.
- Prannay Khosla, Piotr Teterwak, Chen Wang, Aaron Sarna, Yonglong Tian, Phillip Isola, Aaron Maschinot, Ce Liu, and Dilip Krishnan. Supervised contrastive learning. In Hugo Larochelle, Marc’Aurelio Ranzato, Raia Hadsell, Maria-Florina Balcan, and Hsuan-Tien Lin, editors, *Advances in Neural Information Processing Systems 33: Annual Conference on Neural Information Processing Systems 2020, NeurIPS 2020, December 6-12, 2020, virtual*, 2020. URL <https://proceedings.neurips.cc/paper/2020/hash/d89a66c7c80a29b1bdbab0f2a1a94af8-Abstract.html>.
- Francesco Barbieri, José Camacho-Collados, Luis Espinosa Anke, and Leonardo Neves. Tweeteval: Unified benchmark and comparative evaluation for tweet classification. In Trevor Cohn, Yulan He, and Yang Liu, editors, *Findings of the Association for Computational Linguistics: EMNLP 2020, Online Event, 16-20 November 2020*, volume EMNLP 2020 of *Findings of ACL*, pages 1644–1650. Association for Computational Linguistics, 2020. doi: 10.18653/v1/2020.findings-emnlp.148. URL <https://doi.org/10.18653/v1/2020.findings-emnlp.148>.
- Ledell Wu, Fabio Petroni, Martin Josifoski, Sebastian Riedel, and Luke Zettlemoyer. Scalable zero-shot entity linking with dense entity retrieval. In Bonnie Webber, Trevor Cohn, Yulan He, and Yang Liu, editors, *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing, EMNLP 2020, Online, November 16-20, 2020*, pages 6397–6407. Association for Computational Linguistics, 2020. doi: 10.18653/v1/2020.emnlp-main.519. URL <https://doi.org/10.18653/v1/2020.emnlp-main.519>.
- Martin Ester, Hans-Peter Kriegel, Jörg Sander, and Xiaowei Xu. A density-based algorithm for discovering clusters in large spatial databases with noise. In Evangelos Simoudis, Jiawei Han, and Usama M. Fayyad, editors, *Proceedings of the Second International Conference on Knowledge Discovery and Data Mining (KDD-96), Portland, Oregon, USA*, pages 226–231. AAAI Press, 1996. URL <http://www.aaai.org/Library/KDD/1996/kdd96-037.php>.

A Example output graph of the event extractor

```

{
  @id: "https://data.CoyPu.org/event/mod/d868a8be-c49e-48b8-a3a5-5b4b12d7d97f",
  @type: [
    0: "https://schema.CoyPu.org/global#Event",
    1: "http://www.wikidata.org/entity/Q2252077"
  ],
  \protect\vrule width0pt\protect\href{http://www.w3.org/2000/01/rdf-schema#comment:}{http://
  [
    0: {
      @value: "Hamburg shooting : Multiple dead after attack at
      Jehovah Witness church in Germany"
    }
  ],
  https://schema.CoyPu.org/global#hasImpactOn: [
    0: {
      @id: "http://www.wikidata.org/entity/Q35269"
    }
  ],
  https://schema.CoyPu.org/global#hasLocality: [
    0: {
      @id: "http://www.wikidata.org/entity/Q1055"
    },
    1: {
      @id: "http://www.wikidata.org/entity/Q183"
    }
  ],
  https://schema.CoyPu.org/global#hasPublisher: [
    0: {
      @value: "HiTec"
    }
  ],
  https://schema.CoyPu.org/global#hasTimestamp: [
    0: {
      @value: "15_03_2023_17_57_56"
    }
  ]
}

```