

---

# DEVBENCH: A multimodal developmental benchmark for language learning

---

Alvin W. M. Tan, Sunny Yu,  
Bria Long, Wanjing Anya Ma, Tonya Murray,  
Rebecca D. Silverman, Jason D. Yeatman, Michael C. Frank  
Stanford University  
{tanawm, syu03, bria, wanjingm, tonyamur,  
rdsilver, jyeatman, mcfrank}@stanford.edu

## Abstract

How (dis)similar are the learning trajectories of vision–language models and children? Recent modeling work has attempted to understand the gap between models’ and humans’ data efficiency by constructing models trained on less data, especially multimodal naturalistic data. However, such models are often evaluated on adult-level benchmarks, with limited breadth in language abilities tested, and without direct comparison to behavioral data. We introduce DEVBENCH, a multimodal benchmark comprising seven language evaluation tasks spanning the domains of lexical, syntactic, and semantic ability, with behavioral data from both children and adults. We evaluate a set of vision–language models on these tasks, comparing models and humans not only on accuracy but on their response patterns. Across tasks, models exhibit variation in their closeness to human response patterns, and models that perform better on a task also more closely resemble human behavioral responses. We also examine the developmental trajectory of OpenCLIP over training, finding that greater training results in closer approximations to adult response patterns. DEVBENCH thus provides a benchmark for comparing models to human language development. These comparisons highlight ways in which model and human language learning processes diverge, providing insight into entry points for improving language models.

## 1 Introduction

Humans are remarkably good language learners, acquiring language rapidly in the first few years of life without much explicit supervision. Recent machine learning models are also able to acquire some aspects of human language, although they require much larger quantities of language input than a typical human would receive [1, 2]. This “data gap” reflects differences in the learning processes and mechanisms employed by human language learners and language models; understanding the nature of these differences is pivotal for the joint goals of building better cognitive models of language learning and building more data-efficient language models.

Recent work has attempted to bridge this data gap by constructing models that are trained on less data, including on naturalistic data from children [2–5]. However, these models have typically been evaluated using benchmarks that reflect adult human performance, whether explicitly (i.e., with comparison data collected from adult participants) or implicitly (i.e., high accuracy on some recognition task). Such evaluation methods are not appropriate to the goal of understanding whether developmentally realistic data leads to human-like learning. We would not expect child performance to be similar to adult performance on these tasks for various reasons either related to language competence (i.e., vocabulary knowledge) or more generally to co-developing cognitive abilities (e.g.,

working memory limitations and vocabulary knowledge). Instead, it is crucial to evaluate models on benchmarks that can indicate whether the language ability gained by machine learning models matches the language ability gained by children when exposed to similar developmental data.

Research in child language acquisition has observed that children learn different aspects of language at different rates, and the acquisition of different levels of representation also interact in complex and nonlinear ways [6–10]. Thus, in order to characterise models’ language learning performance, we should evaluate multiple levels of linguistic representation, including the lexicon, syntax, and semantics – ideally how these correspond to children’s development at different ages.

Additionally, to conduct methodologically rigorous cognitive evaluation of machine learning models, it is important to compare human and model performance directly (rather than assuming that humans will perform well), and to ensure that evaluation conditions are as similar as possible for models and humans [11, 12]. Notably, many language evaluations with infants and toddlers are multimodal in nature, because this method permits the measurement of language comprehension without the additional working memory and motor control demands of language production. Young children can use nonverbal response methods such as looking or pointing, which can nonetheless reflect their language abilities. The incorporation of multimodality has an additional advantage of introducing grounding, which has been suggested as a possible solution to the data gap [1].

These observations provide a set of desiderata for a developmentally appropriate evaluation of language models:

1. Wide dynamic range of difficulty
2. Multiple levels of linguistic representations
3. Corresponding data from children
4. High similarity in evaluation method between models and humans

To create a benchmark that satisfies these desiderata, we introduce **DEVBENCH**, a multimodal benchmark of language evaluation tasks. DEVBENCH includes a suite of seven tasks measuring lexical, syntactic, and semantic ability, with human data from both children and adults. Notably, the primary evaluation metric reflects models’ similarity to human *response patterns*, rather than *absolute performance*, allowing us to capture finer-grained details about human–model similarity.

We evaluate a set of vision–language models on DEVBENCH, including not only state-of-the-art models but also smaller models and models trained on developmentally realistic data. We additionally investigate how DEVBENCH performance varies over model training by evaluating intermediate checkpoints of OpenCLIP [13]. Evaluation results suggest that current vision–language models exhibit variation in their human-likeness, suggesting further areas of research to develop language models that more closely approximate human language learning.

## 2 Related work

### 2.1 Multimodal benchmarks

Since the advent of multimodal models, various benchmarks have been developed to evaluate their performance [14]. A majority of these benchmarks primarily involve visual question answering [15–19]; other tasks include image captioning [16, 20], prediction [21], and retrieval [15, 20].

Most tasks in these multimodal benchmarks probe models’ perception, reasoning, and knowledge, evaluating models on domains including action prediction, counting, relational reasoning, or optical character recognition. Correct responses to these tests require the conjunction of many skills – notably, all reasoning tasks also require perception, and perception tasks in turn broadly require object knowledge. Furthermore, most multimodal benchmarks focus on models’ visual understanding, and no existing benchmark focuses specifically on the linguistic abilities of multimodal models.

### 2.2 Developmentally inspired evaluation

Some recent work in machine learning evaluation has used benchmarks inspired by developmental psychology and cognitive science. For example, the Large Language Model Response Score (LRS) [22] draws from key experiments in the child development literature to construct question answering tasks for large language models, though it does not involve comparison to data from children. In

Table 1: Characteristics of multimodal and developmentally inspired benchmarks.

Benchmark	Evaluation features				Domains			Human data	
	Multi-modal	Zero-shot	Nonverbal response	Developmental	Lexicon	Syntax	Semantics	Children	Adult
LAMM [16]	✓	✓							
MultiBench [21]	✓	✓							
GEM [20]	✓	✓	✓						
MMBench [18]	✓	✓	✓						
SEED-Bench [24]	✓	✓	✓		✓		✓		
MME [17]	✓	✓	✓		✓		✓		
Perception Test [19]	✓	✓	✓		✓		✓		
M3Exam [25]	✓	✓		✓					✓
LRS [22]		✓		✓					
MEWL [23]	✓		✓	✓	✓		✓		✓
Zorro [3]		✓	✓	✓		✓			
ModelVsBaby [26]	✓	✓	✓	✓	✓			✓	
DEVBENCH	✓	✓	✓	✓	✓	✓	✓	✓	✓

addition, most of its tasks were originally multimodal (with visual stimuli and verbal prompts), and it is not clear how the translation into a unimodal verbal task would affect human performance. The Machine Word Learning (MEWL) benchmark [23] is a multimodal evaluation that builds upon hypothesised mechanisms of few-shot word learning in children, and requires the inference of the meaning of novel words from a set of visual scenes with referentially ambiguous labels. The benchmark contains data from adults, but their poor performance on some subsets of these trials (e.g., those requiring pragmatic implicature) suggests that children might find these tasks very difficult.

Other work assessing developmental models has also developed ad-hoc evaluations. The most common method has been to design evaluation sets that resemble other machine learning model tasks (e.g., grammatical acceptability, image classification) while restricting the domain to a developmentally relevant domain (i.e., only including vocabulary familiar to the model, or choosing image categories that are child-relevant). This method has been applied both to language models (e.g., the Zorro benchmark on BabyBERTa models [3]), and to multimodal models (e.g., the Konkle Objects evaluation on CVCL models [4]). However, again in these cases there are typically no child data, and the assumption that children would perform well in such evaluations is not directly evaluated. We summarise the characteristics of a range of multimodal and developmental benchmarks in Table 1.

### 2.3 Model learning trajectory analyses

A few studies have used developmental approaches to analyse model learning trajectories. Chang and Bergen [27] examined the age of acquisition of different words by measuring the change in mean surprisal of a word over training epochs, finding dissimilarities in the predictors of age of acquisition in models and children. Evanson et al. [28] examined the age of acquisition of different syntactic structures by measuring the point at which models began preferring the grammatical sentence in a grammatical acceptability task. We extend these approaches here by examining training trajectories across multiple levels of linguistic representation.

## 3 DEVBENCH description

DEVBENCH contains seven tasks across lexical, syntactic, and semantic domains. Each task is accompanied by item-level human data so that full human response distributions can be compared to model scores. The lexical tasks measure vocabulary knowledge, operationalised as the ability to correctly pick out the visual referent of a noun label. The syntactic tasks measure grammatical knowledge, operationalised as the ability to correctly pick out a scene containing the correct relations among its constituent members when given a sentential label. The semantic tasks measure conceptual (visual or linguistic) representation space via representational similarity. A schematic of the tasks and the ages of participants contributing data for each task is shown in Figure 1, and sample trials are shown in Figure 2. All code and data will be available at [github.com/alvinwmtan/dev-bench](https://github.com/alvinwmtan/dev-bench) once our unpublished datasets have been cleared for dissemination; all data are licensed under CC

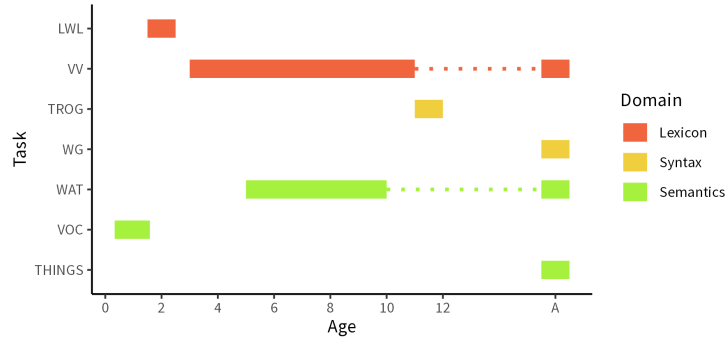


Figure 1: Tasks in DEVBENCH arranged by linguistic domain, along with the ages for which corresponding human data are available. A: Adult.

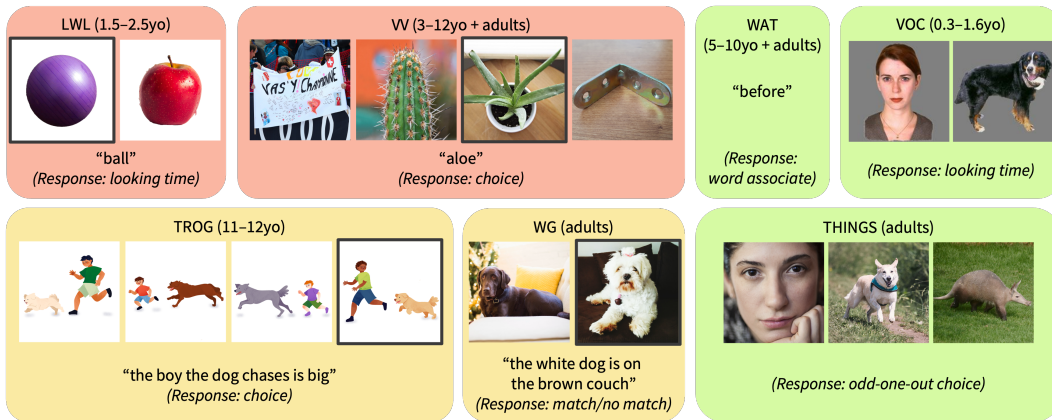


Figure 2: Sample trials for each task in DEVBENCH.

BY-NC-SA or more permissible licences, and have been anonymised to eliminate any personally identifiable information.

### 3.1 Tasks

**Lexicon: Looking-while-listening (LWL)** In this task, children are presented with two visual images (one target and one distractor) as well as a verbal cue (e.g., “Look at the dog!”) [29]. Children’s proportion looking time to each image is measured. We used data from three datasets to improve age coverage: 18-month-old data from Adams et al. [30], 24-month-old data from Frank et al. [31], and 30-month-old data from Donnelly and Kidd [32] (total  $N = 197$ ), with replacement stimuli for images that were not sharable.

**Lexicon: Visual vocabulary task (VV)** In this task, participants hear a word (e.g., “swordfish”) and then see four visual images corresponding to the target and three distractor images that range in similarity to the target word (close, far, and distal) [33]. Participants respond by choosing the image that they think matches the verbal cue. We used an unpublished dataset from Long et al. [33] containing responses from 3- to 12-year-olds as well as adults (total  $N = 1780$ ).

**Syntax: Test of Receptive Grammar (TROG)** In this task, participants are presented with four visual images (one target and three distractors) and then hear a phrase or sentence cue (e.g., “The brown horse chases the white dog”) [34]. In most trials, the distractors are constructed such that they would align with a label that contains the same words as the cue but in a different order (e.g., an image containing a brown dog chasing a white horse). Participants respond by choosing the image that they think matches the verbal cue. We used stimuli and unpublished data from Silverman and Yeatman [35], containing responses from children aged 11–12 (total  $N = 514$ ).

**Syntax: Winoground-NoTag (WG)** This task contains trials with two images and two sentence labels, such that each image has one corresponding label, and the two labels only differ in word order [36]. Human ratings were collected by asking adult crowdworkers whether one particular label matched one particular image, and an image–caption score was calculated as the proportion of affirmative responses (total  $N = 171$ ). For comparability to the other tasks in this benchmark, we considered the image–caption scores for the two images and one sentence of each trial, converted to proportions. We included only trials labelled “NoTag” from [37], which reflect vanilla Winoground trials that rely more narrowly on syntax (as opposed to also requiring pragmatics or other language abilities).

**Semantics: Free word association task (WAT)** In this task, participants were presented with a cue word, and asked to name the first word association that came to mind. We use association frequencies as a proxy for similarity scores. We combined a child dataset from Entwisle [38] with a subset of the adult dataset from Nelson et al. [39] comprising all cue words found in the child dataset (total  $N = 1189$ ), and thresholded the included responses to omit idiosyncratic responses.

**Semantics: Visual object categorization (VOC)** In this task, 4-, 10-, and 14-month-old infants saw pairs of images, and proportion looking times to each image was measured [40] (total  $N = 73$ ). We used replacement stimuli for some images that were not sharable in the original stimuli set. Dissimilarities between images were calculated as the difference in proportion looking times to the two images.

**Semantics: THINGS similarity ratings** In this task, adult participants did a triplet odd-one-out task one triads constructed from the THINGS database [41, 42] (total  $N = 12340$ ). These were used to generate a sparse positive similarity embedding [43], which we used to calculate pairwise similarities among images.

### 3.2 Human–model comparison

Because we were interested in response patterns, we conducted human–model comparison by examining the (dis)similarities in human and model distributions in responses.

On lexicon and syntax tasks, our goal was to compare the distribution of human choices across response options to model choices. We obtained image–text matching logits for each response option, and calculated the *softmax-optimised Kullback–Leibler divergence* of human responses from model responses. This was operationalised as the minimum KL divergence between the human response probability distributions  $h$  from model logits  $m$ , optimizing the softmax exponent  $\beta$ . We average this divergence across trials  $t$ , and calculate each distribution across images  $i$ :

$$D_{\text{KL}}^*(h \parallel m) = \min_{\beta} \frac{1}{t} \sum_t D_{\text{KL}} \left( \mathbf{h}_t \parallel \frac{e^{\beta \mathbf{m}_{it}}}{\sum_i e^{\beta \mathbf{m}_{it}}} \right)$$

For the visual semantic tasks, we conducted human–model comparison by applying representational similarity analysis (RSA) [44] on human and model representational dissimilarity matrices. For WAT, we calculated the softmax-optimised KL divergence of human association probabilities from softmaxed model text embedding similarities, averaged over all trials. All comparisons were conducted within each age bin when applicable.

## 4 Benchmark

We evaluated a diverse set of vision–language models on our benchmark, using only CPUs to run inference on existing models. A description of all models can be found in the SI. A summary of model performance for each task (averaged across all ages) is shown in Table 2, along with model characteristics (number of parameters and size of training set). For lexicon and syntax tasks as well as WAT, we report  $D_{\text{KL}}^*$ , for which *lower* scores indicate greater human-likeness in response patterns. For visual semantic tasks (VOC, THINGS), we report RSA similarity, for which *higher* scores indicate greater human-likeness in response patterns. Divergences are not comparable across datasets due to different features of each dataset.

Table 2: Model characteristics and performance across all tasks, demonstrating variation across models. Arrows indicate the direction of better performance (i.e., lower is better vs. higher is better). Bolded results indicate best result on a task.

Model	# params	# images	Lexicon		Syntax		Semantics		
			LWL ( $\downarrow$ )	VV ( $\downarrow$ )	TROG ( $\downarrow$ )	WG ( $\downarrow$ )	WAT ( $\downarrow$ )	VOC ( $\uparrow$ )	THINGS ( $\uparrow$ )
CLIP-base [45]	149M	400M	0.014	0.205	0.732	0.256	0.495	-0.081	<b>0.397</b>
CLIP-large [45]	428M	400M	0.013	<b>0.179</b>	0.692	0.256	0.495	0.005	0.246
ViLT [46]	87M	4.1M	0.009	0.326	0.682	0.252	0.495	-0.053	0.127
FLAVA [47]	350M	70M	0.013	0.197	0.912	0.254	0.495	-0.042	0.189
BLIP [48]	252M	14M	0.010	0.193	<b>0.576</b>	0.259	0.495	-0.104	0.185
BridgeTower [49]	333M	4M	<b>0.008</b>	0.265	0.584	<b>0.250</b>	0.495	-0.095	0.345
OpenCLIP-H [50]	1.0B	32B	0.012	0.188	0.683	0.255	<b>0.495</b>	0.031	0.227
CVCL [4]	26M	600K	0.060	0.740	0.911	0.258	0.495	<b>0.138</b>	0.175

Overall, CLIP-large and OpenCLIP-H performed relatively well on the lexicon and syntax tasks. CVCL, which was trained on a small set of annotated head-mounted camera from infants [4], was mostly dissimilar to humans in lexicon and syntax tasks, even on the looking-while-listening (LWL) task, which was administered to young children. However, CVCL outperformed other models on the visual object categorization task, suggesting that its visual representational space was more similar to infants’.

## 5 Analysis

To further understand the relationship between model and human responses, we conduct more fine-grained analyses, aiming to answer three specific research questions:

1. How does model–human similarity relate to other features of the models, namely their size (in terms of parameters), their training dataset size, and their overall accuracy on the tasks?
2. How does model–human similarity change over the course of model training, and in particular can we elucidate “developmental” trends in model training?
3. On which items are models and humans most dissimilar? On which items are they most similar?

### 5.1 Model feature analysis

To understand the variation in human-likeness exhibited by different models, we considered a range of model features that may affect response patterns, namely the number of parameters of the model, the number of examples in its training set, and its accuracy on the task (for lexicon and syntax tasks, which have a “correct” answer). For each task and each feature, we calculated Pearson’s correlations between feature values and model–human similarities; number of parameters and number of training images were log-transformed. Similarity–feature correlations are shown in Figure 3a.

Overall, we found that model–human similarity was most correlated with task accuracy, with consistently high correlations across all ages and tasks. Model size also correlates relatively well with model–human similarity for most tasks except for VOC, which is reasonable given that VOC was conducted on the youngest participants (aged 4–14 months). In contrast, the number of training examples exhibited the poorest correlations with model–human similarity, suggesting that dataset size may not be as informative about human-likeness as accuracy or model size.

To illustrate the relationship between accuracy and model–human similarity, we plot these values for the Visual Vocabulary (VV) task in Figure 3b, which is also the task for which we have the largest coverage across age groups. In the VV task, we found a strong correlation between accuracy and model–human similarity for all age bins. In addition, we examined whether we would see differences in the strength of this correlation in data from children of different ages. We found that worse-performing models tended to show response patterns that were more similar to those from younger children, whereas better-performing models showed response patterns more similar to those from older children and adults – captured by an interaction effect between accuracy and age in a linear mixed-effect model ( $b = -0.057$ ,  $SE = 0.003$ ,  $p < .001$ ). These results suggest that children’s lexical representations are more similar to those instantiated in lower-performing multimodal models

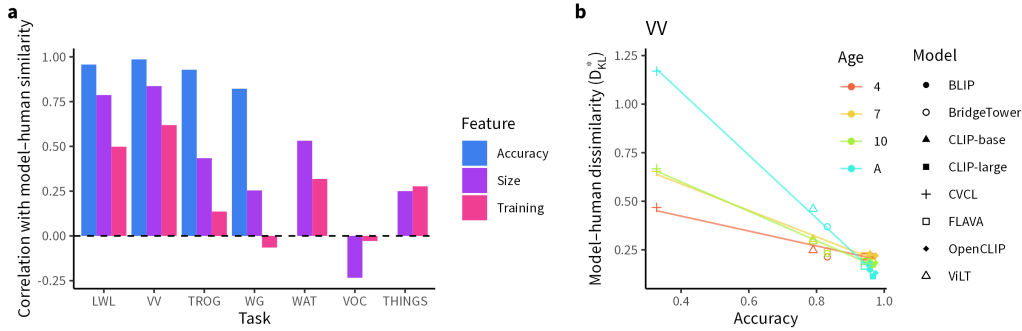


Figure 3: (a) Correlations between model–human similarity and task accuracy, log number of parameters (size), and log number of training images for each task (training), averaged across ages. Accuracy correlates the most strongly with model–human similarity, followed by size, then training. (b) Model–human dissimilarity as a function of task accuracy for each model on the Visual Vocabulary task. Higher performing models showed a closer correspondence to behavioral patterns from children and adults. A: Adult.

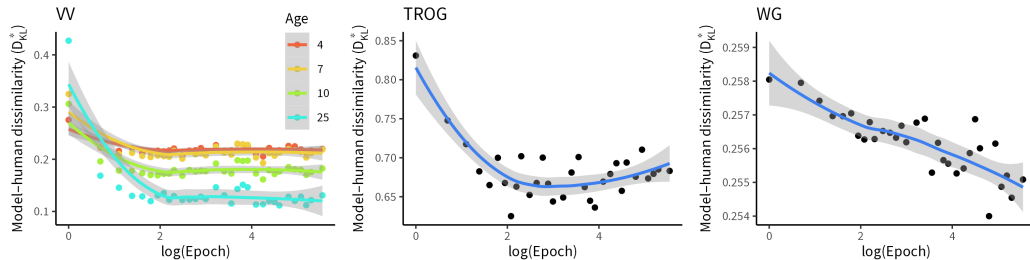


Figure 4: Trajectories of model–human similarity for VV, TROG, and WG. OpenCLIP-H becomes more human-like over training, and recovers developmental trends for VV.

early in development, and gradually become more similar to higher-performing multimodal models across middle childhood.

## 5.2 Model training analysis

We next sought to understand whether human developmental trajectories were comparable to model training trajectories. We made use of OpenCLIP-H [50], an open model for which checkpoints were available on Hugging Face, allowing us to conduct “developmental” analyses. To do so, we sampled 32 checkpoints at approximately logarithmic intervals, and calculated model–human similarities for each task for each checkpoint. Training trajectory curves for three tasks (VV, TROG, and WG) are shown in Figure 4.

Overall, OpenCLIP increased in similarity to humans across training for these three tasks. Further, model performance on the Visual Vocabulary task also reflects a developmental trend: OpenCLIP exhibited greatest similarity to younger humans earlier in the training regime, and greatest similarity to older humans later in the training regime. This pattern matches the trend shown across models in Figure 3b – in both cases, better performing models show better correspondence to human data.

For brevity, we briefly describe the trajectory curves for OpenCLIP-H for the four remaining tasks; complete results are detailed in the SI. For LWL, we found that model–human similarity also improves with training, as expected. For the semantics tasks, the results were more complex, however. For WAT, model–human similarity largely remains constant over training, indicating that language representations do not significantly change. For VOC, the developmental trajectories were non-monotonic. For THINGS, model–human similarity *decreases* with training, perhaps indicating divergence with human visual representational space. Together, these results suggest that multimodal model representations may be less applicable to the semantics tasks we selected,

Table 3: Top five most dissimilar items and top five most similar items between humans and all models for Visual Vocabulary and Winoground tasks.

<b>Most dissimilar items</b>	
VV	horn (distractors: bone, chin, ladybug) hoe (distractors: peg, dustpan, beaker) flan (distractors: fuse, amplifier, turnstile) net (distractors: tee, domino, hydrant) lollipop (distractors: candy, doorbell, crumb)
WG	a person whispering into a dog’s ear / a dog whispering into a person’s ear there are more ladybugs than flowers / there are more flowers than ladybugs the dog is swimming and the person is standing / the dog is standing and the person is swimming blue pants and green top / green pants and blue top a person sits and a dog stands / a person stands and a dog sits
<b>Most similar items</b>	
VV	foam (distractors: float, quilt, asparagus) saddle (distractors: handle, figurine, broccoli) stump (distractors: log, bookshelf, showerhead) sorbet (distractors: palette, tamale, chive) typewriter (distractors: printer, sunglasses, drumstick)
WG	a horse getting wet / getting a horse wet a large living thing in front of a large non-living thing / a large non-living thing in front of a large living thing a deer’s nose is resting on a child’s hand / a child’s hand is resting on a deer’s nose clothing on lines / lines on clothing soft shoes are on a smooth floor / smooth shoes are on a soft floor

and future work is needed to understand differences between semantic representations in uni- and multimodal representations.

### 5.3 Item-level analysis

Finally, we examined specific items to determine which items exhibited the greatest and least dissimilarity in response pattern between models and humans. For each model, we  $z$ -scored the  $D_{KL}^*$  values to control for inter-model variation in overall model–human similarity. We then averaged  $D_{KL}^*$  values across models for each trial, and extracted the top five items with the greatest mean divergence and the top five items with the least mean divergence for qualitative analysis. We illustrate this method for VV and WG, as shown in Table 3.

The most dissimilar items reveal certain features which may particularly drive model–human dissimilarity, particularly in comparison to the most similar items. For VV, some such features include polysemous targets (e.g., “horn” and “net”), targets which may have other labels (e.g., “hand plow” for “hoe”, “pudding” for “flan”), or targets which could be labelled as one of the distractor categories (e.g., “lollipop” is a type of “candy”). For WG, several of the most dissimilar items have genuinely contentious captions – notably, the image for the caption “the dog is swimming and the person is standing” has the person hunched over rather than fully upright, the image for the caption “a person sits and a dog stands” has the dog mid-leap, and the image for the caption “green pants and blue top” has a top that could be described as grey. More broadly, across both VV and WG, humans appear to be better able to handle ambiguity and choose the most likely answer (perhaps through pragmatic reasoning [51]), whereas models are more likely to put less density on the true target.

## 6 Discussion

In this work, we introduced DEVBENCH, a multimodal benchmark for language learning consisting of seven tasks with corresponding data from both children and adults. Evaluating a set of vision–language models revealed variation across models in terms of model–human similarity across lexical, syntactic, and semantic domains. Furthermore, model–human similarity was strongly correlated with



model accuracy, as well as model size to a lesser extent. Analysing OpenCLIP-H checkpoints across training also recovered developmental trends for some tasks, but not others.

More broadly, DEVBENCH provides a method for models trained on developmentally realistic data to be evaluated using a method that is comparable to how children are evaluated. Recent work has seen a plethora of new unimodal or multimodal learning models, including some that are evaluated here (e.g., [4]), but to date no models trained on developmentally realistic data (e.g., head-mounted camera data) have been evaluated actual developmental performance. We believe that benchmarks like DEVBENCH are essential for understanding the degree to which any given model can be used to approximate human learning.

Systematically comparing models and children’s response patterns – rather than overall accuracy – is an essential piece of this puzzle. In doing so, our results already highlight ways in which model training trajectories are rather *unlike* human development trajectories, pointing towards new avenues for future work. For example, models appear to be worse than humans at handling ambiguous inputs; ambiguity resolution is thus a potential avenue for future multimodal model development.

## 6.1 Limitations and future work

The development of DEVBENCH was constrained by currently available human data; notably, this means that some tasks have relatively few items (in comparison with many other machine learning benchmarks), and some tasks have relatively few human participants. These limitations may result in uncertain reliabilities for the obtained results. More data are currently being collected for some of the tasks in DEVBENCH, which we anticipate will improve reliability, and simultaneously permit more expansive developmental analyses due to an extension of the included age ranges. However, we hope that this approach and standardized format will enable future researchers to contribute novel datasets to DEVBENCH, which we anticipate may grow in the coming years. Indeed, DEVBENCH also includes only tasks for English-speaking children and adults, due to dataset availability. This situation reflects inequalities in language acquisition research [52], and more data is needed to construct a multilingual version of DEVBENCH, which will be more comprehensive and generalisable.

Finally, we chose one linking hypothesis between model logits and human distributions, namely optimised KL divergence. This hypothesis assumes a perfect calibration between model logits and true uncertainties, which is only valid to some extent. Further research in model calibration [53] may help to mitigate these effects.

## 6.2 Conclusion

We hope that DEVBENCH can serve as an encouragement for machine learning researchers and cognitive scientists to develop vision–language models that not only perform well, but also can more closely approximate human learning. This correspondence should be pursued both as a way to better understand the processes underlying human development and as a way to transfer humans’ learning efficiencies onto models.

## Acknowledgments and Disclosure of Funding

Thanks to the Jacobs Foundation for support of stimulus and dataset creation. This work was funded in part by an NIH K99HD108386 award to BL and a Stanford Interdisciplinary Graduate Fellowship to WAM.

The authors made the following contributions. AWMT: Conceptualisation, Data curation, Methodology, Formal analysis, Software, Writing – original draft, Writing – review & editing. SY: Data curation, Software, Writing – original draft, Writing – review & editing. BL, WAM, TM, RDS, JDY: Data curation, Writing – review & editing. MCF: Conceptualisation, Methodology, Writing – original draft, Writing – review & editing, Supervision.

## References

- [1] Michael C. Frank. Bridging the data gap between children and large language models. *Trends in Cognitive Sciences*, 27(11):990–992, 2023. ISSN 1364-6613. doi: 10.1016/j.tics.2023.08.007.

- [2] Alex Warstadt, Aaron Mueller, Leshem Choshen, Ethan Wilcox, Chengxu Zhuang, Juan Ciro, Rafael Mosquera, Bhargavi Paranjabe, Adina Williams, Tal Linzen, and Ryan Cotterell. Findings of the BabyLM Challenge: Sample-Efficient Pretraining on Developmentally Plausible Corpora. In Alex Warstadt, Aaron Mueller, Leshem Choshen, Ethan Wilcox, Chengxu Zhuang, Juan Ciro, Rafael Mosquera, Bhargavi Paranjabe, Adina Williams, Tal Linzen, and Ryan Cotterell, editors, *Proceedings of the BabyLM Challenge at the 27th Conference on Computational Natural Language Learning*, pages 1–34. Association for Computational Linguistics, 2023. doi: 10.18653/v1/2023.conll-babylm.1.
- [3] Philip A. Huebner, Elinor Sulem, Fisher Cynthia, and Dan Roth. BabyBERTa: Learning More Grammar With Small-Scale Child-Directed Language. In Arianna Bisazza and Omri Abend, editors, *Proceedings of the 25th Conference on Computational Natural Language Learning*, pages 624–646. Association for Computational Linguistics, 2021. doi: 10.18653/v1/2021.conll-1.49.
- [4] Wai Keen Vong, Wentao Wang, A. Emin Orhan, and Brenden M. Lake. Grounded language acquisition through the eyes and ears of a single child. *Science*, 383(6682):504–511, 2024. doi: 10.1126/science.adi1374.
- [5] Wentao Wang, Wai Keen Vong, Najoung Kim, and Brenden M. Lake. Finding Structure in One Child’s Linguistic Experience. *Cognitive Science*, 47(6):e13305, 2023. ISSN 1551-6709. doi: 10.1111/cogs.13305.
- [6] Arielle Borovsky. Lexico-semantic structure in vocabulary and its links to lexical processing in toddlerhood and language outcomes at age three. *Developmental Psychology*, 58(4):607–630, 2022. ISSN 1939-0599. doi: 10.1037/dev0001291.
- [7] Ellen Irén Brinchmann, Johan Braeken, and Solveig-Alma Halaas Lyster. Is there a direct relation between the development of vocabulary and grammar? *Developmental Science*, 22(1):e12709, 2019. ISSN 1467-7687. doi: 10.1111/desc.12709.
- [8] Laura Justice, Kate Cain, Hui Jiang, Jessica Logan, Rongfang Jia, Hui Jiang, Jessica A. Logan, and Rongfang Jia. Modeling the Nature of Grammar and Vocabulary Trajectories From Prekindergarten to Third Grade. *Journal of Speech, Language, and Hearing Research*, 61(4):910–923, 2018. doi: 10.1044/2018\_JSLHR-L-17-0090.
- [9] Margaux Keith and Elena Nicoladis. The role of within-language vocabulary size in children’s semantic development: Evidence from bilingual children. *Journal of Child Language*, 40(4):873–884, 2013. ISSN 0305-0009, 1469-7602. doi: 10.1017/S0305000912000268.
- [10] Jessie Ricketts, Nicola Dawson, and Robert Davies. The hidden depths of new word knowledge: Using graded measures of orthographic and semantic learning to measure vocabulary acquisition. *Learning and Instruction*, 74:101468, 2021. ISSN 0959-4752. doi: 10.1016/j.learninstruc.2021.101468.
- [11] Michael C Frank. Baby steps in evaluating the capacities of large language models. *Nature Reviews Psychology*, 2(8):451–452, 2023.
- [12] Anna A. Ivanova. Running cognitive evaluations on large language models: The do’s and the don’ts, 2023.
- [13] Mehdi Cherti, Romain Beaumont, Ross Wightman, Mitchell Wortsman, Gabriel Ilharco, Cade Gordon, Christoph Schuhmann, Ludwig Schmidt, and Jenia Jitsev. Reproducible Scaling Laws for Contrastive Language-Image Learning. In *2023 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 2818–2829. IEEE, 2023. ISBN 9798350301298. doi: 10.1109/CVPR52729.2023.00276.
- [14] Tadas Baltrušaitis, Chaitanya Ahuja, and Louis-Philippe Morency. Multimodal machine learning: A survey and taxonomy. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 41(2):423–443, 2019. doi: 10.1109/TPAMI.2018.2798607.
- [15] Emanuele Bugliarello, Fangyu Liu, Jonas Pfeiffer, Siva Reddy, Desmond Elliott, Edoardo Maria Ponti, and Ivan Vulčić. IGLUE: A benchmark for transfer learning across modalities, tasks, and languages. In Kamalika Chaudhuri, Stefanie Jegelka, Le Song, Csaba Szepesvari, Gang Niu, and Sivan Sabato, editors, *Proceedings of the 39th International Conference on Machine Learning*, volume 162 of *Proceedings of Machine Learning Research*, pages 2370–2392. PMLR, 17–23 Jul 2022. URL <https://proceedings.mlr.press/v162/bugliarello22a.html>.
- [16] Zhenfei Yin, Jiong Wang, Jianjian Cao, Zhelun Shi, Dingning Liu, Mukai Li, Lu Sheng, Lei Bai, Xiaoshui Huang, Zhiyong Wang, Jing Shao, and Wanli Ouyang. Lamm: Language-assisted multi-modal instruction-tuning dataset, framework, and benchmark, 2023.
- [17] Chaoyou Fu, Peixian Chen, Yunhang Shen, Yulei Qin, Mengdan Zhang, Xu Lin, Jinrui Yang, Xiawu Zheng, Ke Li, Xing Sun, Yunsheng Wu, and Rongrong Ji. Mme: A comprehensive evaluation benchmark for multimodal large language models, 2024.

- [18] Yuan Liu, Haodong Duan, Yuanhan Zhang, Bo Li, Songyang Zhang, Wangbo Zhao, Yike Yuan, Jiaqi Wang, Conghui He, Ziwei Liu, Kai Chen, and Dahua Lin. Mmbench: Is your multi-modal model an all-around player?, 2024.
- [19] Viorica Patraucean, Lucas Smaira, Ankush Gupta, Adria Recasens, Larisa Markeeva, Dylan Bannarse, Skanda Koppula, Joseph Heyward, Mateusz Malinowski, Yi Yang, Carl Doersch, Tatiana Matejovicova, Yury Sulsky, Antoine Miech, Alexandre Fréchet, Hanna Klimczak, Raphael Koster, Junlin Zhang, Stephanie Winkler, Yusuf Aytar, Simon Osindero, Dima Damen, Andrew Zisserman, and Joao Carreira. Perception test: A diagnostic benchmark for multimodal video models. In A. Oh, T. Naumann, A. Globerson, K. Saenko, M. Hardt, and S. Levine, editors, *Advances in Neural Information Processing Systems*, volume 36, pages 42748–42761. Curran Associates, Inc., 2023. URL [https://proceedings.neurips.cc/paper\\_files/paper/2023/file/8540fba4abdc7f9f7a7b1cc6cd60e409-Paper-Datasets\\_and\\_Benchmarks.pdf](https://proceedings.neurips.cc/paper_files/paper/2023/file/8540fba4abdc7f9f7a7b1cc6cd60e409-Paper-Datasets_and_Benchmarks.pdf).
- [20] Lin Su, Nan Duan, Edward Cui, Lei Ji, Chenfei Wu, Huaishao Luo, Yongfei Liu, Ming Zhong, Taroan Bharti, and Arun Sacheti. GEM: A general evaluation benchmark for multimodal tasks. *CoRR*, abs/2106.09889, 2021. URL <https://arxiv.org/abs/2106.09889>.
- [21] Paul Pu Liang, Yiwei Lyu, Xiang Fan, Zetian Wu, Yun Cheng, Jason Wu, Leslie Chen, Peter Wu, Michelle A. Lee, Yuke Zhu, Ruslan Salakhutdinov, and Louis-Philippe Morency. Multibench: Multiscale benchmarks for multimodal representation learning. *CoRR*, abs/2107.07502, 2021. URL <https://arxiv.org/abs/2107.07502>.
- [22] Eliza Kosoy, Emily Rose Reagan, Leslie Lai, Alison Gopnik, and Danielle Krettek Cobb. Comparing Machines and Children: Using Developmental Psychology Experiments to Assess the Strengths and Weaknesses of LaMDA Responses. In *Proceedings of the First Workshop on AI Meets Moral Philosophy and Moral Psychology at NeurIPS 2023*, 2023. doi: 10.48550/arXiv.2305.11243.
- [23] Guangyuan Jiang, Manjie Xu, Shiji Xin, Wei Liang, Yujia Peng, Chi Zhang, and Yixin Zhu. MEWL: Few-shot multimodal word learning with referential uncertainty. In *Proceedings of the 40th International Conference on Machine Learning*, pages 15144–15169. PMLR, 2023. URL <https://proceedings.mlr.press/v202/jiang23i.html>.
- [24] Bohao Li, Rui Wang, Guangzhi Wang, Yuying Ge, Yixiao Ge, and Ying Shan. Seed-bench: Benchmarking multimodal llms with generative comprehension, 2023.
- [25] Wenxuan Zhang, Mahani Aljunied, Chang Gao, Yew Ken Chia, and Lidong Bing. M3exam: A multilingual, multimodal, multilevel benchmark for examining large language models. In A. Oh, T. Naumann, A. Globerson, K. Saenko, M. Hardt, and S. Levine, editors, *Advances in Neural Information Processing Systems*, volume 36, pages 5484–5505. Curran Associates, Inc., 2023. URL [https://proceedings.neurips.cc/paper\\_files/paper/2023/file/117c5c8622b0d539f74f6d1fb082a2e9-Paper-Datasets\\_and\\_Benchmarks.pdf](https://proceedings.neurips.cc/paper_files/paper/2023/file/117c5c8622b0d539f74f6d1fb082a2e9-Paper-Datasets_and_Benchmarks.pdf).
- [26] Saber Sheybani, Linda B. Smith, Zoran Tiganj, Sahaj Singh Maini, and Aravind Dendukuri. ModelVsBaby: A Developmentally Motivated Benchmark of Out-of-Distribution Object Recognition, 2024.
- [27] Tyler A. Chang and Benjamin K. Bergen. Word Acquisition in Neural Language Models. *Transactions of the Association for Computational Linguistics*, 10:1–16, 2022. ISSN 2307-387X. doi: 10.1162/tacl\_a\_00444.
- [28] Linnea Evanson, Yair Lakretz, and Jean Rémi King. Language acquisition: Do children and language models follow similar learning stages? In Anna Rogers, Jordan Boyd-Graber, and Naoaki Okazaki, editors, *Findings of the Association for Computational Linguistics: ACL 2023*, pages 12205–12218. Association for Computational Linguistics, 2023. doi: 10.18653/v1/2023.findings-acl.773.
- [29] Anne E. Fernald, Renate Zangl, Ana Luz Portillo, and Virginia A. Marchman. *Using Eye Movements to Monitor Spoken Language Comprehension by Infants and Young Children: Looking While Listening*. Language Acquisition and Language Disorders. John Benjamins Publishing Company, 2008. ISBN 978-90-272-5304-0 978-90-272-5305-7 978-90-272-9150-9. doi: 10.1075/lald.44.06fer.
- [30] Katherine A. Adams, Virginia A. Marchman, Elizabeth C. Loi, Melanie D. Ashland, Anne Fernald, and Heidi M. Feldman. Caregiver Talk and Medical Risk as Predictors of Language Outcomes in Full Term and Preterm Toddlers. *Child Development*, 89(5):1674–1690, 2018. ISSN 1467-8624. doi: 10.1111/cdev.12818.
- [31] Michael C. Frank, Elise Sugarman, Alexandra C. Horowitz, Molly L. Lewis, and Daniel Yurovsky. Using Tablets to Collect Data From Young Children. *Journal of Cognition and Development*, 17(1):1–17, 2016. ISSN 1524-8372. doi: 10.1080/15248372.2015.1061528.

- [32] Seamus Donnelly and Evan Kidd. Onset Neighborhood Density Slows Lexical Access in High Vocabulary 30-Month Olds. *Cognitive Science*, 45(9):e13022, 2021. ISSN 1551-6709. doi: 10.1111/cogs.13022.
- [33] Bria Long, Wanjing Anya Ma, Rebecca D. Silverman, Jason D. Yeatman, and Michael C. Frank. Developmental changes in the precision of visual concept knowledge. In *Annual Meeting of the Vision Sciences Society*, 2024.
- [34] Dorothy V. M. Bishop. *Test for the Reception of Grammar (TROG)*. Medical Research Council, 2nd ed edition, 1989.
- [35] Rebecca D. Silverman and Jason D. Yeatman. Accelerating literacy with digital technology, 2023.
- [36] Tristan Thrush, Ryan Jiang, Max Bartolo, Amanpreet Singh, Adina Williams, Douwe Kiela, and Candace Ross. Winoground: Probing Vision and Language Models for Visio-Linguistic Compositionality. In *2022 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 5228–5238, 2022. doi: 10.1109/CVPR52688.2022.00517.
- [37] Anuj Diwan, Layne Berry, Eunsol Choi, David Harwath, and Kyle Mahowald. Why is Winoground Hard? Investigating Failures in Visuolinguistic Compositionality. In Yoav Goldberg, Zornitsa Kozareva, and Yue Zhang, editors, *Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing*, pages 2236–2250. Association for Computational Linguistics, 2022. doi: 10.18653/v1/2022.emnlp-main.143.
- [38] Doris R. Entwisle. *Word Associations of Young Children / by Doris R. Entwisle*. Johns Hopkins Press, 1966.
- [39] Douglas L. Nelson, Cathy L. McEvoy, and Thomas A. Schreiber. The University of South Florida word association, rhyme, and word fragment norms., 1998. URL <http://w3.usf.edu/FreeAssociation/>.
- [40] Céline Spriet, Etienne Abassi, Jean-Rémy Hochmann, and Liuba Papeo. Visual object categorization in infancy. *Proceedings of the National Academy of Sciences*, 119(8):e2105866119, 2022. doi: 10.1073/pnas.2105866119.
- [41] Martin N. Hebart, Adam H. Dickter, Alexis Kidder, Wan Y. Kwok, Anna Corriveau, Caitlin Van Wicklin, and Chris I. Baker. THINGS: A database of 1,854 object concepts and more than 26,000 naturalistic object images. *PLOS ONE*, 14(10):e0223792, 2019. ISSN 1932-6203. doi: 10.1371/journal.pone.0223792.
- [42] Martin N Hebart, Oliver Contier, Lina Teichmann, Adam H Rockter, Charles Y Zheng, Alexis Kidder, Anna Corriveau, Maryam Vaziri-Pashkam, and Chris I Baker. THINGS-data, a multimodal collection of large-scale datasets for investigating object representations in human brain and behavior. *eLife*, 12:e82580, 2023. ISSN 2050-084X. doi: 10.7554/eLife.82580.
- [43] Charles Y. Zheng, Francisco Pereira, Chris I. Baker, and Martin N. Hebart. Revealing interpretable object representations from human behavior. In *Proceedings of the 7th International Conference on Learning Representations*, 2018. doi: 10.48550/arXiv.1901.02915.
- [44] Nikolaus Kriegeskorte, Marieke Mur, and Peter Bandettini. Representational similarity analysis - connecting the branches of systems neuroscience. *Frontiers in Systems Neuroscience*, 2, 2008. ISSN 1662-5137. doi: 10.3389/neuro.06.004.2008.
- [45] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, Gretchen Krueger, and Ilya Sutskever. Learning Transferable Visual Models From Natural Language Supervision, 2021.
- [46] Wonjae Kim, Bokyung Son, and Ildoo Kim. ViLT: Vision-and-Language Transformer Without Convolution or Region Supervision, 2021.
- [47] Amanpreet Singh, Ronghang Hu, Vedanuj Goswami, Guillaume Couairon, Wojciech Galuba, Marcus Rohrbach, and Douwe Kiela. FLAVA: A Foundational Language And Vision Alignment Model, 2022.
- [48] Junnan Li, Dongxu Li, Caiming Xiong, and Steven Hoi. BLIP: Bootstrapping Language-Image Pre-training for Unified Vision-Language Understanding and Generation, 2022.
- [49] Xiao Xu, Chenfei Wu, Shachar Rosenman, Vasudev Lal, Wanxiang Che, and Nan Duan. BridgeTower: Building Bridges Between Encoders in Vision-Language Representation Learning, 2024.
- [50] Romain Beaumont. Large scale openCLIP: L/14, H/14 and g/14 trained on LAION-2B, 2022. URL <https://laion.ai/blog/large-openclip>.

- [51] Noah D. Goodman and Michael C. Frank. Pragmatic Language Interpretation as Probabilistic Inference. *Trends in Cognitive Sciences*, 20(11):818–829, 2016. ISSN 1364-6613. doi: 10.1016/j.tics.2016.08.005.
- [52] Evan Kidd and Rowena Garcia. How diverse is child language acquisition research? *First Language*, 42(6):703–735, 2022. ISSN 0142-7237. doi: 10.1177/01427237211066405.
- [53] Cheng Wang. Calibration in Deep Learning: A Survey of the State-of-the-Art, 2024.
- [54] Tsung-Yi Lin, Michael Maire, Serge Belongie, James Hays, Pietro Perona, Deva Ramanan, Piotr Dollár, and C. Lawrence Zitnick. Microsoft coco: Common objects in context. In David Fleet, Tomas Pajdla, Bernt Schiele, and Tinne Tuytelaars, editors, *Computer Vision – ECCV 2014*, pages 740–755, Cham, 2014. Springer International Publishing. ISBN 978-3-319-10602-1.
- [55] Christoph Schuhmann, Romain Beaumont, Richard Vencu, Cade Gordon, Ross Wightman, Mehdi Cherti, Theo Coombes, Aarush Katta, Clayton Mullis, Mitchell Wortsman, Patrick Schramowski, Srivatsa Kundurthy, Katherine Crowson, Ludwig Schmidt, Robert Kaczmarczyk, and Jenia Jitsev. Laion-5b: An open large-scale dataset for training next generation image-text models. In S. Koyejo, S. Mohamed, A. Agarwal, D. Belgrave, K. Cho, and A. Oh, editors, *Advances in Neural Information Processing Systems*, volume 35, pages 25278–25294. Curran Associates, Inc., 2022. URL [https://proceedings.neurips.cc/paper\\_files/paper/2022/file/a1859debf3b59d094f3504d5ebb6c25-Paper-Datasets\\_and\\_Benchmarks.pdf](https://proceedings.neurips.cc/paper_files/paper/2022/file/a1859debf3b59d094f3504d5ebb6c25-Paper-Datasets_and_Benchmarks.pdf).

## A Appendix

### A.1 Evaluated models

**CLIP-base & CLIP-large** Contrastive Language–Image Pretraining [45] was one of the earliest families of vision–language models. It uses ViT for its vision encoder, and a GPT-style transformer for its text encoder, with further contrastive training on image–text pairs to increase the cosine similarity of matched image–caption pairs. We used the ViT-B/32 model for CLIP-base, and the ViT-L/14 model for CLIP-large.

**ViLT** Vision-and-Language Transformer [46] introduced a method for vision–language pretraining without convolutions. It uses word embeddings concatenated with a linear projection of image patches as inputs, which are passed through a unified transformer encoder trained on three objectives: image–text matching, masked language modelling, and word–patch alignment. We used the ViLT-B/32 model in our evaluation.

**FLAVA** Foundational Language and Vision Alignment Model [47] combines multimodal and unimodal pretraining objectives to broaden the types of usable data sources. The FLAVA model uses a ViT vision encoder, a ViT text encoder, and a ViT multimodal encoder that fused the vision and text hidden states. The vision encoder was trained on masked image modelling while the text encoder was trained on masked language modelling. The multimodal encoder was trained on masked multimodal modelling and image–text matching.

**BLIP** Bootstrapping Language–Image Pretraining [48] uses a multimodal mixture of encoder–decoder transformers. It incorporates unimodal language and text encoders trained on image–text contrastive learning, an image-grounded text encoder trained on image–text matching, and an image-grounded text decoder trained on language modelling. They also used a bootstrapping approach to produce synthetic captions for web images, and noisy image–caption pairs are filtered out. We used the BLIP-B/16 model with image–text matching training on the COCO dataset [54] for evaluation.

**BridgeTower** BridgeTower [49] adds more extensive cross-modal interaction to the “Two Tower” approach of image and text modelling. It includes a ViT vision encoder, a RoBERTa text encoder, and a cross-modal encoder connected to the unimodal encoders via bridge layers. The model is pretrained on masked language modelling and image–text matching.

**OpenCLIP-H** OpenCLIP [50] is an open-data, open-source implementation of the CLIP model. We used the OpenCLIP-H/14 model trained on LAION-2B [55] for evaluation, which additionally has most intermediate checkpoints uploaded to Hugging Face; these were used for our training trajectory analyses.

**CVCL** Child’s View for Contrastive Learning [4] is a family of models trained on naturalistic egocentric videos drawn from head-mounted camera footage from a single child aged 6–25 months. We used the main model of CVCL, which uses a ResNeXt-50 model as its vision encoder, and mean-pooled text embedding as its text encoder; these were trained with a contrastive learning objective on co-occurring utterance–frame pairs from the egocentric video dataset.

### A.2 Detailed benchmark results

Benchmark results for all tasks, split by human age bins, are shown in Table 4. As with the summarised results, CLIP-large and OpenCLIP-H perform relatively well across tasks, along with BridgeTower. CVCL performs poorly on most tasks, but exhibits the best correlations to 10-month-olds and 19-month-olds on the visual object categorisation task.

### A.3 Detailed feature analyses

Correlations between model features and model–human similarities for all tasks, split by human age bins, are shown in Table 5. Note that semantics tasks have no “correct” answer, and thus no accuracies. Accuracy is consistently the most correlated feature even when results are broken down by age bins.

Table 4: Model characteristics and performance across all tasks. Task performance is split by human age bins (in years). A: Adult.

Model	Lexicon							Syntax	
	LWL ( $\downarrow$ )			VV ( $\downarrow$ )				TROG ( $\downarrow$ )	WG ( $\downarrow$ )
	1.5	2	2.5	4	7	10	A	11	A
CLIP-base	0.002	0.007	0.032	0.220	0.228	0.195	0.177	0.732	0.256
CLIP-large	0.002	0.007	0.031	0.216	<b>0.214</b>	<b>0.174</b>	<b>0.113</b>	0.692	0.256
ViLT	0.003	0.005	0.018	0.248	0.304	0.293	0.460	0.682	0.252
FLAVA	0.001	0.006	0.031	0.214	0.220	0.190	0.166	0.912	0.254
BLIP	<b>0.001</b>	0.008	0.021	0.226	0.216	0.182	0.147	<b>0.576</b>	0.259
BridgeTower	0.001	0.005	<b>0.017</b>	<b>0.213</b>	0.245	0.231	0.369	0.584	<b>0.250</b>
OpenCLIP-H	0.002	<b>0.002</b>	0.031	0.220	0.219	0.183	0.131	0.683	0.255
CVCL	0.005	0.027	0.147	0.468	0.655	0.667	1.170	0.911	0.258

Model	Semantics								
	WAT ( $\downarrow$ )					VOC ( $\uparrow$ )			THINGS ( $\uparrow$ )
	5	6	8	10	A	0.3	0.8	1.6	A
CLIP-base	0.052	0.079	0.608	0.714	1.023	-0.372	-0.077	0.207	<b>0.397</b>
CLIP-large	0.052	0.079	0.608	0.714	1.023	-0.250	-0.038	0.302	0.246
ViLT	0.052	0.079	0.608	0.714	1.023	-0.106	-0.020	-0.033	0.127
FLAVA	0.052	0.079	0.608	0.714	1.023	-0.426	0.094	0.207	0.189
BLIP	0.051	<b>0.079</b>	0.608	0.714	1.023	-0.078	-0.237	0.002	0.185
BridgeTower	0.052	0.079	<b>0.608</b>	<b>0.713</b>	1.023	-0.330	-0.064	0.108	0.345
OpenCLIP-H	<b>0.051</b>	0.079	0.608	0.714	<b>1.023</b>	<b>-0.021</b>	-0.010	0.125	0.227
CVCL	0.052	0.079	0.608	0.714	1.023	-0.198	<b>0.189</b>	<b>0.423</b>	0.175

Table 5: Correlations between model features and model–human similarities across all tasks. Task performance is split by human age bins (in years). A: Adult.

Feature	Lexicon							Syntax	
	LWL			VV				TROG	WG
	1.5	2	2.5	4	7	10	A	11	A
Accuracy	0.907	0.971	0.993	0.965	0.987	0.993	0.998	0.928	0.822
Size	0.831	0.818	0.711	0.811	0.837	0.844	0.854	0.434	0.254
Training	0.486	0.598	0.410	0.553	0.602	0.627	0.694	0.136	-0.065

Model	Semantics								
	WAT					VOC			THINGS
	5	6	8	10	A	0.3	0.8	1.6	A
Size	0.631	0.334	0.564	0.391	0.737	0.045	-0.426	-0.320	0.250
Training	0.689	-0.064	0.172	-0.041	0.834	0.154	-0.194	-0.045	0.277

The semantic tasks also show greater variability when considering age bins, such that some age bins have better correlations with size, and other age bins have better correlations with training. However, it is important to note that there was very little variability in model–human similarity for the word association task, which may have exaggerated the variability in feature–similarity correlations.

#### A.4 Detailed trajectory analyses

OpenCLIP-H training trajectories for LWL, WAT, VOC, and THINGS are shown in Figure 5. LWL shows the expected developmental trend, with human-likeness increasing over training, although it is important to note that the three age groups use different sets of stimuli and are thus not inter-comparable. WAT shows almost no change over training, suggesting that language representations are

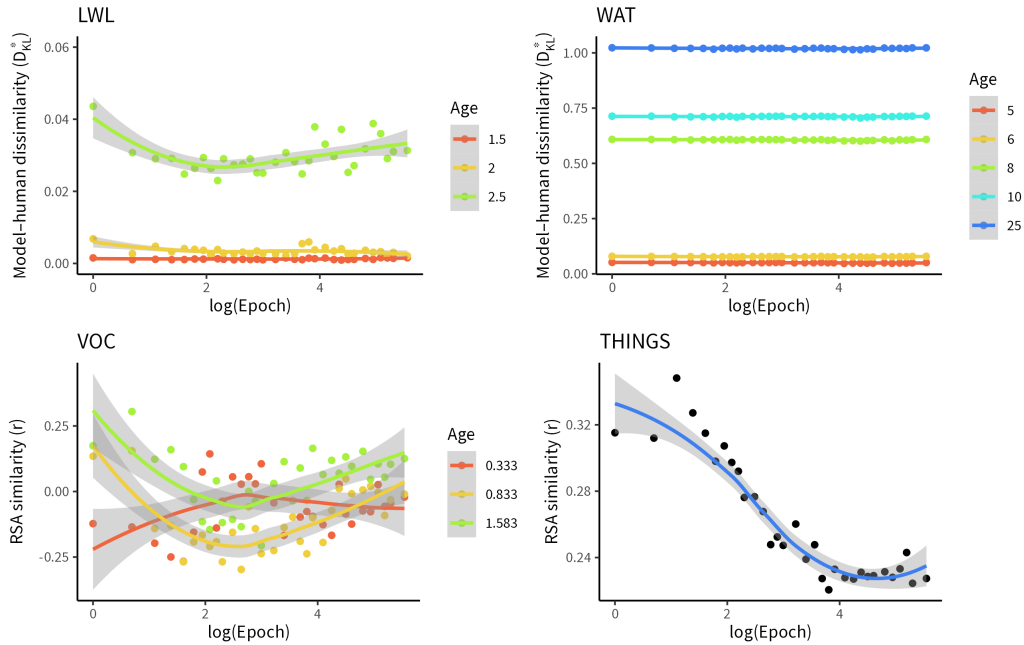


Figure 5: Trajectories of model–human similarity for LWL, WAT, VOC, and THINGS. Note that the three age groups for LWL are not comparable because they use different stimuli sets. For LWL and WAT, smaller values indicate greater model–human similarity, whereas for VOC and THINGS, larger values indicate greater model–human similarity.

not significantly changing over contrastive training. VOC shows a more complex pattern, whereby OpenCLIP-H similarity to infants aged 10 and 19 months exhibits a U-shaped pattern with a minimum around epoch 16, whereas similarity to infants aged 4 months exhibits an inverse U-shaped pattern also peaking around epoch 16. Finally, THINGS shows an inverse pattern, whereby model–human similarity actually decreases over training, rather than increasing. The trajectories for VOC and THINGS suggest that multimodal contrastive learning may actually result in representations that are less human-like, suggesting that human visual representations may not be shaped by vision–language correspondences to the same extent as models like OpenCLIP-H.