
MALLM-GAN: Multi-Agent Large Language Model as Generative Adversarial Network for Synthesizing Tabular Data

Yaobin Ling

McWilliams School of Biomedical Informatics
University of Texas Health Center at Houston
Houston, TX, 77030
Yaobin.ling@uth.tmc.edu

Xiaoqian Jiang

McWilliams School of Biomedical Informatics
University of Texas Health Center at Houston
Houston, TX, 77030
Xiaoqian.Jiang@uth.tmc.edu

Yejin Kim

McWilliams School of Biomedical Informatics
University of Texas Health Center at Houston
Houston, TX, 77030
Yejin.Kim@uth.tmc.edu

Abstract

In the era of big data, access to abundant data is crucial for driving research forward. However, such data is often inaccessible due to privacy concerns or high costs, particularly in healthcare domain. Generating synthetic (tabular) data can address this, but existing models typically require substantial amounts of data to train effectively, contradicting our objective to solve data scarcity. To address this challenge, we propose a novel framework to generate synthetic tabular data, powered by large language models (LLMs) that emulates the architecture of a Generative Adversarial Network (GAN). By incorporating data generation process as contextual information and utilizing LLM as the optimizer, our approach significantly enhance the quality of synthetic data generation in common scenarios with small sample sizes. Our experimental results on public and private datasets demonstrate that our model outperforms several state-of-art models regarding generating higher quality synthetic data for downstream tasks while keeping privacy of the real data,.

1 Introduction

Tabular data is the most common data format in high stake sectors like healthcare. There are many fundamental problems in dealing with tabular data, such as data scarcity, missing values, and irregularity. Among them, data scarcity problem has been the main roadblock. Many dataset in healthcare, such as clinical trial data, have small data size due to data collection cost and privacy risk, and consequently these data cannot afford modern machine learning (e.g., deep learning) which generally have thousands of parameters, at minimum.

Recent advancements in generative models, particularly in text and image,(6; 23) have shown the benefits of technology for generating synthetic data that resembles the real data. Despite this potential, generating tabular data has not been fully tapped into; it has evolved through traditional statistical approaches, like Bayesian networks (29), to deep learning techniques, including autoencoders and Generative Adversarial Networks (GANs) (33). However, these methods requires large data for their training, contradicting our objective to solve data scarcity. Also, the sparsity and heterogeneity in tabular data makes GAN or other deep learning an suboptimal choice, as evidenced by the fact that the tree-based method (e.g., XGBoost) working better than deep learning model (9).

Recently, advancements in large language models (LLMs) have also enabled researchers to use its general intelligence to synthesize tabular data.(5; 12) The premise is that prior knowledge encoded in the parameters of LLMs can provide contextual knowledge for coherent semantics that is required to learn the underlying data generation process. Several studies transformed tabular data to natural language via serialization, and used pre-trained LLMs to generate text containing the synthetic tabular data (5; 12; 17) . While fine-tuning LLMs has led to the creation of more nuanced synthetic data, this process again requires significant sample size, contradicting the objective of addressing data scarcity.

In contrast, in-context learning presents a promising alternative by allowing LLMs to customize without compromising their general reasoning abilities (19) . Particularly, few-shot learning in in-context learning is to provide a few “examples” of data to let LLM to learn the patterns and mimic the examples (14). Our study aims to utilize this few-shot capability for synthetic tabular data generation. Currently, tabular generative model by in-context learning, such as (25) faces a critical shortcoming; it only accommodate too few “examples” (not an entire dataset available), thus discarding remaining data that cannot manage to fit into limited context length (input token). For example, in our real-world trial data ATACH2 with 37 variables, just ten samples consume 4,232 input tokens, whereas common input token size of LLMs, such as GPT3, is 2,048. This failure to utilize all available scarce data can make LLMs to perceive underlying data generating process merely based on “educated guess” with its prior knowledge, instead of data itself. This, consequently, cause distribution discrepancy between real data and synthetic data.

Therefore, we aim to bridge this critical gap. Our key idea is make the *data generation process* explicit; the objective of our in-context learning is to generate better data generation process, as well as to generate individual data instances. Here the data generation process is a prompt text that consists of context of data and any simple “model” that describes relationship between data variables. We chose to use a Bayesian network or causal structure due to its interpretability and simplicity.

However, another challenge is to identify ground-truth data generation process. Motivated by GAN’s adversarial training, we optimize the data generation process (“generator”) in adversarial training with “discriminator” (Table 1) . The discriminator’s role is to discriminates real data from the generated data, and we use the accuracy of the discriminator as a “loss function” to be minimized to optimize the generator. Unlike GAN, our generator is text format, which doesn’t have a derivatives. We address it by Optimization by Prompting, which leverages an independent LLM as an optimizer (34). After optimizing the data generation process, the LLM as generator use it to finally generate synthetic data.

Table 1: Comparison of Generative Adversarial Network (GAN) and Our Model

| | GAN | Our Model |
|----------------------|------------------|-------------------------|
| Generator | Neural network | Frozen LLM and prompt |
| Discriminator | Neural network | Tabular data classifier |
| Optimizer | Gradient descent | Frozen LLM |

Contribution of this paper can be summarized as below

- *Novelty*: We propose a novel concept of optimizing data generation process using in-context learning of LLM. This leverages both data-driven supervised model (discriminator) and knowledge-driven in-context learning of LLM (generator, optimizer).
- *Few-shot synthetic data generation*: Our model works when there are too few data to train a parametric model. It mitigates data scarcity problem in many small-size tabular data in healthcare.

- *Conditional sampling*: Our generator is based on LLM, which enable conditional sampling seamlessly by prompting.
- *Explainability*: Our LLM-based generator explicitly reveals data generation process and its reasoning, which are explainable by design. This enables transparency of our model and facilitate human feedback such as refining the knowledge.

2 Related Work

This section provides a brief overview of the most relevant prior work in the field of tabular data generation, LLM supported synthetic data generation, and different roles that LLM that play in real-world applications.

Synthetic tabular data generation. Many studies have been proposed to generating high quality tabular data for privacy-preserving data sharing and augmenting training data size for machine learning models. Traditional method including Bayesian network (35; 29), approximation Bayesian computation (4), and SMOTE (7). Particularly, Bayesian network can represent a pairwise causal structure via directed acyclic graph (DAG) (21), in which a directed edge between variable A and B exists if A causes B. Causal structure is a compact representation of underlying variable relationship, but does not fully capture the nonlinear numerical relationship between the different types of variables. Deep generative models have also been widely utilized. This include variational autoencoders (VAE) such as TVAE (33) and others (2; 31); GAN such as CTGAN (33), and diffusion model such as TabDDPM (15). The limitation of these model is that they requires sufficient sample size to train the generative model, which contradicts our aim to solve data scarcity.

Synthetic data generation using LLMs. Recently, large language models emerged and has demonstrated its powerful performance in generating natural text. It has also shown a great potential in tabular data (8), such as for predicting (12; 10; 36; 17) and generating tabular data (5; 26; 37; 10). Among them, GReaT (5), the first model in this line, transformed the tabular data into text and fine-tuning LLM (GPT-2), including a feature order permutation step for added realism. However, these prior methods requires fine-tuning LLMs, which requires large data size and computing resources for its fine-tuning. This limitation of existing models motivates us to develop *few-shot* tabular data generative model.

Multiple roles of LLM in real-world applications. In additional to typical natural text generation tasks it was originally trained for, LLMs have been utilized in various tasks. LLM has been used as an optimizer for data type that we can not calculate derivatives directly (34). This LLM as optimizer was used to optimize prompt (34) and optimize heuristic algorithms written in codes (24). LLMs also have been utilized for communicating with other LLMs (i.e., multi-agent LLM); multiple LLMs play different roles to accomplish a task collaboratively, such as coding,(11) question answering,(32) and online decision making.(27; 13) In this paper, we also leverage multiple LLMs with different roles to mimic adversarial training in GAN.

3 Methodology

3.1 Problem formulation

Given a small labeled tabular dataset with n instances and d features, denoted as $D_{\text{real}} = (\mathbf{x}, y)$ where \mathbf{x} represents a d -dimensional vector of features and y indicates label. The features are described by natural-language strings like “age” or “gender”. For synthetic data generation, we train a generator on a training subset D_{train} of D_{real} , generating synthetic dataset D_{syn} .

3.2 Multi-agent LLM as GAN

Overview. We propose to develop a multi-agent LLM as GAN (MALLM-GAN) that generates tabular data by mimicing adversarial optimization (Fig. 1). The objective is to optimize the data generation process θ , which is a natural language description of i) the problem description and ii) the simple data generation process or causal structures representing relationships between variables. In MALLM-GAN, for each iteration i , an LLM agent **Generator** generates data D_{syn} with θ_i and a batch in D_{train} ; a supervised model **Discriminator** is accordingly optimized using $[D_{\text{train}}, D_{\text{syn}}]$ and evaluates θ_i using D_{test} ; and another LLM agent **Optimizer** improves θ_i to decrease the discriminator’s accuracy (Algorithm 1). We repeat the iterations until the discriminator’s accuracy converges or the iteration reaches the maximum epoch.

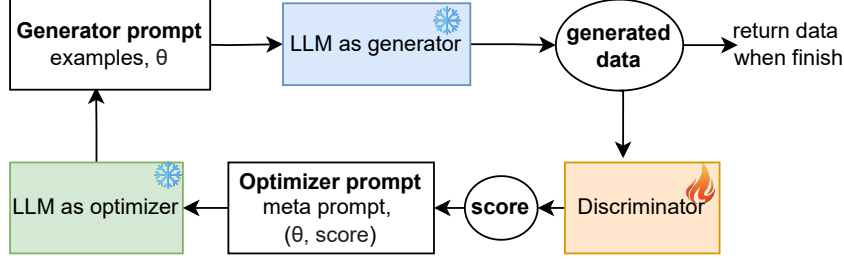


Figure 1: Overview. In each optimization step, the **LLM as Optimizer** generates a data generation process θ in (**Generator prompt**) based on the pairs of previous θ and its score in **Optimizer prompt**. Then the **LLM as Generator** use the current θ and a few examples to generate data. We evaluate the θ using the accuracy (**score**) of **Discriminator**. The more the data generation process θ is optimized, the lower the discriminator’s accuracy. This adversarial optimization finishes when data generation process is no more improved.

3.2.1 Generator

Data generation process. The data generation process θ is described in natural language and prompts the generator LLM to create synthetic data. It includes: i) context of data collection, ii) data schema, iii) causal structure describing relationships between variables, and iv) task instruction. The context provides external knowledge on data collection (e.g., “*this dataset includes subject’s socioeconomic factors...*”). The data schema contains the meta-information of variables (e.g., name, description, type, and categorical values). These elements remain constant during optimization. The causal structure, represented as a DAG and converted into text format (x_1, x_2) , indicates x_1 causes x_2 . Various serialization techniques were tested, but the original structured format proved most effective. The initial causal structure is heuristically determined (e.g., Hill climbing (28)). The task instruction guides the goal, such as “*produce accurate and convincing synthetic data*”. Through adversarial optimization, the causal structure and instructions are refined to reduce the discriminator’s accuracy. Thus, for each iteration i , θ_i is:

$$\theta_i = [\text{context}][\text{schema}], [\text{causal structure}]_i[\text{task instruction}]_i. \quad (1)$$

Note that subscript for iteration i will be omitted for simplicity without loss of generalizability. Also, note that we used causal structure as a means to convey the relationship between variables within the prompt, thus obtaining ground-truth causal structure is not our ultimate goal.

Few shot examples. The data generation process θ is supplemented with n examples to leverage in-context few-shot learning. Structured data (\mathbf{x}, y) is serialized into JSON format, e.g., $\{age: 53, work\ class: self\ emp, \dots\}$ (Supplement listing 2 Lines 25-28). Various natural language serializations were tested but had minimal impact on performance. The number n of examples is crucial; a large n allows learning from diverse examples but is constrained by context length, while a small n avoids overflow but underutilizes data. Our solution, “batches in a batch,” splits a batch into smaller pieces that fit the input token size, generates a set of synthetic data, and collates them into D_{syn} (see Algorithm 1 Line 6). This approach balances the trade-offs in in-context few-shot learning. The final input to the generator LLM is:

$$\theta_i, [JSON((\mathbf{x}, y)_1)], [JSON((\mathbf{x}, y)_2)], \dots, [JSON((\mathbf{x}, y)_n)] \quad (2)$$

for each optimization iteration. See Supplement listing 2 for a full example.

LLM as generator. With the prompt in Eq. 2, the pre-trained, frozen LLM (e.g., GPT-3.5) generates synthetic data. The goal is to create similar but not identical text to the n samples, with the temperature parameter controlling variability. The temperature is set low enough to maintain the original data distribution but high enough to avoid copying. The generator LLM runs multiple times with smaller examples in a batch, and the generated data is collated into D_{syn} . $D_{syn,i}$ denotes the synthetic data generated at iteration i . See Supplement listing 3 for an example.

Conditional sampling. As MALLM-GAN generates synthetic data using LLM, it seamlessly inherits benefits of LLM such as conditional sampling. LLM predicts the next tokens given a user-provided context, even when the specified condition is rare or given as range. To conditionally sample the synthetic data, we modify the task instruction to contain specific conditions (Supplement Listing 4).

3.2.2 Discriminator

Based on the generated data, we evaluate and score the quality of θ by assessing how easy it is to distinguish generated synthetic data from real data. Naturally, this is a supervised learning task, rather than a reasoning task with LLMs. We use XGBoost to train f because the tree-based ensemble models work best with tabular data. We build a discriminator f such that $f : \mathcal{X} \rightarrow c$ where $\mathbf{x} \in \mathcal{X}$ and $f(\mathbf{x})$ is the predicted label c , which is 1 if $\mathbf{x} \in D_{train}$ and 0 if $\mathbf{x} \in D_{syn}$. Specifically, at each iteration i , a new set of synthetic data $D_{syn,i}$ is generated. We form the combined dataset $D_{train} \cup D_{syn,i}$. We assign labels to the combined dataset by

$$D_i = \{(\mathbf{x}, c) \mid \mathbf{x} \in D_{train}, c = 1\} \cup \{(\mathbf{x}, c) \mid \mathbf{x} \in D_{syn,i}, c = 0\}.$$

We update the discriminator f_i incrementally based on f_{i-1} . As the discriminator is a tree-based ensemble model, we incrementally add a new tree to the f_{i-1} that fits the residuals of the current ensembles. We evaluate the accuracy of discriminator with D_{test} and pass a pair of $(\theta_i, L(f_i))$ to the optimizer where $L(f)$ denotes the discriminatory power of f (e.g., accuracy, likelihood). We prefer to use accuracy (rather than likelihood) because this is a direct measurement that we aim to increase and our optimizer does not require numerical derivatives.

The discriminator obtain better discriminatory accuracy to distinguish real or synthetic data as the discriminator accumulate the discriminatory power of past iterations $0, \dots, i - 1$ and also is updated with newly generated, more realistic synthetic data from current iteration i . However, on the other hands, as the D_{syn} become more realistic over the iterations, it gets easier to fool the discriminator, and the discriminator’s accuracy decrease. Therefore, our discriminator obtain better discriminatory power during this adversarial optimization.

3.2.3 Optimizer

The next task is to optimize θ_i based on its score $L(f_i)$. Our parameter to optimize is θ , a text, which doesn’t have a derivatives. So we use Optimization by Prompting, which leverages LLM as an optimizer (34). To make LLM acts as a optimizer, we provide a meta-prompt, which consists of optimization task description such as “*Your task is to optimize prompts for generating high-quality synthetic data. Aim ...*” (see Example in Supplement listing 5 Line 3-6).

To leverage LLM’s in-context few-shot learning in the optimizer (34), we provide a few “examples” of possible solutions $(\theta, L(f))$. Note that the example here is different from data (\mathbf{x}, y) . We keep the top k solution pairs over the past iteration as the optimization trajectory to guide the optimization. We sort the score, so that the more desirable θ goes to the end of prompt. This will allows the LLM to recognize patterns among the data generation process with better score. See example in Supplement listing 5 Line 9-31.

A potential pitfall is that the $L(f)$ of past iteration $0, \dots, i - 1$ is not comparable to the $L(f)$ of current iteration i . The past discriminators f_0, \dots, f_{i-1} have much lower performance in discriminating real and fake, thus the score $L(f_0), \dots, L(f_{i-1})$ are not reliable to compare θ of past iterations with θ of current iteration. Thus we adjust the score $L(f)$ of past iterations with the latest discriminator f_i , so that all the scores are directly comparable to select best θ .

In all, the optimizer LLM takes as input the meta prompt and a series of data generation process θ and adjusted scores $L(f_i)$. The optimizer outputs the revised data generation process, particularly focusing on causal structure and task instruction. We repeat the iterative optimization and generation until reaching to the maximum iteration.

```
1 def optimize_theta(theta):
2     theta_score_pairs = []
3     for _ in range(max_epoch):
4         for batch in D_train:
5             # 1. Run generator
6             D_syn = [LLM_generator(theta + example) for example in batch]
7             # 2. Run discriminator
8             labels_syn, labels_train = [0] * len(D_syn), [1] * len(D_train)
9             (train, test), (train_label, test_label) = train_test_split(
10                 concat(D_train, D_syn), concat(labels_train, labels_syn))
11             discriminator.fit(train, train_label)
12             score = get_accuracy(discriminator.predict(test), test_label)
13             # 3. Run optimizer
14             theta_score_pairs.append((theta, score))
```

```

14         theta = LLM_optimizer(instruction + str(theta_score_pairs))
15     return theta
16
17 def generate_synthetic_data(theta):
18     return [LLM_generator(theta + example) for example in D_train]

```

Listing 1: Python style pseudocode for MALLM-GAN’s optimization and generation

4 Experiments

We present the evaluation results of MALLM-GAN. Our extensive experiments demonstrated that MALLM-GAN outperform baselines in generating high-quality synthetic data while preserving data privacy, thanks to the adversarial optimization of the data generation process. Additionally, MALLM-GAN provides explainable data generation through natural textual representation, effectively generating high-quality synthetic data based on user-provided conditions, even for rare categorical value or numeric ranges.

4.1 Setting

LLM. We used HIPPA-compliant Azure OpenAI GPT-3.5(6) as our generator and GPT-4 (20)(gpt-4-32k-0613) as our optimizer. Due to the extensive workload of the generator, we opted for the lighter, faster gpt-35-turbo-0125 model with a 16k context length. For the optimizer, requiring combinatorial search and high-level reasoning, we used the up-to-date gpt-4-32k-0613 model. As the optimizer requires more “creativity” compared to the generator, the generator’s temperature was set to 0.5, and the optimizer’s to 1.0 after multiple trials.

Data. Our benchmarks include several datasets from various domains: two public datasets (Adult(3), Medical Insurance(1)), and two private medical datasets (ATACH2, ERICH) (18). To ensure fair comparison without memorization concerns (e.g., public datasets are in the training corpus of LLM), private datasets were included. Details can be found in Supplement Table 5.

Baselines. We compared MALLM-GAN against several state-of-art tabular generative models:

- CTGAN (33): A GAN framework with a conditional generator for mixed data type.
- TVAE (33): A variational autoencoder using the same preprocessing strategy as CTGAN, optimized by evidence lower-bound loss.
- Be-GReaT (5): Transforms tabular data into text format and fine-tunes an auto-regressive generative LLM to model the distribution of real data.

Other hyperparameters. Various techniques have been proposed to transform tabular data into natural language text (12). We tested several serializations, such as Manual Template (12) (“Age is 53, Work class type is self-employed, ...”), which proved ineffective for moderate feature sizes; this serialization made the input prompt lengthy and talkative, only worked when feature size $|x|$ is very small. Feature order permutation (5) also had negligible impact on performance. Similar to MALLM-GAN, prior work (25) uses in-context few-shot learning of pre-trained LLMs but incorporates post-hoc data selection, which is beyond our scope. A comparison without post-hoc selection is available in Table 3. Specific hyperparameters and computing resources are available in Supplement Section 2.

Training data size vs. quality of synthetic data. We evaluated the impact of training data size $N = |D_{\text{train}}|$ on synthetic data quality by sampling subsets of different sizes ($N = 100, 200, 400, 800$). We particularly aimed to compare performances in low and moderate data size. For fair comparison between real and synthetic data, synthetic data was generated to match the size of real data ($|D_{\text{train}}| = |D_{\text{syn}}|$). We held out 100 samples as the test set D_{test} before sampling and replicated experiments five times to estimate the standard error of the evaluation metrics. The batch size was set to be 40, with maximum iterations set to be 5, 4, 3, 2 for data sizes $N = 100, 200, 400, 800$, respectively.

4.2 Quantitative Evaluation

We evaluate the performance of synthetic data generation models from two perspective: Privacy leakage by Distance to Closest Records (DCR) and Machine Learning Efficiency (MLE) (8; 33).

MLE. To assess the utility of our synthetic data, we use it to train supervised model and test prediction accuracy on real data (D_{test}). The Adult data is used for a classification task, while the other three

datasets are used for regression. For classification, we fit logistic regression model, random forest, and Support Vector Machine model, calculating F1 score. For regression, we fit linear regression and random forest models and calculate R^2 . We also fit models using real data D_{train} as a gold standard for the MLE for comparison. As a result, MALLM-GAN generated high-quality synthetic tabular data across multiple datasets and training data size, outperforming baselines (Table 2), specially with small training sizes ($N = 100$). This indicates MALLM-GAN’s robustness to smaller sample sizes, unlike baselines that require more data. MALLM-GAN also outperformed baselines on both public and private datasets, suggesting it does not rely on the pre-trained LLM’s memorization.

Table 2: Benchmark results evaluated by MLE

| | | Public dataset | | Private dataset | |
|-------|------------------|-----------------------------------|-----------------------------------|-----------------------------------|------------------------------------|
| | | Adult (F1 score) | Insurance (R^2) | ATACH (R^2) | ERICH (R^2) |
| N=100 | Real data | 0.79 | 0.73 | 0.09 | -0.30 |
| | CTGAN | 0.72 ± 0.01 | -0.76 ± 0.37 | -0.74 ± 0.20 | -0.22 ± 0.19 |
| | TVAE | 0.75 ± 0.03 | -0.46 ± 0.64 | -0.19 ± 0.13 | -0.67 ± 0.16 |
| | Be-GReaT | 0.76 ± 0.03 | -0.10 ± 0.09 | -0.92 ± 0.28 | -0.84 ± 0.37 |
| | MALLM-GAN (ours) | 0.78 ± 0.03 | 0.57 ± 0.08 | 0.01 ± 0.14 | -0.13 ± 0.15 |
| N=200 | Real data | 0.76 | 0.74 | 0.35 | -0.08 |
| | CTGAN | 0.67 ± 0.03 | -0.02 ± 0.14 | -0.12 ± 0.11 | -0.19 ± 0.24 |
| | TVAE | 0.65 ± 0.00 | 0.13 ± 0.33 | 0.05 ± 0.11 | -0.34 ± 0.07 |
| | Be-GReaT | 0.73 ± 0.01 | 0.02 ± 0.13 | -0.22 ± 0.08 | -0.29 ± 0.10 |
| | MALLM-GAN (ours) | 0.73 ± 0.01 | 0.74 ± 0.03 | 0.14 ± 0.07 | -0.08 ± 0.06 |
| N=400 | Real data | 0.74 | 0.82 | 0.47 | 0.21 |
| | CTGAN | 0.58 ± 0.04 | -0.12 ± 0.11 | -0.11 ± 0.13 | -0.11 ± 0.13 |
| | TVAE | 0.75 ± 0.03 | 0.09 ± 0.11 | 0.05 ± 0.10 | -0.22 ± 0.06 |
| | Be-GReaT | 0.77 ± 0.03 | 0.49 ± 0.07 | 0.14 ± 0.09 | -0.09 ± 0.07 |
| | MALLM-GAN (ours) | 0.76 ± 0.06 | 0.66 ± 0.06 | 0.17 ± 0.02 | 0.04 ± 0.06 |
| N=800 | Real data | 0.72 | 0.88 | 0.31 | 0.07 |
| | CTGAN | 0.67 ± 0.00 | -1.70 ± 0.29 | -0.07 ± 0.04 | -0.05 ± 0.02 |
| | TVAE | 0.73 ± 0.02 | 0.70 ± 0.03 | 0.21 ± 0.06 | -0.22 ± 0.11 |
| | Be-GReaT | 0.73 ± 0.01 | 0.75 ± 0.04 | 0.33 ± 0.04 | -0.14 ± 0.06 |
| | MALLM-GAN (ours) | 0.72 ± 0.00 | 0.78 ± 0.02 | 0.15 ± 0.02 | 0.05 ± 0.01 |

DCR distributions. The DCR metric assesses the realism and diversity of synthetic data. It determines whether synthetic data points are too similar to the real data points which might indicate potential privacy concerns or too dissimilar which could affect the utility of the synthetic data. The DCR $d(\mathbf{x}_{\text{syn}}, D_{\text{real}}) = \min_{\mathbf{x}_{\text{real}} \in D_{\text{real}}} l_1\text{-norm}(\mathbf{x}_{\text{syn}}, \mathbf{x}_{\text{real}})$. Low DCR indicates that synthetic data are very close to real data points, implying a risk of data leakage and privacy concerns, as synthetic data too closely mimic the real data. We chose to use l_1 -norm distance to measure the distance between two data points (5). For the categorical variables, the distance is 1 if two categories are different, otherwise 0. As a result, MALLM-GAN achieved similar or higher DCR levels compared to baselines (Fig. 2), implying effective privacy protection without compromising MLE. Overall, MALLM-GAN demonstrated superior performance in generating synthetic data that maintains both privacy and utility.

4.3 Ablation study

Number n of example in in-context few shot learning. Due to the LLM’s limited context length, we implemented a “batches in a batch” method to leverage all training data within these constraints (Section 3.2.1). We varied the number n of examples and found $n = 2$ to be optimal, achieving high DCR without compromising MLE (Supplement Section 2.4).

Causal structure and Optimization. To assess the impact of each component on overall performance, we examined the contribution of the causal structure in the data generation process θ and the LLM as an optimizer. We compared the full model, which includes both components, to a version without them, similar to CLLM (25) without post-processing data selection. The ablation study, conducted on one public dataset (Insurance) and one private dataset (ERICH), showed that incorporating

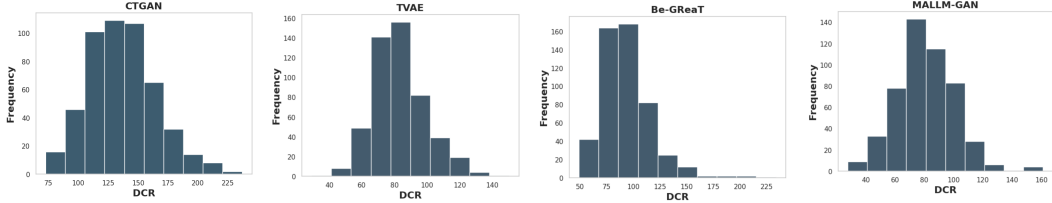


Figure 2: DCR for the ATACH2 (N=100). MALLM-GAN achieved similar or higher level of DCR without compromising MLE.

Table 3: MLE of ablated models to evaluate the effects of causal structure in data generation process and optimization via LLM. Causal: Causal structure in data generation process, Opt: Optimization by LLM.

| | Few-shot | Few-shot+Causal | Few-shot+Causal+Opt (ours) |
|---------------------|----------------------|----------------------|----------------------------|
| Insurance (R^2) | -0.0172 ± 0.4593 | 0.5383 ± 0.0916 | 0.5721 ± 0.0791 |
| ERICH (R^2) | -0.3207 ± 0.1380 | -0.1476 ± 0.1118 | -0.1301 ± 0.1503 |

the causal structure alone significantly improved the MLE compared to a model with only in-context few-shot learning (25). The LLM optimizer further enhanced θ , achieving the highest MLE. Incorporating external knowledge into LLMs has been shown to significantly improve the quality of generated text, similar to retrieval-augmented generation (RAG) (16). Our approach shares this concept by incorporating a “knowledge” graph but optimizes the knowledge itself through adversarial optimization.

4.4 Optimization trajectory of data generation process

A key advantage of MALLM-GAN is its transparent data generation process, described in natural text, allowing us to observe the evolution of the mechanism during adversarial optimization. We illustrate this with a trajectory example of the causal structure (Fig. 3) and task instruction (Table 4) using the Insurance dataset. Initially, the causal structure derived from heuristics had no edges (Fig. 3). Over iterative optimization, a stable causal structure emerged. The task instructions evolved to include specific details (Table 4). Our objective was to reduce the discriminator’s accuracy, and the score decreased over iterations, thanks to the optimized causal structure and task instruction.

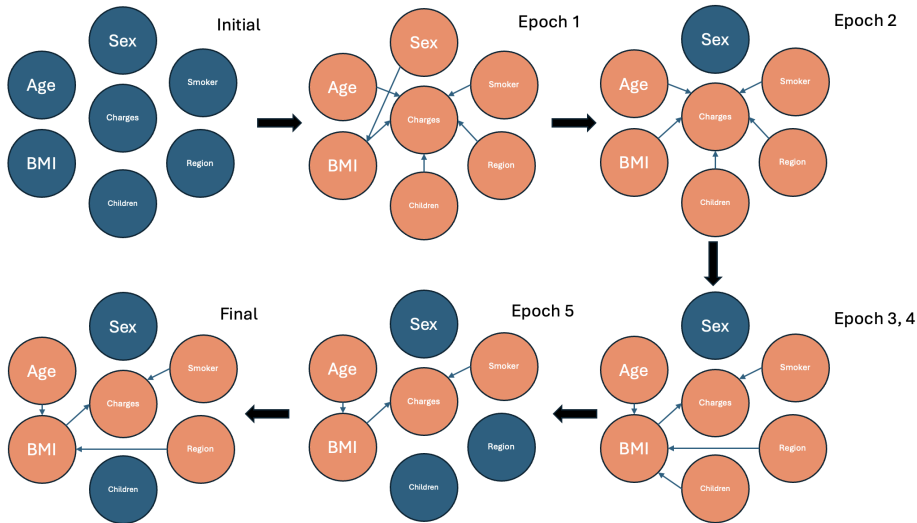


Figure 3: Trajectory of causal structure in data generation process over adversarial optimization. Orange if the variables were used. Blue if not used in the causal structure.

| Iteration | Task instruction | Score |
|-----------|---|--------|
| Epoch 1 | “The task is to generate synthetic data that accurately mirrors these causal relationships. The data should include variables such as ‘age’, ‘sex’, ‘bmi’, ‘children’, ‘smoker’, ‘region’, and ‘charges’. Each variable should influence the others as per the causal structure, creating a realistic representation of possible real-world scenarios.” | 80.95% |
| Epoch 2 | “Your task is to generate synthetic data that faithfully represents these causal relationships. The data should encompass variables such as ‘age’, ‘bmi’, ‘children’, ‘smoker’, ‘region’, and ‘charges’. Each variable should affect the others in accordance with the causal structure, providing a credible simulation of potential real-world scenarios” | 76.19% |
| Epoch 4 | “The ultimate goal is to generate synthetic data that accurately reflects these causal relationships. The synthetic data should incorporate factors such as ‘age’, ‘sex’, ‘bmi’, ‘children’, ‘smoker’, ‘region’, and ‘charges’, and their influence on each other as indicated in the causal structure. The synthetic data should be convincing and representative of the real-world scenarios where these variables interact.” | 35.67% |

Table 4: Trajectory of task instruction in data generation process over adversarial optimization. Lower score is the better.

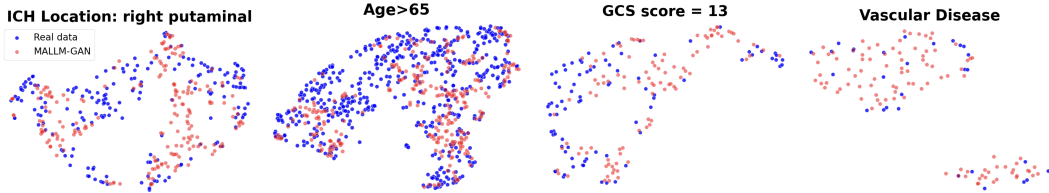


Figure 4: Real and synthetic data distribution with three categorical conditions and one numerical range condition in ERICH data.

4.5 Conditional Sampling

We leverage the generator’s conditional generative capability to create synthetic data with user-provided conditions, focusing on categorical values and numerical ranges. We compare MALLM-GAN and baseline models by visualizing lower-dimensional projections (UMAP). For categorical conditions, we selected three rare conditions in the ERICH dataset: i) *hematoma location = right putaminal*, ii) *GCS score = 13*, and iii) *prior history in vascular disease*. The conditions were met by 187, 83, and 29 patients, respectively. All three baselines failed to generate synthetic data due to insufficient training data. In contrast, MALLM-GAN successfully generated data with distributions similar to the real data (Fig. 4). For numeric range conditions, we selected ‘age’ > 65 in the ERICH dataset, met by 534 patients. The baselines were unable to incorporate numeric range conditions by design. However, MALLM-GAN successfully generated data satisfying the condition (Fig. 4), demonstrating its ability to understand and flexibly apply conditions in natural text format.

4.6 Limitations

The proposed framework has several shortcomings. Firstly, due to the limited context length of the LLM, our model struggles with high-dimensional datasets with too many categorical variables, which make the context information lengthy and reduce the success rate of data generation. Additionally, mimicking the traditional GAN framework, it suffers from convergence issues, making it challenging to define the convergence of the prompt optimization strategy. While our model performs well with small sample sizes, showing better results than other baselines, the improvement diminishes with larger datasets. Moreover, the training and generation process is costly when dealing with large data volumes.

5 Conclusion

We propose a novel framework to generate synthetic tabular data by leveraging multi-agent LLMs to address the limited sample size issues which is prevalent in healthcare. Compared with other LLLM-based methods, we propose a in-context learning approach which does not require fine-tuning

on LLM but still leverage the whole data. We leverage causal structure as data generation process and mimic a GAN architecture to optimize the data generation process. We demonstrate that our model can generate high quality synthetic data while preserving the privacy of real data. Moreover, compared with other black box models, our proposed work enables transparent data generation that allows domain experts to control the process.

References

- [1] Medical cost personal datasets, May 2018.
- [2] AN, S., AND JEON, J.-J. Distributional learning of variational autoencoder: Application to synthetic data generation. In *Advances in Neural Information Processing Systems (2023)*, A. Oh, T. Naumann, A. Globerson, K. Saenko, M. Hardt, and S. Levine, Eds., vol. 36, Curran Associates, Inc., pp. 57825–57851.
- [3] BECKER, B., AND KOHAVI, R. Adult. UCI Machine Learning Repository, 1996. DOI: <https://doi.org/10.24432/C5XW20>.
- [4] BERNTON, E., JACOB, P. E., GERBER, M., AND ROBERT, C. P. Approximate Bayesian Computation with the Wasserstein Distance. *Journal of the Royal Statistical Society Series B: Statistical Methodology* 81, 2 (02 2019), 235–269.
- [5] BORISOV, V., SESSLER, K., LEEMANN, T., PAWELCZYK, M., AND KASNECI, G. Language models are realistic tabular data generators. In *The Eleventh International Conference on Learning Representations (2023)*.
- [6] BROWN, T., MANN, B., RYDER, N., SUBBIAH, M., KAPLAN, J. D., DHARIWAL, P., NEELAKANTAN, A., SHYAM, P., SASTRY, G., ASKELL, A., ET AL. Language models are few-shot learners. *Advances in neural information processing systems* 33 (2020), 1877–1901.
- [7] CHAWLA, N., BOWYER, K., HALL, L., AND KEGELMEYER, W. Smote: Synthetic minority over-sampling technique. *J. Artif. Intell. Res. (JAIR)* 16 (06 2002), 321–357.
- [8] FANG, X., XU, W., TAN, F. A., ZHANG, J., HU, Z., QI, Y., NICKLEACH, S., SOCOLINSKY, D., SENGAMEDU, S., AND FALOUTSOS, C. Large language models (llms) on tabular data: Prediction, generation, and understanding – a survey, 2024.
- [9] GRINSZTAJN, L., OYALLON, E., AND VAROQUAUX, G. Why do tree-based models still outperform deep learning on typical tabular data? In *Thirty-sixth Conference on Neural Information Processing Systems Datasets and Benchmarks Track (2022)*.
- [10] GULATI, M. S., AND ROYSDON, P. F. TabMT: Generating tabular data with masked transformers. In *Thirty-seventh Conference on Neural Information Processing Systems (2023)*.
- [11] GUO, T., CHEN, X., WANG, Y., CHANG, R., PEI, S., CHAWLA, N. V., WIEST, O., AND ZHANG, X. Large language model based multi-agents: A survey of progress and challenges. *arXiv preprint arXiv:2402.01680* (2024).
- [12] HEGSELMANN, S., BUENDIA, A., LANG, H., AGRAWAL, M., JIANG, X., AND SONTAG, D. Tabllm: Few-shot classification of tabular data with large language models. In *Proceedings of The 26th International Conference on Artificial Intelligence and Statistics (25–27 Apr 2023)*, F. Ruiz, J. Dy, and J.-W. van de Meent, Eds., vol. 206 of *Proceedings of Machine Learning Research*, PMLR, pp. 5549–5581.
- [13] HUANG, J.-T., LI, E. J., LAM, M. H., LIANG, T., WANG, W., YUAN, Y., JIAO, W., WANG, X., TU, Z., AND LYU, M. R. How far are we on the decision-making of llms? evaluating llms’ gaming ability in multi-agent environments. *arXiv preprint arXiv:2403.11807* (2024).
- [14] KAPLAN, J., MCCANDLISH, S., HENIGHAN, T., BROWN, T. B., CHESSE, B., CHILD, R., GRAY, S., RADFORD, A., WU, J., AND AMODEI, D. Scaling laws for neural language models, 2020.
- [15] KOTELNIKOV, A., BARANCHUK, D., RUBACHEV, I., AND BABENKO, A. Tabddpm: Modelling tabular data with diffusion models. In *International Conference on Machine Learning (2023)*, PMLR, pp. 17564–17579.
- [16] LEWIS, P., PEREZ, E., PIKTUS, A., PETRONI, F., KARPUKHIN, V., GOYAL, N., KÜTTLER, H., LEWIS, M., TAU YIH, W., ROCKTÄSCHEL, T., RIEDEL, S., AND KIELA, D. Retrieval-augmented generation for knowledge-intensive nlp tasks, 2021.

- [17] LI, T., SHETTY, S., KAMATH, A., JAISWAL, A., JIANG, X., DING, Y., AND KIM, Y. Cancegpt for few shot drug pair synergy prediction using large pretrained language models. *npj Digital Medicine* 7, 1 (Feb 2024), 40.
- [18] LING, Y., TARIQ, M. B., TANG, K., ARONOWSKI, J., FANN, Y., SAVITZ, S. I., JIANG, X., AND KIM, Y. An interpretable framework to identify responsive subgroups from clinical trials regarding treatment effects: Application to treatment of intracerebral hemorrhage. *PLOS Digital Health* 3, 5 (05 2024), 1–17.
- [19] NORI, H., LEE, Y. T., ZHANG, S., CARIGNAN, D., EDGAR, R., FUSI, N., KING, N., LARSON, J., LI, Y., LIU, W., LUO, R., MCKINNEY, S. M., NESS, R. O., POON, H., QIN, T., USUYAMA, N., WHITE, C., AND HORVITZ, E. Can generalist foundation models outcompete special-purpose tuning? case study in medicine. November 2023.
- [20] OPENAI. Gpt-4 technical report, 2023.
- [21] PEARL, J. *Causality*, 2 ed. Cambridge University Press, Cambridge, UK, 2009.
- [22] QURESHI, A. I., PALESCH, Y. Y., BARSAN, W. G., HANLEY, D. F., HSU, C. Y., MARTIN, R. L., MOY, C. S., SILBERGLEIT, R., STEINER, T., SUAREZ, J. I., TOYODA, K., WANG, Y., YAMAMOTO, H., AND YOON, B.-W. Intensive blood-pressure lowering in patients with acute cerebral hemorrhage. *New England Journal of Medicine* 375, 11 (2016), 1033–1043.
- [23] RAMESH, A., PAVLOV, M., GOH, G., GRAY, S., VOSS, C., RADFORD, A., CHEN, M., AND SUTSKEVER, I. Zero-shot text-to-image generation, 2021.
- [24] ROMERA-PAREDES, B., BAREKATAIN, M., NOVIKOV, A., BALOG, M., KUMAR, M., DUPONT, E., RUIZ, F., ELLENBERG, J., WANG, P., FAWZI, O., KOHLI, P., AND FAWZI, A. Mathematical discoveries from program search with large language models. *Nature* 625 (12 2023).
- [25] SEEDAT, N., HUYNH, N., VAN BREUGEL, B., AND VAN DER SCHAAR, M. Curated llm: Synergy of llms and data curation for tabular augmentation in ultra low-data regimes, 2024.
- [26] SOLATORIO, A. V., AND DUPRIEZ, O. Realtabformer: Generating realistic relational and tabular data using transformers, 2023.
- [27] TALEBIRAD, Y., AND NADIRI, A. Multi-agent collaboration: Harnessing the power of intelligent llm agents. *arXiv preprint arXiv:2306.03314* (2023).
- [28] TSAMARDINOS, I., BROWN, L. E., AND ALIFERIS, C. F. The max-min hill-climbing bayesian network structure learning algorithm. *Machine Learning* 65, 1 (Oct 2006), 31–78.
- [29] UPADHYAYA, P., ZHANG, K., LI, C., JIANG, X., AND KIM, Y. Scalable causal structure learning: Scoping review of traditional and deep learning algorithms and new opportunities in biomedicine. *JMIR Med Inform* 11 (Jan 2023), e38266.
- [30] WOO, D., ROSAND, J., KIDWELL, C., MCCAULEY, J. L., OSBORNE, J., BROWN, M. W., WEST, S. E., RADEMACHER, E. W., WADDY, S., ROBERTS, J. N., ET AL. The ethnic/racial variations of intracerebral hemorrhage (erich) study protocol. *Stroke* 44, 10 (2013), e120–e125.
- [31] WU, J., PLATANIOTIS, K., LIU, L., AMJADIAN, E., AND LAWRYSHYN, Y. Interpretation for variational autoencoder used to generate financial synthetic tabular data. *Algorithms* 16, 2 (2023).
- [32] WU, Q., BANSAL, G., ZHANG, J., WU, Y., ZHANG, S., ZHU, E., LI, B., JIANG, L., ZHANG, X., AND WANG, C. Autogen: Enabling next-gen llm applications via multi-agent conversation framework. *arXiv preprint arXiv:2308.08155* (2023).
- [33] XU, L., SKOULARIDOU, M., CUESTA-INFANTE, A., AND VEERAMACHANENI, K. *Modeling tabular data using conditional GAN*. Curran Associates Inc., Red Hook, NY, USA, 2019.
- [34] YANG, C., WANG, X., LU, Y., LIU, H., LE, Q. V., ZHOU, D., AND CHEN, X. Large language models as optimizers.

- [35] YOUNG, J., GRAHAM, P., AND PENNY, R. Using bayesian networks to create synthetic data, 2009.
- [36] YU, B., FU, C., YU, H., HUANG, F., AND LI, Y. Unified language representation for question answering over text, tables, and images. In *Findings of the Association for Computational Linguistics: ACL 2023* (Toronto, Canada, July 2023), A. Rogers, J. Boyd-Graber, and N. Okazaki, Eds., Association for Computational Linguistics, pp. 4756–4765.
- [37] ZHANG, T., WANG, S., YAN, S., JIAN, L., AND LIU, Q. Generative table pre-training empowers models for tabular prediction. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing* (Singapore, Dec. 2023), H. Bouamor, J. Pino, and K. Bali, Eds., Association for Computational Linguistics, pp. 14836–14854.

Supplementary

1 Example of prompts and output

Here, we provided example of generator prompt and optimizer prompt. Note that generator prompt evolves over the iteration.

```
1 System role:
2 % Specify role and task
3 You are a data generation model. Your task is to understand the instruction
  below and generate tabular data.
4
5 % Context of data
6 <context>The dataset include subject's social economic factors and
  demographics with the label that indicates whether their income is
  higher than 50k. </context>
7
8 % Data schema
9 <schema> age (numerical),workclass (categorical), education (categorical),
  education-num (numerical),marital-status (categorical), occupation (
  categorical), relationship (categorical), race (categorical), sex (
  categorical), capital-gain (numerical),capital-loss (numerical),hours-
  per-week (numerical),native-country (categorical), Income (categorical)
  </schema>
10
11 %Categorical variables and their available categories
12 <categorical variables> workclass: {'Private', 'Local-gov', 'Without-pay', '
  Self-emp-not-inc', 'State-gov', 'Federal-gov', 'Self-emp-inc'},
  education: {'Some-college', 'Masters', '11th', '1st-4th', '7th-8th', '
  Bachelors', 'Doctorate', '12th', '5th-6th', 'Prof-school', 'Assoc-voc',
  'Assoc-acdm', '10th', '9th', 'HS-grad'}, marital-status: {'Divorced',
  'Married-spouse-absent', 'Married-civ-spouse', 'Never-married', '
  Widowed', 'Separated'}, occupation: {'Handlers-cleaners', 'Transport-
  moving', 'Sales', 'Prof-specialty', 'Farming-fishing', 'Machine-op-
  inspct', 'Adm-clerical', 'Other-service', 'Craft-repair', 'Protective-
  serv', 'Exec-managerial', 'Tech-support', 'Priv-house-serv'},
  relationship: {'Wife', 'Not-in-family', 'Other-relative', 'Unmarried',
  'Own-child', 'Husband'}, race: {'Black', 'Amer-Indian-Eskimo', 'Other',
  'Asian-Pac-Islander', 'White'}, sex: {'Male', 'Female'}, native-
  country: {'Vietnam', 'Mexico', 'Hong', 'Taiwan', 'Italy', 'Portugal', '
  Ireland', 'Guatemala', 'El-Salvador', 'United-States'}, Income: {'>50K'
  , '<=50K'}
13 </categorical variables>
14
15 %causal structure
16 <causal structure> Consider this optimized causal graph of the data, where
  a pair (A, B) is used to represent a scenario where A affects B: [( 'age
  ', 'workclass'), ('education', 'education-num'), ('education-num', '
  Income'), ('marital-status', 'relationship'), ('occupation', 'Income'),
  ('hours-per-week', 'Income'), ('workclass', 'Income')]]
17
18 This adjusted graph introduces 'education-num', which is a key determinant
  of 'Income'. Be sure to reflect 'age' impact on 'workclass' and '
  marital-status' effect on 'relationship'. When creating the 'Income'
  data, pay careful attention to the roles of 'education', 'education-num
  ', 'occupation', and 'hours-per-week' as stated in the causal graph.
19 </causal structure>
20
21 %Task
22 <task> The ultimate goal is to produce accurate and convincing synthetic
  data that dutifully represents these causal relationships. As such,
  strive for a quality score that is less than 70.0%. </task>
23
24 User role:
25 % Example
```

```

26 <example> Here are examples from real data:
27 [{ 'age': 53.0, 'workclass': 'Self-emp-not-inc', 'education': '10th', '
    education-num': 6.0, 'marital-status': 'Married-civ-spouse', '
    occupation': 'Farming-fishing', 'relationship': 'Husband', 'race': '
    White', 'sex': 'Male', 'capital-gain': 0.0, 'capital-loss': 0.0, 'hours
    -per-week': 60.0, 'native-country': 'United-States', 'Income': '<=50K'
    }, { 'age': 23.0, 'workclass': 'Private', 'education': 'HS-grad', '
    education-num': 9.0, 'marital-status': 'Never-married', 'occupation': '
    Adm-clerical', 'relationship': 'Own-child', 'race': 'White', 'sex': '
    Female', 'capital-gain': 0.0, 'capital-loss': 0.0, 'hours-per-week':
    40.0, 'native-country': 'United-States', 'Income': '<=50K'}]
28 </example>
29
30 <instruction>
31 Generate two synthetic samples mimic the provided samples. DO NOT COPY the
    samples and try to make the generated samples diverse. The response
    should be formatted strictly as a list in JSON format, suitable for
    direct use in data processing scripts such as conversion to a DataFrame
    in Python. No additional text or numbers should precede the JSON data.
32 </instruction>

```

Listing 2: Example of generator prompt

```

1 json
2 [{"treatment": 0, "age": 68.2, "ICH volume": 4.1, "ICH Location": "L Lobar",
    "IVH volume": 0.2, "GCS score": 14.3, "NIHSS score": 11.7, "Systolic
    blood pressure": 195.0, "Diastolic Blood Pressure": 83.0, "Hypertension
    ": 1, "Hyperlipidemia": 1, "Type I Diabetes": 0, "Type II Diabetes": 0,
    "Congestive heart failure": 0, "Atrial Fibrillation": 0, "PTCA": 0, "
    Peripheral Vascular Disease": 0, "Myocardial fraction": 0, "Anti-
    diabetic": 0, "Antihypertensives": 1, "White blood count": 4.3, "
    Hemoglobin": 12.5, "Hematocrit": 37.7, "Platelet count": 129.0, "APTT":
    35.3, "INR": 1.1, "Glucose": 148.0, "Sodium": 145.0, "Potassium": 4.1,
    "Chloride": 106.0, "CD": 30.1, "Blood urea nitrogen": 18.0, "
    Creatinine": 1.2, "race": "White", "sex": "Female", "ethnicity": "
    Hispanic", "mRS score after 30 days": 2.7}]

```

Listing 3: Example of generator output. We presented an example with sufficiently high DCR (39.7) to protect patient data privacy

```

1 <Instruction>
2 Generate {number of samples in real data meeting the conditions} synthetic
    samples with {user-provided conditions}. Response should be formatted
    strictly as a list in JSON format, suitable for direct use in data
    processing scripts such as conversion to a DataFrame in Python. No
    additional text or numbers should precede the JSON data.
3 </Instruction>

```

Listing 4: Modified instruction in generator prompt for conditional sampling

```

1 System role:
2 % Specify role and task
3 Your task is to optimize prompts for generating high-quality synthetic data.
    Aim to lower the scores associated with each casual structure and
    prompt, where a lower score reflects better quality. Here are the steps
    :
4 1. Examine the existing prompt-score pairs.
5 2. Adjust the causal graph to better represent the underlying relationships
    by adding or removing connections, and consider incorporating new
    features from the list {self.cols}.
6 3. Modify the prompt guidance to align with the revised causal graph,
    ensuring it aids in reducing the score.
7
8 User role:

```

```

9 <pair>
10 Reflecting the adjusted causal graph of the data, where each tuple (A, B)
    indicates that A impacts B:
11 [( 'age', 'workclass'), ('marital-status', 'relationship'), ('marital-status',
    'Income'), ('relationship', 'sex'), ('education', 'Income'), ('
    occupation', 'Income'), ('workclass', 'Income'), ('hours-per-week', '
    Income')]
12
13 Use this causal graph as a guide to generate synthetic data that closely
    mirrors the real-world dataset. Remember to factor in the influence of
    'age' on 'workclass', and 'marital-status' on 'relationship' and '
    Income'. The 'relationship' should guide the generation of the 'sex'
    attribute. Further, take into consideration the effects of 'education',
    'occupation', and 'hours-per-week' on 'Income' when synthesizing your
    data. The goal is to produce synthetic data that convincingly mimic
    these causal relationships.
14 Set your aim to achieve a score below 75.0%.
15 Score: 80.0%
16 </pair>
17
18 <pair>
19 Consider the revised and detailed causal graph of the data, which includes
    ('age', 'workclass'), ('marital-status', 'relationship'), ('
    relationship', 'sex'), ('education', 'Income'), ('occupation', 'Income'
    ), ('workclass', 'Income'), ('hours-per-week', 'Income'):
20
21 In light of the causal graph, generate synthetic samples that mimic the
    structure in the provided dataset. Values such as 'age' should reflect
    on 'workclass'; 'marital-status' and 'relationship' should collaborate
    to inform 'sex', while 'education', 'occupation', 'workclass', and '
    hours-per-week' should exhibit their influence on 'Income'. Also
    consider 'marital-status' influence on 'Income'. Your aim is to
    generate synthetic data that fully embody the interconnections within
    this causal graph.
22 Aim to achieve a score lower than 75%
23 Score: 80.95%
24 </pair>
25
26 <pair>
27 Here is the causal graph of the data, where a tuple (A, B) indicates A
    causes B:
28 [( 'marital-status', 'relationship'), ('marital-status', 'Income'), ('
    relationship', 'sex')]
29 Given the description of the data, generate synthetic samples that mimic
    the provided samples.
30 Score: 85.71%
31 </pair>
32
33 Your updated prompt should explicitly include any modifications to the
    causal graph and guidance. The aim is to create a prompt that leads to
    the lowest possible score.
34
35 The updated prompt:

```

Listing 5: Example of optimizer prompt

```

1 <Causal structure> The optimized causal network, suggesting the influence
    of variable A on variable B, includes the following relationships: [( '
    Age', 'Hyperlipidemia'), ('Hyperlipidemia', 'Type II Diabetes'), ('Type
    II Diabetes', 'Blood urea nitrogen'), ('Blood urea nitrogen', '
    Creatinine'), ('Hypertension', 'Congestive heart failure'), ('
    Congestive heart failure', 'Atrial Fibrillation'), ('Atrial
    Fibrillation', 'GCS score'), ('GCS score', 'mRS score after 30 days'),
    ('Anti-diabetic', 'Type I Diabetes'), ('Type I Diabetes', '
    Antihypertensives'), ('Antihypertensives', 'Potassium'), ('Potassium',

```



```

2   'Sodium'), ('PTCA', 'Peripheral Vascular Disease'), ('Peripheral
3   Vascular Disease', 'Myocardial fraction'), ('Myocardial fraction', '
   Hemoglobin'), ('Hemoglobin', 'Hematocrit'), ('race', 'ethnicity'), ('
   Sex', 'Hyperlipidemia')]]</Causal structure>
<Task> Your task is to create realistic synthetic patient data, keeping the
   altered causal relationships as your guiding principle. Ensure the
   data reflects a diverse set of potential patient scenarios, evidencing
   the variety of health conditions one might find in a clinical setting.
   Remember that the engineered data should present unique, individual
   patient scenarios, each portraying a different, complex clinical
   situation. The synthetic data needs to be representative of different
   demographics ('Sex', 'race', 'ethnicity') and should also take into
   consideration different health conditions and treatment plans.</Task>"

```

Listing 6: Example of optimizer output

2 Experiment details

2.1 Benchmark datasets descriptions

We provide detailed description on the benchmark data in Table 5

Table 5: Datasets description

| | # samples | # features | Description | Source |
|-------------------|-----------|------------|--|--------|
| Adult | 32,561 | 14 | The dataset include people’s social economic factors and demographics with the label that indicates whether their income is higher than 50k. | (3) |
| Medical Insurance | 2,772 | 7 | This is a dataset used to describe the patients’ demographics with their health insurance bills. | (1) |
| ATACH2 | 1,000 | 37 | This is an RCT data that investigate in treatment for Intracerebral hemorrhage patients. | (22) |
| ERICH | 1,521 | 29 | The data is from a case-control study of Intracerebral Hemorrhage study which aims to investigate in the Ethnic/Racial variations. | (30) |

2.2 Hyperparameters

Specific hyperparameters for each model are provided below.

- **CTGAN:** Default parameters
- **TVAE:** Default parameters
- **BeGReaT:**
 - Base LLM: Distiled-GPT2
 - Batch size: 40
 - Epochs: Depend on the feature numbers and the total sample size. (200-400)
- **MALLM-GAN:**
 - Temperature for generator: 0.5
 - Temperature for optimizer: 1.0
 - Batch size: 50
 - Discriminator: XGBoost (max depth: 3, eta: 0.3, objective: binary:logistic)

2.3 Computing resource details

The model proposed in this study does not require extensive computing resource for fine-tuning. However, this model require access to Azure service. For other baseline models, they are implemented on one NVIDIA H100 80GB HBM3 GPU.

2.4 Number n of example in in-context few shot learning

Given the limited context length that the LLM can understand, we proposed “batches in a batch” method to leverage all training data in limited context length in the generator LLM (Section 3.2.1). We varied the number n of few-shot examples by $n = 1, \dots, 5$ and measured the MLE (Fig. 5) and DCR distribution (Table 6) to find the optimal number n . As a result, the increasing number n of examples did not always increase the MLE of synthetic data (Fig. 5) but decreased the DCR (Table 6), thus increasing privacy concerns. Instead, $n = 2$ achieved sufficiently high DCR without compromising MLE. The MLE did not increase with more examples because the more examples will increase the context length and the generator LLM overlook some key context information. On the other hand, the DCR decreased with more examples because the generator LLM is more likely to stick to copy the provided examples. Interesting, the increasing number of examples does not affect the DCR of synthetic data generated from public dataset (Adult, Insurance).

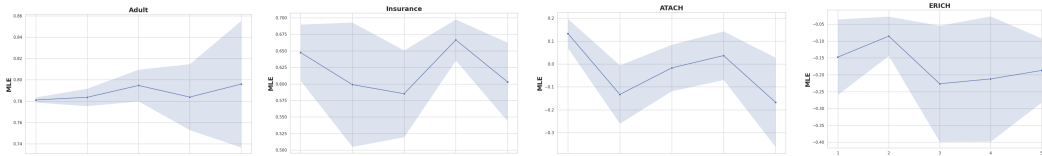


Figure 5: Number n of examples and MLE .

| | 1 | 2 | 3 | 4 | 5 |
|-----------|-------------|--------------|--------------|--------------|--------------|
| Adult | 5, 7, 8 | 6, 8, 11 | 6, 8, 11 | 6, 8, 10 | 6, 8, 10 |
| Insurance | 33, 87, 187 | 61, 145, 298 | 64, 144, 438 | 64, 159, 505 | 53, 126, 297 |
| ATACH2 | 66, 81, 95 | 75, 88, 104 | 73, 83, 97 | 68, 81, 94 | 71, 79, 93 |
| ERICH | 66, 79, 92 | 69, 83, 100 | 65, 79, 94 | 67, 79, 94 | 62, 74, 85 |

Table 6: Number n of examples and DCR. 25%, 50% (Median), 75% quantile.