
MINT: a Multi-modal Image and Narrative Text Dubbing Dataset for Foley Audio Content Planning and Generation

Ruibo Fu^{1†} Shuchen Shi^{2†} Hongming Guo³ Tao Wang¹ Chunyu Qiang^{4,5}

Zhengqi Wen¹ Jianhua Tao^{6,7} Xin Qi^{1,8} Yi Lu^{1,8} Xiaopeng Wang^{1,8}

Zhiyong Wang^{1,8} Yukun Liu⁸ Xuefei Liu¹ Shuai Zhang⁶ Guanjun Li¹

¹Institute of Automation, Chinese Academy of Sciences ²Shanghai Polytechnic University

³Beijing University of Posts and Telecommunications ⁴Tianjin University

⁵Kuaishou Technology Co., Ltd ⁶Department of Automation, Tsinghua University

⁷Beijing National Research Center for Information Science and Technology, Tsinghua University

⁸University of Chinese Academy of Sciences

ruibo.fu@nlpr.ia.ac.cn

Abstract

Foley audio, critical for enhancing the immersive experience in multimedia content, faces significant challenges in the AI-generated content (AIGC) landscape. Despite advancements in AIGC technologies for text and image generation, the foley audio dubbing remains rudimentary due to difficulties in cross-modal scene matching and content correlation. Current text-to-audio technology, which relies on detailed and acoustically relevant textual descriptions, falls short in practical video dubbing applications. Existing datasets like AudioSet, AudioCaps, Clotho, Sound-of-Story, and WavCaps do not fully meet the requirements for real-world foley audio dubbing task. To address this, we introduce the Multi-modal Image and Narrative Text Dubbing Dataset (MINT), designed to enhance mainstream dubbing tasks such as literary story audiobooks dubbing, image/silent video dubbing. Besides, to address the limitations of existing TTA technology in understanding and planning complex prompts, a Foley Audio Content Planning, Generation, and Alignment (CPGA) framework is proposed, which includes a content planning module leveraging large language models for complex multi-modal prompts comprehension. Additionally, the training process is optimized using Proximal Policy Optimization based reinforcement learning, significantly improving the alignment and auditory realism of generated foley audio. Experimental results demonstrate that our approach significantly advances the field of foley audio dubbing, providing robust solutions for the challenges of multi-modal dubbing. Even when utilizing the relatively lightweight GPT-2 model, our framework outperforms open-source multimodal large models such as LLaVA, DeepSeek-VL, and Moondream2. The dataset is available at <https://github.com/borisfrb/MINT>¹

1 Introduction

Foley, or foley audio, refers to the generation of routine sound effects that are added to multimedia to enhance the immersion of experience [1]. In professional media production such as films, animation, TV shows and short videos in social media, the foley audio is widely selected and fused into the corresponding video, which is called audio dubbing. Recently, with the rapid development and

¹The MINT dataset is licensed under CC BY-NC-SA-4.0 license. † Equal contributions.

widespread application of AIGC technology in the entertainment sector, there is an increasing demand for the generation of highly immersive and realistic multimedia encompassing text, images, and audio, where foley audio dubbing is a very important but easily neglected part.

Currently, AIGC technology primarily focuses on the high-precision generation of information under the condition of precise content description, with most research centered on text and image modalities. Technologies like Sora excel in producing continuous visual content from minimal prompts, but generating foley audio remains rudimentary. Foley audio dubbing faces challenges in cross-modal scene matching and content correlation [2], requiring the alignment of audio descriptions with image and text modalities [3]. In actual video dubbing scenarios, the most common form is to dub foley audio based on image and narrative text prompts, making it very challenging to generate matching and highly immersive audio. Hence, multi-modal dubbing is an urgently needed research direction.

The text-to-audio (TTA) technology [4] is currently the mainstream solution for foley audio dubbing tasks. This technology necessitates that individuals with a certain level of relevant expertise provide a precise and fully acoustically relevant textual description, clear and suitable for the TTA model employed, to generate the desired scene’s audio. Although multimodal prompts are utilized as input in tasks like image style transfer and text-based question-and-answer, textual prompts play an important role in AIGC tasks. When generating foley audio from textual prompts, the input must explicitly detail the sound events.

At present, research on TTA mainly focuses on two aspects: datasets and model architecture. In terms of datasets, the most classic dataset is AudioSet [5], which covers a wide range of sound events. To facilitate the modeling from text description to audio, the text descriptions have been carefully processed and annotated through various means. These text descriptions are very concise, containing only acoustic elements. However, some related datasets still differ from the requirements of actual video dubbing application scenarios in terms of modal type, description type, and audio quality. Examples of such datasets include AudioCaps [6], Clotho [7], Sound-of-Story [8], and WavCaps [9]. These existing datasets are unable to fully meet the needs of foley audio dubbing applications in real-world scenarios. In terms of model architecture, AudioGen [10] uses a self-regressive TTA model. DiffSound [11] and Make-An-Audio [12] employ discrete diffusion models. AudioLDM2 [13] and TANGO [14] combine large language models (LLMs) and audio codecs. These improvements in model architecture mainly focus on accelerating the regeneration process and enhancing the quality of the generated foley audio. The generalization and robustness of models based on text inputs largely depend on whether the training data can cover the data distribution space of actual applications. Reinforcement learning has also been explored for TTA, offering potential advantages in optimizing models for perceptual audio quality through interaction-based learning [15]. Unlike visual or textual data, audio quality is highly subjective and context-dependent, making it hard to design objective metrics.

However, in practical dubbing tasks, the prompts applicable for generating foley audio are typically multi-modal, and the text descriptions are often lengthy narratives rich in detail. While some research efforts aim to enhance the robustness of TTA models by using preprocessed text descriptions [16], most research primarily addresses issues of nonstandard and ambiguous descriptions. The modeling primarily focuses on descriptions highly related to acoustics, resulting in a gap between current TTA technology and real-world dubbing demands. Consequently, the mismatch between text descriptions and acoustic scene descriptions poses a significant challenge, primarily due to the technology’s limited capability in content planning and detailing for dubbing tasks. Additionally, the absence of a multi-modal dubbing dataset tailored for real-world scenarios is a critical factor hindering technological advancement.

In this paper, we establish a Multi-modal Image and Narrative Text Dubbing Dataset (MINT), aimed at fine-grained foley audio content planning and generation. The dataset encompasses key application scenarios for dubbing tasks, including narrative text descriptions and intricate visual expressions from images, addressing the limitations of existing TTA datasets, which only describe acoustic environments. Based on this dataset, we propose a Foley Audio Content Planning, Generation, and Alignment (CPGA) framework. To address the limitations of existing TTA technology in understanding and planning complex prompts, we have developed a Foley Audio Content Planning module, leveraging large language models (LLMs) to enhance comprehension of complex texts and cross-modal prompts. Furthermore, the training process is optimized by employing Proximal Policy Optimization (PPO) based reinforcement learning. Experimental results demonstrate that the

proposed MINT dataset significantly enhances multi-modal dubbing tasks. Compared to models such as GPT-4, our framework excels in supporting general foley audio generation tasks, markedly improving both the alignment and the auditory realism of the generated audio. The main contributions of this article include the following three parts:

- **MINT dataset:**The MINT dataset was constructed, representing, to our best knowledge, the first dataset for multi-modal Foley audio dubbing involving long narrative texts and images. Long narrative texts present challenges due to information redundancy, conflicts, and interference, making direct application in Foley audio description difficult. Similarly, image content descriptions often deviate from the corresponding Foley audio descriptions across modalities. The establishment of this dataset significantly advances content planning tasks based on complex multi-modal promotes. Experiments demonstrate that the proposed MINT dataset effectively enhances the performance of dubbing tasks in real-world scenarios.
- **CPGA framework:**The foley audio Content Planning, Generation, and Alignment (CPGA) framework is proposed, capable of generating foley audio that matches complex multi-modal promotes. The content planning module leverages the large model’s deep understanding of multi-modal information, fuses and analyzes these promotes to produce accurate textual descriptions, addressing the time-consuming manual design and adjustment issues inherent in existing technologies. Experiments confirm the proposed method’s enhancements in the generalization and robustness of Foley audio generation.
- **Acoustic guidance PPO:** Compared with the traditional method, which only optimizes foley audio content planning module and generation module respectively, the proposed direct end-to-end acoustic guidance Proximal Policy Optimization avoids cumulative error loss. Experiments show that the proposed method effectively improves the generation accuracy of Foley audio.

2 MINT: Multi-modal Image and Narrative Text Dubbing Dataset

2.1 Motivation

Our motivation for constructing this dataset is based on the following three points.

- **Expanding Applications and Technological Versatility:** Text-to-Audio (TTA) techniques primarily focus on the precise acoustic description of Foley audio. The annotation space formed by these prompts is relatively small compared to open scenario description spaces. Although this makes the conversion from prompt to audio relatively straightforward, it also limits the current application scenarios. Despite Foley sound’s critical role in post-production, there is no comprehensive dataset for Foley sound generation. To enhance TTA models’ ability to generate high-quality Foley sounds, a multimodal input dataset is urgently needed.
- **Enhancing Technological Robustness:** Mainstream TTA models are based on diffusion model architecture, where the quality of generation is highly correlated with the input prompt. This necessitates designers to extract precise prompts from multimodal ambiguous prompts in film and television dubbing. To address this, our dataset includes complex multimodal descriptions as inputs and concise, accurate prompts as targets, thereby reducing the burden of prompt engineering for TTA models.
- **Promoting the Development of Audio Content planning and Creation:** Current audio generation research focuses on presenting given content under clear constraints, without the need to plan the details involved in the audio content. Traditional audio generation tasks primarily emphasize modality-aligned conversion. The establishment of this dataset can facilitate research on cross-modal conversion in non-aligned scenarios, emphasizing understanding and creation.

2.2 Guidelines

In this section, we introduce the principles and methods for constructing the dataset.

- **Simulating Realistic and Robust Scenarios:** To better simulate real-world dubbing and enhance the robustness of TTA models, we constructed a multimodal dubbing dataset using filtered AudioCaps[6] data. AudioCaps, derived from AudioSet[5], broadly covers natural audio. To align with real-world dubbing demands, we augmented AudioCaps with images

| | | |
|------------------------|--|--|
| Original Audio Caption | An adult male is speaking, a motor is running, rhythmic vibration, and water is gurgling | |
| Generation Prompt | <p>I would like you to expand an audio descriptions with the following requirements:</p> <ul style="list-style-type: none"> • Each expanded description should be around 100 words, providing more details based on the brief sound descriptions, without introducing any new sounds. • The expanded descriptions should focus on depicting the scene where the sounds occur, the feelings they evoke, the auditory experience, and the way the sounds are produced, rather than directly describing the sounds themselves. • Incorporate elements of a story such as setting, characters, and plot development to create a more immersive and engaging experience. • While it is not necessary to meet all the above requirements simultaneously, prioritize the fluency and coherence of the language. | |
| Long Narrative Text | <p>🌀 In a quiet suburban neighborhood, an adult male stands in his garage, speaking animatedly on his phone. The steady hum of a motor running fills the background, blending seamlessly with his deep, resonant voice. Each word he utters is punctuated by the rhythmic vibration of a nearby washing machine, its cyclical motions creating a soothing, predictable pattern. The air is warm and slightly humid, carrying the faint scent of detergent. In the corner, a hose feeds into a drain, where water gurgles gently, adding a soft, melodic undertone to the scene. Together, these sounds weave a tapestry of domestic tranquility, evoking a sense of home and routine amidst the hustle of daily life.</p> | <p>∞ As the adult male's voice carries through the air, it's as if he's sharing a secret with the world. His words are laced with conviction, and his tone is reassuring. The hum of the motor provides a gentle background melody, its steady beat a reminder of the machinery's steady work. The rhythmic vibration emanating from it is almost palpable, like the thrum of a harp string. Meanwhile, the water gurgling in the distance is like a soothing brook, its gentle babble a counterpoint to the motor's steady pulse. The combination of sounds creates a sense of calm, as if the world is unfolding at a peaceful, deliberate pace.</p> |

Figure 1: LLM generation example.

and extended textual descriptions using advanced language models. Each dataset entry now includes an image, extended text, original audio caption, and audio, forming quadruplets. These components can be used in various combinations to facilitate modality alignment and simulate scenarios with missing modalities. This ensures the dataset better reflects real-world tasks, improving model performance in practical applications.

- **Diverse Generation:** To ensure the generalization ability of the constructed dataset, we employed various generation and screening methods, leveraging human expertise, advanced language model capabilities, and extended narrative text evaluation techniques. This comprehensive approach guarantees the diversity and generalizability of the dataset.

2.3 Dataset construction process

Image modal part of MINT dataset. We randomly selected a series of frames from YouTube videos corresponding to AudioCaps. Subsequently, we employed image clustering techniques to identify the single frame that best represents the video’s content. Finally We use manual evaluation to filter out images that are blurry or unclear in meaning.

Text modal part of MINT dataset. Based on the original AudioCaps audio descriptions, we utilize Large Language Models (LLMs) to expand them into long narrative texts. Our prompts explicitly require the models to follow specific rules for expansion: **(1) No addition of new acoustic elements.** **(2) Setting the narrative text’s plot and characters.** **(3) Expanding on the subjective auditory experiences.** More details are shown in Figure 1.

To ensure the diversity of narrative texts reflective of the real world, we employ multiple mainstream LLMs, including GPT-4 [17], LLAMA3-8B, and LLAMA3-70B[18], to generate different narrative texts. This approach simulates the broad quality range of real-world open-domain narrative text. All generated texts are then scored through human evaluation, and low-scoring texts are filtered out.

2.4 Overall Statistics

The expanded dataset comprises 35,363 training samples, 2,532 validation samples, and 2,121 test samples. To verify the comprehensiveness of the dubbing scenarios, we categorized common dubbing scenes into four major categories and eleven subcategories:

| Environmental | Natural | | | Urban | | |
|---------------|---------------------|--------------------|-----------------|-----------------|-----------------|--------------|
| Subset Sounds | Weather | Water | Animal | Traffic | Crowd | Construction |
| Count | 9439 | 9438 | 9316 | 9379 | 8222 | 3111 |
| Environmental | Indoor | | | Industrial | | |
| Subset Sounds | Household appliance | Office environment | Daily household | Factory machine | Factory machine | |
| Count | 9514 | 6669 | 9763 | 8526 | 4352 | |

Table 1: Count of Scene Category in the Dataset

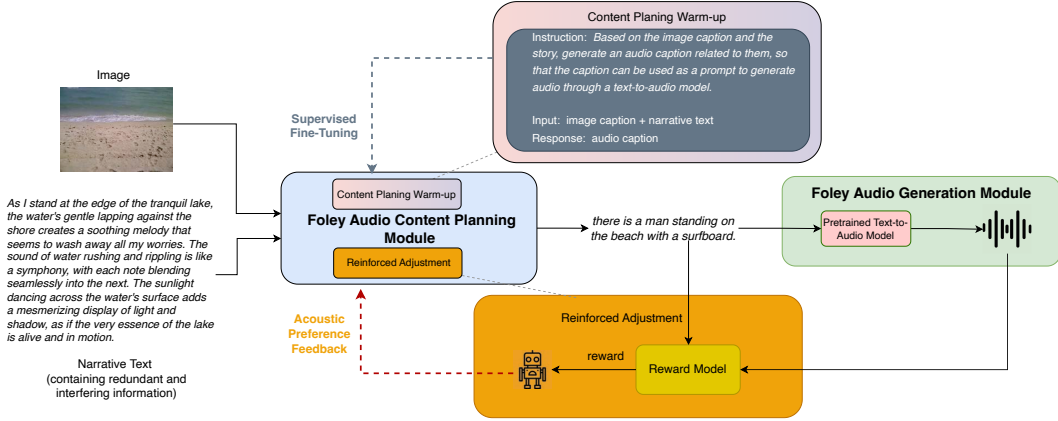


Figure 2: The overall framework of our proposed method.

- Natural Environmental Sounds (Weather sounds, Water sounds, Animal sounds)
- Urban Environmental Sounds (Traffic sounds, Crowd sounds, Construction sounds)
- Indoor Environmental Sounds (Household appliance sounds, Office environment sounds, Daily household sounds)
- Industrial Environmental Sounds (Factory machine sounds, Tool usage sounds)

We counted the occurrences of all scene sounds within the dataset. Given that the audio in AudioCaps often includes multiple mixed sounds, a single data sample may contain multiple categories of scene sounds. The statistical results indicate that our dataset extensively covers real-world dubbing scenarios. The results are shown in Table 1.

3 CPGA:Foley audio Content Planning-Generation-Alignment framework

The real-world dubbing scenario encompasses a rich tapestry of multimodal inputs, including both visual elements (images or video) and narrative text. Real-world dubbing scenarios necessitate a multimodal approach to audio generation. This involves not just simple audio generation but a nuanced understanding and integration of multimodal cues—something that conventional TTA technologies are ill-equipped to handle. To bridge the gap between the requirements of real-world dubbing scenarios and the capabilities of TTA technologies, we propose the incorporation of a Foley audio Content Planning, Generation, and Alignment framework (CPGA) into the foley audio generation process. The CPGA is designed to comprehend and analyze the complexities of multimodal inputs, addressing issues such as redundancies, noise, weak conflicts, and omissions that are prevalent in real-world scenarios. By leveraging the deep understanding capabilities of LMMs, the Foley audio Content Planning module formulates a detailed content plan that guides the foley audio generation process, ensuring that the generated audio is in harmony with both the visual and narrative aspects of the content. Upon establishing a comprehensive Foley audio content plan, the framework proceeds with audio generation using a modified TTA model that is informed by the insights from the Foley audio Content Planning module. This ensures that the generated audio is not only contextually accurate but also enriched with the nuances captured in the content plan. To ensure optimal audio output quality, the framework incorporates an alignment module that employs reinforcement learning mechanisms. This module refines the audio generation process by establishing a reward function based on the effectiveness of the generated audio.

3.1 Foley Audio Content Planning

The Foley Audio Content Planning module is a cornerstone in bridging the existing gap between the capabilities of large generative models in audio generation and the nuanced requirements of real-world dubbing applications. This module capitalizes on the recent successes of large language models in various Natural Language Processing tasks. With their profound contextual understanding, honed by extensive training data, large language models have excelled at tasks such as Text Summarization, Text Simplification, and Paraphrase Generation. Inspired by these capabilities, we harness large language models to explicitly fuse the conditional information required for multimodal dubbing tasks.

The initial step in our Foley audio Content Planning module involves the use of pre-trained image caption models to extract visual information from images, which could be static pictures or keyframes from videos. These models translate the visual data into textual descriptions, effectively converting visual cues into a modality that can be processed alongside textual data. Once the visual information is converted into text, it is concatenated with the corresponding narrative text to form an extended text sequence. The narrative text typically consists of story descriptions that provide context and direction for the dubbing process. However, these descriptions may contain noise and superfluous details that pose challenges for the TTA systems. To refine the content planning process, we employ large language models to perform information fusion on the combined text sequence. Through the use of specific instructions, the language model is directed to sift through the extended text, identifying and summarizing information that positively contributes to the generation of sound effects. The Foley audio Content Planning module constructs input prompts that are structured to facilitate the language model’s task. The prompts are composed as follows: **<Instruction><Image Caption><Narrative Text>**. By following this structured input, the language model is able to focus on the relevant aspects of the text sequence, filtering out irrelevant details and emphasizing information that aids in the creation of Foley audio content.

3.2 Foley Audio Generation

Following the successful integration of visual and narrative information into a concise text sequence via the proposed information fusion approach in the first step, we advance to the second step: audio generation using a TTA model. Among various TTA models, those based on latent diffusion models have shown remarkable capabilities in generating high-quality audio that aligns closely with the text inputs. A standout example in this domain is Tango, which utilizes the Flan-T5, a large language model, as its text encoder. Flan-T5 has been pre-trained on a vast array of chain-of-thought and instruction-based datasets, endowing it with exceptional generalization performance across different NLP tasks. This makes it an ideal choice for encoding the relatively accurate audio caption derived from step one for Foley audio generation.

Although the integration of the Foley audio Content Planning and the use of Tango for Foley audio generation represent significant advancements, relying solely on the Foley Audio Content Planning could lead to cumulative errors throughout the pipeline. This scenario essentially represents an open-loop control system, where a gap remains between the generated text prompts and the final audio output, potentially affecting the controllability of the generation process.

3.3 End to end alignment based on acoustic guidance Proximal Policy Optimization

To guarantee optimal outcomes in the final generated audio, our framework incorporates an alignment module that utilizes a reinforcement learning mechanism for fine-tuning the language model. This step is crucial for enhancing the precision of the prompts generated under the instruction of the language model, which, in turn, ensures that the audio produced is of the highest quality. The reinforcement learning mechanism leverages real-world audio samples to imbue the large language model with a richer understanding of acoustic information. This is achieved by setting up a reward function that evaluates the acoustic similarity between the generated audio and authentic audio samples. By optimizing towards this reward function, the large language model becomes adept at aligning textual prompts with the corresponding acoustic properties required for the audio output. This alignment is essential for maintaining congruence between the generated audio and the multimodal inputs, which includes visual cues and narrative text.

Proximal Policy Optimization (PPO) serves as the method of choice within this reinforcement learning framework to accomplish end-to-end alignment. PPO directly tunes the model’s parameters

by maximizing the reward function that reflects the quality of the audio output. This optimization process focuses on the end result, streamlining the alignment of the generated audio with the expected acoustic profile. As the model iterates through this process, it learns to produce prompts that lead to the most immersive and accurate Foley audio. Through the application of this reinforcement learning strategy, our framework achieves a robust and efficient pipeline capable of generating Foley audio that is not just contextually and thematically consistent with the visual and narrative elements but also acoustically rich and authentic. This end-to-end optimization ensures that the auditory content not only meets but exceeds the standards required for real-world applications, thereby providing an Enhanced immersive experience.

4 Experiments and Analysis

4.1 Dataset

In this work, we use the proposed MINT dataset to construct the training and testing sets used in the experiments. The training set contains a total of 35,363 entries, while the testing set contains 2,532 entries. In the multimodal dubbing generation method proposed in this paper, the information carried by an image is expressed by converting it into an image caption. Therefore, it is necessary to preprocess the images in the dataset to improve training speed. To achieve this, we use the BLIP [19], pretrained on the COCO [20] dataset, to extract image captions. During the preprocessing stage, for each image, we use BLIP to generate 5 image captions. Then, we use the CLIP [21] to calculate the similarity between the image and each of the 5 image captions, selecting the caption with the highest CLIP score as the final choice.

4.2 Training Setting

We use GPT-2 (GPT2-124M) [22] as the model for training. The Stage I Content Planing Warm-up is to train the language model in content planning, enabling it to correctly extract valid information from long texts that contain complex and redundant information. The Stage II Reinforced Adjustment involves using the reinforcement learning algorithm PPO to feed acoustic information from the audio back into the language model, allowing the language model to generate better prompt texts for the TTA model.

Stage I: Content Planing Warm-up Training the language model to learn content planning requires a high-quality dataset. We consider the textual descriptions in the AudioCaps dataset to be high-quality audio captions, as they are manually annotated and have undergone strict screening. We construct a high-quality dataset to train GPT-2, consisting of <query, response> pairs. The query is a combination of Instruction, image caption, and narrative text, while the response is the corresponding textual description from AudioCaps. We train for 50 epochs on a single 4090 GPU with a batch size of 16, and the training duration is 4 hours.

Stage II: Reinforced Adjustment In the reinforcement learning adjustment phase, we randomly select a data entry from the training set and concatenate the image caption, narrative text, and Instruction from it, then input this concatenated text into the GPT-2 model fine-tuned in Step 1. After content planning by GPT-2, it generates a more precise textual description that matches the input distribution of the TTA model. Subsequently, we use CLAP [23] to extract features from both the textual description and the audio from the selected data and calculate their similarity. The calculated similarity serves as the reward for the PPO algorithm, which is then used to fine-tune the GPT-2 model. During this training phase, we use a learning rate of 1e-6, a batch size of 16, a mini-batch size of 4, and train for 10 epochs on two 4090 GPUs. The training duration is approximately 35 hours.

4.3 Evaluation Metrics

We perform both objective evaluation and human subjective evaluation on the generated audio. The primary metrics used for objective evaluation include the Frechet Distance (FD) and Kullback-Leibler (KL) divergence. The FD score quantifies the overall similarity between the generated audio samples and the target samples without the need for paired reference audio samples. The KL divergence is calculated using paired samples and measures the divergence between two probability distributions. Both metrics are based on the state-of-the-art audio classifier PANNs [24]. For subjective evaluation, following previous methods in the TTA field [10, 13], we ask five human evaluators to assess two

aspects of the generated audio: overall audio quality (OVL) and relevance to the text caption (REL). We randomly select 20 audio samples generated by each method and ask participants to rate them on a scale from 1 to 100.

Table 2: The subjective evaluation results of different TTA models and vision-language models (VLMs). In this comparison of different VLMs, Tango is used to generate audio from the audio captions.

| Model | Input | Subjective Metrics | | Model | Input | Subjective Metrics | |
|---------------|---------------------|--------------------|----------------|------------------|-------------------------|--------------------|----------------|
| | | OVL \uparrow | REL \uparrow | | | OVL \uparrow | REL \uparrow |
| GroundTruth | - | 87.56 | 85.72 | GroundTruth | - | 87.56 | 85.72 |
| AudioGen [10] | narrative text | 37.05 | 29.66 | Moondream2 | image && narrative text | 50.56 | 47.52 |
| AudioLDM [13] | narrative text | 35.11 | 30.22 | | | | |
| Tango [15] | narrative text | 41.36 | 32.15 | DeepSeek-VL [25] | image && narrative text | 58.18 | 56.67 |
| AudioGen | AudioCaps test text | 67.52 | 65.23 | | | | |
| AudioLDM | AudioCaps test text | 72.35 | 70.10 | LLaVA [26] | image && narrative text | 63.73 | 60.65 |
| Tango | AudioCaps test text | 83.55 | 81.29 | | | | |

Table 3: The results of our proposed method and other methods in both objective and subjective evaluations. Tango is also used as the audio generation model in this comparison.

| Model | Input Content | Objective Metrics | | Subjective Metrics | |
|---------------|--|-------------------|-----------------|--------------------|----------------|
| | | FD \downarrow | KL \downarrow | OVL \uparrow | REL \uparrow |
| GroundTruth | - | - | - | 87.56 | 85.72 |
| GPT-2 | <i>narrative text</i> | 45.09 | 3.95 | 45.18 | 33.67 |
| GPT-2 | <i>image caption</i> | 48.26 | 4.00 | 42.56 | 31.52 |
| GPT-2 | <i>image caption&&narrative text</i> | 46.40 | 3.97 | 48.56 | 32.17 |
| SFT-GPT-2 | <i>narrative text</i> | 28.87 | 1.70 | 65.52 | 62.23 |
| SFT-GPT-2 | <i>image caption</i> | 33.78 | 3.35 | 62.16 | 59.31 |
| SFT-GPT-2 | <i>image caption&&narrative text</i> | 27.09 | 1.59 | 73.55 | 71.29 |
| LLaVA | <i>image&&narrative text</i> | 30.28 | 1.82 | 63.73 | 60.65 |
| PPO-SFT-GPT-2 | <i>image caption&&narrative text</i> | 26.99 | 1.66 | 78.35 | 75.96 |

4.4 MINT dataset Tests on mainstream TTA models

In this section, we directly tested the test set of the MINT dataset on the current mainstream TTA models. Observations from the left side of the Table 2 indicate that when only the narrative text input from the MINT dataset is considered, the existing mainstream TTA models (including AudioGen, AudioLDM, Tango) fail to effectively process the narrative text. When compared to the annotated audio text descriptions in AudioCaps, there is a noticeable drop in performance, with even the top-performing TANGO model suffering a performance loss of approximately 40% on both OVL and REL metrics. The primary reason is that the current TTA models have a limited capacity to comprehend the existing text descriptions, and their functionality is confined to reconstructing precise acoustic descriptions. This experiment further confirms the significant modeling challenges in simulating the real-world application scenarios of the MINT dataset that we have constructed.

4.5 MINT dataset Tests on mainstream Multi-modal Large Models

In this section, we employ the test set from the constructed MINT dataset to evaluate several leading multimodal large models. To ensure optimal performance of the MLMs, we meticulously selected the most effective test results as the evaluation set for each sample. The experimental results on the right side of Table 2 reveal that, for multi-modal prompt inputs, LLaVA outperforms Moondream2² and DeepSeek-VL in multi-modal foley dubbing. Integrating image modal guidance, LLaVA also performs better than the traditional TTA model, yet it still significantly trails the GroundTruth. Our analysis indicates that while multimodal large models possess certain capabilities in processing multimodal information and comprehension, they lack specialized training for the dubbing task, resulting in notable shortcomings in this area of expertise.

²<https://huggingface.co/vikhyatk/moondream2>

4.6 Evaluation on proposed CGPA framework

In this section, due to the limited computing resources, we selected gpt-2 as the basic model of content planning module to evaluate the CPGA framework we proposed, and evaluated it with FD, KL, OVL and rel. It can be seen from Table 3 that the performance of Foley audio dubbing has been significantly improved after SFT operation compared with that without SFT operation due to full learning of the mode of dubbing task. At the same time, it can be observed that the overall performance is better when multimodal prompts are used as input. We speculate that the model learning can effectively promote the model’s in-depth understanding of multimodal dubbing tasks. In addition, it can also be observed that the subjective and objective indicators of PPO-SFT-GPT-2 proposed by us are better than those of LLaVA, and the end to end alignment based on acoustic guidance PPO method also further improves the performance, reaching an overall better performance for the current multimodal dubbing task.

5 Conclusions and Future Work

In this paper, we introduce the MINT dataset, a multi-modal dataset designed for foley audio dubbing tasks involving narrative texts and images. We also propose the CPGA framework, which integrates content planning, generation, and alignment for foley audio. This framework leverages the deep understanding capabilities of large models to process and analyze multi-modal prompts, significantly reducing the reliance on manual design and adjustment. The CPGA framework enhances the generalization and robustness of foley audio dubbing, ensuring that the generated audio aligns well with the provided multi-modal prompts. Furthermore, we employ a reinforcement learning approach based on PPO with acoustic guidance. This end-to-end optimization method avoids the cumulative loss of errors that can occur when optimizing individual modules separately. Experiments have demonstrated that the proposed CPGA framework significantly enhances dubbing tasks. The content planning module effectively addresses the current challenges of multimodal prompt fusion and long narrative text comprehension. Even when utilizing the relatively lightweight GPT-2 model, our framework outperforms open-source multimodal large models such as LLaVA, DeepSeek-VL, and Moondream2. Future work focuses on further improve the content key element planning and research on dubbing in the case of more modals.

Acknowledgments and Disclosure of Funding

This work is supported by the National Natural Sciencel Foundation of China (NSFC) (No.62101553, No.62306316, No.U21B20210, No.62201571).

References

- [1] D.B. Anderson and M.A. Casey. The sound dimension. *IEEE Spectrum*, 34(3):46–50, 1997.
- [2] Chaoning Zhang, Chenshuang Zhang, Sheng Zheng, Yu Qiao, Chenghao Li, Mengchun Zhang, Sumit Kumar Dam, Chu Myaet Thwal, Ye Lin Tun, Le Luang Huy, et al. A complete survey on generative ai (aigc): Is chatgpt from gpt-4 to gpt-5 all you need? *arXiv preprint arXiv:2303.11717*, 2023.
- [3] Yi Yang, Brendan Shillingford, Yannis Assael, Miaosen Wang, Wendi Liu, Yutian Chen, Yu Zhang, Eren Sezener, Luis C Cobo, Misha Denil, et al. Large-scale multilingual audio visual dubbing. *arXiv preprint arXiv:2011.03530*, 2020.
- [4] Xuenan Xu, Heinrich Dinkel, Mengyue Wu, and Kai Yu. Text-to-audio grounding: Building correspondence between captions and sound events. In *ICASSP 2021-2021 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 606–610. IEEE, 2021.
- [5] Jort F Gemmeke, Daniel PW Ellis, Dylan Freedman, Aren Jansen, Wade Lawrence, R Channing Moore, Manoj Plakal, and Marvin Ritter. Audio set: An ontology and human-labeled dataset for audio events. In *2017 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 776–780. IEEE, 2017.

- [6] Chanwoo D Kim, Byeongchang Kim, Hyun Lee, and Juheon Nam. Audiocaps: Generating captions for audios in the wild. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 119–132, 2019.
- [7] Konstantinos Drossos, Samuel Lipping, and Tuomas Virtanen. Clotho: An audio captioning dataset. In *2020 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 736–740. IEEE, 2020.
- [8] Keunwoo Choi, Jiyoung Lee, and Juheon Nam. Sound of story: Multi-modal storytelling with audio. In *Proceedings of the 2021 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 3060–3064. IEEE, 2021.
- [9] Yuxin Mei, Yuxuan He, and Xiaoxiao Liu. Wavcaps: A chatgpt-assisted weakly-labelled audio captioning dataset for audio-language multimodal research. In *Proceedings of the 2023 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 1234–1238. IEEE, 2023.
- [10] Felix Kreuk, Gabriel Synnaeve, Adam Polyak, Uriel Singer, Alexandre Défossez, Jade Copet, Devi Parikh, Yaniv Taigman, and Yossi Adi. Audiogen: Textually guided audio generation. *arXiv preprint arXiv:2209.15352*, 2022.
- [11] Dongchao Yang, Jianwei Yu, Helin Wang, Wen Wang, Chao Weng, Yuexian Zou, and Dong Yu. Diffsound: Discrete diffusion model for text-to-sound generation. *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, 2023.
- [12] Rongjie Huang, Jiawei Huang, Dongchao Yang, Yi Ren, Luping Liu, Mingze Li, Zhenhui Ye, Jinglin Liu, Xiang Yin, and Zhou Zhao. Make-an-audio: Text-to-audio generation with prompt-enhanced diffusion models. In *International Conference on Machine Learning*, pages 13916–13932. PMLR, 2023.
- [13] Haohe Liu, Qiao Tian, Yi Yuan, Xubo Liu, Xinhao Mei, Qiuqiang Kong, Yuping Wang, Wenwu Wang, Yuxuan Wang, and Mark D Plumbley. Audioldm 2: Learning holistic audio generation with self-supervised pretraining. *arXiv preprint arXiv:2308.05734*, 2023.
- [14] Deepanway Ghosal, Navonil Majumder, Ambuj Mehrish, and Soujanya Poria. Text-to-audio generation using instruction-tuned llm and latent diffusion model. *arXiv preprint arXiv:2304.13731*, 2023.
- [15] Navonil Majumder, Chia-Yu Hung, Deepanway Ghosal, Wei-Ning Hsu, Rada Mihalcea, and Soujanya Poria. Tango 2: Aligning diffusion-based text-to-audio generations through direct preference optimization. *arXiv preprint arXiv:2404.09956*, 2024.
- [16] Apoorv Vyas, Bowen Shi, Matthew Le, Andros Tjandra, Yi-Chiao Wu, Baishan Guo, Jiemin Zhang, Xinyue Zhang, Robert Adkins, William Ngan, Jeff Wang, Ivan Cruz, Bapi Akula, Akinniyi Akinyemi, Brian Ellis, Rashel Moritz, Yael Yungster, Alice Rakotoarison, Liang Tan, Chris Summers, Carleigh Wood, Joshua Lane, Mary Williamson, and Wei-Ning Hsu. Audiobox: Unified audio generation with natural language prompts, 2023.
- [17] OpenAI. Gpt-4 technical report, 2024.
- [18] AI@Meta. Llama 3 model card. 2024.
- [19] Junnan Li, Dongxu Li, Caoming Xiong, and Steven Hoi. Blip: Bootstrapping language-image pre-training for unified vision-language understanding and generation, 2022.
- [20] Tsung-Yi Lin, Michael Maire, Serge Belongie, James Hays, Pietro Perona, Deva Ramanan, Piotr Dollár, and C Lawrence Zitnick. Microsoft coco: Common objects in context. In *Computer Vision—ECCV 2014: 13th European Conference, Zurich, Switzerland, September 6–12, 2014, Proceedings, Part V 13*, pages 740–755. Springer, 2014.
- [21] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. In *International conference on machine learning*, pages 8748–8763. PMLR, 2021.

- [22] Alec Radford, Jeff Wu, Rewon Child, David Luan, Dario Amodei, and Ilya Sutskever. Language models are unsupervised multitask learners. 2019.
- [23] Yusong Wu, Ke Chen, Tianyu Zhang, Yuchen Hui, Taylor Berg-Kirkpatrick, and Shlomo Dubnov. Large-scale contrastive language-audio pretraining with feature fusion and keyword-to-caption augmentation. In *ICASSP 2023-2023 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 1–5. IEEE, 2023.
- [24] Qiuqiang Kong, Yin Cao, Turab Iqbal, Yuxuan Wang, Wenwu Wang, and Mark D Plumbley. Panns: Large-scale pretrained audio neural networks for audio pattern recognition. *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, 28:2880–2894, 2020.
- [25] Haoyu Lu, Wen Liu, Bo Zhang, Bingxuan Wang, Kai Dong, Bo Liu, Jingxiang Sun, Tongzheng Ren, Zhuoshu Li, Yaofeng Sun, Chengqi Deng, Hanwei Xu, Zhenda Xie, and Chong Ruan. Deepseek-vl: Towards real-world vision-language understanding, 2024.
- [26] Haotian Liu, Chunyuan Li, Yuheng Li, and Yong Jae Lee. Improved baselines with visual instruction tuning, 2023.

6 Appendix

6.1 Data Format

Our proposed dataset can be accessed from the following link. <https://github.com/borisfrb/MINT>

Our dataset includes images, narrative text, audio captions, and audio. We organize the data using JSON files, where each line represents a data sample. Table 4 is an example of a data sample. You can use the yt-dlp³ to retrieve audio files using the provided youtube_id and audio_start_time. Note that when using the yt-dlp tool to fetch audio files, ensure that the duration for fetching audio is set to 10 seconds, as specified by AudioSet and AudioCaps. For images, we provide their indices in the JSON file. The actual images can be downloaded from Zenodo, and the download links can be obtained from the provided link.

Table 4: Example of a data sample

```
{
  "audiocaps_id": "97151",
  "youtube_id": "vfY_TJq7n_U",
  "audio_start_time": "130",
  "audio_caption": "Rustling occurs, ducks quack and water splashes, followed by an adult female and adult male speaking and duck calls being blown",
  "image": "97151.png",
  "narrative_text": "As I make my way along the winding path, I come across a loving couple, their gentle conversation a warm and intimate accompaniment to the natural soundscape. The adult female's voice is soft and melodious, while the adult male's is deep and soothing. Their words are lost in the distance, but the love and contentment in their tone is palpable. Suddenly, a duck call pierces the air, followed by a chorus of quacks and honks from the ducks in the water. The sounds blend together in perfect harmony, a beautiful tapestry of sound that envelops me in its serenity."
}
```

6.2 Details of Subjective Evaluation

6.2.1 Evaluation metrics

Overall audio quality (OVL) and relevance to the text caption (REL) are subjective measures used to evaluate the effectiveness of audio generated by text-to-audio models. Table 5 and Table 6 show the scoring criteria we designed.

Table 5: Overall audio quality rating level description

| OVL | Level Description |
|----------|---|
| 80-100 | The audio quality is extremely high, the sound is clear and natural, with almost no noise or distortion, and the overall performance is very close to real environment recording. |
| 70-89 | The audio quality is high, the sound is clear, and there may be slight noise or distortion occasionally, but it does not affect the overall listening experience. |
| 50-69 | The audio quality is moderate and the sound is basically clear, but there is obvious noise or distortion that may affect the listening experience. |
| 30-49 | The audio quality is low, and there is significant noise or distortion in the sound, which seriously affects the overall listening experience. |
| Below 30 | The audio quality is very poor, the sound is blurry, the noise or distortion is very serious, and it is almost impossible to listen normally. |

6.2.2 Evaluators Selection

Participants for the OVL and REL listening tests should be selected based on specific criteria to ensure they represent the target audience of the generated audio. Typically, participants should have normal hearing capabilities and be unfamiliar with the specific work of this study to avoid bias. Ensuring diversity among paid participants helps achieve a more generalizable assessment of audio quality.

Pre-test Training. To ensure scoring consistency, evaluators undergo comprehensive training before the actual test. This training includes:

³<https://github.com/yt-dlp/yt-dlp>

Table 6: Relevance to the text caption rating level description

| REL | Level Description |
|----------|--|
| 80-100 | The audio and text descriptions are highly consistent, with every detail perfectly matching the text, and the auditory content almost perfectly matches the text content. |
| 70-89 | The audio and text descriptions are relatively consistent, and the main content and details are basically consistent with the text. Only a few details may have slight deviations. |
| 50-69 | The audio and text descriptions are consistent and can reflect the main content of the text, but there are obvious deviations or missing details. |
| 30-49 | The similarity between audio and text descriptions is low, with only some content matching the text description and most details being inaccurate or incorrect. |
| Below 30 | The audio and text descriptions are almost inconsistent, with significant differences in content that cannot reflect the main information of the text. |

1. **Introduction to the Evaluation Criteria:** Detailed explanation of the OVL and REL scoring criteria, including examples of each rating level.
2. **Sample Evaluations:** Evaluators listen to pre-selected audio samples that exemplify different aspects of the OVL and REL scoring criteria. These samples should cover a range of quality levels from poor to excellent.
3. **Practice Session:** Evaluators participate in practice sessions where they rate additional samples and receive feedback on their ratings. This step helps calibrate their judgments and align their understanding of the scoring criteria.

Consistency Checks. During the training phase, evaluators’ ratings are monitored for consistency. Statistical measures such as inter-rater reliability (e.g., Cronbach’s alpha) can be calculated to ensure agreement among evaluators. Evaluators who exhibit significant deviations from the group consensus may require additional training or be excluded from the final testing.

6.2.3 Evaluation Scale

We ask five evaluators to assess the generated audio from two aspects: OVL and REL. We select 20 audio samples generated by each method and ask participants to rate them on a scale from 1 to 100. The scoring table used by each evaluator is shown in Table 7.

Table 7: Scoring table for evaluators

| | Audio_1 | Audio_2 | | Audio_20 |
|-----|---------|---------|-------|----------|
| OVL | | | | |
| REL | | | | |

6.3 Vision-Language Model Testing Details

We test several vision-language models using the test set from the proposed MINT dataset. First, we require the vision-language models to generate an audio caption related to the image and narrative text given the image, narrative text, and instruction. This audio caption is then fed into the text-to-audio model to generate audio. Finally, we evaluate the generated audio. The models used for testing and the prompts employed for each different model are shown in Table 8 and Table 9, respectively.

Table 8: The link to the pre-trained vision-language model used.

| Model | Link |
|-------------|---|
| Moondream2 | https://huggingface.co/vikhyatk/moondream2 |
| DeepSeek-VL | https://huggingface.co/deepseek-ai/deepseek-vl-7b-chat |
| LLaVA | https://huggingface.co/llava-hf/llava-v1.6-mistral-7b-hf |

6.4 Dubbing Scene Statistics

We employed the LLama-70b model to perform a statistical coverage analysis of dubbing themes within the dataset. The implementation details are presented in the Figure 3.

Table 9: The prompts used during testing with the pre-trained vision-language model. Orange text indicates escape characters. **Instruction:** "Based on the image and the narrative text, generate an audio caption related to them, so that the caption can be used as a prompt to generate audio through a text-to-audio model."

| Model | Prompt |
|-------------|--|
| Moondream2 | "narrative text:\n" + narrative text + "\n" + Instruction |
| DeepSeek-VL | "<image_placeholder>\nnarrative text:\n" + narrative text + "\n" + Instruction |
| LLaVA | "[INST] <image>\nnarrative text:\n" + narrative text + "\n" + Instruction + "[/INST]" |

| | |
|------------------------------|---|
| Long Narrative Text | As I stand beside the serene gurgling stream, the gentle melody of its waters is suddenly disrupted by a loud, jarring thump. The sound waves ripple through the air, shattering the peaceful atmosphere. The gurgling stream, once a soothing background hum, now seems to falter, as if taken aback by the unexpected interruption. The thump's reverberations echo through the forest, causing leaves to rustle and birds to take flight. The sudden jolt of sound creates a sense of unease, as if the natural world has been momentarily jarred out of its tranquility. The stream's gentle gurgling returns, but the memory of the thump lingers, a reminder of the fleeting nature of serenity |
| Categorization Prompt | I have listed some categories of environmental sounds. I will give you a descriptive text, and you need to identify the sounds present in it and classify them into both major and subcategories. A single text may contain multiple sounds, and you need to consider all the categories. The categories are as follows: Natural Environmental Sounds (Weather sounds, Water sounds, Animal sounds); Urban Environmental Sounds (Traffic sounds, Crowd sounds, Construction sounds); Indoor Environmental Sounds (Household appliance sounds, Office environment sounds, Daily household sounds); Industrial Environmental Sounds (Factory machine sounds, Tool usage sounds); |
| Result | Based on the provided text, the environmental sounds present are: \n\n1. Natural Environmental Sounds:\n* Weather sounds: None\n* Water sounds: Gurgling stream\n\t* Animal sounds: Birds chirping or taking flight \n2. Urban Environmental Sounds: None \n3. Indoor Environmental Sounds: None \n4. Industrial Environmental Sounds: None The thump is the primary sound that disrupts the peaceful atmosphere, and its reverberations cause the leaves to rustle and birds to take flight. The gurgling stream is the background hum that is initially soothing but is disrupted by the thump. The text does not contain any urban, indoor, or industrial sounds." |

Figure 3: Examples of Scene Classification

6.5 Dataset Construction Details

To ensure the integrity of the text expansion, we have established several stringent rules. First, the expansion process strictly prohibits the addition of any new auditory elements, ensuring that the narratives are solely based on the original audio content. Second, the models are tasked with constructing complete storylines, setting scenes, and characters, to enhance the narrative's immersion and appeal. Moreover, the expanded content should primarily describe the scenarios depicted by the audio, the emotions evoked, and the manner in which the sounds are produced, rather than directly describing the sounds themselves. Each expanded description, approximately 100 words in length, should elaborate on these elements in greater detail while prioritizing narrative fluency and linguistic coherence. Through this approach, we aim to provide a richer, more storied auditory experience. More results are shown in Figure 4.

6.6 The Main Claims

The paper's contributions and scope are focusing on the creation and characteristics of a new dataset. These sections effectively highlight the dataset's relevance and potential impact on further research.

6.7 External Data

We are utilizing the AudioCaps dataset, which is available under the MIT License. This licensing ensures that we adhere to the required legal standards for use and distribution of the data.

| Original Audio Caption | Long Narrative Text |
|--|---|
| The chirping of multiple birds accompanies gurgling water and crunching footsteps | In the early hours of the morning, a serene forest scene unfolds, dappled with the first light of dawn filtering through the leafy canopy above. A small group of birds, nestled among the vibrant green foliage, awakens the day with a symphony of chirping. Their songs are varied and melodious, echoing lightly in the cool, crisp air. Nearby, a small brook meanders through the underbrush, its waters gurgling gently over smooth stones and fallen branches, adding a soothing undertone to the avian concert. Amidst this natural harmony, the soft crunching of footsteps on the forest floor gradually becomes perceptible. A lone hiker, entranced by the tranquil beauty of the early morning, walks slowly, deliberately, each step an interaction with the rich tapestry of sounds. The peaceful atmosphere is thick with the fragrance of earth and growing things, the forest alive with the sensory feast of sight and sound. |
| An adult male is speaking, a motor is running, rhythmic vibration, and water is gurgling | On a busy city street, lined with aging buildings and bustling sidewalks, the atmosphere is charged with the chaotic energy of urban life. Amidst this backdrop, the deep, grumbling rumble of an aging bus engine breaks through the ambient noise. It idles heavily at a stop, vibrations echoing off the nearby structures, creating a resonant base that underscores the city's heartbeat. Suddenly, the monotony is pierced by the sharp, clear tone of a bell, signaling the closing of doors with an urgency that slices through the urban drone. No sooner does the tone fade than the bus's engine revs with renewed vigor. With a jolt of energy, the vehicle begins to accelerate, its engine growling louder and deeper as it gathers speed, merging back into the relentless flow of city traffic. Passengers inside the bus sway with the motion, each absorbed in their own thoughts, as the bus disappears down the bustling avenue, leaving a wake of reverberating sound that slowly melds back into the cityscape. |
| People laugh, some kissing | As the evening sun dipped below the horizon, the warm glow of the setting sun cast a golden light on the bustling street. The air was alive with the infectious laughter of a group of friends, their joyous sounds carrying on the gentle breeze. Amidst the chorus of giggles, a couple caught each other's eyes, their faces lighting up with affection. As they leaned in for a tender kiss, the surrounding laughter and chatter momentarily paused, as if the world had slowed down to savor the intimate moment. The soft smacking of lips and gentle whispers of sweet nothings only added to the enchanting atmosphere, leaving all who witnessed the tender exchange with a warm, fuzzy feeling in their hearts. |
| A helicopter hovers nearby, followed by people talking nearby" | As the helicopter's rotors whirred to a gentle halt, the air was filled with the soft hum of machinery, its vibrations subtly altering the atmosphere. The sound was almost soothing, like a lullaby, as the blades slowly came to a stop. As the noise subsided, the distant chatter of people grew louder, their conversations weaving together in a tapestry of laughter and everyday banter. The sounds blended seamlessly, creating a sense of tranquility, as if the world had momentarily paused to allow for a brief respite. The scene unfolded like a still life, with the helicopter's presence serving as a reminder of the world beyond the tranquil atmosphere, while the voices of the people nearby whispered secrets and shared stories, their words carrying on the gentle breeze. |
| An aircraft engine idles while people are talking | In the expansive tarmac of a bustling airport, the scene is dominated by the persistent hum of an aircraft engine idling, its sound a steady backdrop to the flurry of activities around. Nearby, a group of passengers, just disembarked, are engaged in animated conversation. They share stories of their travels, their voices a mixture of excitement and relief, mingling with the mechanical symphony of the engine. The air carries a palpable sense of anticipation and movement. The engine's low rumble underscores the transient encounters and farewells happening under its watch—every conversation punctuated by the powerful breath of the airplane, reminding everyone of the journeys that have just ended and those about to begin. |

Figure 4: More Examples of Long Narrative text

6.8 Ethics Statement

The access to this MINT dataset is limited to academic institutions and is for research purposes only. We include frames extracted from each YouTube video as images in the dataset and ensure that these images do not adversely affect the copyright owner's ability to generate revenue from their original content, thereby complying with YouTube's fair use policy. If any copyright owner believes their rights have been infringed, we commit to promptly removing the disputed materials from our dataset.