# TorchOpera: A Compound AI System for LLM Safety

Shanshan Han, Zijian Hu, Alay Dilipbhai Shah, Han Jin, Yuhang Yao, Dimitris Stripelis, Zhaozhuo Xu, Chaoyang He

### Abstract

We introduce TorchOpera, a compound AI system for enhancing the safety and quality of prompts and responses for Large Language Models. TorchOpera ensures that all user prompts are safe, contextually grounded, and effectively processed, while enhancing LLM responses to be relevant and high quality. TorchOpera utilizes the vector database for contextual grounding, rule-based wrappers for flexible modifications, and specialized mechanisms for detecting and adjusting unsafe or incorrect content. We also provide a view of the compound AI system to reduce the computational cost. Extensive experiments show that TorchOpera ensures the safety, reliability, and applicability of LLMs in real-world settings while maintaining the efficiency of LLM responses.

## 1. Introduction

Safeguarding the inference of Large Language Models (LLMs) is critical in real-world applications. Safety risks may exist in the user prompts as well as LLM responses during the users' interactions with LLMs. Malicious users may exploit the vulnerabilities of LLMs by interacting with them with crafted prompts, e.g., prompt injections (Liu et al., 2023; Kumar et al., 2023; Zhu et al., 2023; Chu et al., 2024; Tedeschi et al., 2024; Zhao et al., 2024). The outputs generated by LLMs can also be offensive, discriminatory, nonsensical, factually incorrect (e.g. hallucinations), etc (Zhang et al., 2023; 2024; Wang et al., 2023; Fan et al., 2023; Huang et al., 2023; Xu et al., 2024a), as the models are often trained on publicly available data that have uncontrolled sources and may include unsafe contents, which can propagate through the model's responses and produce harmful or inappropriate outputs.

Safeguarding LLMs is crucial and cannot be overstated. Unsafe inputs can not only manipulate the LLM outputs but also reveal sensitive information, bypass system instructions, or even execute harmful commands (Russinovich et al., 2024; Xu et al., 2024b; Chang et al., 2024; Liu et al., 2023; Kumar et al., 2023; Zhu et al., 2023; Chu et al., 2024; Tedeschi et al., 2024; Zhao et al., 2024). Also, problematic LLM outputs can confuse users, perpetuate negative stereotypes, and undermine public trust in LLM applications. This is particularly problematic in use cases where the accurate response is critical, such as healthcare, finance, and legal systems.

Addressing the safety issues associated with LLM inference is complex, as safety risks can arise at any point when processing a user prompt and often necessitate coordination of different methods. To safeguard LLM inference from unsafe or problematic outputs, standalone approaches deploy ML models to detect different types of safety risks in the LLM outputs (Hanu & Unitary team, 2020; Lees et al., 2022; Markov et al., 2023). However, while these models can identify issues, they lack the functionality to correct errors directly within the outputs. This gap can be partially bridged by employing a separate model designed specifically for fixing detected errors. Nevertheless, this approach still fails to address certain challenges, such as hallucinations, which often stem from insufficient, inaccurate, or outdated source information (Xu et al., 2024a; Zhang et al., 2023; Huang et al., 2023). In light of this, we can employ retrieval-augmented generation (RAG) (Lewis et al., 2020; Chen et al., 2024a; Gao et al., 2023), which mitigates hallucinations by enriching the user query with additional contextual information from external data sources, thus effectively enhancing the LLM's responses in more factual content.

However, all of these approaches fail to support quick customization of user needs and cannot handle rapidly changing contexts and system settings, while in certain cases, a simpler, code-based rule approach, denoted as "wrappers", can be more effective (Mohiuddin, 2024). As an example, consider a scenario where users want to add some texts at the beginning of the LLM outputs to warn if there are any phishing URLs in the texts. To achieve this goal, we can utilize crafted regex patterns to obtain URLs in the LLM outputs, and call APIs, such as Google Safe Browsing (Google, 2005) or PhishTank (Ulevitch, 2006), to find out unsafe URLs. Such a method does not require model training or additional supplementary data sources and can be easily deployed in the LLM system, thus is more flexible to be quickly adapted to new safety challenges as they emerge. Therefore, enhancing the overall safety of LLM inference re-

TorchOpera: A Compound AI System for LLM Safety

	*			U	11		
Feature	Perspective API	Open AI	Nvidia NeMo	GuardRails	Detoxify	Llama Guard	Ours
Open-sourced	×	×	1	1	1	1	~
Self-developed model	1	1	×	×	1	1	1
Deployable on edge devices	1	1	-	-	1	×	1
Zero-shot generalization	1	1	-	-	1	1	1
Explainable results	×	×	×	×	×	×	1
Flexible workflow	×	×	1	1	×	×	1

Table 1. Comparison of moderation-based harmfulness mitigation approaches

quires a comprehensive, integrated system that orchestrates nodes with functionality components, such as ML models, RAG for grounding, and wrappers, while ensuring these components work collaboratively and harmoniously.

This paper proposes TorchOpera, a compound AI system that enhances LLM safety throughout the entire lifecycle of LLM interactions. TorchOpera systematically manages safety challenges in LLM applications comprehensively, thus advancing a safe and scalable deployment of LLM applications. It also adapts to new safety challenges with high flexibility, thus is suitable for changing user requirements and system environments. TorchOpera orchestrates several key nodes with different specializations, including 1) a Safety Detection Node that identifies safety risks in user inputs and LLM outputs, 2) a Grounding Node that utilizes vector databases to contextualize user queries, and 3) a Repair Node that leverages different methods, such as ML models and code-based wrappers, to correct errors detected in the LLM outputs.

Contribution. We propose TorchOpera, a compound system to address safety issues in LLMs, instead of considering different safety challenges as sole and independent issues. TorchOpera consists of multiple modules, including Safety Detector, Grounding, and Repairer, each targeting specific safety challenges in LLM interactions. The core module, Safety Detector, is developed based on our own base model that has 1.6B parameters, thus is light-weighted and can be deployed on edge devices. We distinguish between safety detection in user inputs and LLM outputs, specifically addressing hallucinations in LLM outputs. To facilitate further refinement of outputs that may contain hallucinations, we propose a model that not only detects hallucinations but also provides explanations based on the LLM's generative capabilities. These explanations can further be used to refine and improve the LLM responses. TorchOpera allows user-defined wrappers to create flexible rules for fixing easily addressable errors in LLM-generated content, which enhances adaptability and customization of the system.

## 2. Related Work

Moderation-based harmfulness mitigation approaches ensure the outputs generated by LLMs are safe, appropriate, and free from harmful content (Markov et al., 2023; Rebedea et al., 2023; Lees et al., 2022; Hanu & Unitary team, 2020; Mohiuddin, 2024). These methods leverage rulebased methods, machine learning classifiers, and human interfaces to monitor, evaluate, and manage the outputs produced by LLMs.

**Close-sourced solutions.** OpenAI Moderation API (Markov et al., 2023) and Perspective API (Lees et al., 2022) utilize ML classifiers to detect undesired contents. These approaches provide scores for pre-defined categories of harmful content, such as toxicity, severe toxicity, identity attacks, insults, threats, etc. These tools are widely used in content moderation to filter out harmful content and has been incorporated into various online platforms to maintain safer user interactions (team, 2008). However, they are less adaptable to emerging safety risks as they are not open-sourced and cannot be finetuned.

**Opensourced solutions.** LlamaGuard (Inan et al., 2023) leverages the zero/few-shot abilities of the Llama2-7B architecture (Touvron et al., 2023) and can adapt to different taxonomies and sets of guidelines for different applications and users. Despite its adaptability, LlamaGuard's reliability depends on the LLM's understanding of the categories and the model's predictive accuracy. However, deploying LlamaGuard on edge devices is challenging due to its large number of parameters, which typically exceed the computing resources available on edge devices. Detoxify (Hanu & Unitary team, 2020) offers open-source models designed to detect toxic comments. These models, based on BERT (Devlin et al., 2018) and RoBERTac (Liu et al., 2019) architectures, are trained on the Jigsaw datasets (JIGSAW, 2019; 2018; 2020). Detoxify provides pre-trained models that can be easily integrated into other systems to identify toxic content. Also, the models are able to recognize subtle nuances in language that might indicate harmful content, making them effective for moderating content.

**Customizable solutions.** Guardrails (Mohiuddin, 2024) and Nvidia NeMo Guardrails (Rebedea et al., 2023) employ customizable workflows to enhance LLM safety. Guardrails (Mohiuddin, 2024) define flexible components, called "rails", to enable users to add wrappers at any stage of inference, which enables users to add structure, type, and quality guarantees to LLMs outputs. Such rails can be code-based or using ML models. However, it does not have self-developed model and miss a unified solution for general

cases. Nvidia NeMo Guardrails (Rebedea et al., 2023) functions as an intermediary layer that enhances the control and safety of LLMs. This framework includes pre-implemented moderation dedicated to fact-checking, hallucination prevention, and content moderation, which offers a robust solution for enhancing LLM safety.

We compare our approaches with the existing approaches in Table 1.

## 3. TorchOpera System Design

TorchOpera compound system enhances safety of LLM inputs and outputs while improving their quality. Specifically, it achieves two goals, 1) all user inputs are safe, contextually grounded, and effectively processed, such that the inputs to the LLMs are of high-quality and informative; and 2) the output generated by the LLMs are evaluated and enhanced, such that the outputs passed to users can be both relevant and of high quality. The workflow can be partitioned into two parts, including 1) processing before LLM inference that enhances user queries, and 2) processing after LLM inference that detects undesired content and handle them properly. We overview our system in Figure 1.

1. Pre-inference processing. Before sending user queries to LLMs, TorchOpera detects if there are any safety issues in the queries with TorchOpera Safety Detector and ground the queries with context knowledge with TorchOpera Grounding. TorchOpera Safety Detector monitors user inputs to identify and reject queries that might be unsafe. The monitoring includes typical safety checks, including toxicity, stereotypes, threats, obscenities, prompt injection attacks, etc. Any form of unsafe content will lead to the queries being rejected. Inputs that pass this initial safety check are grounded with context with TorchOpera Grounding, where the user query is tailored into an enhanced format by being contextualized with relevant knowledge retrieved from the vector data storage. By equipping the query with some context knowledge, the LLM can do inference with enriched information, thus can reduce hallucinations when generating responses. The details of TorchOpera Safety Detector and TorchOpera Grounding will be introduced in §4.1 and §4.2, respectively.

**2. Post-inference processing.** Upon LLM finishing inference, TorchOpera Safety Detector detects safety issues in the LLM outputs, specifically, hallucinations. This is because LLM applications typically leverages well-developed LLMs or APIs, such as LLaMA (Touvron et al., 2023) and ChatGPT API (Markov et al., 2023), which are generally safe and less likely to generate toxic or other unsafe content, while hallucinations occur frequently. The Safety Detector not only identifies hallucinations but also provides reasons for their occurrence, such that TorchOpera can utilize

the reasoning for later refinement of the LLM outputs. To achieve goal, TorchOpera employs a text generation model to generate explainable results, and adjusts the loss function during training to ensure the model to produce classification results. TorchOperaSafety Detector also uses code to analyze the responses generated to derive classification results. After TorchOperaSafety Detector finishes detection, TorchOpera Repair fixes the problematic content or aligns the outputs with some rule-based wrappers to meet user expectations. If the outputs are difficult to fix, such as those containing persistent hallucinations, the raw outputs are passed to TorchOpera Grounding to generate a new prompt, which is then used to re-query the LLM. Details about TorchOpera Repair can be found in §4.3.

### 4. TorchOpera Components

#### 4.1. TorchOpera Safety Detector

The Safety Detector addresses unsafe inputs and LLM outputs generated by LLMs to ensure both the ensuring that both the prompts provided to the models and the outputs they generate are free from harmful content and misinformation.

Handling Unsafe Inputs. TorchOpera utilizes a unified model specifically to detect undesired content in the user queries, such as toxicity, malicious prompts, stereotypes, threats, etc. One of the biggest challenges in training such model is the discrepancy between the training data and real-world user query distributions, where using traditional datasets alone can result in poor performance due to their divergence from actual user queries (Markov et al., 2023). To mitigate these issues, we crafted a training dataset by combining samples randomly selected from 15 public datasets. The datasets used include: HEx-PHI (Qi et al., 2024), OpenAI (Markov et al., 2023), Hotpot QA (Yang et al., 2018), Truthful QA (Lin et al., 2021), Awesome ChatGPT Prompts (Akın, 2023), Jigsaw Unintended-Bias Data (JIGSAW, 2019), GPT-Jailbreak (Romero, 2023), Jailbreak (Hao, 2023), Personalization Prompt (Siah, 2024), OA Chat Prompts (Testing, 2024), ChatGPT Prompts (Rashad, 2023), 10k Prompts Ranked (Community, 2024a), Iterative Prompt (Community, 2024b), and Instruction Following (Kojohnjaratkul, 2023). By integrating data from multiple sources, including various domains and contexts, we can better simulate the variety of queries that users might submit. Such sophisticated dataset capturing the diverse range of content types and user behaviors that LLMs are likely to encounter in practice, thus ensures a more representative sample of potential real-world inputs.

Handling Unsafe Outputs. While current LLMs, such as ChatGPT (Markov et al., 2023) and Llama (Touvron et al., 2023; Inan et al., 2023), are generally designed to be safe

TorchOpera: A Compound AI System for LLM Safety

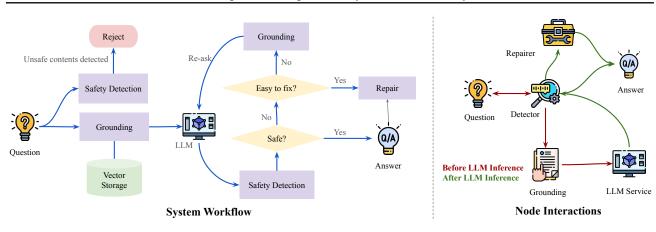


Figure 1. System Overview.

and often refuse to answer queries that appear even slightly malicious, they can sometimes be overly cautious (Markov et al., 2023; Inan et al., 2023). This conservative nature stems from the models' underlying safety protocols, which prioritize avoiding any potential harm over providing nuanced responses. Consequently, these LLMs may refuse to a wide range of queries that may not pose actual risks but fall within ambiguous or borderline categories. Given that many AI applications are currently built on top of well-established LLMs, their conservative nature reduces the necessity to detect toxicity in their outputs. Nevertheless, the most significant challenge remains the issue of hallucinations. While grounding can reduce the frequency of hallucinations by enriching the context available to the model, it cannot eliminate them entirely. This is because the model's inherent propensity to generate plausible-sounding but incorrect information is a fundamental characteristic that stems from its training on large, diverse datasets, which inevitably contain errors and inconsistencies.

To address hallucinations in LLM outputs, Torch-Opera Safety Detector utilizes a fine-tuned model designed to both detect hallucinations and provide hints for their subsequent mitigation. Specifically, the model is required to perform two key tasks: 1) classification: the model should detect the presence of hallucinations in LLM outputs; and 2) text generation: the model should generate explanations for why it identifies certain outputs as hallucinations to provide insights for subsequent output repair.

To achieve this goal, we employ the methods as follows.

 Crafting Training Data. We use hallucination classification data and frame the questions and classification results as sentences. For example, the question might be, "Is there any hallucination in the following record?" with answers of "Yes" or "No". We also generate explanations of hallucinations with GPT4 API (Markov et al., 2023) and include them in the training data.

- 2. Using Generative Models. We explore the generative abilities of LLMs. By fine-tuning generative models, we leverage their ability to generalize, allowing them to handle a variety of hallucination scenarios effectively.
- 3. Classification Results. TorchOpera Safety Detector determines whether an output contains hallucinations based on "Yes" or "No" responses.

### 4.2. TorchOpera Grounding

TorchOpera Grounding enhances the contextual richness and informativeness of user queries by leveraging external knowledge stored in vector data repositories. This process ensures that LLMs can utilize such knowledge to generate high-quality outputs, particularly by grounding user queries before they are passed to the LLMs for inference.

To support similarity search over the knowledge data, we create vector storage for plaintext knowledge. This involves vectorizing entire knowledge entries to create vector indexes. We employ two primary methods for indexing:

- Whole Knowledge Indexing: This method involves indexing entire data from the datasets. While comprehensive, it reflects the data distribution and ensurers that the indexed data captures the contextual variety and complexity found in real-world queries.
- Key Information Indexing: This method involves indexing only the questions. By focusing on key information, this approach targets the core elements of user queries, facilitating efficient retrieval of relevant data.

To ensure grounding to be effective, i.e., desired knowledge can be retrieved when issuing a query, the distribution of

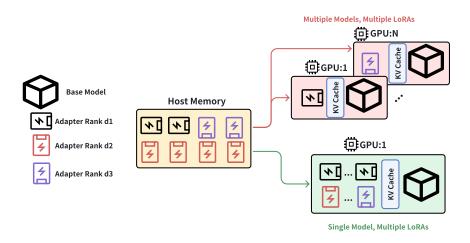


Figure 2. Serving multiple LoRAs with a single GPU.

index should follow the distribution of real-world queries. This ensures that the model's responses are both relevant and practical in real-world applications. By capturing the distribution of actual user queries, we improve the model's ability to generate contextually appropriate responses.

#### 4.3. TorchOpera Repair

TorchOpera Repair leverages light-weight wrappers to enable defining guidelines for fixing problematic contents in the LLM outputs with high flexibility. The wrapper can incoorporate code-based rules, APIs, web searching, and small models to accomplish editing and fixing tasks efficiently, which reduces computational overhead of calling costly LLMs, thus is more flexible, commercial, and easy to adapt. Also, it simplifies and accelerates the development of user protocols, especially for scenarios that requires real-time adjustment to changing conditions where training or finetuning the inference LLMs is impractical, thereby enhances the adaptability to evolving user requirements and safety protocols and avoiding the intricacies involved with pretraning or finetuning LLMs.

Warning URLs task example. The objective was to detect if LLM outputs contain URLs and prepend a warning message of the unsafe URLs at the beginning of the LLM outputs. TorchOpera Repairer should check the safety of the URLs founded, i.e., whether they are malicious or unreachable, and includes such information in the warning if they were unsafe. Note that such task cannot be accomplished with prompt engineering when asking queries to LLMs, as the warning message should be at the beginning, and since LLMs generate contents token by token, the later contents in generation can not be predicted. To fix the LLM outputs with proper warning of URLs, TorchOpera Repairer utilizes a regular expression pattern to identify URLs within the text. Upon URLs founded, TorchOpera Repairer calls APIs for detecting phishing URLs, such as Google SafeBrowsing (Google, 2005), and assess the accessibility of the benign URL by issuing web requests. Malicious URLs, as well as unreachable URLs that return status codes of 4XX, are added in the warning at the beginning of the LLM outputs.

### 5. Implementation of TorchOpera

#### 5.1. Introduction of Base Model

Our base model is self-developed, decoder-only transformerbased small language model (SLM) with only 1.6B parameters<sup>1</sup>. SLMs are gaining popularity in the AI landscape by offering powerful capabilities with minimal computational requirements. This evolution is particularly significant as it opens avenues for deploying AI in various settings, from mobile devices to server constraints, all while maintaining high performance. The integration of SLMs into innovative architectures such as mixture of experts (MoE) and model federation further amplifies their utility, enabling the construction of larger, more powerful systems by synergistically combining multiple (or many) SLMs. SLMs significantly reduce latency and require far less computational power compared to LLMs. This allows them to process queries more quickly, which enhances both the speed and cost-efficiency of inference, as well as responsiveness in generative AI applications. Also, SLM can be deployed and trained across a myriad of platforms and devices, ranging from powerful GPUs on the cloud to edge devices like smartphones and AI PCs. This adaptability ensures that SLMs can be integrated into various technological environments, thus broadening their applicability and enhancing user accessibility. Moreover, SLMs are particularly well-suited for

<sup>&</sup>lt;sup>1</sup>We will provide more details after we release the base model.

TorchOpera: A Compound AI System for LLM Safety

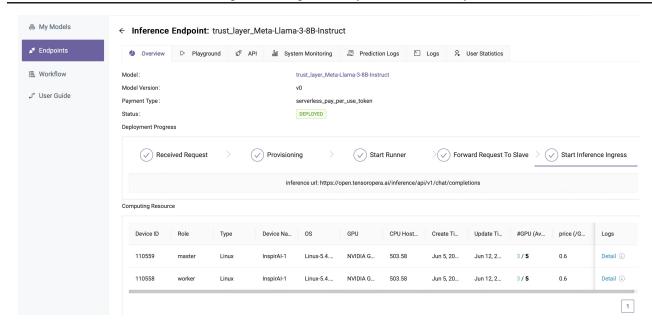


Figure 3. UI of defining TorchOpera as a service in our platform.

integration into composite AI architectures such as Mixture of Experts (MoE) and model federation systems. These configurations utilize multiple SLMs in tandem to construct a more powerful model that can tackle more complex tasks like multilingual processing and predictive analytics from several data sources.

Our base model was trained with a 3-stage data curriculum on 3 trillion tokens of text and code data in 8K sequence length. The base model uses grouped query attention (GQA) with 4 KV heads and 16 attention heads and has a deeper architecture than other SLMs. Specifically, our base model has 32 transformer decoder blocks which is 78% deeper than Gemma-2B (Team et al., 2024), 33% deeper than Qwen1.5-1.8B (Bai et al., 2023) and StableLM-2-1.6B (Bellagente et al., 2024), and 15% deeper than OpenELM-1.1B (Mehta et al., 2022; 2024).

#### 5.2. Efficient Deployment of Safety Detectors

Compared to traditional approaches that serve LoRA-based fine tuned models by copying the same pre-trained model for every other LoRA adapters across multiple GPUs, we reuse the same base model copy to serve multiple LoRAs using a single GPU. Figure 2 provides an architectural overview of TorchOpera's single model, multi-LoRA serving system, as well as a comparison to the multi-model, multi-LoRA counterpart. In our implementation, we build on top of the Punica (Chen et al., 2024b) multi-tenant LoRA serving system that supports continuous batching for adapters of heterogeneous ranks and enables the dynamic and ondemand loading of multiple heterogeneous adapters to meet the demand of various request workloads.

This deployment not only leads to enhanced and efficient utilization of the available GPU resources but also reduces the computational costs. By minimizing the redundancy of model replication, TorchOperaalso achieves higher scalability and flexibility, making it possible to extend our system to applications using multiple adapters in the future. Additionally, such dynamic adapter loading mechanism ensures optimal response time and efficient resource allocation, which can serve multiple models of the compound system in demanding computational environments.

### 6. TorchOpera Compound System as a Service

We have a platform that allows users to define, deploy and serve compound AI system based applications efficiently. Figure 3 shows the UI of deploying TorchOperato safeguard an inference model Llama-3-8B-instruct (Touvron et al., 2023). From a system perspective, we facilitate cross-cloud execution across a decentralized network of nodes with a scalable and cloud-agnostic compute layer. This enables the management of compute resources efficiently, without geographic constraints. Also, our infrastructure can dynamically adjust the compute resources of each endpoint, based on real-time workload demands. This ensures responsiveness and availability of each endpoint, making our infrastructure to handle varying workload efficiently while reducing unnecessary computational costs.

Figure 4 presents the workflow of deploying TorchOpera as a service and calling TorchOpera for safeguarding LLM inferences. To deploy TorchOpera, developers define com-

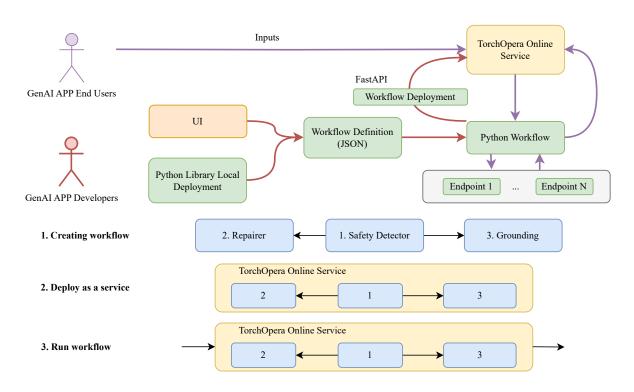


Figure 4. TorchOpera coumpound system as a service. Red lines indicate deployment flow. Purple lines indicate service flow.




Figure 5. Key steps of deploying TorchOpera.

ponents of TorchOpera, i.e., Safety Detector, Grounding, and Repairer, then deploy TorchOpera, and run the workflow to serve it. We provide key steps of deploying TorchOpera in Figure 5. To call TorchOpera service, GenAI APP users (or some APP inputs) trigger the service, which will call necessary counterparts for inferences with Python backends; see purple lines in Figure 4.

## 7. Conclusion

In this paper, we introduced TorchOpera, a comprehensive AI system designed to enhance the safety and reliability of large language models (LLMs). By integrating several key components, including Safety Detector, Grounding, and Repairer, we addressed critical challenges such as hallucinations, unsafe inputs, and the need for contextually enriched outputs. Our Safety Detector plays a pivotal role in ensuring user safety by detecting various forms of harmful content in user inputs and outputs. We demonstrated the importance of crafting training datasets that reflect real-world query distributions to improve the model's accuracy and reliability. We also propse a finetuned model that achieves dual functionalities of both classification and text generation, which allows for not only the identification of hallucinations but also the provision of detailed explanations, which provides hints for further repair of hallucinations. We believe that our work can serve as a stepping stone to contribute to the advancement of the field of LLM safety.

## References

Akın, F. K. Awesome chatgpt prompts dataset. 2023. https://huggingface.co/datasets/ fka/awesome-chatgpt-prompts.

- Bai, J., Bai, S., Chu, Y., Cui, Z., Dang, K., Deng, X., Fan, Y., Ge, W., Han, Y., Huang, F., Hui, B., Ji, L., Li, M., Lin, J., Lin, R., Liu, D., Liu, G., Lu, C., Lu, K., Ma, J., Men, R., Ren, X., Ren, X., Tan, C., Tan, S., Tu, J., Wang, P., Wang, S., Wang, W., Wu, S., Xu, B., Xu, J., Yang, A., Yang, H., Yang, J., Yang, S., Yao, Y., Yu, B., Yuan, H., Yuan, Z., Zhang, J., Zhang, X., Zhang, Y., Zhang, Z., Zhou, C., Zhou, J., Zhou, X., and Zhu, T. Qwen technical report. arXiv preprint arXiv:2309.16609, 2023.
- Bellagente, M., Tow, J., Mahan, D., Phung, D., Zhuravinskyi, M., Adithyan, R., Baicoianu, J., Brooks, B., Cooper, N., Datta, A., et al. Stable lm 2 1.6 b technical report. *arXiv preprint arXiv:2402.17834*, 2024.
- Chang, Z., Li, M., Liu, Y., Wang, J., Wang, Q., and Liu, Y. Play guessing game with llm: Indirect jailbreak attack with implicit clues. *arXiv preprint arXiv:2402.09091*, 2024.
- Chen, J., Lin, H., Han, X., and Sun, L. Benchmarking large language models in retrieval-augmented generation. In *Proceedings of the AAAI Conference on Artificial Intelli*gence, volume 38, pp. 17754–17762, 2024a.
- Chen, L., Ye, Z., Wu, Y., Zhuo, D., Ceze, L., and Krishnamurthy, A. Punica: Multi-tenant lora serving. *Proceed*ings of Machine Learning and Systems, 6:1–13, 2024b.
- Chu, J., Liu, Y., Yang, Z., Shen, X., Backes, M., and Zhang, Y. Comprehensive assessment of jailbreak attacks against llms. ArXiv, abs/2402.05668, 2024. URL https://api.semanticscholar. org/CorpusID:267547966.
- Community, D. I. B. T. 10k prompts ranked dataset. 2024a. https://huggingface.co/datasets/ DIBT/10k\_prompts\_ranked.
- Community, D. I. B. T. Iterative prompt 20k dataset. 2024b. https:// huggingface.co/datasets/RLHFlow/ iterative-prompt-v1-iter1-20K.
- Devlin, J., Chang, M.-W., Lee, K., and Toutanova, K. Bert: Pre-training of deep bidirectional transformers for language understanding. arXiv preprint arXiv:1810.04805, 2018.
- Fan, M., Wang, C., Chen, C., Liu, Y., and Huang, J. On the trustworthiness landscape of state-ofthe-art generative models: A survey and outlook. 2023. URL https://api.semanticscholar. org/CorpusID:266149416.
- Gao, Y., Xiong, Y., Gao, X., Jia, K., Pan, J., Bi, Y., Dai, Y., Sun, J., and Wang, H. Retrieval-augmented generation for large language models: A survey. *arXiv preprint arXiv:2312.10997*, 2023.

- Google. Google safebrowsing. 2005. https:// developers.google.com/safe-browsing.
- Hanu, L. and Unitary team. Detoxify. Github. https://github.com/unitaryai/detoxify, 2020.
- Hao, J. Jailbreak classification dataset. 2023. https://huggingface.co/datasets/ jackhhao/jailbreak-classification.
- Huang, L., Yu, W., Ma, W., Zhong, W., Feng, Z., Wang, H., Chen, Q., Peng, W., Feng, X., Qin, B., and Liu, T. A survey on hallucination in large language models: Principles, taxonomy, challenges, and open questions. *ArXiv*, abs/2311.05232, 2023. URL https://api.semanticscholar. org/CorpusID:265067168.
- Inan, H., Upasani, K., Chi, J., Rungta, R., Iyer, K., Mao, Y., Tontchev, M., Hu, Q., Fuller, B., Testuggine, D., et al. Llama guard: Llm-based input-output safeguard for human-ai conversations. arXiv preprint arXiv:2312.06674, 2023.
- JIGSAW. Jigsaw toxic comment classification dataset. 2018. https://www.kaggle.com/c/ jigsaw-toxic-comment-classification-challenge/ data.
- JIGSAW. Jigsaw multilingual toxic comment classification dataset. 2020. https://www.kaggle.com/c/ jigsaw-multilingual-toxic-comment-classification/ data.
- Kojohnjaratkul, W. Instruction following dataset. 2023. https://huggingface.co/datasets/ wis-k/instruction-following-eval.
- Kumar, A., Agarwal, C., Srinivas, S., Feizi, S., and Lakkaraju, H. Certifying llm safety against adversarial prompting. ArXiv, abs/2309.02705, 2023. URL https://api.semanticscholar. org/CorpusID:261557007.
- Lees, A., Tran, V. Q., Tay, Y., Sorensen, J., Gupta, J., Metzler, D., and Vasserman, L. A new generation of perspective api: Efficient multilingual character-level transformers. In *Proceedings of the 28th ACM SIGKDD Conference on Knowledge Discovery and Data Mining*, pp. 3197–3207, 2022.
- Lewis, P., Perez, E., Piktus, A., Petroni, F., Karpukhin, V., Goyal, N., Küttler, H., Lewis, M., Yih, W.-t., Rocktäschel,

T., et al. Retrieval-augmented generation for knowledgeintensive nlp tasks. Advances in Neural Information Processing Systems, 33:9459-9474, 2020.

- Lin, S., Hilton, J., and Evans, O. Truthfulqa: Measuring how models mimic human falsehoods, 2021.
- Liu, Y., Ott, M., Goyal, N., Du, J., Joshi, M., Chen, D., Levy, O., Lewis, M., Zettlemoyer, L., and Stoyanov, V. Roberta: A robustly optimized bert pretraining approach. arXiv preprint arXiv:1907.11692, 2019.
- Liu, Y., Deng, G., Li, Y., Wang, K., Zhang, T., Liu, Y., Wang, H., Zheng, Y., and Liu, Y. Prompt injection attack against llm-integrated applications. ArXiv, abs/2306.05499, 2023. URL https://api.semanticscholar. org/CorpusID:259129807.
- Markov, T., Zhang, C., Agarwal, S., Nekoul, F. E., Lee, T., Adler, S., Jiang, A., and Weng, L. A holistic approach to undesired content detection in the real world. In Proceedings of the AAAI Conference on Artificial Intelligence, volume 37, pp. 15009-15018, 2023.
- Mehta, S., Abdolhosseini, F., and Rastegari, M. Cvnets: High performance library for computer vision. In Proceedings of the 30th ACM International Conference on Multimedia, MM '22, 2022.
- Mehta, S., Sekhavat, M. H., Cao, O., Horton, M., Jin, Y., Sun, C., Mirzadeh, I., Najibi, M., Belenko, D., Zatloukal, P., and Rastegari, M. OpenELM: An Efficient Language Model Family with Open Training and Inference Framework. arXiv.org, April 2024. URL https://arxiv.org/abs/2404.14619v1.
- Mohiuddin, S. Guardrails ai's commitment to responsible vulnerability disclosure, 2024. https://www.guardrailsai.com/blog/ commitment-to-responsible-vulnerability. Ulevitch, D. Google safebrowsing. 2006. https://
- Qi, X., Zeng, Y., Xie, T., Chen, P.-Y., Jia, R., Mittal, P., and Henderson, P. Fine-tuning aligned language models compromises safety, even when users do not intend to! In The Twelfth International Conference on Learning Representations, 2024. URL https://openreview. net/forum?id=hTEGyKf0dZ.
- 2023. Rashad, M. Chatgpt prompts dataset. https://huggingface.co/datasets/ MohamedRashad/ChatGPT-prompts.
- Rebedea, T., Dinu, R., Sreedhar, M., Parisien, C., and Cohen, J. Nemo guardrails: A toolkit for controllable and safe llm applications with programmable rails. arXiv preprint arXiv:2310.10501, 2023.

- Romero, R. D. J. Chatgpt jailbreak prompts dataset. 2023. https://huggingface.co/datasets/ rubend18/ChatGPT-Jailbreak-Prompts.
- Russinovich, M., Salem, A., and Eldan, R. Great. now write an article about that: The crescendo multiturn llm jailbreak attack. ArXiv, abs/2404.01833, 2024. URL https://api.semanticscholar. org/CorpusID:268856920.
- Siah, A. Filtered personalization prompt response dataset. 2024. https://huggingface.co/datasets/ andrewsiah/filtered personalization prompt\_response.
- Team, G., Mesnard, T., Hardin, C., Dadashi, R., Bhupatiraju, S., Pathak, S., Sifre, L., Rivière, M., Kale, M. S., Love, J., et al. Gemma: Open models based on gemini research and technology. arXiv preprint arXiv:2403.08295, 2024.
- team, P. A. Perspective api case studies. 2008. https: //perspectiveapi.com/case-studies/.
- Tedeschi, S., Friedrich, F., Schramowski, P., Kersting, K., Navigli, R., Nguyen, H., and Li, B. Alert: A comprehensive benchmark for assessing large language models' safety through red teaming. ArXiv, abs/2404.08676, 2024. URL https://api.semanticscholar. org/CorpusID:269149567.
- Testing, N. Qa chat prompts dataset. 2024. https://huggingface.co/datasets/ nm-testing/qa-chat-prompts.
- Touvron, H., Lavril, T., Izacard, G., Martinet, X., Lachaux, M.-A., Lacroix, T., Rozière, B., Goyal, N., Hambro, E., Azhar, F., et al. Llama: Open and efficient foundation language models. arXiv preprint arXiv:2302.13971, 2023.
- phishtank.org/.
- Wang, B., Chen, W., Pei, H., Xie, C., Kang, M., Zhang, C., Xu, C., Xiong, Z., Dutta, R., Schaeffer, R., Truong, S., Arora, S., Mazeika, M., Hendrycks, D., Lin, Z.-H., Cheng, Y.-K., Koyejo, S., Song, D. X., and Li, B. Decodingtrust: A comprehensive assessment of trustworthiness in gpt models. ArXiv, abs/2306.11698, 2023. URL https://api.semanticscholar. org/CorpusID:259202782.
- Xu, Z., Jain, S., and Kankanhalli, M. S. Hallucination is inevitable: An innate limitation of large language models. ArXiv, abs/2401.11817, 2024a. URL https://api.semanticscholar. org/CorpusID:267069207.

- Xu, Z., Liu, Y., Deng, G., Li, Y., and Picek, S. Llm jailbreak attack versus defense techniques–a comprehensive study. *arXiv preprint arXiv:2402.13457*, 2024b.
- Yang, Z., Qi, P., Zhang, S., Bengio, Y., Cohen, W. W., Salakhutdinov, R., and Manning, C. D. Hotpotqa: A dataset for diverse, explainable multi-hop question answering. arXiv preprint arXiv:1809.09600, 2018.
- Zhang, J., Wu, Q., Xu, Y., Cao, C., Du, Z., and Psounis, K. Efficient toxic content detection by bootstrapping and distilling large language models. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 38, pp. 21779–21787, 2024.
- Zhang, Y., Li, Y., Cui, L., Cai, D., Liu, L., Fu, T., Huang, X., Zhao, E., Zhang, Y., Chen, Y., Wang, L., Luu, A. T., Bi, W., Shi, F., and Shi, S. Siren's song in the ai ocean: A survey on hallucination in large language models. *ArXiv*, abs/2309.01219, 2023. URL https://api.semanticscholar. org/CorpusID:261530162.
- Zhao, X., Yang, X., Pang, T., Du, C., Li, L., Wang, Y.-X., and Wang, W. Y. Weak-to-strong jailbreaking on large language models. *ArXiv*, abs/2401.17256, 2024. URL https://api.semanticscholar. org/CorpusID:267320277.
- Zhu, K., Wang, J., Zhou, J., Wang, Z., Chen, H., Wang, Y., Yang, L., Ye, W., Gong, N. Z., Zhang, Y., and Xie, X. Promptbench: Towards evaluating the robustness of large language models on adversarial prompts. *ArXiv*, abs/2306.04528, 2023. URL https://api.semanticscholar. org/CorpusID:259095572.