# SCAR: Efficient Instruction-Tuning for Large Language Models via Style Consistency-Aware Response Ranking

Zhuang Li, Yuncheng Hua, Thuy-Trang Vu Haolan Zhan, Lizhen Qu, Gholamreza Haffari Monash University, Australia

{zhuang.li1,devin.hua,trang.vu1,first.last}@monash.edu

### Abstract

Recent studies have shown that maintaining a consistent response style by human experts and enhancing data quality in training sets can significantly improve the performance of fine-tuned Large Language Models (LLMs) while reducing the number of training examples needed. However, the precise definition of style and the relationship between style, data quality, and LLM performance remains unclear. This research decomposes response style into presentation and composition styles and finds that, among training data of similar quality, those with higher style consistency lead to better LLM performance. Inspired by this, we introduce Style Consistency-Aware Response Ranking (SCAR), which automatically prioritizes instruction-response pairs in the training set based on their response stylistic consistency. By selecting the most styleconsistent examples, ranging from the top 25%to 0.7% of the full dataset, the fine-tuned LLMs can match or even surpass the performance of models trained on the entire dataset in coding and open-ended question-answering benchmarks. Code and data are available at https: //github.com/zhuang-li/SCAR.

#### **1** Introduction

Instruction-following LLMs, such as GPT-3.5 and GPT-4 (Achiam et al., 2023), have revolutionized natural language processing with their ability to generalize across a wide range of tasks (Brown et al., 2020; Chung et al., 2022; Ouyang et al., 2022). These models are typically trained in two stages: unsupervised pre-training on a vast corpus of text and supervised fine-tuning (SFT) on a smaller dataset of instruction-response pairs.

Recent studies, such as AlpaGasus (Chen et al., 2024) and LIMA (Zhou et al., 2024), demonstrate that carefully curated, smaller datasets can outperform larger ones in improving LLM SFT performance. AlpaGasus finds that smaller datasets with

higher quality (i.e., helpfulness, correctness) outperform significantly larger ones when it comes to fine-tuning high-capacity LLMs. The Superficial Alignment Hypothesis, proposed in LIMA, suggests that pre-trained language models already possess the necessary knowledge, and the primary goal of fine-tuning is to guide the model toward adopting specific response styles, thus not requiring large amounts of data. LIMA achieves notable performance with only 1,000 high-quality instructionresponse pairs, optimized for consistent style by human experts. However, this hypothesis raises three open questions: i) What key elements constitute response styles that impact LLM SFT? ii) How do data helpfulness and correctness relate to style consistency in influencing efficient SFT? iii) Can we develop an automatic method that measures stylistic elements to curate smaller, stylistically consistent datasets for more efficient SFT at a lower cost, without relying on human experts?

Our research delves into the intricacies of response style and its impact on LLM performance. Our empirical studies show that the response style can be decomposed into two distinct components: **Presentation Style** which includes aspects such as tone, word choice, and formatting, and Creativity Style, which refers to the degree of creativity or uncertainty in a response, considering how the content are selected and composited to address the given instruction. We conduct extensive experiments on these style components and the effects of style consistency, correctness, and helpfulness of the fine-tuning data on LLM performance. Through extensive experiments, we uncover a crucial insight: when comparing sets of instruction-response pairs with similar levels of response correctness and helpfulness, higher consistency in both presentation and creativity styles leads to significantly better performance of LLMs on downstream tasks.

However, optimizing style consistency is challenging, even for human experts. We discover data with LLM-generated responses exhibiting consistent styles can significantly outperform human-crowdsourced data in improving LLM performance. Inspired by this, we introduce Style Consistency-Aware Response Ranking (SCAR), a novel ranking-based model that prioritizes instruction-response pairs by ensuring their stylistic consistency while maintaining data quality. SCAR is trained on LLM-synthesized and human-crowdsourced datasets to reward responses with higher consistency in presentation and creativity styles. Enhanced with representation learning, SCAR can better distinguish between the two styles and prioritizes stylistic elements that improve LLM performance. Experiments show by selecting the most style-consistent examples-from as little as 0.7% to 25% of the original data size—from styleinconsistent datasets, fine-tuned LLMs can match or surpass the performance of LLMs trained on original full datasets like Octocoder-15.5b (Muennighoff et al., 2023) and OLMO-7b-SFT (Groeneveld et al., 2024) on coding (HumanEval; Chen et al. 2021) and open-ended question answering (AlpacaEval; Dubois et al. 2023) benchmarks. SCAR outperforms leading data selection baselines for efficient SFT, enhancing LLM performance while reducing computational costs.

In summary, our contributions are two-fold:

i) We unveil elements in response styles and empirically show, for datasets with comparable correctness and helpfulness, higher presentation and creativity style consistency significantly enhance LLM performance across various benchmarks.

ii) We introduce SCAR, a ranking method that selects style-consistent examples for efficient LLM SFT. SCAR outperforms data selection baselines, enabling LLMs trained on a small fraction (e.g., 25%, 0.7%) of the original data selected by SCAR to match or surpass the performance of LLMs trained on the full data for coding and open-ended tasks, significantly reducing computational costs.

### 2 Impact of Styles on LLM Fine-tuning

In this section, we study two research questions: i) What key elements in style can influence LLM SFT? and ii) How do style consistency and data quality impact LLM performance?

### **RQ1: What Factors Constitute Response Style**

Through empirical analysis on the style difference of both synthetically generated and humangenerated instruction-tuning data, we discover that response style can be decomposed into presentation and creativity styles that are highly influential to the LLM fine-tuning performance.

**Presentation Style** refers to a response's tone, word choice, and formatting. GPT-3.5 responses are typically formal, use bullet points, and include transitional words, unless intentionally instructed otherwise. Conversely, human responses, coming from many authors, vary in tone from formal to conversational and may lack consistent formatting. Such style analysis often appears in authorship analysis (Tripto et al., 2023; Zheng and Jin, 2023).

*Creativity Style* involves content selection, strategies, and techniques in crafting a response, focusing on its *uncertainty or creativity* relative to the instruction. GPT-3.5 consistently favours straightforward, conventional coding solutions with minimal external libraries, while human responses provide diverse, novel, or unexpected solutions, including complex syntax, niche packages, or external URLs, reflecting individual perspectives and expertise.

## **RQ2: Influence of Style Consistency and Data Quality on LLM Performance**

To explore how style consistency and data quality affect LLM performance, we create and evaluate both human-generated and synthetic data in coding and general open-ended domains.

We control style variations to create three dataset types-human-generated, referenced, and directto explore how presentation and creativity styles impact LLM performance. In the coding domain, we source 10,000 instruction-response pairs from StackExchange<sup>1</sup>, an online platform including around 11 million pairs of coding questions and answers. For the general domain, we use 1,000 examples from the LIMA dataset. Additionally, we generate two synthetic response types with controlled styles: "referenced" and "direct." "Referenced" responses are crafted by an instructiontuned chat-LLM that rewrites human responses to retain their meaning, thus mirroring the uncertainty level of the human-generated response. In contrast, "direct" responses are created from scratch by the same LLM, maintaining similar presentation attributes such as tone and formatting, yet they may vary in meaning, introducing distinct elements with varying levels of uncertainty. Table 2 illustrates these response types.

<sup>&</sup>lt;sup>1</sup>https://stackexchange.com/

		StackExchang	ge		LIMA		
	Stylometric	lometric Data Cod		Stylometric	Data	Llama3-8b	
Data Curation	Analysis	Quality	Performance	Analysis	Quality	Performance	
Methods	Std. TTR /	Helpfulness /	Avg. Pass@1/	Std. TTR/	Helpfulness /	L.C. WinRate	
	Std. PPL	Correctness	Avg. Pass@10	Std. PPL	Correctness	L.C. WIIKate	
Human Response	22.27 / 1.41	3.34 / 3.57	31.65 / 46.63	19.54 / 8.01	4.32 / 4.37	2.29	
GPT-3.5-turbo							
Referenced	7.95 / 0.31	3.65 / 3.60	31.66 / 48.82	17.43 / 5.86	4.05 / 4.32	4.07	
Direct	7.75 / 0.28	3.55 / 3.50	35.11 / 49.68	16.43 / 3.61	4.18 / 4.49	7.15	
Llama2-70b-chat-hf							
Referenced	11.09 / 0.48	3.47 / 3.33	30.16 / 46.44	16.08 / 5.04	4.25 / 4.36	4.27	
Direct	12.49 / 0.25	3.03 / 3.03	33.11 / 47.35	15.60/3.11	4.33 / 4.44	8.14	
Llama2-13b-chat-hf							
Referenced	7.29 / 0.24	2.82 / 2.54	26.88 / 42.87	12.96 / 3.49	4.03 / 4.00	3.94	
Direct	8.27 / 0.22	2.09 / 1.93	25.13 / 37.73	13.18 / 1.13	3.66 / 3.78	6.80	

Table 1: Performance comparison of CodeLlama-7b and Llama3-8b fine-tuned on training sets curated using different methods and various LLMs, along with data quality and stylometric analysis metrics for the training sets.




Table 2: Comparison of responses to an instruction. Some details are abbreviated as '...' due to space limits. Shared creativity style elements between "Human" and "Referenced" responses are highlighted in orange, and shared presentation style elements between "Referenced" and "Direct" responses are in purple.

By using three chat-LLMs with different capabilities to generate synthetic "referenced" and "direct" datasets, we can isolate the effects of data quality on LLM performance. The models employed are *GPT-3.5-turbo*, *Llama-2-70b-chat-hf*, and *Llama-2-13b-chat-hf* (Touvron et al., 2023), with *GPT-3.5turbo* being the most advanced, followed by *Llama-2-70b-chat-hf* and *Llama-2-13b-chat-hf*, as ranked on the arena-leaderboard (Zheng et al., 2024).

We use coding domain data to fine-tune the *CodeLlama-7b-hf* (Roziere et al., 2023) and general domain data to fine-tune the *Meta-Llama-3-8B* (AI@Meta, 2024). Due to limited resources, we consistently use LoRA (Hu et al., 2021) and bfloat16 when fine-tuning all LLMs.

**Stylometric Analysis.** To evaluate the stylistic elements of human and synthetic responses relevant to presentation styles, we apply five widely-used metrics in authorship attribution analysis (Tripto et al., 2023; Zheng and Jin, 2023). These include the Type Token Ratio (TTR) (Templin, 1957), Measure of Textual Lexical Diversity (MTLD) (McCarthy, 2005) for functional words, Flesch score (Kincaid et al., 1975), average sentence length, and punctuation frequency. Higher TTR and MTLD values indicate greater lexical diversity, while a higher Flesch score denotes improved readability. *To assess creativity style consistency*, we measure perplexity using the Llama3-8b language model to quantify response creativity. Perplexity, PPL $(y \mid x)$ , where y is the response and x is the instruction, indicates higher certainty with lower values.

T-SNE (Van der Maaten and Hinton, 2008) (Figure 1, left) plots show that embeddings of GPT-3.5-turbo-generated "referenced" and "direct" responses form tight clusters in the center, reflecting consistent *presentation* styles in the synthetic data. These embeddings are created by vectorizing five authorship attribution metrics and the IDs of functional words. Conversely, human responses are more dispersed in the outer region, showing lower consistency. Figure 1 (right) reveals a more skewed perplexity density distribution for "direct" responses, showing higher *creativity* consistency compared to "referenced" and human ones.

Standard deviations (Std.) of TTR and perplexity of different types of responses are listed in Table 1, while additional authorship analysis metrics are detailed in Table 8 in the Appendix. We observe human responses have much higher Std. values regarding TTR, perplexity and other metrics compared to synthetic responses, and "referenced" responses exhibit a higher perplexity Std. than "direct" responses. The Std. values of these metrics across "referenced" and "direct" responses from Llama-70b-chat-hf, Llama-13b-chat-hf, and GPT-3.5-turbo indicate that synthetic responses from all these LLMs have higher consistency in both styles compared to human data.

**Data Quality Analysis.** We evaluated a sample of 100 examples from each dataset using GPT-4-




Figure 1: (Left) T-SNE plot showing the presentation styles of human and GPT-3.5-turbo responses to LIMA instructions. (Right) Density plot of perplexity detailing the creativity styles of these responses.

turbo. We rate the scores of helpfulness and correctness using the adjusted prompt from the automatic data evaluator, ICE-Score (Zhuo, 2024), for the coding domain and AlpaGasus (Chen et al., 2024) for the open-ended domain, and then calculate the average scores across the samples. Higher scores indicate better quality. Table 1 reveals that in the coding domain, GPT-3.5-turbo-generated responses match the quality of human-written ones, while other LLMs produce lower-quality data. Ideally, the "referenced" response should preserve the human response's content, yielding similar correctness scores. However, less capable LLMs may introduce hallucinations during the rewriting process, altering this content. In the open domain, Llama2-70b-chat-hf and GPT-3.5-turbo responses are comparable in quality to human-generated responses, whereas Llama2-13b-chat-hf responses are of lower quality.

Impact on LLM Performance. We evaluate the performance of the CodeLlama-7b model finetuned on various curated datasets using the HumanEval (Python)(Chen et al., 2021) and MultiPL-E (Java, JavaScript, and C++)(Cassano et al., 2023) benchmarks. For coding domain, we report average Pass@1 and average Pass@10 execution accuracies across 164 coding questions spanning four programming languages. We use AlpacaEval to measure the length control win rate (L.C. Win-Rate) (Dubois et al., 2024) by comparing responses from the fine-tuned Llama3-8b with those from GPT-4-preview-1106 on 2500 diverse open-domain instructions. We use Llama3-70b-chat-hf as our automatic evaluator for its cost-effectiveness (0.9\$ per evaluation). This evaluator is among the top, comparable with GPT-4 evaluators, and highly correlates with human judgment, surpassing humanto-human agreement  $(67.5 \text{ vs. } 65.7)^2$ .

Overall, across the same data types ("referenced" or "direct") from various chat-LLMs, lower quality data correlate with poorer LLM performance, underscoring the essential role of data quality in LLM SFT. Notably, when produced by the same LLM and when data quality is comparable or even marginally lower, "direct" responses consistently enhance LLM performance more than "referenced" responses. Furthermore, both "direct" and "referenced" responses generally surpass humangenerated data in performance across both domains, demonstrating the benefits of creativity and presentation style consistency in LLM fine-tuning.

An exception in LLM performance trends occurs with data generated by Llama2-13b-chat in the coding domain, where "direct" responses, scoring approximately 2 in helpfulness and correctness, significantly lag behind both "referenced" responses, which score 2.5, and human data, which scores 3.3.

Takeaway. The analysis reveals several insights:

i) Response style can be decomposed into presentation style (tone, word choice, formatting) and creativity style (content selection, response surprisingness and uncertainty).

ii) The LLM-generated responses demonstrate higher style consistency than human responses, with "direct" responses showing the greatest consistency in presentation and creativity styles.

iii) Both improved data quality and style consistency in a dataset enhance LLM fine-tuning, and among datasets of similar quality, those with higher style consistency in presentation and creativity yield significantly better LLM performance.

### **3** Style Consistency-Aware Ranking

Inspired by the findings, we design a ranker, SCAR, to capture differences in presentation and creativity styles, selecting training examples with consistent response styles to enhance LLM SFT.

**Ranking Objective.** Given a dataset  $\mathcal{D} = \{(x_i, y_i^d, y_i^r, y_i^h)\}_{i=1}^N$ , where  $x_i$  represents the instruction,  $y_i^d$  and  $y_i^r$  are the "direct" and human "referenced" responses from chat-LLMs, respectively, and  $y_i^h$  represents the human response. We aim to learn a ranking function R(x, y) that assigns higher scores to responses that consistently align with a *helpful* answering style. The objective for each instance is to learn the ranking function:

<sup>&</sup>lt;sup>2</sup>https://github.com/tatsu-lab/alpaca\_eval/

$$\mathcal{L}_{r}(x, y^{d}, y^{r}, y^{h}) = \sum_{(y^{a}, y^{b}) \in \mathcal{P}} \max(0, \alpha - R_{\theta}(x, y^{a}) + R_{\theta}(x, y^{b})) \quad (1)$$

s.t. 
$$\min(f(x, y^a), f(x, y^b)) > \sigma$$
 (2)

where  $\mathcal{P} = \{(y^{d}, y^{r}), (y^{r}, y^{h}), (y^{d}, y^{h})\}$  represents the set of desired pairwise orderings, based on the findings from Sec. 2, that "direct" responses are more consistent in creativity than "referenced" ones, "referenced" responses are more consistent in presentation than human data, and "direct" responses outperform human data in both presentation and creativity consistency. The margin  $\alpha$  ensures the difference in the ranking scores assigned by  $R_{\theta}(x, y)$ , while the quality measure function f(x, y) evaluates the quality (e.g., helpfulness, correctness) of the response y given the instruction x. The quality measure function f can be implemented using strong LLMs such as GPT-3.5 or GPT-4 with a prompt, as in Chen et al. (2024), to evaluate the helpfulness and correctness of the answers and average these scores to obtain the final quality score. The threshold  $\sigma$  ensures the ranker rewards only those responses that are not only styleconsistent but also of high quality, preventing it from favouring unhelpful or erroneous ones.

**Reward Function.** The reward function  $R_{\theta}(x, y)$  is modelled as a neural network that takes representations of presentation style  $\mathbf{v}_p \in \mathbb{R}^{1 \times M}$  and creativity style  $\mathbf{v}_c \in \mathbb{R}^{1 \times M}$ , passing them through a multi-layer perceptron (MLP) to compute the final scalar reward score:

$$R_{\theta}(x, y) = \text{MLP}_{r}([\mathbf{v}_{p}; \mathbf{v}_{c}])$$
$$\mathbf{v}_{p} = \text{Max-Pool}(\mathbf{V}_{y})$$
$$\mathbf{v}_{c} = \text{MLP}_{c}([\mathbf{V}_{x}^{0}; \mathbf{V}_{y}^{0}])$$
(3)

where  $\mathbf{v}_p$  is obtained by max pooling the sequence representation  $\mathbf{V}_y$  of the response y, capturing the salient features relevant to presentation styles.  $\mathbf{v}_c$  is derived from concatenating the initial or [CLS] token representations  $\mathbf{V}_x^0$  of the instruction x and  $\mathbf{V}_y^0$ of the response y, then passing through an MLP to learn the relation between instruction and response, as inspired by Relation Network (Sung et al., 2018). The representations  $\mathbf{V} \in \mathbb{R}^{N \times M}$  of the instruction or response sequences are obtained from an encoder such as RoBERTa-base (Liu et al., 2019) for open-ended domain or the codet5p-110membedding (Wang et al., 2023c) for code domain. Style Representation Learning. Ensuring that the learned representations  $\mathbf{v}_p$  and  $\mathbf{v}_c$  accurately capture the presentation and creativity styles, respectively, can be challenging when relying solely on the ranking objectives, as the two styles may become entangled during the learning process. However, we can leverage the similarities in presentation style between "referenced" and "direct" responses, as well as the similarities in creativity degrees between human and "referenced" responses, as reflected by Sec. 2 study, to guide the learning of distinct style representations. To capture the unique characteristics of presentation and creativity styles and facilitate the learning of the ranking function, we introduce a regularization term using triplet margin losses:

$$\mathcal{L}_{rl}(x, y^d, y^r, y^h) = \lambda_p \max\{0, d(\mathbf{v}_p^d, \mathbf{v}_p^r) - d(\mathbf{v}_p^r, \mathbf{v}_p^h) + \beta_p\} + \lambda_c \max\{0, d(\mathbf{v}_c^h, \mathbf{v}_c^r) - d(\mathbf{v}_c^d, \mathbf{v}_c^h) + \beta_c\}$$
(4)

where  $d(\mathbf{v}_i, \mathbf{v}_j) = \|\mathbf{v}_i - \mathbf{v}_j\|_2$  is the distance function and  $\beta$  is the margin.

**Final Loss Function.** The final loss function combines the ranking loss and the representation learning losses:  $\mathcal{L}_{scar} = \mathcal{L}_r + \mathcal{L}_{rl}$  This combined loss function guides the model to distinguish between different styles while maintaining high-quality, relevant responses, enabling the selection of style-consistent examples for efficient LLM fine-tuning. **Ranking and Filtering.** After training reward function  $R_{\theta}(x, y)$ , it ranks instruction-response pairs (x, y) in a held-out dataset. The top k% of examples with the highest scores are selected to create a style-consistent subset for fine-tuning pre-trained LLMs. This filtered dataset is expected to improve the performance of fine-tuned LLMs on target tasks more than using the entire original dataset.

### **4** Experiments

We train SCAR using data from the *coding* and *open-ended question-answering* domains to select examples for LLM SFT from the full dataset in these same domains.

**Ranker Data.** We collect instructions for SCAR training and evaluation, which include 10,000 randomly selected examples from StackExchange for the code domain, and 6,000 instructions from a combination of 5,000 random Dolly (Conover et al., 2023) data samples and the full LIMA dataset. Dolly is a human-curated dataset with 15,000 high-quality instruction-response pairs. We create the

data by pairing instructions with human responses and the "referenced" and "direct" responses generated by GPT-3.5-turbo, as described in Section 2. Due to budget constraints, we use GPT-3.5-turbo to rate responses according to the constraint in Eq.(2). We randomly allocate the data with an 8:1:1 ratio for training, validation, and testing of the ranker.

**Ranker Evaluation.** We report the accuracy of the ranker in correctly rating responses on the test, where the goal is to rate "direct" responses higher than "referenced" responses and "referenced" responses higher than human responses. These accuracies are denoted as  $\operatorname{Acc}(y^d \succ y^r \succ y^h)$ ,  $\operatorname{Acc}(y^r \succ y^h)$ , and  $\operatorname{Acc}(y^d \succ y^r)$ , respectively.

LLM SFT Data. SCAR and other baselines select data from two sources, held out from the ranking training data. These sources provide diverse but style-inconsistent examples: *i*) *Human-Crowdsourced Data*, curated by many authors, making it diversified and naturally styleinconsistent. *ii*) *Mixed Synthetic Data*, generated by GPT-3.5-turbo using various system prompts, reflecting the practical use of multiple open-source synthetic datasets to enhance diversity.

For the code domain, human-generated data comes from a sample of 20,000 crowdsourced examples StackExchange. To ensure quality, we select examples with instructions that include code blocks and answers with a rating above 2. The mixed synthetic data comprises 20,000 examples, sourced evenly from: i) 5000 StackExchange instructions with "direct" responses, ii) 5000 Stack-Exchange instructions with "referenced" responses, iii) 5,000 coding examples curated using Evol-Instruct (Luo et al., 2023) by Zan et al. (2023), and iv) 5,000 coding examples generated using Self-Instruct (Wang et al., 2023b). The instructions cover Python, Java, JavaScript, and C++, identified using guesslang<sup>3</sup>. For Self-Instruct, we instruct GPT-3.5-turbo to generate target-language data.

*For the open-ended domain*, human-generated data comes from 10,000 Dolly examples, which are held out from the Dolly examples used for ranker training. Mixed data includes 10,000 examples, evenly sourced from: i) 2,500 held-out Dolly instructions with "direct" answers, ii) 2,500 Dolly instructions with "referenced" answers, iii) 2500 open-domain examples using Self-Instruct by LaMini (Wu et al., 2023), and iv) examples curated using Evol-Instruct from Xu et al. (2023).

**Data Selection and LLM SFT.** The data selection methods sample 50%, 25%, and 12.5% of coding-domain data to fine-tune *CodeLlama-7b*, and 50%, 25%, and 10% of open-domain data to fine-tune *Llama3-8b*. Both LLMs use LoRA.

**LLM Evaluation.** We use HumanEval and Multip-E for coding evaluation, reporting the Avg. Pass@(1+10) =  $\frac{(Avg.Pass@1+Avg.Pass@10)}{2}$ across four languages for fine-tuned CodeLlama-7b. For general tasks, we use AlpacaEval and report the L.C. WinRate of outputs from fine-tuned Llama3-8b compared to GPT-4-preview-1106, as in Section 2.

Data Selection Baselines. We compare SCAR in two settings with six baselines: I) RANDOM: Randomly selects examples. II) PERPLEXITY (Albalak et al., 2024): Selects examples with the lowest response perplexity (PPL(y|x)) computed using Llama3-8b. III) SUPERFILTERING (Li et al., 2024): Select the most challenging examples for LLMs with the highest IFD (Instruction-Following) Difficulty) score. Here, we compute IFD as  $\frac{PPL(y|x)}{PPI_{(u)}}$  using Llama3-8b. IV) HUMAN FEED-PPL(y)BACK RANKING (HFR): Uses the same ranker architecture as SCAR trained on 10,000 stackexchange-paired (Lambert et al., 2023) examples annotated given human preference (each instruction paired with positive and negative responses) for coding domain and 6000 human preference examples from Anthropic RLHF data (Bai et al., 2022) for the general domain. V) ALPAGA-SUS (Chen et al., 2024): Selects data based on response accuracy scores rated by GPT-3.5-turbo, consistent with the rating method used in our ranker. VI) DIVERSITY: Applies k-means clustering to diversify examples by selecting randomly from each cluster, a method commonly used in active learning (Li and Haffari, 2023; Li et al., 2023c; Zhdanov, 2019). VII) SCAR (ID): SCAR trained on in-domain (ID) data (e.g., code) and selects examples within the same domain. VIII) SCAR (OOD): SCAR trained on in-domain data and selects examples from an out-of-domain (OOD) dataset. For instance, SCAR is trained on the code domain and selects data from the open domain or vice versa.

### 4.1 Main Results and Discussion

**Effectiveness of SCAR-Selected Data.** As shown in Figure 2, SCAR(ID) accelerates and enhances SFT while reducing costs. LLMs fine-tuned on only 25% and 10% of SCAR(ID)-selected data

<sup>&</sup>lt;sup>3</sup>https://github.com/yoeo/guesslang

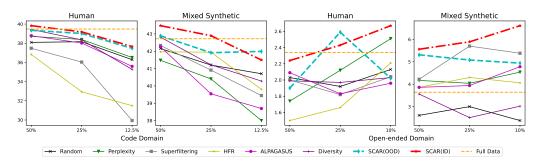


Figure 2: The performance of LLMs fine-tuned with human and synthetic data in code and open domain sampled with different data selection approaches

achieve comparable or superior performance to models trained on full datasets in coding and general domains, respectively.

SCAR(ID)-selected data consistently outperforms other baselines in fine-tuning LLMs. Some baselines show unstable performance. Superfiltering performs poorly in the coding domain, likely because it may assign high IFD scores to erroneous examples in crowdsourced coding data, which varies in quality. Perplexity and AlpaGasusselected data result in similar LLM performance trends but do not ensure style consistency, leading to inferior performance compared to SCAR(ID). Traditional active learning methods like Random and Diversity sampling are less effective for LLM fine-tuning. This is likely because LLMs require less data diversity for effective fine-tuning, as evidenced by smaller datasets outperforming larger ones, and the style-inconsistent target scenario inherently includes diversity. Surprisingly, HFR underperforms in most scenarios. This suggests that training the ranker on inconsistent human preferences from diverse authors may hinder its ability to select the most beneficial training data for LLMs.

Impact of Selected Data Sizes. Figure 2 shows that in the coding domain, using fewer data selected by various methods usually lowers LLM performance. However, in the open-ended domain, most methods can select fewer synthetic data to finetune LLMs that outperform those trained on the full dataset. With SCAR(ID), reducing data consistently improves LLM performance in the open domain. This demonstrates SCAR(ID)'s superiority and, to some extent, supports the Superficial Alignment Hypothesis, indicating that LLMs don't always need vast amounts of data to perform well. Impact of SCAR Performance. Table 3 shows SCAR(OOD) performs worse than SCAR(ID) in both domains, explaining the lower LLM performance with SCAR(OOD)-selected data. Despite this, SCAR(OOD) outperforms baselines in most

	SCA	R(ID)	SCAR(OOD)		
	Code	Open	Code	Open	
$\operatorname{Acc}(y^d \succ y^r \succ y^h)$		64.77			
$Acc(y^d \succ y^r)$		80.80			
$\operatorname{Acc}(y^r\succ y^h)$	99.80	81.47	95.58	69.89	

Table 3: SCAR's ranking accuracies when trained with in-domain (ID) or out-of-domain (OOD) examples and tested on ranking data from code and open domains.

cases, demonstrating its cross-domain robustness. The performance gap between SCAR(OOD) and SCAR(ID) is larger in the open domain, indicating that generalizing from code to open-ended data is more challenging than the reverse. Differentiating creativity styles is more difficult than presentation styles, especially for selecting code data in out-of-domain settings, as shown by comparing  $Acc(y^{d} \succ y^{r})$  (68.29) and  $Acc(y^{r} \succ y^{h})$  (95.58). Stylometric and Data Quality Analysis of SCAR-**Selected Data.** Table 4 illustrates that SCAR(ID) effectively enhances style consistency in the selected Dolly data, as evidenced by the consistently lower TTR and perplexity standard deviation compared to the full dataset. However, for the code data, while the TTR standard deviation decreases, the perplexity standard deviation increases when selecting smaller subsets (25%, 12.5%), suggesting that differentiating creativity styles within code data is challenging. This difficulty may contribute to the observed performance drop in LLMs when fine-tuning on these smaller subsets of code data. Furthermore, we could not observe significant average data quality (helpfulness, correctness) improvement within the selected data, indicating that the effectiveness of our method primarily lies in the improved style consistency.

### 4.2 Ablation Study

To evaluate effectiveness of SCAR(ID) components, We compared the full setting (Full, GPT-3.5) to versions without the quality constraint in Eq.(2) (w/o con, GPT-3.5), without representation learning in Eq.(4) (w/o rl, GPT-3.5), and without refer-

	Std. TTR	Std. PPL	Helpful	Correct						
StackExchange										
100%	21.48	1.81	2.84	2.68						
50%	16.78	1.72	3.02	3.01						
25%	14.85	1.73	2.78	2.72						
12.5%	14.29	1.86	2.67	2.77						
		Dolly								
100%	30.96	3.26	3.95	3.91						
50%	28.43	2.69	3.98	3.99						
25%	24.74	2.41	3.96	3.93						
10%	23.73	2.18	3.98	3.99						

Table 4: Stylometric and quality analysis of data subsets selected by SCAR(ID) from the full human-crowdsourced StackExchange and Dolly datasets.

enced responses (w/o ref, GPT-3.5) during training. We also generated synthetic data for training the ranker using Llama2-13b (Full, Llama2-13b), Llama2-70b (Full, Llama2-70b), and Llama3-70b (Full, Llama3-70b), as well as Llama2-13b without the quality constraint (w/o con, Llama2-13b).

Style Representation Learning. Figure 3 shows




Figure 3: Evaluation of the influence of different components of SCAR during training on LLM performance. that removing the representation learning loss (w/o rl, GPT-3.5) or the "referenced" responses (w/o ref, GPT-3.5) from SCAR training slightly decreases LLM performance in the code domain. However, removing "referenced" responses greatly reduces LLM performance in the open domain (Table 15, Appendix). The distance patterns between presentation and creativity embeddings align with the optimization objective of Eq.(4) even without the loss, likely due to the "referenced" responses used in training. Thus, we use a low coefficient (0.1)for the representation learning loss. Table 16 in the Appendix provides further analysis of these embedding distances.

**Data Quality Constraint.** Removing the data quality constraint in Eq.(2) for SCAR significantly worsens the performance of LLMs fine-tuned on SCAR-selected data, especially when SCAR is trained on lower-quality data like Llama2-13b-generated responses (w/o con, Llama2-13b), compared to the full setting (Full, Llama2-13b). This highlights the importance of the constraint when training the ranker on lower-quality data.

LLMs for Generating SCAR Training Data. Fig-

ure 3 shows that using synthetic data from other LLMs for SCAR training slightly degrades the performance of fine-tuned LLMs, particularly when using Llama2-13b-generated data. This is due to the quality constraint which filters out 90% of Llama2-13b-generated low-quality ranker training examples, reducing ranking performance. Additionally, the style misalignment between the Llama family and GPT-3.5 data may further decrease LLM performance when selecting mix-synthetic GPT-3.5-generated data.

**Comparing with Open-source LLMs.** We finetune *OLMO-7b* and *Starcoder-15.5b* (Li et al., 2023b) with subsets (2.5k, 5k, and 10k) of their original datasets (320k and 13k, respectively) selected via SCAR(ID). We compare their performance to the official checkpoints, *OLMO-7b-SFT* and *Octocoder-15.5b*, which were instructiontuned on the full datasets. Table 5 shows SCARselected subsets significantly improve model performance, achieving these with only 0.7% to 20% of the original data sizes, as measured by L.C. Win-Rate on AlpacaEval and average Pass@(1+10) on HumanEval and MultiPL-E.

OLMO-7b	Data Sizes	320k	10k	5k	2.5k
	L.C. WinRate	3.86	5.37	5.64	4.08
Starcoder-15.5b	Data Sizes	13k	10k	5k	2.5k
	Avg. Pass@(1+10)	37.85	39.69	40.09	40.14

Table 5: L.C. WinRate for OLMO and average Pass@(1+10) for Starcoder fine-tuned on original sizes (320k, 13k) and their subsets (10k, 5k, 2.5k) of data.

## 5 Related Work

Instruction-Tuning Data Selection. Instructiontuning trains LLMs to follow complex instructions in various contexts (Wei et al., 2021; Sanh et al., 2021). Data are sourced from human-curated examples (Wang et al., 2022b; Zhou et al., 2024) and LLM outputs (Xu et al., 2023; Wang et al., 2022a). Studies (Zhou et al., 2024; Chen et al., 2024; Li et al., 2024, 2023a; Lu et al., 2023) show that smaller, high-quality datasets can outperform significantly larger ones in boosting LLM performance. LIMA uses expert human curation for stylistic consistency (Zhou et al., 2024), while AlpaGasus (Chen et al., 2024) utilizes LLMs to assess data quality. Li et al. (2024, 2023a) apply Instruction Following Difficulty scores to identify effective training examples. Lu et al. (2023) enhances data diversity by tagging instructional elements while Bukharin and Zhao (2023) does so by measuring instruction embedding similarities.

Automatic Authorship Detection. Traditional authorship detection used lexical features like TTR, MTLD, and Flesch readability scores (Tripto et al., 2023; Zheng and Jin, 2023). Recent focus has shifted to distinguishing human and machine-generated texts using advanced neural networks to analyze styles at the corpus (Mitchell et al., 2023; Su et al., 2023) or the sentence levels (Zeng et al., 2024, 2023; Wang et al., 2023a).

## 6 Conclusion

Our empirical study demonstrates that among training datasets of similar quality, those with higher consistency in presentation and creativity significantly enhance the performance of fine-tuned LLMs. Based on this, we propose SCAR, a ranker designed to measure stylistic consistency in training data used for fine-tuning LLMs. Our experiments show that LLMs fine-tuned with small subsets of the original dataset—ranging from 25% to as little as 0.7%, selected by SCAR—can outperform those trained on full datasets. Furthermore, SCAR consistently surpasses other data selection baselines in training LLMs.

### Limitations

A potential limitation arises when training an LLM on data with a style heavily biased towards one specific type, such as data selected by SCAR. While this approach might enhance the model's general capabilities on various downstream tasks, it can potentially skew the output style towards that specific style, in our case, the style similar to GPT-3.5-turbo. Consequently, this could restrict the fine-tuned LLM's application in scenarios requiring diverse stylistic outputs, such as multi-agent role-playing LLMs or generating content with varying tones and styles. In such cases, the fine-tuned model may struggle to produce outputs that deviate from the style it was trained on, potentially limiting its adaptability to different use cases.

### References

Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altenschmidt, Sam Altman, Shyamal Anadkat, et al. 2023. Gpt-4 technical report. *arXiv preprint arXiv:2303.08774*.

AI@Meta. 2024. Llama 3 model card.

Alon Albalak, Yanai Elazar, Sang Michael Xie, Shayne Longpre, Nathan Lambert, Xinyi Wang, Niklas Muennighoff, Bairu Hou, Liangming Pan, Haewon Jeong, et al. 2024. A survey on data selection for language models. *arXiv preprint arXiv:2402.16827*.

- Yuntao Bai, Andy Jones, Kamal Ndousse, Amanda Askell, Anna Chen, Nova DasSarma, Dawn Drain, Stanislav Fort, Deep Ganguli, Tom Henighan, et al. 2022. Training a helpful and harmless assistant with reinforcement learning from human feedback. *arXiv preprint arXiv:2204.05862*.
- Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. 2020. Language models are few-shot learners. *Advances in neural information processing systems*, 33:1877–1901.
- Alexander Bukharin and Tuo Zhao. 2023. Data diversity matters for robust instruction tuning. *arXiv preprint arXiv:2311.14736*.
- Federico Cassano, John Gouwar, Daniel Nguyen, Sydney Nguyen, Luna Phipps-Costin, Donald Pinckney, Ming-Ho Yee, Yangtian Zi, Carolyn Jane Anderson, Molly Q Feldman, et al. 2023. Multipl-e: a scalable and polyglot approach to benchmarking neural code generation. *IEEE Transactions on Software Engineering*.
- Lichang Chen, Shiyang Li, Jun Yan, Hai Wang, Kalpa Gunaratna, Vikas Yadav, Zheng Tang, Vijay Srinivasan, Tianyi Zhou, Heng Huang, et al. 2024. Alpagasus: Training a better alpaca with fewer data. *International Conference on Learning Representations*.
- Mark Chen, Jerry Tworek, Heewoo Jun, Qiming Yuan, Henrique Ponde de Oliveira Pinto, Jared Kaplan, Harri Edwards, Yuri Burda, Nicholas Joseph, Greg Brockman, et al. 2021. Evaluating large language models trained on code. *arXiv preprint arXiv:2107.03374*.
- Hyung Won Chung, Le Hou, Shayne Longpre, Barret Zoph, Yi Tay, William Fedus, Eric Li, Xuezhi Wang, Mostafa Dehghani, Siddhartha Brahma, et al. 2022. Scaling instruction-finetuned language models. *arXiv preprint arXiv:2210.11416*.
- Mike Conover, Matt Hayes, Ankit Mathur, Jianwei Xie, Jun Wan, Sam Shah, Ali Ghodsi, Patrick Wendell, Matei Zaharia, and Reynold Xin. 2023. Free dolly: Introducing the world's first truly open instructiontuned llm.
- Yann Dubois, Balázs Galambosi, Percy Liang, and Tatsunori B Hashimoto. 2024. Length-controlled alpacaeval: A simple way to debias automatic evaluators. arXiv preprint arXiv:2404.04475.
- Yann Dubois, Xuechen Li, Rohan Taori, Tianyi Zhang, Ishaan Gulrajani, Jimmy Ba, Carlos Guestrin, Percy Liang, and Tatsunori B. Hashimoto. 2023. Alpacafarm: A simulation framework for methods that learn from human feedback. *Preprint*, arXiv:2305.14387.

- Dirk Groeneveld, Iz Beltagy, Pete Walsh, Akshita Bhagia, Rodney Kinney, Oyvind Tafjord, Ananya Harsh Jha, Hamish Ivison, Ian Magnusson, Yizhong Wang, et al. 2024. Olmo: Accelerating the science of language models. *arXiv preprint arXiv:2402.00838*.
- Edward J Hu, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, Weizhu Chen, et al. 2021. Lora: Low-rank adaptation of large language models. In *International Conference on Learning Representations*.
- J Peter Kincaid, Robert P Fishburne Jr, Richard L Rogers, and Brad S Chissom. 1975. Derivation of new readability formulas (automated readability index, fog count and flesch reading ease formula) for navy enlisted personnel.
- Nathan Lambert, Lewis Tunstall, Nazneen Rajani, and Tristan Thrush. 2023. Huggingface h4 stack exchange preference dataset.
- Ming Li, Yong Zhang, Shwai He, Zhitao Li, Hongyu Zhao, Jianzong Wang, Ning Cheng, and Tianyi Zhou. 2024. Superfiltering: Weak-to-strong data filtering for fast instruction-tuning. *arXiv preprint arXiv:2402.00530*.
- Ming Li, Yong Zhang, Zhitao Li, Jiuhai Chen, Lichang Chen, Ning Cheng, Jianzong Wang, Tianyi Zhou, and Jing Xiao. 2023a. From quantity to quality: Boosting Ilm performance with self-guided data selection for instruction tuning. *arXiv preprint arXiv:2308.12032*.
- Raymond Li, Loubna Ben Allal, Yangtian Zi, Niklas Muennighoff, Denis Kocetkov, Chenghao Mou, Marc Marone, Christopher Akiki, Jia Li, Jenny Chim, et al. 2023b. Starcoder: may the source be with you! *arXiv preprint arXiv:2305.06161.*
- Zhuang Li and Gholamreza Haffari. 2023. Active learning for multilingual semantic parser. In *Findings* of the Association for Computational Linguistics: EACL 2023, pages 633–639.
- Zhuang Li, Lizhen Qu, Philip R Cohen, Raj Tumuluri, and Gholamreza Haffari. 2023c. The best of both worlds: Combining human and machine translations for multilingual semantic parsing with active learning. In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 9511–9528.
- Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. 2019. Roberta: A robustly optimized bert pretraining approach. arXiv preprint arXiv:1907.11692.
- Keming Lu, Hongyi Yuan, Zheng Yuan, Runji Lin, Junyang Lin, Chuanqi Tan, Chang Zhou, and Jingren Zhou. 2023. # instag: Instruction tagging for analyzing supervised fine-tuning of large language models. In *The Twelfth International Conference on Learning Representations*.

- Ziyang Luo, Can Xu, Pu Zhao, Qingfeng Sun, Xiubo Geng, Wenxiang Hu, Chongyang Tao, Jing Ma, Qingwei Lin, and Daxin Jiang. 2023. Wizardcoder: Empowering code large language models with evolinstruct. *arXiv preprint arXiv:2306.08568*.
- Philip M McCarthy. 2005. An assessment of the range and usefulness of lexical diversity measures and the potential of the measure of textual, lexical diversity (MTLD). Ph.D. thesis, The University of Memphis.
- Eric Mitchell, Yoonho Lee, Alexander Khazatsky, Christopher D Manning, and Chelsea Finn. 2023. Detectgpt: Zero-shot machine-generated text detection using probability curvature. In *International Conference on Machine Learning*, pages 24950–24962. PMLR.
- Niklas Muennighoff, Qian Liu, Armel Randy Zebaze, Qinkai Zheng, Binyuan Hui, Terry Yue Zhuo, Swayam Singh, Xiangru Tang, Leandro Von Werra, and Shayne Longpre. 2023. Octopack: Instruction tuning code large language models. In *The Twelfth International Conference on Learning Representations*.
- Long Ouyang, Jeffrey Wu, Xu Jiang, Diogo Almeida, Carroll Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, et al. 2022. Training language models to follow instructions with human feedback. *Advances in Neural Information Processing Systems*, 35:27730–27744.
- Baptiste Roziere, Jonas Gehring, Fabian Gloeckle, Sten Sootla, Itai Gat, Xiaoqing Ellen Tan, Yossi Adi, Jingyu Liu, Tal Remez, Jérémy Rapin, et al. 2023. Code llama: Open foundation models for code. arXiv preprint arXiv:2308.12950.
- Victor Sanh, Albert Webson, Colin Raffel, Stephen H Bach, Lintang Sutawika, Zaid Alyafeai, Antoine Chaffin, Arnaud Stiegler, Teven Le Scao, Arun Raja, et al. 2021. Multitask prompted training enables zero-shot task generalization. *arXiv preprint arXiv:2110.08207*.
- Jinyan Su, Terry Zhuo, Di Wang, and Preslav Nakov. 2023. Detectllm: Leveraging log rank information for zero-shot detection of machine-generated text. In *Findings of the Association for Computational Linguistics: EMNLP 2023*, pages 12395–12412.
- Flood Sung, Yongxin Yang, Li Zhang, Tao Xiang, Philip HS Torr, and Timothy M Hospedales. 2018. Learning to compare: Relation network for few-shot learning. In *Proceedings of the IEEE conference* on computer vision and pattern recognition, pages 1199–1208.
- Mildred C Templin. 1957. *Certain language skills in children: Their development and interrelationships*, volume 10. JSTOR.
- Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti

Bhosale, et al. 2023. Llama 2: Open foundation and fine-tuned chat models. *arXiv preprint arXiv:2307.09288*.

- Nafis Tripto, Adaku Uchendu, Thai Le, Mattia Setzu, Fosca Giannotti, and Dongwon Lee. 2023. HANSEN: Human and AI spoken text benchmark for authorship analysis. In *Findings of the Association* for Computational Linguistics: EMNLP 2023, pages 13706–13724, Singapore. Association for Computational Linguistics.
- Laurens Van der Maaten and Geoffrey Hinton. 2008. Visualizing data using t-sne. *Journal of machine learning research*, 9(11).
- Pengyu Wang, Linyang Li, Ke Ren, Botian Jiang, Dong Zhang, and Xipeng Qiu. 2023a. Seqxgpt: Sentencelevel ai-generated text detection. In *Proceedings* of the 2023 Conference on Empirical Methods in Natural Language Processing, pages 1144–1156.
- Yizhong Wang, Yeganeh Kordi, Swaroop Mishra, Alisa Liu, Noah A Smith, Daniel Khashabi, and Hannaneh Hajishirzi. 2022a. Self-instruct: Aligning language model with self generated instructions. *arXiv preprint arXiv:2212.10560*.
- Yizhong Wang, Yeganeh Kordi, Swaroop Mishra, Alisa Liu, Noah A Smith, Daniel Khashabi, and Hannaneh Hajishirzi. 2023b. Self-instruct: Aligning language models with self-generated instructions. In *The 61st* Annual Meeting Of The Association For Computational Linguistics.
- Yizhong Wang, Swaroop Mishra, Pegah Alipoormolabashi, Yeganeh Kordi, Amirreza Mirzaei, Anjana Arunkumar, Arjun Ashok, Arut Selvan Dhanasekaran, Atharva Naik, David Stap, et al. 2022b. Super-naturalinstructions: Generalization via declarative instructions on 1600+ nlp tasks. arXiv preprint arXiv:2204.07705.
- Yue Wang, Hung Le, Akhilesh Deepak Gotmare, Nghi DQ Bui, Junnan Li, and Steven CH Hoi. 2023c. Codet5+: Open code large language models for code understanding and generation. *arXiv preprint arXiv:2305.07922*.
- Jason Wei, Maarten Bosma, Vincent Zhao, Kelvin Guu, Adams Wei Yu, Brian Lester, Nan Du, Andrew M Dai, and Quoc V Le. 2021. Finetuned language models are zero-shot learners. In *International Conference on Learning Representations*.
- Minghao Wu, Abdul Waheed, Chiyu Zhang, Muhammad Abdul-Mageed, and Alham Fikri Aji. 2023. Lamini-lm: A diverse herd of distilled models from large-scale instructions. *arXiv preprint arXiv:2304.14402*.
- Can Xu, Qingfeng Sun, Kai Zheng, Xiubo Geng, Pu Zhao, Jiazhan Feng, Chongyang Tao, and Daxin Jiang. 2023. Wizardlm: Empowering large language models to follow complex instructions. *arXiv eprints*, pages arXiv–2304.

- Daoguang Zan, Ailun Yu, Bo Shen, Jiaxin Zhang, Taihong Chen, Bing Geng, Bei Chen, Jichuan Ji, Yafen Yao, Yongji Wang, and Qianxiang Wang. 2023. Can programming languages boost each other via instruction tuning? *Preprint*, arXiv:2308.16824.
- Zijie Zeng, Lele Sha, Yuheng Li, Kaixun Yang, Dragan Gašević, and Guangliang Chen. 2024. Towards automatic boundary detection for human-ai collaborative hybrid essay in education. In *Proceedings* of the AAAI Conference on Artificial Intelligence, volume 38, pages 22502–22510.
- Zijie Zeng, Lele Sha, Yuheng Li, Kaixun Yang, Dragan Gašević, and Guanliang Chen. 2023. Towards automatic boundary detection for human-ai hybrid essay in education. *arXiv preprint arXiv:2307.12267*.
- Fedor Zhdanov. 2019. Diverse mini-batch active learning. arXiv preprint arXiv:1901.05954.
- Lianmin Zheng, Wei-Lin Chiang, Ying Sheng, Siyuan Zhuang, Zhanghao Wu, Yonghao Zhuang, Zi Lin, Zhuohan Li, Dacheng Li, Eric Xing, et al. 2024. Judging llm-as-a-judge with mt-bench and chatbot arena. Advances in Neural Information Processing Systems, 36.
- Wanwan Zheng and Mingzhe Jin. 2023. A review on authorship attribution in text mining. Wiley Interdisciplinary Reviews: Computational Statistics, 15(2):e1584.
- Chunting Zhou, Pengfei Liu, Puxin Xu, Srinivasan Iyer, Jiao Sun, Yuning Mao, Xuezhe Ma, Avia Efrat, Ping Yu, Lili Yu, et al. 2024. Lima: Less is more for alignment. Advances in Neural Information Processing Systems, 36.
- Terry Yue Zhuo. 2024. Ice-score: Instructing large language models to evaluate code. In *Findings of the Association for Computational Linguistics: EACL 2024*, pages 2232–2242.

# A Appendix

# A.1 Case Studies

Instruction
Why is FIFA against adding instant replay to the game?
Human Response
There are a few fundamental considerations:
Uncertainty is a part of the game. The referee and linesmen are the arbiters of the action. Instan
replay would limit their authority.
Football is global. Many places do not have access to the technology necessary to implement instan replay.
Football is a fast-paced game with few opportunities for stoppage. Instant replay would unnecessarily slow the pace.
In 2008, FiFA President Sepp Blatter said:
"Let it be as it is and let's leave [football] with errors. The television companies will have the right to
say [the referee] was right or wrong, but still the referee makes the decision – a man, not a machine.
Blatter and others at FIFA have repeatedly argued against using instant replay. But lately, FIFA have
begun to come around on the idea. At FIFA's Congress in São Paulo prior to the 2014 World Cup Blatter proposed allowing managers 2 challenges per game, much like the NFL handles challenges

today. Although it's not quite "instant replay," in 2012 FIFA approved two different goal-line technologies to improve referee accuracy: "Hawk-Eye" – which uses visual triangulation to determine ball location – and "GoalRef" – which uses a microchip in the ball and magnetic sensors within goalposts. (Many say FIFA approved the technologies in response to Frank Lampard's snubbed "goal" against Germany in the 2010 World Cup.) In 2013, FIFA announced it would use GoalControl, a German competitor to Hawk-Eye, at the Confederations Cup, basically a rehearsal for the World Cup. After a successful run at that tournament, FIFA announced it would implement GoalControl at the 2014 World Cup. The Guardian provides a pretty helpful FAQ on the technology.

FIFA may choose to implement further changes to approved goal-line technology and referee rules when it meets again after the World Cup.

Human Referenced Response from GPT-3.5

FIFA is against adding instant replay to the game for several reasons. One of the main concerns is that uncertainty is seen as a natural part of the game, and implementing instant replay would limit the authority of the referees and linesmen. Additionally, football is a global sport, and many regions may not have the necessary technology to support instant replay. Another factor is that football is a fast-paced game with minimal stoppages, so introducing instant replay could potentially disrupt the flow of the game. Ultimately, FIFA has historically been hesitant to embrace instant replay, preferring to maintain the human element in decision-making on the field.

**Direct Response from GPT-3.5** 

FIFA is against adding instant replay to the game because they believe it would disrupt the flow of the game and potentially lead to delays. They also argue that human error is a part of the game and adding instant replay could take away from the excitement and unpredictability of live sports. Additionally, implementing instant replay would require significant changes to the rules and regulations of the game, which FIFA may be hesitant to do.

Table 6: Comparison of the three responses regarding FIFA's stance on instant replay.

Table 6 presents the full examples of human, "referenced," and "direct" responses to the instruction without omitting any details. As evident from the examples, the "referenced" response has the same content as the human response, thus mirroring the creativity style of the human response. On the other hand, the "direct" response has a similar formatting and tone to the "referenced" response, indicating a similar presentation style between the two.

#### A.2 Prompt for Generating Referenced Response

The rewriting prompt instruction is as follows:

```
### Reference Answer:
{human response}
### Background
You are a knowledgeable AI assistant.
Above is the reference answer. Below is an instruction that describes
a task. Given the reference answer, write a response that
appropriately completes the request.
Please keep the semantics of the reference answer unchanged in your
response, while pretending as if you have never seen the reference
answer, when crafting your final response.
### Instruction:
{instruction}
### Response:
```

### A.3 Prompt for Generating Direct Response

The prompt instruction to generate "direct" response is as follows:

```
### Background
You are a knowledgeable AI assistant.
Below is an instruction that describes a task. Please write a
response that appropriately completes the request.
### Instruction:
{instruction}
### Response:
```

#### A.4 Implementation Details

We fine-tuned the LLaMA-3 and CodeLlama-7b models on NVIDIA A100 GPUs. Both models underwent three training epochs with a learning rate of  $2 \times 10^{-5}$ , leveraging a cosine learning rate scheduler and a warmup ratio of 0.03. Training precision was supported by enabling BF16 and TF32 modes. For the LLaMA-3 model, we used a single GPU with a batch size of 2, while for CodeLlama-7b, we used two GPUs with the same batch size and integrated LoRA parameters with r = 8 and  $\alpha = 16$ .

For the SCAR ranker training, we used a learning rate of  $2 \times 10^{-5}$  and trained for 20 epochs. For code domain tasks, we use the codet5p-110m-embedding for contextual representation encoding, while for open domain tasks, we use roberta-base.

## A.5 Expanded Results for LLM Performance in Coding Tasks

Table 7 presents the detailed results for the coding tasks mentioned in Table 1, providing a comprehensive breakdown of the Pass@1 and Pass@10 metrics for each task, rather than just the average scores.

Data Curation	HumanEval		MultiPL-E	
Methods	Python	Java	JavaScript	C++
	Pass@1/Pass@10	Pass@1 / Pass@10	Pass@1 / Pass@10	Pass@1 / Pass@10
Human Response	32.93 / 47.93	29.78 / 42.35	33.84 / 51.85	30.05 / 44.38
GPT-3.5				
Referenced	30.83 / 54.61	31.53 / 42.43	33.96 / 53.19	30.31 / 45.05
Direct	38.95 / 53.82	32.11 / 44.49	37.86 / 53.97	31.52 / 46.45
Llama2-70b				
Referenced	30.94 / 48.18	29.71 / 41.84	32.36 / 52.13	27.64 / 43.59
Direct	37.26 / 50.14	29.96 / 42.73	35.52 / 50.66	29.69 / 45.86
Llama2-13b				
Referenced	26.20 / 43.52	26.65 / 38.45	29.02 / 47.91	25.63 / 41.60
Direct	26.16 / 39.13	22.77 / 33.04	28.57 / 43.56	23.01 / 35.19

Table 7: Detailed performance comparison, as in Table 1, of CodeLlama-7b on the HumanEval (Python) and MultiPL-E (Java, JavaScript, C++) coding benchmarks, fine-tuned with training sets curated using different methods. The Pass@1 and Pass@10 scores for each individual programming language are reported.

## A.6 Full Results for Stylometric Analysis

To quantitatively assess the stylistic consistency of the datasets, we employed five widely-used stylometric metrics to measure the presentation style and perplexity to measure the creativity style:

Data Curation	Т	ſR	MT	LD	Avg. Se	nt. Len.	Punct.	Freq.	Flesch	Score	Perplex	(ylx)
Methods	Mean	Std.	Mean	Std.	Mean	Std.	Mean	Std.	Mean	Std.	Mean	Std.
StackExchange												
Human Response	59.36	22.27	14.65	8.57	77.77	72.59	33.12	28.42	40.84	46.78	3.33	1.41
GPT-3.5-turbo												
Referenced	32.35	7.95	13.92	2.68	43.01	18.51	39.39	21.73	55.25	16.48	1.87	0.31
Direct	34.88	7.75	13.62	2.64	43.82	21.52	34.65	19.07	52.12	36.16	1.84	0.28
Llama2-70b-chat												
Referenced	43.89	11.09	14.68	3.79	59.88	39.26	34.91	24.77	52.40	20.80	2.02	0.48
Direct	44.64	12.49	14.25	3.87	64.42	53.47	31.67	24.11	51.46	21.21	1.62	0.25
Llama2-13b-chat												
Referenced	31.83	7.29	15.96	3.03	38.59	17.85	46.93	26.09	61.10	15.65	1.80	0.24
Direct	31.91	8.27	15.09	3.06	40.15	26.34	40.29	23.56	59.59	16.56	1.74	0.22
			1		LI	MA	1		1		H	
Human Response	33.26	19.54	16.39	8.98	27.19	33.89	56.99	61.87	64.93	22.89	8.89	8.01
GPT-3.5-turbo												
Referenced	47.44	17.43	15.65	5.63	24.81	16.55	14.78	10.93	57.72	21.26	5.94	5.86
Direct	46.61	16.43	15.26	5.39	24.69	16.39	14.17	9.44	55.06	20.88	3.19	3.61
Llama2-70b-chat												
Referenced	38.87	16.08	15.56	4.75	23.96	16.71	26.44	18.32	60.31	18.64	4.74	5.04
Direct	36.50	15.60	15.34	5.14	23.66	15.43	27.74	16.67	57.83	18.32	2.51	3.11
Llama2-13b-chat												
Referenced	34.39	12.96	16.52	4.24	23.91	13.00	27.93	15.91	63.31	17.66	3.70	3.49
Direct	30.63	13.18	15.57	3.93	23.62	17.88	33.87	17.39	59.85	19.11	2.41	1.13

Table 8: Detailed performance comparison of Stylometric Analysis across StackExchange and LIMA datasets showing average and standard deviation for five metrics.

1. **Type-Token Ratio** (**TTR**): TTR measures lexical diversity by calculating the ratio of unique words (types) to the total number of words (tokens) in a text. A higher TTR indicates greater lexical

diversity.

- 2. Measure of Textual Lexical Diversity (MTLD): MTLD is another measure of lexical diversity that is less sensitive to text length compared to TTR. It calculates the average length of sequential word strings that maintain a given TTR value. A higher MTLD score suggests greater lexical diversity.
- 3. Average Sentence Length (Avg. Sent. Len.): This metric computes the average number of words per sentence within each response, providing insights into the syntactic complexity of the text.
- 4. **Punctuation Frequency (Punct. Freq.):** This measure calculates the frequency of punctuation marks within each response, reflecting the density of punctuation usage in the text.
- 5. Flesch Reading Ease Score (Flesch Score): The Flesch Score assesses the readability of a text based on the average sentence length and the average number of syllables per word. Higher scores indicate greater readability.
- 6. **Perplexity of** P(y|x): Unlike the other five metrics, perplexity measures the creativity style by evaluating the likelihood of a response given an instruction.

Table 8 presents the average and standard deviation of these metrics calculated across all responses within each example (an instruction-response pair) for both human-written and LLM-synthesized responses, given the instructions from the LIMA dataset and the instructions from StackExchange.

Our analysis reveals that the LLM-synthesized data exhibits higher presentation style consistency compared to human-written responses. Across both datasets, the synthesized responses from GPT-3.5 and Llama2 models show lower standard deviations for most metrics, indicating greater consistency in lexical diversity, sentence length, punctuation usage, and readability.

We can see that "direct" responses show higher creativity consistency than the "referenced" responses, as indicated by the lower perplexity standard deviation. Interestingly, the "referenced" responses also exhibit higher creativity consistency compared to the human responses, particularly in the StackExchange code data, where we expect the "referenced" responses to have a similar level of creativity consistency to human responses. We hypothesize that this discrepancy arises because, despite instructing the LLM to generate "referenced" responses that closely mimic the semantic content of human responses, the model may still introduce subtle variations or modifications to the original meaning during the generation process.

It is noteworthy that the LIMA dataset, which was carefully curated by human experts for style consistency, still exhibits greater style inconsistency in our stylometric metrics compared to the LLM-synthesized datasets. This observation highlights the challenge of achieving style consistency through manual curation and underscores the potential of using LLMs to generate stylistically consistent data.

In summary, our stylometric analysis provides quantitative evidence supporting the hypothesis that LLM-synthesized datasets exhibit greater style consistency compared to human-written responses.

## A.7 Detailed Results for Data Selection Experiments on Human Data in the Coding Domain

Table 9 presents the detailed results for the LLM performance fine-tuned on data selected using various approaches, as shown in Figure 2. Instead of only displaying the average Pass@1 and Pass@10 scores, this table provides a comprehensive breakdown of the performance metrics for each task. The performance ranking of the different data selection methods in the table follows the same pattern observed in Figure 2, confirming the consistency of the findings across individual tasks.

For a detailed explanation of the Pass@1 and Pass@10 metrics, please refer to the HumanEval paper by Chen et al. (2021).

## A.8 Detailed Results for Data Selection Experiments on Mixed Synthetic Data in Coding Domain

Table 10 provides a detailed breakdown of the LLM performance results presented in Figure 2. The table reports the Pass@1 and Pass@10 scores across 4 different programming languages for LLMs fine-tuned on data selected using various data selection approaches. This expanded view offers a comprehensive look

Data Sampling	HumanEval		MultiPL-E	
Methods	Python	Java	JavaScript	C++
	Pass@1 / Pass@10	Pass@1 / Pass@10	Pass@1 / Pass@10	Pass@1 / Pass@10
Full Data	32.87 / 48.24	30.92 / 44.92	33.84 / 52.62	28.51 / 43.91
SCAR (OOD)				
50%	31.94 / 47.80	30.85 / 43.29	33.91 / 52.45	29.23 / 45.28
25%	31.85 / 46.80	29.97 / 43.24	33.14 / 52.75	29.20 / 45.21
12.5%	30.77 / 46.80	28.92 / 41.86	31.23 / 48.38	28.17 / 43.61
SCAR (ID)				
50%	33.83 / 50.24	30.10 / 44.95	34.46 / 53.10	28.25 / 43.71
25%	31.48 / 48.68	30.76 / 44.60	32.91 / 52.15	28.92 / 43.98
12.5%	31.10 / 47.14	29.46 / 43.06	31.38 / 49.11	27.61 / 42.39
Random				
50%	29.79 / 44.06	30.14 / 43.90	32.86 / 51.61	28.48 / 43.89
25%	30.04 / 45.76	30.22 / 42.35	33.06 / 51.05	28.89 / 43.89
12.5%	27.94 / 45.79	27.53 / 40.47	31.48 / 51.25	25.29 / 40.51
Perplexity				
50%	33.27 / 47.90	29.73 / 42.16	32.67 / 52.13	28.46 / 43.40
25%	32.29 / 47.05	29.33 / 42.40	32.45 / 50.10	28.73 / 44.78
12.5%	27.40 / 45.13	28.67 / 40.77	31.30 / 50.71	26.36/41.75
Superfiltering				
50%	26.50 / 42.00	29.72 / 43.53	32.97 / 52.40	27.86 / 44.86
25%	24.12 / 38.51	29.29 / 42.76	32.50 / 53.20	26.89 / 41.01
12.5%	8.22 / 25.58	26.79 / 38.83	30.11 / 49.20	23.99 / 36.82
HFR				
50%	20.29 / 41.52	30.41 / 44.11	33.49 / 51.27	28.71 / 44.83
25%	11.20 / 25.73	29.38 / 42.81	31.73 / 51.51	28.09 / 43.07
12.5%	11.04 / 27.74	27.51 / 40.82	30.71 / 49.41	24.91 / 39.77
AlpaGasus				
50%	31.30 / 44.90	30.59 / 43.41	34.21 / 52.48	29.45 / 43.91
25%	30.32 / 45.00	29.73 / 42.78	32.24 / 51.65	28.29 / 44.15
12.5%	24.76 / 41.90	28.24 / 42.12	30.84 / 49.56	26.17 / 41.12
Diversity				
50%	33.05 / 48.38	30.53 / 44.06	34.02 / 53.99	28.84 / 42.60
25%	30.38 / 44.52	30.04 / 42.53	33.34 / 52.71	28.68 / 44.66
12.5%	25.87 / 44.07	27.35 / 39.37	30.48 / 49.65	24.99 / 40.38

Table 9: Detailed performance comparison of CodeLlama-7b on the HumanEval (Python) and MultiPL-E (Java, JavaScript, C++) coding benchmarks. The model is fine-tuned using human-written datasets sampled with different sampling methods and varying proportions. The table reports the Pass@1 and Pass@10 scores for each individual programming language.

at the LLM's performance on individual tasks and programming languages, complementing the summary results shown in the figure.

## A.9 Detailed Results for Data Selection Experiments in Open Domain

Table 11 presents the detailed numerical values for the Length Control WinRate, complementing the visual representation provided in Figure 2.

## A.10 Style and Quality Analysis of SCAR-Selected Data

Table 12 provides a comprehensive set of results, expanding upon the information presented in Table 4. In addition to the helpfulness, correctness, and standard deviations of TTR and perplexity, this table includes the full range of stylometric and quality metrics and their corresponding average values.

Data Sampling	HumanEval		MultiPL-E	
Methods	Python	Java	JavaScript	C++
	Pass@1 / Pass@10	Pass@1 / Pass@10	Pass@1 / Pass@10	Pass@1 / Pass@10
Full Data	40.63 / 54.93	32.67 / 44.24	36.89 / 54.10	32.68 / 45.65
SCAR (OOD)				
50%	40.15 / 55.25	32.15 / 44.44	37.01 / 55.59	31.96 / 46.59
25%	38.23 / 52.58	32.57 / 45.44	37.04 / 53.20	30.60 / 45.67
12.5%	38.29 / 52.74	32.46 / 45.45	36.07 / 53.45	31.91/45.56
SCAR (ID)				
50%	40.98 / 56.57	32.80 / 45.75	37.58 / 55.69	32.73 / 45.71
25%	39.84 / 56.75	32.52 / 43.83	36.67 / 55.32	32.00 / 46.26
12.5%	36.93 / 52.96	32.62 / 44.82	36.45 / 52.33	30.43 / 45.42
Random				
50%	39.04 / 51.80	31.75 / 44.85	35.59 / 55.13	32.76 / 46.34
25%	35.61 / 52.40	31.33 / 44.24	36.68 / 54.23	30.53 / 44.60
12.5%	34.99 / 51.90	31.34 / 44.29	35.91 / 51.63	31.08 / 44.49
Perplexity				
50%	31.91 / 50.94	32.44 / 45.37	37.02 / 54.75	33.22 / 46.19
25%	35.55 / 48.65	31.85 / 45.44	35.40 / 51.75	31.28 / 43.32
12.5%	27.37 / 43.06	30.90 / 44.19	36.34 / 48.74	30.46 / 42.96
Superfiltering				
50%	38.93 / 54.55	31.80 / 44.48	35.03 / 54.40	32.22 / 47.25
25%	35.93 / 51.41	32.47 / 44.10	34.46 / 53.13	30.89 / 44.90
12.5%	34.35 / 49.81	30.34 / 42.81	32.97 / 50.60	30.46 / 44.22
HFR				
50%	39.09 / 53.59	32.42 / 43.90	36.11 / 53.51	31.60 / 45.51
25%	38.04 / 53.36	32.57 / 43.51	36.45 / 54.10	31.27 / 46.28
12.5%	29.20 / 50.06	31.87 / 43.85	35.17 / 53.94	30.02 / 44.31
AlpaGasus				
50%	36.88 / 53.05	32.20 / 45.65	36.57 / 54.84	33.07 / 45.77
25%	32.52 / 49.55	31.37 / 42.82	33.32 / 51.72	30.37 / 44.69
12.5%	29.08 / 45.07	31.09 / 43.09	34.82 / 52.53	29.73 / 44.16
Diversity				
50%	39.21 / 54.95	32.10 / 45.48	37.25 / 54.58	32.60 / 46.33
25%	35.29 / 51.33	32.00 / 43.41	36.10 / 55.44	30.98 / 45.19
12.5%	33.60 / 50.18	31.78 / 44.92	34.82 / 51.92	30.91 / 44.10

Table 10: Detailed performance comparison of CodeLlama-7b on the HumanEval (Python) and MultiPL-E (Java, JavaScript, C++) coding benchmarks. The model is fine-tuned using GPT-3.5-turbo-generated datasets sampled with different sampling methods and varying proportions. The table reports the Pass@1 and Pass@10 scores for each individual programming language.

## A.11 Ablation Study

Tables 13 and 14 present detailed performance metrics for LLMs following the removal of various components in SCAR. It is evident that removing almost any ablated component from SCAR, whether selecting data from human or synthetic sources in the code domain, significantly reduces performance. This confirms the effectiveness of each component in our methodology. However, the removal of representation learning (w/o RL, GPT-3.5) and the removal of "referenced" responses (w/o ref, GPT-3.5) do not decrease performance in the code domain as much as anticipated, though they still lower the performance. Subsequent to these findings, we conducted two additional analyses, which are detailed below.

		Methods									
	SCAR (ID)	SCAR (OOD)	Random	Perplexity	Superfiltering	HFR	AlpaGasus	Diversity			
Human											
100%				2.34							
50%	2.24	1.90	2.03	1.74	2.00	1.50	2.09	1.99			
25%	2.43	2.59	1.92	2.12	1.82	1.66	1.83	1.97			
10%	2.67	2.02	2.13	2.51	2.04	2.21	1.96	2.03			
Synthetic											
100%				3.64							
50%	5.56	5.31	2.61	4.17	4.22	3.86	3.86	3.56			
25%	5.89	5.08	3.00	4.04	5.70	4.30	3.94	2.51			
10%	6.61	4.94	2.38	4.54	5.38	4.06	4.78	3.02			

Table 11: Detailed comparison of the Length Control WinRate for Llama3-8b on the AlpacaEval benchmarks. Llama3-8b is fine-tuned using both human-written or GPT-3.5-turbo-generated data sampled with different data selection methods and varying proportions.

	T	ſR	MT	LD	Avg. Se	nt. Len.	Punct.	Freq.	Flesch	Score	Perpl	exity	Holpful	Correct
	Mean	Std.	Mean	Std.	Mean	Std.	Mean	Std.	Mean	Std.	Mean	Std.	Helpful	Correct
	StackExchange													
Human														
100%	59.16	21.48	15.05	8.37	69.40	66.43	30.77	27.17	42.75	44.36	3.83	1.81	2.84	2.68
50%	50.80	16.78	16.34	6.30	68.16	65.49	37.23	28.53	48.59	30.68	3.77	1.72	3.02	3.01
25%	47.43	14.85	16.58	5.28	53.36	48.11	34.93	27.10	49.84	24.60	3.84	1.73	2.78	2.72
12.5%	45.78	14.29	16.45	4.98	50.50	49.46	33.35	25.42	51.26	22.25	3.93	1.86	2.67	2.77
Synthetic														
100%	36.67	14.45	12.13	3.87	60.88	61.39	37.72	24.62	49.17	23.10	1.67	0.31	3.63	3.64
50%	36.79	10.52	13.07	2.80	52.85	36.48	35.49	22.01	50.52	16.87	1.74	0.31	3.52	3.56
25%	36.67	9.33	13.29	2.75	48.71	27.26	31.70	17.62	51.19	15.94	1.83	0.34	3.47	3.44
12.5%	37.19	9.22	13.52	2.98	48.36	28.54	28.93	17.02	51.42	16.03	1.94	0.35	3.55	3.39
			I				Dolly		1					
Human														
100%	54.51	30.96	8.93	8.00	19.90	16.66	7.62	12.22	61.21	28.03	5.23	3.26	3.95	3.91
50%	61.24	28.43	9.55	7.92	21.35	16.36	6.58	8.84	58.27	24.33	4.57	2.69	3.98	3.99
25%	62.81	24.74	18.58	7.52	23.49	17.22	6.92	9.32	55.54	21.76	4.17	2.41	3.96	3.93
10%	57.01	23.73	11.26	6.77	25.44	20.01	7,71	7.16	51.78	22.40	3.93	2.18	3.98	3.99
Synthetic														
100%	55.15	30.04	9.87	7.67	23.76	32.82	12.30	20.53	54.40	71.06	2.75	1.16	3.93	3.96
50%	47.78	21.08	13.30	5.71	27.33	25.25	18.12	22.09	48.61	21.62	2.38	0.72	3.99	3.99
25%	41.96	17.34	13.83	4.40	24.59	18.42	20.54	19.19	46.47	19.89	2.33	0.61	3.98	4.02
10%	40.53	14.83	14.15	3.87	21.49	11.93	20.99	15.92	42.04	17.74	2.46	0.52	4.00	4.02

Table 12: Detailed performance comparison of the stylometric analysis conducted across the StackExchange and LIMA datasets. The table reports the average and standard deviation for five authorship metrics, perplexity, and average helpfulness and correctness scores.

## A.12 Impact of Training SCAR Without Referenced Responses

As illustrated in Table 15, training SCAR without "referenced" responses significantly reduces performance in the open domain. This underscores the importance of using "referenced" responses to learn representations for creative styles. In contrast, in the code domain, the absence of "referenced" responses only marginally lowers performance.

## A.13 Representation Distances/Similarities Analysis

As in Table 16, we calculate the cosine similarities between creativity and presentation style embeddings for the pairs: ("direct"–"referenced")  $\cos(\mathbf{v}^d, \mathbf{v}^r)$ , ("referenced"–"human")  $\cos(\mathbf{v}^r, \mathbf{v}^h)$ , and ("direct"– "human")  $\cos(\mathbf{v}^d, \mathbf{v}^h)$ . According to Eq. 4, we expect the distance between ("direct"–"referenced") to be smaller than those for ("referenced"–"human") and ("direct"–"human") with respect to presentation style embeddings. Conversely, the distance for ("referenced"–"human") should be smallest in terms

Data Sampling	HumanEval		MultiPL-E	
Methods	Python	Java	JavaScript	C++
	Pass@1 / Pass@10	Pass@1 / Pass@10	Pass@1 / Pass@10	Pass@1 / Pass@10
	1	Human Data		
Full, GPT-3.5				
50%	32.44 / 50.38	30.67 / 44.86	34.40 / 53.16	29.49 / 45.73
25%	31.98 / 49.25	30.41 / 43.65	34.04 / 52.72	29.19/43.41
12.5%	31.10/47.14	29.46 / 43.06	31.38 / 49.11	27.61 / 42.39
w/o con, GPT-3.5				
50%	31.21 / 50.01	30.14 / 44.23	34.67 / 51.90	28.67 / 43.90
25%	31.19 / 47.83	31.22 / 45.73	32.91 / 52.41	28.32 / 44.85
12.5%	30.13 / 45.39	28.72 / 42.68	30.99 / 49.60	27.39 / 42.85
w/o rl, GPT-3.5				
50%	33.60 / 50.02	30.47 / 44.53	33.88 / 52.96	28.91 / 45.22
25%	31.76 / 47.47	30.73 / 43.98	32.51 / 51.11	29.42 / 43.47
12.5%	30.56 / 45.26	28.82 / 43.19	31.24 / 49.35	26.89 / 40.95
w/o ref, GPT-3.5				
50%	33.63 / 49.22	31.06 / 45.11	34.45 / 53.41	28.66 / 43.96
25%	31.57 / 48.06	30.84 / 44.26	32.89 / 52.58	29.24 / 45.05
12.5%	30.62 / 45.98	28.06 / 40.71	30.80 / 48.08	28.16/42.80
Full, Llama2-70b				
50%	33.27 / 49.42	30.49 / 43.21	33.70 / 51.46	29.24 / 44.27
25%	29.47 / 46.12	29.75 / 43.19	33.33 / 49.69	29.17 / 44.39
12.5%	30.76 / 46.79	28.13 / 40.52	31.23 / 50.34	27.66/41.58
Full, Llama2-13b				
50%	31.90 / 50.38	30.75 / 44.29	33.34 / 51.81	28.62 / 42.57
25%	31.71 / 48.49	29.78 / 43.73	32.20 / 51.25	28.40/43.16
12.5%	30.29 / 46.03	28.18 / 42.03	30.70 / 48.19	27.47 / 41.58
w/o con, Llama2-13b				
50%	30.76 / 43.63	29.84 / 44.11	32.07 / 51.50	28.04 / 43.07
25%	30.15 / 42.78	29.44 / 43.66	32.88 / 54.14	27.93 / 44.26
12.5%	27.93 / 41.07	27.28 / 39.27	31.18 / 49.99	25.57 / 41.35
Full, Llama3-70b				
50%	32.48 / 50.39	30.68 / 45.30	33.49 / 53.01	29.28 / 45.13
25%	32.28 / 49.14	30.04 / 43.86	32.09 / 51.54	28.09 / 43.63
12.5%	30.40 / 48.36	28.14 / 41.71	30.67 / 49.67	26.99 / 42.47

Table 13: Detailed performance comparison of CodeLlama-7b on the HumanEval (Python) and MultiPL-E (Java, JavaScript, C++) coding benchmarks, fine-tuned with GPT-3.5-generated datasets sampled using different sampling methods in different portions. The Pass@1 and Pass@10 scores for each individual programming language are reported.

of creativity style embeddings. Notably, even without the representation learning loss and only using "referenced" responses during SCAR training, the distances already meet our constraints. This result might explain why eliminating the representation learning loss in Eq. 4 during ranker training does not significantly affect LLM performance. Furthermore, training SCAR without using "referenced" responses or on out-of-domain examples significantly disrupts the anticipated distance constraints. Consequently, the performance of the LLM also deteriorates when it is trained on data selected by SCAR that did not utilize "referenced" responses or was trained on out-of-domain examples.

## A.14 Expanded Results on Starcoder-15.5b

Table 17 presents the full Pass@1 and Pass@10 results for the coding benchmarks HumanEval and MultiPL-E. It contrasts the performance of Starcoder-15.5b, a pre-trained coding LLM, after fine-tuning with various portions of data selected by SCAR from the original dataset, against Octocoder. The original dataset, comprising 13k examples, was curated by the BigCode team, who developed both Starcoder and

Data Sampling	HumanEval	MultiPL-E				
Methods	Python	Java	JavaScript	C++		
	Pass@1 / Pass@10	Pass@1 / Pass@10	Pass@1 / Pass@10	Pass@1 / Pass@10		
		Mixed Synthetic Data				
Full, GPT-3.5						
50%	40.98 / 56.57	32.80 / 45.75	37.58 / 55.69	32.73 / 45.71		
25%	39.84 / 56.75	32.52 / 43.83	36.67 / 55.32	32.00 / 46.26		
12.5%	36.93 / 52.96	32.62 / 44.82	36.45 / 52.33	30.43 / 45.42		
w/o con, GPT-3.5						
50%	39.65 / 55.05	32.30 / 44.40	38.21 / 54.92	32.17 / 45.66		
25%	39.30 / 56.87	32.76 / 45.87	37.43 / 54.76	32.11 / 45.77		
12.5%	36.56 / 51.72	33.00 / 44.48	35.53 / 53.10	31.02 / 45.44		
w/o rl, GPT-3.5						
50%	39.83 / 54.27	32.28 / 43.66	37.66 / 55.99	32.53 / 46.31		
25%	38.62 / 56.03	32.55 / 43.67	36.75 / 53.65	32.25 / 45.06		
12.5%	36.02 / 51.78	32.71/45.68	35.70 / 52.15	31.70/45.51		
w/o ref, GPT-3.5						
50%	39.85 / 55.81	32.13 / 44.00	36.87 / 56.79	32.67 / 46.43		
25%	36.80 / 54.70	32.68 / 45.91	36.87 / 57.04	31.61 / 47.02		
12.5%	36.41 / 50.96	32.66 / 44.58	35.78 / 52.21	30.99 / 44.88		
Full, Llama2-70b						
50%	39.21 / 52.49	32.39 / 45.21	37.45 / 54.87	33.03 / 46.36		
25%	39.23 / 53.77	31.59 / 45.21	37.35 / 55.15	30.81 / 45.04		
12.5%	37.59 / 51.64	31.44 / 44.82	37.04 / 52.55	30.67 / 44.80		
Full, Llama2-13b						
50%	37.29 / 53.60	33.24 / 43.86	37.04 / 56.29	32.36 / 44.65		
25%	36.70 / 51.88	31.97 / 44.57	36.35 / 56.33	31.12 / 46.04		
12.5%	33.78 / 48.61	30.61 / 41.77	34.21 / 51.66	31.11/45.27		
w/o con, Llama2-13b						
50%	37.72 / 53.82	32.18 / 44.19	37.23 / 56.76	32.57 / 46.31		
25%	38.59 / 53.47	32.68 / 44.97	37.19 / 55.59	32.00 / 46.58		
12.5%	33.34 / 49.78	32.05 / 43.76	35.58 / 53.38	31.02 / 46.13		
Full, Llama3-70b						
50%	39.40 / 54.46	32.87 / 45.00	36.99 / 57.26	32.52 / 46.38		
25%	38.40 / 54.73	32.54 / 44.79	37.40 / 54.46	30.92 / 44.06		
12.5%	35.48 / 50.33	31.80/45.40	36.45 / 53.71	30.99 / 46.66		

Table 14: Detailed performance comparison of CodeLlama-7b on the HumanEval (Python) and MultiPL-E (Java, JavaScript, C++) coding benchmarks, fine-tuned with GPT-3.5-generated datasets sampled using different sampling methods in different portions. The Pass@1 and Pass@10 scores for each individual programming language are reported.

	Human			Mix Synthetic		
	50%	25%	10%	50%	25%	10%
Full w/o ref	2.24	2.43	2.67	5.56	5.89	6.61
w/o ref	1.95	2.25	1.99	3.59	4.74	4.44

Table 15: Comparison of SCAR(ID) models with and without using "referenced" responses during ranker training, and their impact on L.C. WinRate performance in fine-tuned Llama3-8b models.

Octocoder, specifically to fine-tune Starcoder into Octocoder. We obtain the Octocoder results from the official BigCode leaderboard<sup>4</sup>.

<sup>&</sup>lt;sup>4</sup>https://huggingface.co/spaces/bigcode/bigcodemodelsleaderboard/tree/main/community\_results/bigcode\_octocoder\_loubnabnl

	Presentation Embedding Distances			Uncertainty Embedding Distances		
	$\cos(\mathbf{v}_p^d,\mathbf{v}_p^r)$	$\cos(\mathbf{v}_p^r,\mathbf{v}_p^h)$	$\cos(\mathbf{v}_p^d,\mathbf{v}_p^h)$	$\cos(\mathbf{v}_c^d,\mathbf{v}_c^r)$	$\cos(\mathbf{v}_c^r,\mathbf{v}_c^h)$	$\cos(\mathbf{v}_c^d,\mathbf{v}_c^h)$
	LIMA					
SCAR(ID)	0.9368	0.8970	0.7884	0.8312	0.8801	0.7209
SCAR(ID) w/o rl	0.9050	0.7962	0.6369	0.9406	0.9587	0.8717
SCAR(ID) w/o ref	0.9442	0.7970	0.7249	0.9696	0.8935	0.8544
SCAR(OOD)	0.9416	0.9344	0.8884	0.8887	0.9115	0.8574
	StackExchange					
SCAR(ID)	0.9020	0.8574	0.6867	-0.4330	0.9646	-0.4803
SCAR(ID) w/o rl	0.9274	0.8224	0.6968	0.7312	0.8978	0.4480
SCAR(ID) w/o ref	0.9778	0.8844	0.8660	0.9836	0.9143	0.8952
SCAR(OOD)	0.9702	0.8502	0.8249	0.7451	0.0083	-0.1289

Table 16: The cosine similarities between the presentation and creativity style representations of "direct" ( $\mathbf{v}_p^d, \mathbf{v}_c^d$ ), "referenced" ( $\mathbf{v}_p^r, \mathbf{v}_c^r$ ), and human-written ( $\mathbf{v}_p^h, \mathbf{v}_c^h$ ) responses for both the LIMA and StackExchange datasets.

Data Sampling	HumanEval	MultiPL-E				
Methods	Python	Java JavaScript		C++		
	Pass@1 / Pass@10	Pass@1 / Pass@10	Pass@1 / Pass@10	Pass@1 / Pass@10		
Octocoder	35.56 / 51.81	26.03 / 38.44	32.80 / 46.97	29.32 / 41.90		
Starcoder-15.5b						
10,000	36.29 / 53.99	28.29 / 39.58	33.22 / 49.79	30.17 / 46.20		
5,000	36.95 / 54.07	28.96 / 39.02	34.53 / 49.90	32.83 / 44.47		
2,500	37.57 / 55.65	29.29 / 41.06	34.09 / 49.47	31.19 / 42.83		

Table 17: Detailed performance comparison of Octocoder and Starcoder-15.5b, fine-tuned on various portions of the selected data, on the HumanEval (Python) and MultiPL-E (Java, JavaScript, C++) coding benchmarks.