
MFC-Bench: Benchmarking Multimodal Fact-Checking with Large Vision-Language Models

Shengkang Wang^{1,*}, Hongzhan Lin^{2,*}, Ziyang Luo^{2,*}, Zhen Ye³, Guang Chen^{1,†}, Jing Ma^{2,†}

¹Beijing University of Posts and Telecommunications ²Hong Kong Baptist University

³Hong Kong University of Science and Technology

{wsk, chenguang}@bupt.edu.cn, {cshzlin, cszyluo, majing}@comp.hkbu.edu.hk

Abstract

Large vision-language models (LVLMs) have significantly improved multimodal reasoning tasks, such as visual question answering and image captioning. These models embed multimodal facts within their parameters, rather than relying on external knowledge bases to store factual information explicitly. However, the content discerned by LVLMs may deviate from actual facts due to inherent bias or incorrect inference. To address this issue, we introduce *MFC-Bench*, a rigorous and comprehensive benchmark designed to evaluate the factual accuracy of LVLMs across three tasks: Manipulation, Out-of-Context, and Veracity Classification. Through our evaluation on *MFC-Bench*, we benchmarked 12 diverse and representative LVLMs, uncovering that current models still fall short in multimodal fact-checking and demonstrate insensitivity to various forms of manipulated content. We hope that *MFC-Bench* could raise attention to the trustworthy artificial intelligence potentially assisted by LVLMs in the future. The *MFC-Bench* and accompanying resources are publicly accessible at <https://github.com/wskbest/MFC-Bench>, contributing to ongoing research in the multimodal fact-checking field.

1 Introduction

Significant advancements have been made in natural language processing (NLP), highlighted by the development of large language models (LLMs) (Chang et al., 2023) equipped with billions of parameters and pre-trained on extensive data (Brown et al., 2020; Chowdhery et al., 2022; Touvron et al., 2023a,b). These models, including notable examples like ChatGPT and GPT-4 (OpenAI, 2023), have shown remarkable proficiency in understanding and executing human instructions through methods such as instruction fine-tuning and reinforcement learning from human feedback (RLHF) (Ouyang et al., 2022). They offer robust zero-shot capabilities, allowing them to perform tasks effectively without further parameter tuning (Kojima et al., 2022; Lin et al., 2023; Wei et al., 2021, 2023). Simultaneously, there has been progress in adapting these capabilities to vision-based LLMs (Dai et al., 2023; Gong et al., 2023; Liu et al., 2023a; OpenAI, 2023; Team et al., 2023; Zhu et al., 2023), known as large vision-language models (LVLMs), which extend their proficiency across various multimodal vision-language tasks (Fu et al., 2023; Hudson and Manning, 2019; Lu et al., 2022). This convergence of advancements in both unimodal and multimodal domains represents a significant leap in artificial intelligence, setting the stage for more cohesive and adaptive applications across different platforms and modalities.

Recent studies have thoroughly investigated the extent to which LLMs hold factual information and their capacity to reason with such knowledge (Hu et al., 2024b), which hypothesized that LLMs,

*Equal contribution. Hongzhan Lin is the project leader.

†Corresponding authors.

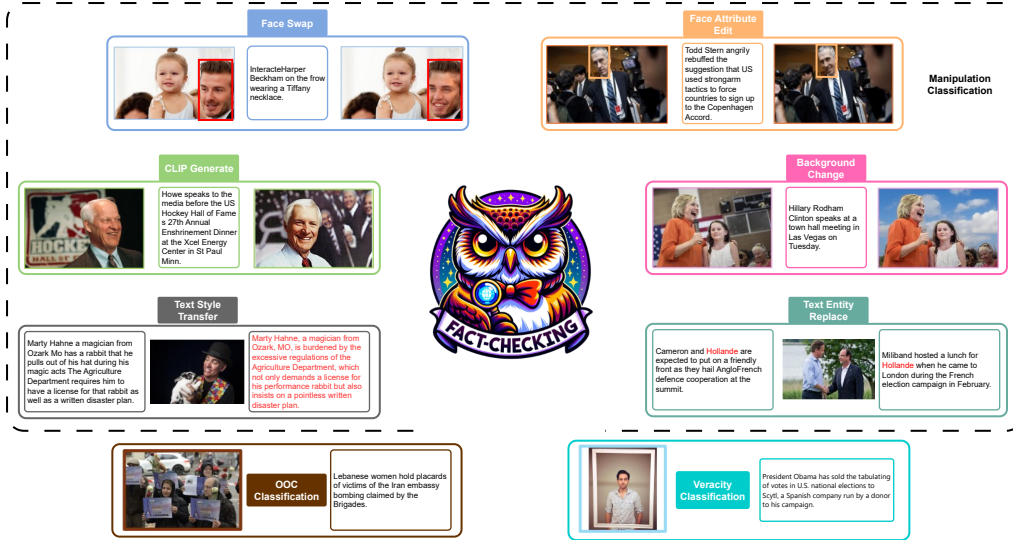


Figure 1: *MFC-Bench* is a comprehensive benchmark designed to evaluate the LVLMs across three distinct multimodal fact-checking tasks: Manipulation, Out-of-Context, and Veracity Classification.

trained on vast data, could adequately substitute for evidence retrieval and conduct fact-checking autonomously, relying solely on their parametric knowledge. Beyond text-only fact-checking (Guo et al., 2022; Thorne et al., 2018; Lin et al., 2023, 2022a), multimodal content is often perceived as more credible and spreads more quickly than similar textual claims (Li and Xie, 2020; Newman et al., 2012). However, the capabilities and limitations of LVLMs in managing multimodal reasoning tasks (Akhtar et al., 2023) related to factuality, particularly in identifying online unverified information within multimodal inputs, remain underexplored. These multimodal fact-checking tasks (Nakamura et al., 2020; Newman et al., 2012; Shao et al., 2023; Yao et al., 2023) are crucial for understanding social dynamics and require sophisticated social judgment and decision-making abilities. Given that LVLMs are trained on extensive and varied image-text corpora and demonstrate remarkable generalization capabilities (Liu et al., 2023a), it is vital to evaluate both their strengths and potential challenges in handling factual knowledge and reasoning. This inquiry is particularly relevant to ensuring trustworthy insights, focusing on how LVLMs analyze and integrate complex visual and textual elements accurately and responsibly.

To this end, we introduce *MFC-Bench* as shown in Figure 1, a comprehensive Multimodal Fact-Checking testbed designed to evaluate LVLm in terms of identifying factual inconsistencies and counterfactual scenarios. *MFC-Bench* encompasses a wide range of visual and textual queries, organized into three binary classification tasks: Manipulation Classification, Out-of-Context Classification, and Veracity Classification. These tasks draw from a mix of diverse datasets (Newman et al., 2012; Shao et al., 2023; Yao et al., 2023) and our newly created datasets specifically designed for analyzing manipulations of multimodal facts: 1) The Manipulation Classification task targets various alterations like face swapping, face attribute editing, background changing, image generation, entity replacement, and style transfer; 2) The Out-of-Context Classification task focuses on identifying the false connection between the image and text that may be both true; 3) The Veracity Classification task is the multimodal counterpart to classifying the veracity of textual claims given the visual evidence, by leveraging the inherent knowledge embedded in LVLMs. Such a three-task design philosophy aims to investigate the helpfulness of LVLMs in the stage of verdict prediction for multimodal fact-checking. We presented these tasks to LVLMs with carefully crafted prompts, gathered the model’s feedback, and conducted a comprehensive analysis of the outcomes, which allowed us to evaluate the model’s performance on *MFC-Bench*, ensuring a thorough understanding of its capabilities and limitations.

Through *MFC-Bench*, we comprehensively assess the ability of various LVLMs (Bai et al., 2023; Dai et al., 2023; Liu et al., 2023a; OpenAI, 2023) to accurately identify manipulated and misleading content within multimodal inputs. Our benchmark offers a rigorous examination of current LVLMs, highlighting the considerable gaps in their performance. Tasks aimed at detecting false connections,

Table 1: Dataset sources, description, and distribution.

Tasks	Description	Sources	Distribution		
			Fact.	Non-Fact.	All
Manipulation	Face Swap	DGM4	4,000	2,000	6,000
	Face Attribute Edit	DGM4	4,000	2,000	6,000
	Background Change	Ours	1,000	2,000	3,000
	CLIP-based SD Generate	Ours	5,000	5,000	10,000
	Text Style Transfer	Ours	1,000	1,000	2,000
	Text Entity Replace	Ours	1,000	1,000	2,000
OOB	Detect out of context	NewsCLIPpings	1,000	1,000	2,000
Veracity	Verify the claim w/ image	MocheG	469	1,531	2,000

such as OOB Classification, reveal pronounced disparities in LVLm efficacy. For more intricate tasks like Manipulation Classification, which necessitates deep background knowledge and sophisticated reasoning, LVLms typically demonstrate only moderate success. Overall, *MFC-Bench* is designed to provide researchers with a multi-dimensional understanding of their models’ capabilities in multimodal fact-checking. Our goal is to advance auditing insights within LVLms, playing a crucial role in curbing the spread of online disinformation and promoting the stability and cohesion of diverse communities.

Our contributions are three-fold: 1) We introduce *MFC-Bench*, a comprehensive testbed with 33K multimodal samples across three fact-checking tasks to assess LVLms’ trustworthiness; 2) Extensive evaluation of 12 advanced LVLms reveals significant challenges, with GPT-4V only achieving F1 scores of 45.6%, 75.2%, and 60.0% across the Manipulation, OOB, and Veracity Classification tasks, respectively; 3) We provide a detailed analysis of performance variations among different LVLms using strategies like chain-of-thought and in-context learning prompts.

2 Dataset Construction

To systematically assess the visual and linguistic factual knowledge related to inconsistencies and counterfactual reasoning abilities of LVLms, we formulate our benchmark into three specific tasks: Manipulation Classification, Out-of-Context Classification, and Veracity Classification. For these tasks, we carefully curate appropriate visual and textual queries from a variety of sources to ensure a comprehensive evaluation of LVLms in multimodal fact-checking, as summarized in Table 1.

2.1 Task

2.1.1 Manipulation Classification

Manipulation Classification (Qi et al., 2019) is a task meticulously designed to ascertain whether multimodal data encompasses fabricated elements. To investigate LVLms’ proficiency in identifying multimodal content altered through various manipulative techniques, we designed six types of manipulation³. The first four methods focus on visual alterations, while the last two target textual modifications.

- **Method 1: Face Swap (FS).** Face Swap involves the process of cutting a face from one image and replacing it with a different face in another image. It can be used to create realistic but fake images of public figures, such as politicians, celebrities, or journalists, appearing to do things they never did. It is important for LVLms not only to verify the authenticity of news text content but also to accurately identify whether the individuals in the accompanying photos correspond to the reported events. We have sampled and chosen a Face Swap subset of the DGM4 dataset (Shao et al., 2023) as part of our benchmark to *detect Whether LVLm can recognize individuals and retrieve information related to individuals from its internal parametric knowledge* through multimodal data.

³Here, we consider the most challenging setting (Akhtar et al., 2023) that the correct content in one modality, accompanied by the manipulated content in the other modality, which increases credibility.

- **Method 2: Face Atttribute Edit (AE).** Unlike Face Swap, Face Attribute Edit achieves deception by altering the facial expressions of humans like newsmakers. This can be potentially harmful to the public, as it can particularly portray a public figure laughing inappropriately in a serious context, which is highly misleading and infuriating. To identify such discrepancies, LVLMs must precisely recognize the type of event and the expected demeanor of the individuals involved. Our benchmark randomly selected visual and textual samples related to face attribute editing from the previously established DGM4 dataset (Shao et al., 2023). This inclusion allows us to *evaluate the multimodal fact-checking capabilities of LVLMs in recognizing the scene, identifying personal information and detecting the correctness of face’s status* in visual content.
- **Method 3: Background Change (BC).** The same individuals, involving the same events, can take place in different locations. Before the emergence of diffusion models, manipulating a suitable scene was extremely challenging. However, with the advent of diffusion models (Rombach et al., 2022), we can now effortlessly alter the background of images, thereby creating scenes that did not originally exist in fact. Specifically, we are interested in whether LVLMs can exactly determine if the time and location of an event align with the actual scene. We utilized Grounding DINO (Liu et al., 2023b) and `stable-diffusion-inpainting`⁴ models to generate a background for an outdoor scene. Our objective was to *examine the capability of LVLMs in faithfully identifying these artificially constructed counterfactual scenarios*.
- **Method 4: CLIP-based Stacle Diffusion Generate (CG).** Stable diffusion (SD) traditionally employs the text-to-image generation. However, by incorporating CLIP (Radford et al., 2021), we can transform the process into an image-to-image generation (Ramesh et al., 2022), enabling the manipulated image to retain the linguistic information from the original image. It is crucial for LVLMs to accurately discern between authentic and fabricated images by incorporating their internal knowledge. Using StabilityAI’s `Stable-Diffusion-2-1-Unclip`⁵, we generated stable diffusion versions of the original images for replacement. This design allows us to *test the fact-checking capacity of LVLMs for awareness of whether the multimodal contents have been manipulated with the original image information*.
- **Method 5: Text Entity Replace (ER).** Entity replacement is a traditional method of text manipulation. Using Named Entity Recognition (NER) (Lample et al., 2016) from `bert-base-NER`⁶, we identified named entities corresponding to persons within a given claim where newsmakers are mentioned. Subsequently, we located these named entities in another claim with the same persons and swapped the surrounding contextual texts between the two claims. It creates counterfactual scenarios where the photos and claims contain the same individuals, but the events depicted are different. *This scenario challenges the ability of LVLMs to keenly associate individuals with events, relying on their internal factual knowledge*.
- **Method 6: Text Style Transfer (ST).** Similar to Face Attribute Edit, Text Style Transfer can alter the perception of the same person and event, giving a different factual impression. For instance, an originally sad event can be described in a way that makes it seem humorous. This poses a substantial challenge for fact-checking efforts as it requires LVLMs not only to detect the factual content but also to understand the tone and style nuances that might misrepresent the underlying truth of the situation. Hence, we first utilized GPT-4 (OpenAI, 2023) to determine whether the sentiment of the text is positive or negative. Then, leveraging the advanced text style transfer capabilities of GPT-4, we rewrote the text to express the opposite sentiment. *The process examines LVLMs’ ability to rigorously comprehend the events and associated sentiments depicted in images and claims, and to correctly correlate them*.

2.1.2 Out-of-Context Classification

Out-of-Context (OOC) Classification (Luo et al., 2021) aims to evaluate the coherence and correspondence of context across various modalities. Unlike the aforementioned manipulation techniques that

⁴<https://huggingface.co/runwayml/stable-diffusion-inpainting>

⁵<https://huggingface.co/stabilityai/stable-diffusion-2-1-unclip>

⁶<https://huggingface.co/dslim/bert-base-NER>

require modifying images and texts, OOC Classification combines real but misused images and texts. If the image and claim are contextually aligned, we define the relationship as true. Conversely, if the image and claim are not contextually aligned, we define the relationship as false. We collected multimodal samples from the NewsCLIPpings dataset (Luo et al., 2021), using embedding methods such as CLIP and SBERT-WK (Wang and Kuo, 2020) to extract the most similar misused images, for *the evaluation of LVLMS’ ability in discerning subtle semantic inconsistencies between images and texts* in OOC Classification.

2.1.3 Veracity Classification

Veracity Classification (Yao et al., 2023) involves assessing whether the context from one modality aligns with or accurately reflects the context from another modality. Based on the image evidence, the LVLMS need to predict the truthfulness (Supported, Refuted) of the claim. We curated a subset of the Moche dataset (Yao et al., 2023) for this task. If the image supports the truthfulness of the claim, we label the relationship between the image and the claim as “Supported” indicating a true label. Otherwise, it is labeled as “Refuted” indicating a false label. This is a cross-modal semantic transformation task designed to *test whether LVLMS can detect complete semantic factual consistency between the two modalities*.

2.2 Label Setting

To unify the three tasks and facilitate a more effective analysis of benchmark results, we simplify the tasks into binary classification, we define the label $L = \{\text{Fact.}, \text{Non-Fact.}\}$. The Manipulation Classification task involves determining whether multimodal news is fabricated, with labels indicating “Manipulated” (Non-Fact.) or “Not Manipulated” (Fact.) The OOC Classification task assesses whether the image and claim are inconsistent, with labels indicating “Matched” (Fact.) or “Not Matched” (Non-Fact.). Lastly, the Veracity Classification task evaluates whether the claim is true based on the image, with labels indicating “True” (Fact.) or “Not True” (Non-Fact.).

3 Methodology

3.1 Models

To provide an exhaustive perspective on the current state of LVLMS within the context of multimodal fact-checking, we conducted evaluations on 12 representative accessible LVLMS. Our selection encompasses a range of models from diverse organizations, differing in size, which allows for a thorough understanding of the capabilities and limitations of LVLMS in handling multimodal content concerned with facts.

For the open-source and accessible LVLMS, we adopt the representative models like LLaVA-NeXT (Liu et al., 2024), InstructBLIP (Dai et al., 2023), Qwen-VL (Bai et al., 2023), Yi-VL (Young et al., 2024), InternVL (Chen et al., 2023c), CogVLM (Wang et al., 2023a), MiniCPM-V-2 (Hu et al., 2024a), mPLUG-Owl (Ye et al., 2023a), Emu2 (Sun et al., 2023) and MiniGPT-v2 (Chen et al., 2023b). As two of the most powerful closed-source LVLMS, both GPT-4V and Claude3-Haiku are also included in our testing scope.

3.2 Prompt Strategy

We define a multimodal content $M = \{I, C\}$ as a tuple consisting of an image I and an accompanying claim C to be fact-checked.

Given that our benchmark comprises three distinct tasks, we have developed three task instructions T_i specifically designed to enhance the multimodal fact-checking capabilities of the LVLMS.

- **Manipulation Classification (Task T_1):** “Manipulation encompasses various alterations such as face swapping, face attribute editing, background changing, image generation, entity replacement, and style transfer. Your task is to determine if the image and caption have been manipulated.”
- **Out-of-Context Classification (Task T_2):** “Out-of-Context Classification is a task in which the goal is to identify whether a given image and accompanying text are contextually

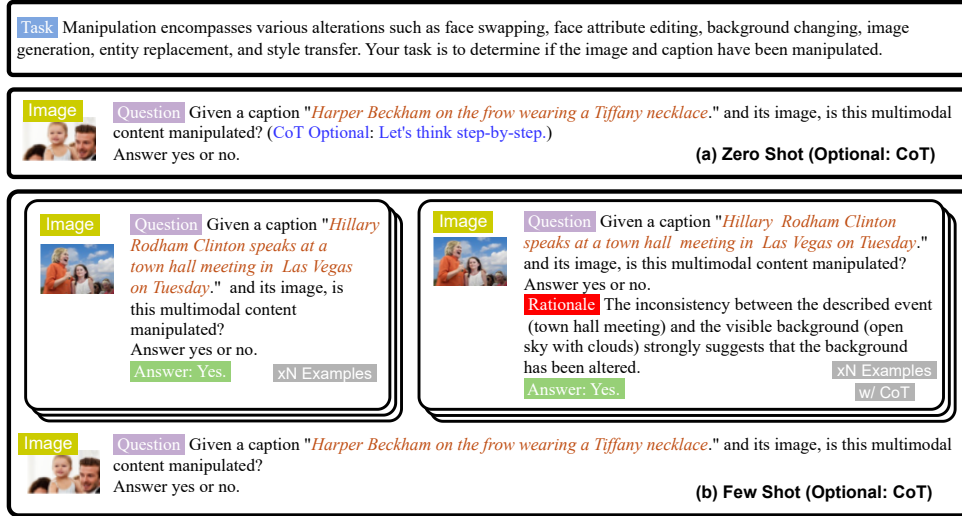


Figure 2: Comparison of prompts in zero-shot and few-shot scenarios with and without CoT.

mismatched or falsely connected. Your task is to identify whether a given image and its accompanying text are contextually mismatched or falsely connected.”

- **Veracity Classification (Task T_3):** “The Veracity task in a multimodal context involves assessing the truthfulness or accuracy of textual claims by using visual evidence. Your task is to determine the truthfulness of textual claims based on the accompanying visual evidence.”

To enable the model to answer binary classification questions, we carefully design three questions for three tasks and incorporate the image I and claim C into them.

- **Manipulation Classification (Question Q_1):** “Given a claim $\{C\}$ and its image $\{I\}$, is this multimodal content manipulated?”
- **Out-of-Context Classification (Question Q_2):** “Does this claim $\{C\}$ match its image $\{I\}$?”
- **Veracity Classification (Question Q_3):** “Based on the image $\{I\}$, is this claim $\{C\}$ true?”

At the end of each prompt template, we specify the required output format F : “Answer yes or no.”. As demonstrated in Figure 2, to explore the effect of different prompt strategies like Chain-of-Thought (CoT) (Wei et al., 2022) or In-Context Learning (ICL) prompting, we utilized the four following prompt methods for the *MFC-Bench*: *Zero-shot*, *Zero-shot with CoT* (Kojima et al., 2022), *Few-shot*, and *Few-shot with CoT* (Wei et al., 2022).

- **Zero-shot Prompt.** We initially employed the zero-shot setting to activate the fact-checking capabilities of LVLMs. Given a task instruction T_i , a question unit Q_i , and the return format F , the LVLMs $f(\cdot)$ are expected to determine whether the output $Y = f(T_i, Q_i, F)$ is “Yes” or “No”, as depicted in Figure 2(a). To extend the Zero-shot with CoT setting in LLMs described in Kojima et al. (2022), we simply incorporated the CoT prompt C_p “Let’s think step by step” into the original prompt to encourage the LVLMs to implicitly conduct complex reasoning of determining the factual label L . Consequently, LVLMs will process $f(T_i, Q_i, C_p, F)$ and finally return the answer to multimodal fact-checking.
- **Few-shot Prompt.** Previous literature has indicated that pre-trained LLMs can significantly benefit from the inclusion of a few ICL demonstrations (Brown et al., 2020). To assess whether the LVLMs could gain similar advantages from the in-context demonstrations in multimodal fact-checking, we employed the few-shot setting. For the few-shot examples, we define each example $E = \{Q_i, L\}$ consisting of a question Q_i and its corresponding label L . The inputs of LVLMs are given as $\{T_i, E^N, Q_i, F\}$, where E^N represents multiple

Table 2: Results of different LVLMs on the *MFC-Bench* across different multimodal fact-checking tasks, in the zero-shot setting. The accuracy and macro-averaged F1 score (%) are reported as the metrics. The best and second test results are in bold and underlined, respectively.

Models	Size	Manipulation		OOC		Veracity	
		Accuracy	F1	Accuracy	F1	Accuracy	F1
GPT-4V	-	55.3	45.6	75.8	75.2	77.4	60.0
Claude3-Haiku	-	50.6	36.8	59.8	59.5	80.3	57.4
Emu2	37B	36.5	30.5	51.9	51.1	70.0	52.6
InternVL	25.5B	60.4	45.3	<u>73.4</u>	<u>73.0</u>	80.0	57.4
CogVLM	17B	57.0	54.6	61.4	56.2	76.4	63.4
LLaVA-NeXT	13B	62.1	56.9	61.8	57.2	78.4	51.3
InstructBLIP	13B	41.7	30.7	59.5	52.3	49.6	49.3
Qwen-VL	7B	45.5	45.5	69.7	69.4	82.7	69.3
mPLUG-Owl	7B	<u>62.4</u>	50.5	48.3	46.1	60.8	49.7
MiniGPT-v2	7B	41.4	29.5	62.4	62.3	79.3	65.0
Yi-VL	6B	58.5	42.4	70.4	70.4	78.4	60.0
MiniCPM-V-2	2.8B	63.2	<u>56.2</u>	67.2	66.3	<u>81.8</u>	<u>65.5</u>

examples and N denotes the number of examples, as demonstrated in Figure 2(b). In terms of the Few-shot with CoT prompt, we manually curated a rationale R for each example to guide the LVLMs, where the example is represented as $E_c = \{Q_i, R, L\}$ and the input is $\{T_i, E_c^N, Q_i, F\}$.

4 Experiments

In the preceding sections, we have outlined the composition of the benchmark, the tested models, the task definitions, and the prompting methods. In this section, we will commence by presenting the performance of various LVLMs on the *MFC-Bench* across different tasks and prompt strategies, followed by a detailed analysis.

4.1 Experimental Setup

We conduct extensive experiments on the *MFC-Bench* to evaluate a total of 12 representative LVLMs: 1) GPT-4V (OpenAI, 2023); 2) Claude3-Haiku; 3) Emu2 (Sun et al., 2023); 4) InternVL (Chen et al., 2023c); 5) CogVLM (Wang et al., 2023a); 6) LLaVA-NeXT (Liu et al., 2024); 7) InstructBLIP (Dai et al., 2023); 8) Qwen-VL (Bai et al., 2023); 9) mPLUG-Owl (Ye et al., 2023a); 10) MiniGPT-v2 (Chen et al., 2023b); 11) Yi-VL (Young et al., 2024); 12) MiniCPM-V-2 (Hu et al., 2024a).

To ensure our results are reproducible, we set the temperature as 0 without any sampling mechanism. We use the accuracy and macro-averaged F1 score as the evaluation metrics. More implementation details and baseline descriptions are provided in Appendix §A.

4.2 Main Results

In Table 2, we present the average outcomes of 12 accessible and representative LVLMs in a zero-shot setting on the *MFC-Bench*. From the results, we derive the following observations:

1) For the overall performance of the LVLMs on the Manipulation Classification, the open-sourced model LLaVA-NeXT achieves the best performance with the 56.9% macro-averaged F1 score. It is worth noting that the most lightweight model, MiniCPM-V-2, also performs well across a spectrum of manipulation techniques, with the highest 63.2% accuracy and 56.2% macro-averaged F1 score. Counterintuitively, the more powerful closed-source models, namely GPT-4V and Claude3-Haiku, fail to produce promising results in this task. 2) This discrepancy underscores the complexity of model architecture and the necessity of task-specific tuning, revealing that sheer computational power does not guarantee superior performance in such a specialized task for manipulation classification. None of the tested models exceed a performance threshold of 57%, revealing a vulnerability of vision-language foundation models in this multimodal fact-checking subtask. 3) In OOC Classification,

Table 3: Results of different LVLMs on the *MFC-Bench* across different multimodal fact-checking tasks with the zero-shot CoT setting.

Models	Size	Manipulation		OOC		Veracity	
		Accuracy	F1	Accuracy	F1	Accuracy	F1
GPT-4V	-	54.8	50.6	76.5	76.2	77.7	58.7
Claude3-Haiku	-	50.6	42.7	57.0	55.8	80.1	54.0
Emu2	37B	40.6	38.9	52.7	46.3	42.8	40.3
InternVL	25.5B	<u>61.9</u>	49.2	56.5	47.7	79.0	53.6
CogVLM	17B	58.3	<u>54.7</u>	61.3	56.3	75.2	61.4
LLaVA-NeXT	13B	58.0	55.5	52.4	39.1	77.2	46.2
InstructBLIP	13B	41.4	31.0	57.0	47.6	37.2	36.9
Qwen-VL	7B	45.2	45.2	<u>71.9</u>	<u>71.8</u>	81.8	65.3
mPLUG-Owl	7B	52.2	50.6	49.5	47.8	68.8	51.2
MiniGPT-v2	7B	41.5	31.1	61.8	59.6	77.4	<u>64.4</u>
Yi-VL	6B	58.8	40.7	69.4	69.3	78.0	56.1
MiniCPM-V-2	2.8B	62.4	50.5	68.2	67.5	<u>80.8</u>	62.2

GPT-4V stands out as the preeminent model with the highest 75.8% accuracy and 75.2% macro-averaged F1 score. In terms of Veracity Classification, Qwen-VL is distinguished by its considerable macro-averaged F1 score of 69.3%. 4) Overall, we can find almost all the LVLMs could achieve better performance on OOC Classification but worse on Manipulation Classification, and performance on Veracity Classification lies in the intermediate range. This pattern underscores the rational distribution of task difficulty within our proposed benchmark, *MFC-Bench*, which comprehensively spans a spectrum from challenging to straightforward multimodal fact-checking tasks.

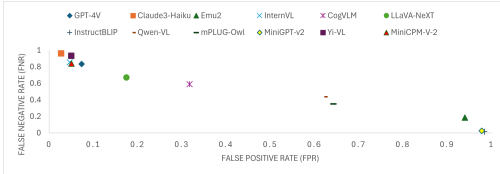


Figure 3: Yes/No Bias in tested LVLMs.

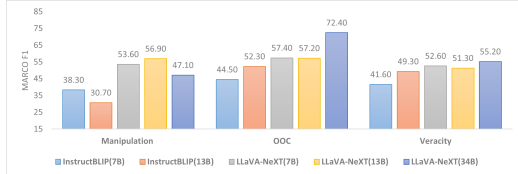


Figure 4: Model size effects of LVLMs.

4.3 Yes/No Bias

During benchmarking, we identified a Yes/No Bias issue with the tested LVLMs, where it tends to consistently respond with either “yes” or “no”. We have chosen two key metrics to evaluate the Yes/No bias of the model for the Manipulation Classification task: 1) False Positive Rate (FPR) (Fawcett, 2006) and 2) False Negative Rate (FNR) (Powers, 2020). In Figure 3, models such as GPT-4V, Claude3-Haiku, Yi-VL, and InternVL tend to answer “no” more frequently. Conversely, models like Emu2, MiniGPT-v2, and InstructBLIP are more inclined to answer “yes”. Meanwhile, LLaVA-NeXT, CogVLM, Qwen-VL, and mPLUG-Owl exhibit a balanced performance without a strong bias towards either affirmative or negative classifications. Given that these models were not specifically trained for this task, the presence of such biases is not unexpected. This underscores the necessity of *MFC-Bench*, aiming to guide the enhancement of fact-checking capabilities in LVLMs for future developments.

4.4 Effect of Model Size

To explore the impact of model size on factual capabilities, we analyzed two families of LVLMs: InstructBLIP and LLaVA-NeXT, which both utilize the same language backbone, i.e., Vicuna (Chiang et al., 2023), and employ similar CLIP models, with InstructBLIP using EVA CLIP-g and LLaVA-NeXT using CLIP ViT-L/14. Specifically, we examined InstructBLIP (7B), InstructBLIP (13B), LLaVA-NeXT (7B), LLaVA-NeXT (13B), and LLaVA-NeXT (34B). As shown in Figure 4, the following observations were made: 1) In Manipulation Classification, there is a minimal correlation between the model size of the specific LVLMs family and the performance. 2) Regarding OOC Classification and Veracity Classification, the model performance generally improves with the increased model size.

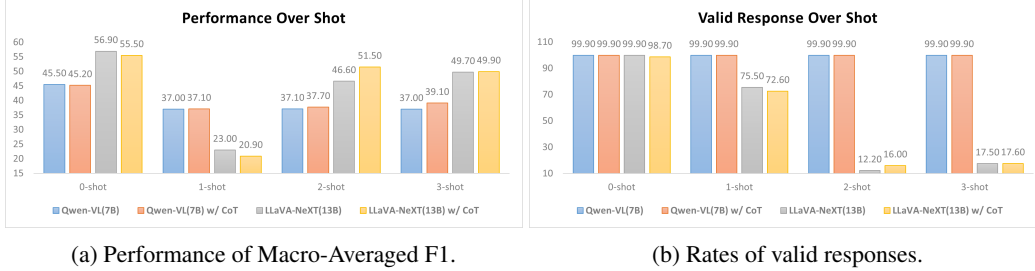


Figure 5: Comparison between few-shot conditions w/ and w/o CoT for Qwen-VL and LLaVA-NeXT.

4.5 Effect of CoT

As Table 2 and Table 3 show, the impact of CoT in the zero-shot setting varies across different models and tasks on *MFC-Bench*. For Manipulation Classification, most LVLMs exhibit improved performance with CoT, particularly in terms of the F1 score, as seen in GPT-4V, where the F1 score increased from 45.6% to 50.6%, and in Claude3-Haiku, where it rose from 36.8% to 42.7%. In the case of OOC Classification, CoT proves beneficial for some LVLMs, such as Qwen-VL, while it negatively affects others, like Claude3-Haiku. For Veracity Classification, CoT generally does not significantly impact performance and may even reduce it for certain models.

In few-shot settings, as shown in Figure 5, CoT does not enhance the performance of Qwen-VL (7B) and LLaVA-NeXT (13B). For Qwen-VL(7B), CoT has a minimal to slightly positive impact on performance across all shot scenarios, without notably influencing the rate of valid responses. Conversely, CoT impacts LLaVA-NeXT (13B) inconsistently. The possible reasons for these observations include the underdeveloped ability of the LVLm to handle multiple image inputs and the excessive length of the rationale, which diminishes the model’s ability to understand the task effectively.

4.6 Effect of ICL

To thoroughly investigate the impact of In-Context Learning (ICL) on model performance, we selected Qwen-VL (7B) and LLaVA-NeXT (13B) that support multiple image inputs to conduct few-shot experiments on Manipulation Classification. We calculated the macro-averaged F1 scores and the rates of valid responses for both LVLMs, where the valid response means the response without ambiguous outputs. 1) The results, as illustrated in Figure 5, indicate that the implementation of few-shot learning does not enhance the fact-checking capabilities of these models. 2) For the performance of Qwen-VL in Figure 5a, the few-shot prompt (i.e., ICL) did not result in a performance improvement. Instead, we found that it induced model inertia, leading it to predominantly respond with “no” in most instances. 3) For LLaVA-NeXT, as the number of shots increases, the average number of valid responses from the model progressively decreases, as shown in Figure 5b. We speculate that this number decline of valid responses to our prompt is likely due to the model’s lack of sufficient training on multi-image scenarios. We provide more qualitative analysis in Appendix §D.

5 Conclusion and Future Work

In this study, we aim to investigate the trustworthy insight of LVLMs by examining the multimodal fact-checking ability of LVLMs across a spectrum of task categories. For this purpose, we have developed the *MFC-Bench*, a comprehensive testbed consisting of 33K multimodal samples, spanning three tasks of varied complexity. Our evaluation of various LVLMs using different prompting methods, including those with CoT or ICL prompts, on the *MFC-Bench* reveals that these models still exhibit limitations in accurately addressing multimodal fact-checking tasks. In our future work, we plan to update our benchmark on the justification production for multimodal fact-checking with LVLMs.

References

Shruti Agarwal, Hany Farid, Yuming Gu, Mingming He, Koki Nagano, and Hao Li. 2019. Protecting world leaders against deep fakes. In *CVPR Workshops*.

- Harsh Agrawal, Karan Desai, Yufei Wang, Xinlei Chen, Rishabh Jain, Mark Johnson, Dhruv Batra, Devi Parikh, Stefan Lee, and Peter Anderson. 2019. Nocaps: Novel object captioning at scale. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 8948–8957.
- Mubashara Akhtar, Michael Schlichtkrull, Zhijiang Guo, Oana Cocarascu, Elena Simperl, and Andreas Vlachos. 2023. Multimodal automated fact-checking: A survey. In *Findings of the Association for Computational Linguistics: EMNLP 2023*, pages 5430–5448.
- Jean-Baptiste Alayrac, Jeff Donahue, Pauline Luc, Antoine Miech, Iain Barr, Yana Hasson, Karel Lenc, Arthur Mensch, Katherine Millican, Malcolm Reynolds, et al. 2022. Flamingo: a visual language model for few-shot learning. In *Advances in Neural Information Processing Systems*.
- Shivangi Aneja, Chris Bregler, and Matthias Nießner. 2021. COSMOS: Catching Out-of-Context Misinformation with Self-Supervised Learning. In *ArXiv preprint arXiv:2101.06278*.
- Jinze Bai, Shuai Bai, Shusheng Yang, Shijie Wang, Sinan Tan, Peng Wang, Junyang Lin, Chang Zhou, and Jingren Zhou. 2023. Qwen-vl: A frontier large vision-language model with versatile abilities. *arXiv preprint arXiv:2308.12966*.
- Rohan Bavishi, Erich Elsen, Curtis Hawthorne, Maxwell Nye, Augustus Odena, Arushi Somani, and Saḡnak Taşlılar. 2023. Introducing our multimodal models.
- Tom B Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. 2020. Language models are few-shot learners. In *Proceedings of the 34th International Conference on Neural Information Processing Systems*, pages 1877–1901.
- Boxi Cao, Hongyu Lin, Xianpei Han, Le Sun, Lingyong Yan, Meng Liao, Tong Xue, and Jin Xu. 2021. Knowledgeable or educated guess? revisiting language models as knowledge bases. In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 1860–1874.
- Yupeng Chang, Xu Wang, Jindong Wang, Yuan Wu, Linyi Yang, Kaijie Zhu, Hao Chen, Xiaoyuan Yi, Cunxiang Wang, Yidong Wang, et al. 2023. A survey on evaluation of large language models. *ACM Transactions on Intelligent Systems and Technology*.
- Fei-Long Chen, Du-Zhen Zhang, Ming-Lun Han, Xiu-Yi Chen, Jing Shi, Shuang Xu, and Bo Xu. 2023a. Vlp: A survey on vision-language pre-training. *Machine Intelligence Research*, 20(1):38–56.
- Jun Chen, Deyao Zhu, Xiaoqian Shen, Xiang Li, Zechun Liu, Pengchuan Zhang, Raghuraman Krishnamoorthi, Vikas Chandra, Yunyang Xiong, and Mohamed Elhoseiny. 2023b. Minigt-v2: large language model as a unified interface for vision-language multi-task learning. *ArXiv*, abs/2310.09478.
- Zhe Chen, Jiannan Wu, Wenhai Wang, Weijie Su, Guo Chen, Sen Xing, Zhong Muyan, Qinglong Zhang, Xizhou Zhu, Lewei Lu, Bin Li, Ping Luo, Tong Lu, Yu Qiao, and Jifeng Dai. 2023c. Internvl: Scaling up vision foundation models and aligning for generic visual-linguistic tasks. *ArXiv*, abs/2312.14238.
- Wei-Lin Chiang, Zhuohan Li, Zi Lin, Ying Sheng, Zhanghao Wu, Hao Zhang, Lianmin Zheng, Siyuan Zhuang, Yonghao Zhuang, Joseph E Gonzalez, et al. 2023. Vicuna: An open-source chatbot impressing gpt-4 with 90%* chatgpt quality. See <https://vicuna.lmsys.org> (accessed 14 April 2023).
- Aakanksha Chowdhery, Sharan Narang, Jacob Devlin, Maarten Bosma, Gaurav Mishra, Adam Roberts, Paul Barham, Hyung Won Chung, Charles Sutton, Sebastian Gehrmann, et al. 2022. Palm: Scaling language modeling with pathways. *arXiv preprint arXiv:2204.02311*.
- Wenliang Dai, Junnan Li, Dongxu Li, Anthony Meng Huat Tiong, Junqi Zhao, Weisheng Wang, Boyang Albert Li, Pascale Fung, and Steven C. H. Hoi. 2023. Instructblip: Towards general-purpose vision-language models with instruction tuning. *ArXiv*, abs/2305.06500.
- Brian Dolhansky, Russ Howes, Ben Pfau, Nicole Baram, and Cristian Canton-Ferrer. 2019. The deepfake detection challenge (dfdc) preview dataset. *ArXiv*, abs/1910.08854.
- Danny Driess, Fei Xia, Mehdi SM Sajjadi, Corey Lynch, Aakanksha Chowdhery, Brian Ichter, Ayzaan Wahid, Jonathan Tompson, Quan Vuong, Tianhe Yu, et al. 2023. Palm-e: An embodied multimodal language model. *arXiv preprint arXiv:2303.03378*.
- Yanai Elazar, Nora Kassner, Shauli Ravfogel, Abhilasha Ravichander, Eduard Hovy, Hinrich Schütze, and Yoav Goldberg. 2021. Measuring and improving consistency in pretrained language models. *Transactions of the Association for Computational Linguistics*, 9:1012–1031.

- Tom Fawcett. 2006. An introduction to roc analysis. *Pattern recognition letters*, 27(8):861–874.
- Chaoyou Fu, Peixian Chen, Yunhang Shen, Yulei Qin, Mengdan Zhang, Xu Lin, Zhenyu Qiu, Wei Lin, Jinrui Yang, Xiawu Zheng, et al. 2023. Mme: A comprehensive evaluation benchmark for multimodal large language models. *arXiv preprint arXiv:2306.13394*.
- Tao Gong, Chengqi Lyu, Shilong Zhang, Yudong Wang, Miao Zheng, Qian Zhao, Kuikun Liu, Wenwei Zhang, Ping Luo, and Kai Chen. 2023. Multimodal-gpt: A vision and language model for dialogue with humans. *arXiv preprint arXiv:2305.04790*.
- Yash Goyal, Tejas Khot, Douglas Summers-Stay, Dhruv Batra, and Devi Parikh. 2017. Making the v in vqa matter: Elevating the role of image understanding in visual question answering. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 6904–6913.
- Zhijiang Guo, Michael Schlichtkrull, and Andreas Vlachos. 2022. A survey on automated fact-checking. *Transactions of the Association for Computational Linguistics*, 10:178–206.
- Benjamin Heinzerling and Kentaro Inui. 2021. Language models as knowledge bases: On entity representations, storage capacity, and paraphrased queries. In *Proceedings of the 16th Conference of the European Chapter of the Association for Computational Linguistics: Main Volume*, pages 1772–1791.
- Shengding Hu, Yuge Tu, Xu Han, Chaoqun He, Ganqu Cui, Xiang Long, Zhi Zheng, Yewei Fang, Yuxiang Huang, Weilin Zhao, et al. 2024a. Minicpm: Unveiling the potential of small language models with scalable training strategies. *arXiv preprint arXiv:2404.06395*.
- Xuming Hu, Junzhe Chen, Xiaochuan Li, Yufei Guo, Lijie Wen, S Yu Philip, and Zhijiang Guo. 2024b. Do large language models know about facts? In *The Twelfth International Conference on Learning Representations*.
- Drew A Hudson and Christopher D Manning. 2019. Gqa: A new dataset for real-world visual reasoning and compositional question answering. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 6700–6709.
- Albert Q. Jiang, Alexandre Sablayrolles, Arthur Mensch, Chris Bamford, Devendra Singh Chaplot, Diego de Las Casas, Florian Bressand, Gianna Lengyel, Guillaume Lample, Lucile Saulnier, L  lio Renard Lavaud, Marie-Anne Lachaux, Pierre Stock, Teven Le Scao, Thibaut Lavril, Thomas Wang, Timoth  e Lacroix, and William El Sayed. 2023. Mistral 7b. *CoRR*, abs/2310.06825.
- Zhengbao Jiang, Antonios Anastasopoulos, Jun Araki, Haibo Ding, and Graham Neubig. 2020. X-factor: Multilingual factual knowledge retrieval from pretrained language models. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 5943–5959.
- Saurav Kadavath, Tom Conerly, Amanda Askell, Tom Henighan, Dawn Drain, Ethan Perez, Nicholas Schiefer, Zac Hatfield-Dodds, Nova DasSarma, Eli Tran-Johnson, et al. 2022. Language models (mostly) know what they know. *arXiv preprint arXiv:2207.05221*.
- Takeshi Kojima, Shixiang Shane Gu, Machel Reid, Yutaka Matsuo, and Yusuke Iwasawa. 2022. Large language models are zero-shot reasoners. In *Advances in Neural Information Processing Systems*.
- Guillaume Lample, Miguel Ballesteros, Sandeep Subramanian, Kazuya Kawakami, and Chris Dyer. 2016. Neural architectures for named entity recognition. In *Proceedings of the 2016 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 260–270.
- Bohao Li, Rui Wang, Guangzhi Wang, Yuying Ge, Yixiao Ge, and Ying Shan. 2023a. Seed-bench: Benchmarking multimodal llms with generative comprehension. *arXiv preprint arXiv:2307.16125*.
- Kaixin Li, Yuchen Tian, Qisheng Hu, Ziyang Luo, and Jing Ma. 2024. Mmcode: Evaluating multi-modal code large language models with visually rich programming problems.
- Xian Li, Ping Yu, Chunting Zhou, Timo Schick, Luke Zettlemoyer, Omer Levy, Jason Weston, and Mike Lewis. 2023b. Self-alignment with instruction backtranslation.
- Yiyi Li and Ying Xie. 2020. Is a picture worth a thousand words? an empirical study of image content and social media engagement. *Journal of marketing research*, 57(1):1–19.
- Hongzhan Lin, Ziyang Luo, Bo Wang, Ruichao Yang, and Jing Ma. 2024. Goat-bench: Safety insights to large multimodal models through meme-based social abuse. *arXiv preprint arXiv:2401.01523*.

- Hongzhan Lin, Jing Ma, Liangliang Chen, Zhiwei Yang, Mingfei Cheng, and Chen Guang. 2022a. Detect rumors in microblog posts for low-resource domains via adversarial contrastive learning. In *Findings of the Association for Computational Linguistics: NAACL 2022*, pages 2543–2556.
- Hongzhan Lin, Pengyao Yi, Jing Ma, Haiyun Jiang, Ziyang Luo, Shuming Shi, and Ruifang Liu. 2023. Zero-shot rumor detection with propagation structure via prompt learning. In *Proceedings of the AAAI Conference on Artificial Intelligence*, pages 5213–5221.
- Stephanie Lin, Jacob Hilton, and Owain Evans. 2022b. Teaching models to express their uncertainty in words. *arXiv preprint arXiv:2205.14334*.
- Fuxiao Liu, Yinghan Wang, Tianlu Wang, and Vicente Ordonez. 2021. Visual news: Benchmark and challenges in news image captioning. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 6761–6771, Online and Punta Cana, Dominican Republic. Association for Computational Linguistics.
- Haotian Liu, Chunyuan Li, Yuheng Li, Bo Li, Yuanhan Zhang, Sheng Shen, and Yong Jae Lee. 2024. Llava-next: Improved reasoning, ocr, and world knowledge.
- Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. 2023a. Visual instruction tuning. In *Thirty-seventh Conference on Neural Information Processing Systems*.
- Shilong Liu, Zhaoyang Zeng, Tianhe Ren, Feng Li, Hao Zhang, Jie Yang, Chun yue Li, Jianwei Yang, Hang Su, Jun-Juan Zhu, and Lei Zhang. 2023b. Grounding dino: Marrying dino with grounded pre-training for open-set object detection. *ArXiv*, abs/2303.05499.
- Yuan Liu, Haodong Duan, Yuanhan Zhang, Bo Li, Songyang Zhang, Wangbo Zhao, Yike Yuan, Jiaqi Wang, Conghui He, Ziwei Liu, et al. 2023c. Mmbench: Is your multi-modal model an all-around player? *arXiv preprint arXiv:2307.06281*.
- Pan Lu, Swaroop Mishra, Tanglin Xia, Liang Qiu, Kai-Wei Chang, Song-Chun Zhu, Oyvind Tafjord, Peter Clark, and Ashwin Kalyan. 2022. Learn to explain: Multimodal reasoning via thought chains for science question answering. *Advances in Neural Information Processing Systems*, 35:2507–2521.
- Grace Luo, Trevor Darrell, and Anna Rohrbach. 2021. NewsCLippings: Automatic Generation of Out-of-Context Multimodal Media. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 6801–6817, Online and Punta Cana, Dominican Republic. Association for Computational Linguistics.
- Haipeng Luo, Qingfeng Sun, Can Xu, Pu Zhao, Jianguang Lou, Chongyang Tao, Xiubo Geng, Qingwei Lin, Shifeng Chen, and Dongmei Zhang. 2023a. Wizardmath: Empowering mathematical reasoning for large language models via reinforced evol-instruct.
- Ziyang Luo, Can Xu, Pu Zhao, Qingfeng Sun, Xiubo Geng, Wenxiang Hu, Chongyang Tao, Jing Ma, Qingwei Lin, and Daxin Jiang. 2023b. Wizardcoder: Empowering code large language models with evol-instruct. *arXiv preprint arXiv:2306.08568*.
- Marie-Helen Maras and Alex Alexandrou. 2018. Determining authenticity of video evidence in the age of artificial intelligence and in the wake of deepfake videos. *The International Journal of Evidence & Proof*, 23:255 – 262.
- Thomas Mesnard, Cassidy Hardin, Robert Dadashi, Surya Bhupatiraju, Shreya Pathak, Laurent Sifre, Morgane Rivière, Mihir Sanjay Kale, Juliette Love, Pouya Tafti, Léonard Hussenot, Aakanksha Chowdhery, Adam Roberts, Aditya Barua, Alex Botev, Alex Castro-Ros, Ambrose Slone, Amélie Héliou, Andrea Tacchetti, Anna Bulanova, Antonia Paterson, Beth Tsai, Bobak Shahriari, Charline Le Lan, Christopher A. Choquette-Choo, Clément Crepey, Daniel Cer, Daphne Ippolito, David Reid, Elena Buchatskaya, Eric Ni, Eric Noland, Geng Yan, George Tucker, George-Cristian Muraru, Grigory Rozhdestvenskiy, Henryk Michalewski, Ian Tenney, Ivan Grishchenko, Jacob Austin, James Keeling, Jane Labanowski, Jean-Baptiste Lespiau, Jeff Stanway, Jenny Brennan, Jeremy Chen, Johan Ferret, Justin Chiu, and et al. 2024. Gemma: Open models based on gemini research and technology. *CoRR*, abs/2403.08295.
- Meta. 2024. Introducing meta llama 3: The most capable openly available llm to date. <https://ai.meta.com/blog/meta-llama-3/>.
- Subhabrata Mukherjee, Arindam Mitra, Ganesh Jawahar, Sahaj Agarwal, Hamid Palangi, and Ahmed Awadallah. 2023. Orca: Progressive learning from complex explanation traces of gpt-4.

- Kai Nakamura, Sharon Levy, and William Yang Wang. 2020. Fakeddit: A new multimodal benchmark dataset for fine-grained fake news detection. In *Proceedings of the Twelfth Language Resources and Evaluation Conference*, pages 6149–6157, Marseille, France. European Language Resources Association.
- Eryn J Newman, Maryanne Garry, Daniel M Bernstein, Justin Kantner, and D Stephen Lindsay. 2012. Nonpro-bative photographs (or words) inflate truthiness. *Psychonomic Bulletin & Review*, 19:969–974.
- OpenAI. 2023. Gpt-4 technical report. *ArXiv*, abs/2303.08774.
- Long Ouyang, Jeffrey Wu, Xu Jiang, Diogo Almeida, Carroll Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Gray, et al. 2022. Training language models to follow instructions with human feedback. In *Advances in Neural Information Processing Systems*.
- Liangming Pan, Xiaobao Wu, Xinyuan Lu, Anh Tuan Luu, William Yang Wang, Min-Yen Kan, and Preslav Nakov. 2023. Fact-checking complex claims with program-guided reasoning. In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 6981–7004.
- Fabio Petroni, Patrick Lewis, Aleksandra Piktus, Tim Rocktäschel, Yuxiang Wu, Alexander H Miller, and Sebastian Riedel. 2020. How context affects language models’ factual predictions. In *Automated Knowledge Base Construction*.
- Fabio Petroni, Tim Rocktäschel, Sebastian Riedel, Patrick Lewis, Anton Bakhtin, Yuxiang Wu, and Alexander Miller. 2019. Language models as knowledge bases? In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 2463–2473.
- David MW Powers. 2020. Evaluation: from precision, recall and f-measure to roc, informedness, markedness and correlation. *arXiv preprint arXiv:2010.16061*.
- Peng Qi, Juan Cao, Tianyun Yang, Junbo Guo, and Jintao Li. 2019. Exploiting multi-domain visual information for fake news detection. In *2019 IEEE international conference on data mining (ICDM)*, pages 518–527. IEEE.
- Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, Gretchen Krueger, and Ilya Sutskever. 2021. Learning transferable visual models from natural language supervision.
- Aditya Ramesh, Prafulla Dhariwal, Alex Nichol, Casey Chu, and Mark Chen. 2022. Hierarchical text-conditional image generation with clip latents. *ArXiv*, abs/2204.06125.
- Adam Roberts, Colin Raffel, and Noam Shazeer. 2020. How much knowledge can you pack into the parameters of a language model? In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 5418–5426.
- Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. 2022. High-resolution image synthesis with latent diffusion models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 10684–10695.
- Rui Shao, Tianxing Wu, and Ziwei Liu. 2023. Detecting and grounding multi-modal media manipulation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 6904–6913.
- Quan Sun, Yufeng Cui, Xiaosong Zhang, Fan Zhang, Qiying Yu, Zhengxiong Luo, Yuezhe Wang, Yongming Rao, Jingjing Liu, Tiejun Huang, and Xinlong Wang. 2023. Generative multimodal models are in-context learners. *ArXiv*, abs/2312.13286.
- Yi Tay, Mostafa Dehghani, Vinh Q. Tran, Xavier Garcia, Jason Wei, Xuezhi Wang, Hyung Won Chung, Siamak Shakeri, Dara Bahri, Tal Schuster, Huaixiu Steven Zheng, Denny Zhou, Neil Houlsby, and Donald Metzler. 2023. U12: Unifying language learning paradigms.
- Gemini Team, Rohan Anil, Sebastian Borgeaud, Yonghui Wu, Jean-Baptiste Alayrac, Jiahui Yu, Radu Soricut, Johan Schalkwyk, Andrew M Dai, Anja Hauth, et al. 2023. Gemini: A family of highly capable multimodal models. *arXiv preprint arXiv:2312.11805*.
- James Thorne, Andreas Vlachos, Christos Christodoulopoulos, and Arpit Mittal. 2018. Fever: a large-scale dataset for fact extraction and verification. In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long Papers)*, pages 809–819.

- Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, et al. 2023a. Llama: Open and efficient foundation language models. *arXiv preprint arXiv:2302.13971*.
- Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, et al. 2023b. Llama 2: Open foundation and fine-tuned chat models. *arXiv preprint arXiv:2307.09288*.
- Neeraj Varshney, Swaroop Mishra, and Chitta Baral. 2022. Investigating selective prediction approaches across several tasks in iid, ood, and adversarial settings. In *Findings of the Association for Computational Linguistics: ACL 2022*, pages 1995–2002.
- Bin Wang and C.-C. Jay Kuo. 2020. Sbert-wk: A sentence embedding method by dissecting bert-based word models. *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, 28:2146–2157.
- Weihan Wang, Qingsong Lv, Wenmeng Yu, Wenyi Hong, Ji Qi, Yan Wang, Junhui Ji, Zhuoyi Yang, Lei Zhao, Xixuan Song, Jiazheng Xu, Bin Xu, Juanzi Li, Yuxiao Dong, Ming Ding, and Jie Tang. 2023a. Cogvlm: Visual expert for pretrained language models. *ArXiv*, abs/2311.03079.
- Weihan Wang, Qingsong Lv, Wenmeng Yu, Wenyi Hong, Ji Qi, Yan Wang, Junhui Ji, Zhuoyi Yang, Lei Zhao, Xixuan Song, et al. 2023b. Cogvlm: Visual expert for pretrained language models. *arXiv preprint arXiv:2311.03079*.
- Yizhong Wang, Yeganeh Kordi, Swaroop Mishra, Alisa Liu, Noah A. Smith, Daniel Khashabi, and Hannaneh Hajishirzi. 2023c. Self-instruct: Aligning language models with self-generated instructions.
- Jason Wei, Maarten Bosma, Vincent Zhao, Kelvin Guu, Adams Wei Yu, Brian Lester, Nan Du, Andrew M Dai, and Quoc V Le. 2021. Finetuned language models are zero-shot learners. In *International Conference on Learning Representations*.
- Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Fei Xia, Ed H Chi, Quoc V Le, Denny Zhou, et al. 2022. Chain-of-thought prompting elicits reasoning in large language models. In *Advances in Neural Information Processing Systems*.
- Xiang Wei, Xingyu Cui, Ning Cheng, Xiaobin Wang, Xin Zhang, Shen Huang, Pengjun Xie, Jinan Xu, Yufeng Chen, Meishan Zhang, et al. 2023. Zero-shot information extraction via chatting with chatgpt. *arXiv preprint arXiv:2302.10205*.
- Can Xu, Qingfeng Sun, Kai Zheng, Xiubo Geng, Pu Zhao, Jiazhan Feng, Chongyang Tao, and Daxin Jiang. 2023. Wizardlm: Empowering large language models to follow complex instructions.
- Zhengyuan Yang, Linjie Li, Kevin Lin, Jianfeng Wang, Chung-Ching Lin, Zicheng Liu, and Lijuan Wang. 2023. The dawn of llms: Preliminary explorations with gpt-4v (ision). *arXiv preprint arXiv:2309.17421*, 9(1).
- Barry Menglong Yao, Aditya Shah, Lichao Sun, Jin-Hee Cho, and Lifu Huang. 2023. End-to-end multimodal fact-checking and explanation generation: A challenging dataset and models. In *Proceedings of the 46th International ACM SIGIR Conference on Research and Development in Information Retrieval, SIGIR '23*, page 2733–2743, New York, NY, USA. Association for Computing Machinery.
- Qinghao Ye, Haiyang Xu, Guohai Xu, Jiabo Ye, Ming Yan, Yi Zhou, Junyan Wang, Anwen Hu, Pengcheng Shi, Yaya Shi, Chenliang Li, Yuanhong Xu, Hehong Chen, Junfeng Tian, Qiang Qi, Ji Zhang, and Feiyan Huang. 2023a. mplug-owl: Modularization empowers large language models with multimodality. *ArXiv*, abs/2304.14178.
- Qinghao Ye, Haiyang Xu, Guohai Xu, Jiabo Ye, Ming Yan, Yiyang Zhou, Junyang Wang, Anwen Hu, Pengcheng Shi, Yaya Shi, et al. 2023b. mplug-owl: Modularization empowers large language models with multimodality. *arXiv preprint arXiv:2304.14178*.
- Zhenfei Yin, Jiong Wang, Jianjian Cao, Zhelun Shi, Dingning Liu, Mukai Li, Lu Sheng, Lei Bai, Xiaoshui Huang, Zhiyong Wang, et al. 2023. Lamm: Language-assisted multi-modal instruction-tuning dataset, framework, and benchmark. *arXiv preprint arXiv:2306.06687*.
- 01.AI Alex Young, Bei Chen, Chao Li, Chengen Huang, Ge Zhang, Guanwei Zhang, Heng Li, Jiangcheng Zhu, Jianqun Chen, Jing Chang, Kaidong Yu, Peng Liu, Qiang Liu, Shawn Yue, Senbin Yang, Shiming Yang, Tao Yu, Wen Xie, Wenhao Huang, Xiaohui Hu, Xiaoyi Ren, Xinyao Niu, Pengcheng Nie, Yuchi Xu, Yudong Liu, Yue Wang, Yuxuan Cai, Zhenyu Gu, Zhiyuan Liu, and Zonghong Dai. 2024. Yi: Open foundation models by 01.ai. *ArXiv*, abs/2403.04652.

- Weihao Yu, Zhengyuan Yang, Linjie Li, Jianfeng Wang, Kevin Lin, Zicheng Liu, Xinchao Wang, and Lijuan Wang. 2023. Mm-vet: Evaluating large multimodal models for integrated capabilities. *arXiv preprint arXiv:2308.02490*.
- Wenhao Yu, Dan Iter, Shuohang Wang, Yichong Xu, Mingxuan Ju, Soumya Sanyal, Chenguang Zhu, Michael Zeng, and Meng Jiang. 2022. Generate rather than retrieve: Large language models are strong context generators. In *The Eleventh International Conference on Learning Representations*.
- Rowan Zellers, Yonatan Bisk, Ali Farhadi, and Yejin Choi. 2019. From recognition to cognition: Visual commonsense reasoning. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 6720–6731.
- Aohan Zeng, Xiao Liu, Zhengxiao Du, Zihan Wang, Hanyu Lai, Ming Ding, Zhuoyi Yang, Yifan Xu, Wendi Zheng, Xiao Xia, Weng Lam Tam, Zixuan Ma, Yufei Xue, Jidong Zhai, Wenguang Chen, Peng Zhang, Yuxiao Dong, and Jie Tang. 2023. Glm-130b: An open bilingual pre-trained model.
- Duzhen Zhang, Yahan Yu, Chenxing Li, Jiahua Dong, Dan Su, Chenhui Chu, and Dong Yu. 2024. Mm-llms: Recent advances in multimodal large language models. *arXiv preprint arXiv:2401.13601*.
- Susan Zhang, Stephen Roller, Naman Goyal, Mikel Artetxe, Moya Chen, Shuohui Chen, Christopher Dewan, Mona Diab, Xian Li, Xi Victoria Lin, Todor Mihaylov, Myle Ott, Sam Shleifer, Kurt Shuster, Daniel Simig, Punit Singh Koura, Anjali Sridhar, Tianlu Wang, and Luke Zettlemoyer. 2022. Opt: Open pre-trained transformer language models.
- Chunting Zhou, Pengfei Liu, Puxin Xu, Srinu Iyer, Jiao Sun, Yuning Mao, Xuezhe Ma, Avia Efrat, Ping Yu, Lili Yu, Susan Zhang, Gargi Ghosh, Mike Lewis, Luke Zettlemoyer, and Omer Levy. 2023. Lima: Less is more for alignment.
- Deyao Zhu, Jun Chen, Xiaoqian Shen, Xiang Li, and Mohamed Elhoseiny. 2023. Minigpt-4: Enhancing vision-language understanding with advanced large language models. *arXiv preprint arXiv:2304.10592*.

A Descriptions of LVLm Baselines

We conduct extensive experiments on the *MFC-Bench* to evaluate a total of 12 LVLms:

- GPT-4V (OpenAI, 2023), developed by OpenAI, is a version of the GPT-4 architecture that includes capabilities for processing and generating images in addition to text. We specifically utilize the “gpt-4-vision-preview” version.
- Claude3-Haiku ⁷, developed by Anthropic, possesses sophisticated vision capabilities comparable to other leading models. It can process a wide range of visual formats, including photos, charts, graphs, and technical diagrams. We specifically utilize the “claude-3-haiku-20240307” version.
- Emu2 (Sun et al., 2023) is a generative multimodal model with 37 billion parameters, designed to enhance task-agnostic in-context learning capabilities through effective scaling. We specifically utilize the “Emu2” version.
- InternVL (Chen et al., 2023c) is a large-scale vision-language foundation model, scaling up the vision foundation model to 6 billion parameters and progressively aligning it with the LLM, using web-scale image-text data from various sources. We specifically utilize the “InternVL-Chat-V1-5” version.
- CogVLM (Wang et al., 2023a) is a powerful open-source visual language foundation model that achieves state-of-the-art performance on multiple cross-modal benchmarks by using a trainable visual expert module for deep fusion of vision and language features. We specifically utilize the “cogvlm-chat” version.
- LLaVA-NeXT (Liu et al., 2024) is the new version of LLaVA (Liu et al., 2023a), with improved reasoning, OCR, and world knowledge capabilities. We specifically utilize the “llava-v1.6-vicuna-7b, llava-v1.6-vicuna-13b, llava-v1.6-34b” version.

⁷<https://claude.ai/>

- **InstructBLIP** (Dai et al., 2023) introduces a novel vision-language instruction-tuning framework utilizing BLIP-2 models to enhance zero-shot generalization performance across diverse vision-language tasks. We specifically utilize the “instructblip-vicuna-7b, instructblip-vicuna-13b” version.
- **Qwen-VL** (Bai et al., 2023) is Alibaba Cloud’s multimodal large vision-language model that excels in multilingual text recognition, fine-grained understanding, and multi-image interleaved conversations, significantly outperforming other large vision-language models in various benchmarks. We specifically utilize the “Qwen/Qwen-VL-Chat” version.
- **mPLUG-Owl** (Ye et al., 2023a), developed by DAMO Academy, is a training approach that enhances LLMs with multimodal capabilities by integrating a foundational LLM with a visual knowledge module and a visual abstractor module, using a two-stage method to align image and text. We specifically utilize the “mplug-owl-llama-7b” version.
- **MiniGPT-v2** (Chen et al., 2023b) is a unified vision-language model designed for diverse tasks such as image description and visual question answering, utilizing unique task identifiers for improved performance and efficiency. We specifically built the model based on the “llama-2-7b-chat” LLaMA version with the checkpoint of the online developing demo.
- **Yi-VL** (Young et al., 2024) is an open-source multimodal vision-language model from the Yi LLM series, excelling in content comprehension and multi-round image conversations, and leading in recent English and Chinese benchmarks. We specifically utilize the “Yi-VL-6B” version.
- **MiniCPM-V-2**⁸ is a robust multimodal large language model designed for efficient end-side deployment. It is built on the foundation of SigLip-400M and MiniCPM-2.4B, connected by a perceiver resampler. We specifically utilize the “MiniCPM-V 2.0” version.

B Implementation Details

B.1 Data Construction

For Manipulation Classification, we designed six types of manipulation, selecting data from the DGM4 dataset (Shao et al., 2023) and constructing additional datasets ourselves. The initial data was sourced from the VisualNews (Liu et al., 2021) datasets. The DGM4 dataset complies with the Apache-2.0 license. The VisualNews dataset is available upon request.

- **Method 1: Face Swap (FS)**. A Face Swap subset of the DGM4 dataset (Shao et al., 2023) was sampled and selected.
- **Method 2: Face Attribute Edit (AE)**. Visual and textual samples related to face attribute editing were randomly selected from the previously established DGM4 dataset (Shao et al., 2023).
- **Method 3: Background Change (BC)**. Backgrounds for outdoor scenes were generated using Grounding DINO (Liu et al., 2023b) and stable-diffusion-inpainting⁹ techniques. First, we used Grounding DINO to detect the people in the photos and create inverse masks. Then, we provided these masks along with the original images for stable-diffusion-inpainting. The prompt for generating the backgrounds was “blue sky, white clouds.” The pipeline was implemented using ComfyUI.
- **Method 4: CLIP-based Stable Diffusion Generate (CG)**. Stable diffusion versions of the original images were generated using StabilityAI’s Stable-Diffusion-2-1-Unclip. By utilizing Stable-Diffusion-2-1-Unclip, we input the original claim and image into the model to generate the manipulated images.
- **Method 5: Text Entity Replace (ER)**. Named entities corresponding to persons within a given claim were identified using Named Entity Recognition (NER) (Lample et al., 2016) from bert-base-NER¹⁰, and the surrounding contextual texts between two claims were swapped. To ensure that the claims contain people, we first screened the data and selected only the claims that included individuals.

⁸<https://huggingface.co/openbmb/MiniCPM-V-2>

⁹<https://huggingface.co/runwayml/stable-diffusion-inpainting>

¹⁰<https://huggingface.co/dslim/bert-base-NER>

- **Method 6: Text Style Transfer (ST).** The sentiment of the text was first determined using GPT-4 (OpenAI, 2023), and then the text was rewritten to express the opposite sentiment using GPT-4’s advanced text style transfer capabilities.

The Out-of-Context Classification data is sourced from the NewsCLIPpings dataset (Luo et al., 2021), while the Veracity Classification data is obtained and sampled randomly from the Mocheg dataset (Yao et al., 2023). The NewsCLIPpings dataset is available upon request. Mocheg dataset complies with the Apache-2.0 license.

B.2 GPUs Usage

We utilized the high-performance computing platform and employed Slurm to request 2-4 A800 GPUs for benchmarking.

C Related Work

C.1 LLMs and LVLMs

Recent advancements have seen LLMs excel across various domains, with major tech companies developing high-performing proprietary models such as OpenAI’s GPT-3 (Brown et al., 2020) and GPT-4 (OpenAI, 2023), Google’s PaLM (Chowdhery et al., 2022) and Gemini (Team et al., 2023), and Anthropic’s Claude. These models, however, are often only accessible via specific APIs or not at all. In contrast, the AI community has embraced the emergence of open-source LLMs, making significant contributions like MistralAI’s Mistral-series (Jiang et al., 2023), Google’s UL2-20B (Tay et al., 2023) and Gemma (Mesnard et al., 2024), Tsinghua University’s GLM-130B (Zeng et al., 2023), and Meta’s OPT (Zhang et al., 2022) and the LLaMA series (Touvron et al., 2023a,b; Meta, 2024), enhanced by extensive alignment efforts (Wang et al., 2023c; Xu et al., 2023; Luo et al., 2023b,a; Mukherjee et al., 2023; Zhou et al., 2023; Li et al., 2023b).

LVLMs have significantly advanced the understanding of both textual and visual data within a unified framework (Chen et al., 2023a; Zhang et al., 2024). Innovative models such as Flamingo (Alayrac et al., 2022) and PaLM-E (Driess et al., 2023) have demonstrated the ability to integrate visual and textual information effectively, without the need for task-specific training. Concurrently, the development of diverse multimodal datasets (Yang et al., 2023) stemming from GPT-4 and GPT-4V (OpenAI, 2023) has spurred the fine-tuning of models like LLaVA (Liu et al., 2023a), MiniGPT-4 (Zhu et al., 2023), mPLUG-Owl (Ye et al., 2023b), InstructBLIP (Dai et al., 2023), and others (Bai et al., 2023; Wang et al., 2023b; Gong et al., 2023; Team et al., 2023; Bavishi et al., 2023), highlighting a trend towards more versatile and real-world applicable multimodal systems.

C.2 Factual Knowledge in LMs

Previous studies have established that language models (LMs) can function as repositories of factual knowledge, serving effectively as knowledge bases (Petroni et al., 2019, 2020; Heinzerling and Inui, 2021). This reservoir of factual information acquired during pretraining proves beneficial for knowledge-intensive tasks, such as question-answering and fact-checking (Roberts et al., 2020; Yu et al., 2022; Pan et al., 2023). Petroni et al. (2019) used cloze tests involving triples and tailored prompts to evaluate the factual knowledge embedded in language models, while Jiang et al. (2020) focused on optimizing prompt design to enhance factual retrieval from these models.

Despite these advancements, the reliability of these methods has been questioned. Elazar et al. (2021) highlighted the inconsistency in rank-based probing methods when using paraphrased contexts. Similarly, Cao et al. (2021) argued that biased prompting and the leakage of correct answers can often lead to an overestimation of an LM’s knowledge retention. On the other hand, Varshney et al. (2022) employed question-answering formats to gauge models’ uncertainty about specific facts, suggesting a different approach to measure factual accuracy. Our methodology aligns more closely with the approaches of Kadavath et al. (2022); Lin et al. (2022b); Hu et al. (2024b), which involve querying models directly to self-evaluate their accuracy in delivering factual responses, offering a more direct assessment of their knowledge capabilities. But differently, this work focuses on the multimodal nature of fact checking to explore the complex reasoning capability of LVLMs.

C.3 Multimodal Fact-Checking

Multimodal Fact-Checking refers to the systematic process of identifying counterfactuals or inconsistencies between facts across different modalities within multimodal data (Akhtar et al., 2023). Common manifestations of multimodal misinformation include claims about digitally manipulated context (Agarwal et al., 2019; Shao et al., 2023) and the amalgamation of context from disparate modalities and contexts (Luo et al., 2021; Aneja et al., 2021). The former is predominantly associated with deepfake technologies (Maras and Alexandrou, 2018; Dolhansky et al., 2019), while the latter is linked with cheapfake methodologies (Aneja et al., 2021). An essential Multimodal Fact-Checking pipeline consists of evidence retrieval and the adjudication process. Evidence retrieval furnishes the foundational basis for subsequent multimodal judgments. Within the adjudication phase, tasks are delineated into distinct categories, such as Manipulation Classification, Out-of-Context Classification, and Veracity Classification.

Manipulation Classification (Shao et al., 2023) is a task meticulously designed to ascertain whether multimodal data encompasses fabricated elements. Out-of-context Classification (Luo et al., 2021) aims to evaluate the coherence and correspondence of context across various modalities. Veracity Classification (Yao et al., 2023) involves assessing whether the context from one modality aligns with or accurately reflects the context from another modality. Collectively, these tasks constitute the comprehensive process of multimodal fact-checking. In this work, we employed six different manipulation techniques to assess whether LVLMs can detect manipulations in multimodal news. Data from the NewsCLIPPings dataset is used to challenge LVLMs’ ability to discern semantic differences between real images and real text, specifically for OOC classification. Similar to text, the cross-modal Veracity task is used to evaluate LVLMs’ ability to perform factual inference across different modalities.

C.4 Benchmarks for LVLMs

Traditional multimodal benchmarks have been centered around specific skills such as visual recognition (Goyal et al., 2017), image description (Agrawal et al., 2019), and visual commonsense reasoning (Zellers et al., 2019). However, the advent of advanced LVLMs has necessitated the development of new benchmarks to keep pace with their robust zero-shot capabilities, which often exceed those measured by conventional metrics. This has exposed shortcomings in their ability to match answers accurately, highlighting issues with robustness. To address these limitations, the research community has introduced several innovative benchmarks, such as MME (Fu et al., 2023), MMBench (Liu et al., 2023c), MM-Vet (Yu et al., 2023), SEED-Bench (Li et al., 2023a), GOAT-Bench (Lin et al., 2024), LAMM (Yin et al., 2023) and MMCode (Li et al., 2024). These benchmarks are designed to facilitate structured evaluations of complex multimodal tasks and reveal the flaws of traditional methods. Distinct from these, our proposed benchmark is tailored to systematically assess multimodal factual knowledge, especially concerning disinformation detection in the realm of deepfakes and cheapfakes. This testbed would allow for a more thorough exploration of LVLMs’ trustworthy awareness concerning a wider range of task types associated with multimodal factuality.

D Analysis

D.1 Potential Test Set Leakage

For the open-source LVLMs, test set leakage is not a concern, as the literature explicitly delineates the datasets and instruction-tuning procedures employed in their training, none of which encompass the multimodal data utilized in our *MFC-Bench*. However, we cannot fully guarantee the exclusion of potential data leakage with GPT-4V and Claude3-Haiku, as its internal workings remain opaque. Nevertheless, as evidenced by the results in the experiments, where all LVLMs were evaluated directly on the *MFC-Bench*, the absence of significant test set leakage is implied. This is inferred from the fact that direct application of the LVLMs did not yield disproportionately high performance, which would be expected if the models were benefiting from test set leakage.

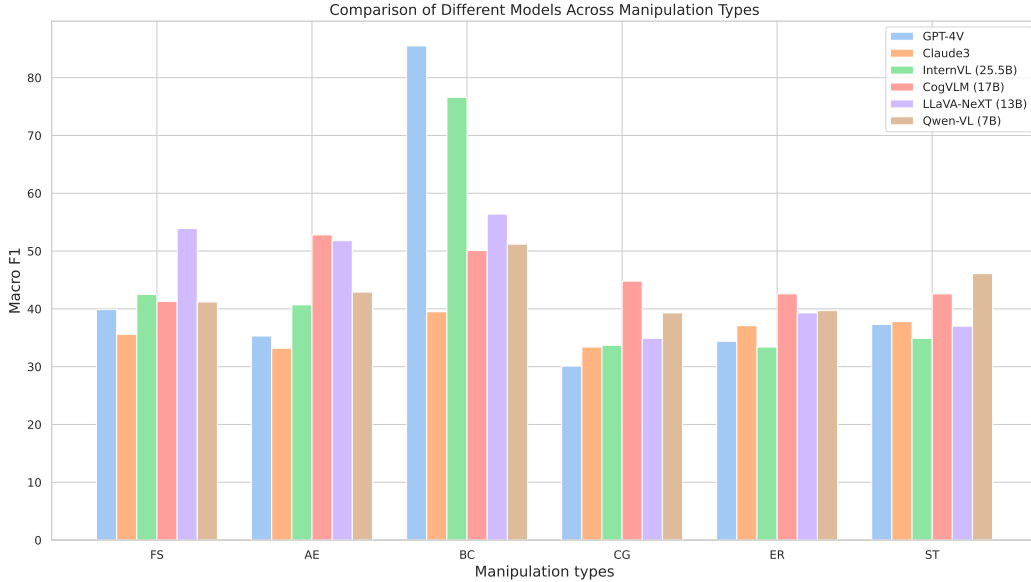


Figure 6: Effect of prompts specifically designed for different types of manipulation techniques.

D.2 Results on Different Manipulation Techniques

We further provide the detailed results of the 12 representative LVLMs on the Manipulation Classification with respect to the six manipulation methods, as depicted in Table 4-5.

D.3 Effect of Prompts on Manipulation Classification

To verify the model’s understanding of manipulation tasks, we designed prompts for six different manipulation tasks and tested them on twelve models (see §E). As shown in Figure 6, the model’s performance on each sub-task was consistent with that of a single prompt. This suggests that the model struggles with manipulation fact-checking. For the Background Change task, the scenarios we set might have been too simple, making it easy for the model to detect the manipulations.

Table 4: Detailed results of LVLMs on the Manipulation Classification in the zero-shot setting.

Models	FS		AE		BC		CG		ER		ST	
	Acc.	F1	Acc.	F1	Acc.	F1	Acc.	F1	Acc.	F1	Acc.	F1
GPT-4V (-)	52.5	40.7	49.5	37.1	<u>82.2</u>	81.3	52.3	44.6	47.7	35.9	47.3	34.2
Claude3-Haiku (-)	50.2	35.8	50.2	36.1	50.0	35.5	50.2	35.7	52.5	40.6	<u>50.7</u>	37.2
Emu2 (37B)	35.5	30.7	35.3	30.0	32.7	25.9	33.6	28.8	50.2	36.7	49.8	38.1
InternVL (25.5B)	64.4	44.4	65.1	43.9	78.9	71.3	53.0	41.5	<u>50.6</u>	36.0	50.5	36.2
CogVLM (17B)	54.0	51.6	53.1	<u>50.4</u>	71.7	70.5	60.7	58.9	46.7	<u>41.1</u>	48.2	41.1
LLaVA-NeXT (13B)	60.7	<u>51.2</u>	60.5	50.7	81.8	79.9	<u>61.9</u>	<u>59.6</u>	48.5	38.4	55.5	51.2
InstructBLIP (13B)	33.6	25.7	33.6	25.8	33.6	25.7	50.5	35.8	50.2	35.0	<u>50.7</u>	36.7
Qwen-VL (7B)	45.4	45.2	46.3	46.1	46.9	46.8	46.9	46.2	39.8	39.4	40.2	40.0
mPLUG-Owl (7B)	45.5	45.5	45.1	45.1	47.7	47.7	50.5	49.4	50.2	49.4	49.2	<u>48.2</u>
MiniGPT-v2 (7B)	33.4	25.1	33.3	25.0	33.4	25.2	50.2	34.0	50.1	33.8	48.8	33.1
Yi-VL (6B)	65.3	44.2	<u>64.7</u>	43.7	68.9	50.5	51.2	40.2	49.4	34.6	49.6	36.8
MiniCPM-V-2 (2.8B)	62.2	50.4	62.5	50.1	83.7	85.8	63.1	59.9	48.1	36.1	49.6	38.9

D.4 Case Study

To better understand the reasoning process of the model in fact-checking, we are conducting a study on the correct and incorrect reasoning processes of the GPT-4V model. Figure 7 illustrates an instance where GPT-4V fails to identify manipulated content, specifically a face swap involving Joe Biden and another individual. This oversight underscores a significant limitation of GPT-4V in accurately recognizing individuals within images. The model’s rationale primarily emphasizes overall scene consistency and plausible historical context, but it fails to detect the specific manipulation

Table 5: Detailed results of LVLMs on the Manipulation Classification in the zero-shot with CoT setting.

Models	FS		AE		BC		CG		ER		ST	
	Acc	F1	Acc	F1	Acc	F1	Acc	F1	Acc	F1	Acc	F1
GPT-4V (-)	46.7	45.2	51.0	48.5	67.9	67.5	56.7	51.0	54.4	<u>49.4</u>	52.2	42.1
Claude3-Haiku (-)	50.0	43.7	50.1	43.5	52.6	46.7	50.1	39.0	49.1	41.2	<u>51.6</u>	42.3
Emu2 (37B)	40.2	39.3	40.0	39.3	38.0	37.3	38.2	36.3	49.2	42.8	49.8	43.2
InternVL (25.5B)	<u>65.2</u>	45.0	64.4	44.8	85.7	85.2	55.8	46.8	50.1	36.0	50.7	37.1
CogVLM (17B)	56.7	53.0	55.1	51.3	74.8	73.2	59.5	<u>56.3</u>	48.9	42.7	51.1	44.3
LLaVA-NeXT (13B)	55.4	<u>51.3</u>	55.3	<u>51.1</u>	76.4	75.5	<u>59.1</u>	58.0	47.1	40.5	<u>51.6</u>	48.8
InstructBLIP (13B)	33.5	25.8	33.6	26.0	34.0	26.5	50.2	36.5	50.0	35.7	47.2	35.5
Qwen-VL (7B)	46.7	46.4	47.2	46.9	46.2	46.1	45.8	45.3	38.1	37.8	38.2	38.1
mPLUG-Owl (7B)	53.9	50.6	53.8	50.5	54.7	50.8	50.6	50.3	<u>50.2</u>	49.5	48.2	<u>47.7</u>
MiniGPT-v2 (7B)	33.8	26.0	33.7	26.1	34.8	26.7	50.5	36.1	48.8	36.4	46.3	33.7
Yi-VL (6B)	66.3	42.8	65.5	42.2	69.1	48.7	50.9	37.9	49.7	33.9	49.7	35.4
MiniCPM-V-2 (2.8B)	65.0	44.2	<u>65.2</u>	44.0	<u>81.8</u>	<u>76.8</u>	58.3	51.9	49.2	35.0	50.1	37.1

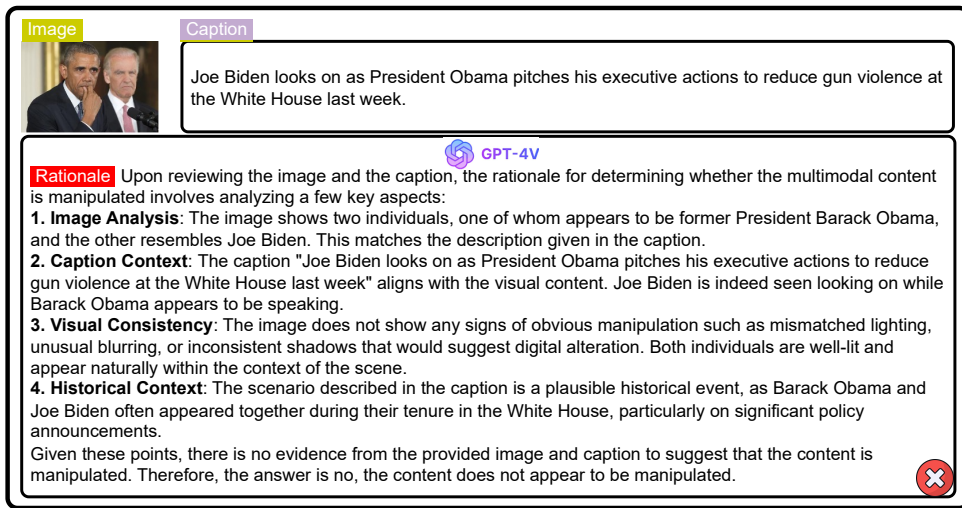


Figure 7: Example of wrongly predicted manipulation by GPT-4V with rationale.

of Joe Biden’s identity. In contrast, Figure 8 showcases GPT-4V’s successful identification of manipulated content by accurately discerning the discrepancy between the emotional state depicted in the image and the corresponding caption. Todd Stern’s smiling expression contrasts with the caption’s description of him angrily rebuffing a suggestion. GPT-4V effectively recognizes this emotional mismatch, demonstrating its capability to evaluate the coherence between visual and textual elements.

D.5 Error Analysis

In zero-shot settings, the model’s performance relies solely on its understanding of the instructions, its comprehension of the images and claims, and ultimately making a judgment based on this understanding(see also §D.4). The main results indicate that the model’s fact-checking ability is weak. As discussed in §4.3, the Yes/No Bias also highlights this issue.

In few-shot settings, the model does not gain insights from the examples. As Figure 5 shows, LLaVA-NeXT’s usable response rate decreases, and it starts outputting gibberish instead of “yes” or “no”. Specifically, in few-shot with CoT conditions, LLaVA-NeXT does not generate its own reasoning process but merely copies the rationale from previous examples. For example, one output from LLaVA-NeXT is, “Answer yes or no. Rationale: The image shows what seems to be an unnatural or edited blend of faces, particularly noticeable in the features of the man and the child. This indicates that the image may have been digitally altered.”, which is already included in the demonstrations of the prompt.

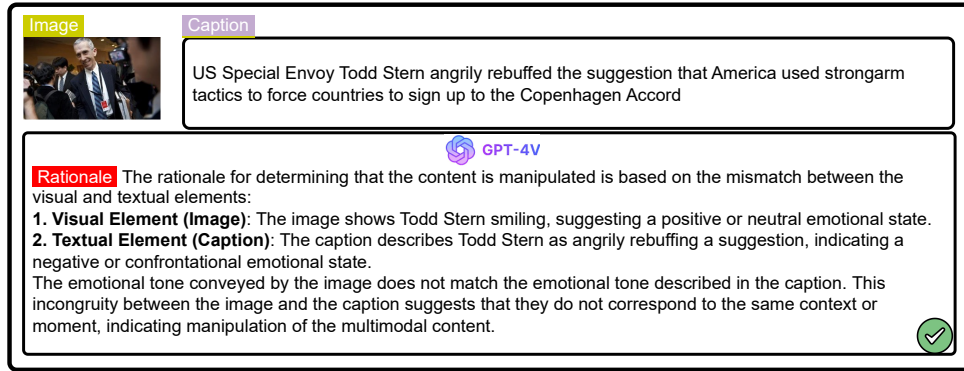


Figure 8: Example of correctly predicted manipulation by GPT-4V with rationale.

E Prompts Designed for Manipulation Techniques

1. Face Swap is a manipulation technique of cutting a face from one image and replacing it with a different face in another image. Your task is to determine if the claim and its image have used Face Swap. Answer yes or no.
2. Face Attribute Edit is a manipulation technique for altering facial expressions. Your task is to determine if the claim and its image have used Face Attribute Edit. Answer yes or no.
3. Background Change is a manipulation technique that involves altering the background of images. Your task is to determine if the claim and its image have used Background Change. Answer yes or no.
4. CLIP-based Stable Diffusion Generation is a manipulation technique that utilizes an image-to-image generation pipeline to produce manipulated images. Your task is to determine if the claim and its image have used CLIP-based Stable Diffusion Generate. Answer yes or no.
5. Text Entity Replace is a manipulation technique that involves identifying named entities corresponding to persons in one text, locating these entities in another text, and swapping the surrounding contextual texts between the two. Your task is to determine if the claim and its image have used Text Entity Replace. Answer yes or no.
6. Text Style Transfer is a manipulation technique that rewrites text to express the opposite sentiment. Your task is to determine if the claim and its image have used Text Style Transfer. Answer yes or no.

F Ethics

The aim of this research is to focus on the multimodal fact-checking issue related to LVLMs, to curb the dissemination of multimodal disinformation, and to protect individuals from exposure to fake news. However, we acknowledge the risk that malicious actors might attempt to reverse-engineer misinformation that could evade detection by AI systems trained on LVLMs. We vehemently discourage and denounce such practices, and emphasize that human moderation is essential to prevent such occurrences. Our utilization of data adheres to the terms of the datasets (Shao et al., 2023; Luo et al., 2021; Yao et al., 2023). All the data in this work only includes text and image modalities and does not contain any user information on social media.

G Limitations and Future Work

As this is the first benchmark work to evaluate the multimodal fact-checking capacity of LVLMs, there are no doubt multiple efforts needed to improve the work in the future:

- The dynamic and context-specific nature of multimodal fact-checking presents a challenge in interpretation and analysis. The current benchmark may not fully capture this complexity, potentially limiting the generalizability of our findings. Human interpretation of multimodal

disinformation is inherently intricate and contextual. Additionally, future studies could be enhanced by a more comprehensive examination of bias and fairness in model evaluations to prevent the reinforcement or exacerbation of stereotypical hallucinations.

- While this pioneering work delivers comprehensive results related to multimodal fact-checking, further improving the interpretability of these findings could provide deeper, more actionable insights for practical applications and further development of models. Delving into the underlying reasons for the fact-checking outcomes observed in LVLMs and discussing these in detail would not only shed light on model behaviors but also suggest avenues for optimization. Expanding on how these results can be translated into model enhancements and identifying specific aspects that could benefit from refinement would make the findings more applicable. Additionally, exploring how these interpretations align with real-world multimodal data usage could guide future research directions, fostering advancements in both theoretical and applied domains of multimodal fact-checking.
- During the benchmarking process, we did not require the model to provide its reasoning process, asking only for a “yes” or “no” response. In future work, we should investigate the model’s internal reasoning mechanisms and how it arrives at its conclusions. Furthermore, the current LVLM demonstrates grounding capabilities that can be leveraged to better understand the model’s interpretation of images and its fact-checking judgments.
- Expanding the scope to include a broader array of models could enhance the robustness and applicability of the results. Incorporating diverse multilingual datasets, the audio modality, advanced manipulation techniques (both DeepFake and CheapFake), and emerging LVLMs into our benchmark work could provide a more nuanced understanding of LVLMs’ capabilities across various languages. Although there is a long way to go, where there is a will, there is a way.