

# Bridging Social Media and Search Engines: Dredge Words and the Detection of Unreliable Domains

Evan M. Williams<sup>1</sup>, Peter Carragher<sup>1</sup>, Kathleen M. Carley<sup>1</sup>

<sup>1</sup>Carnegie Mellon University  
{emwillia, pcarragh, carle}@andrew.cmu.edu

## Abstract

Proactive content moderation requires platforms to rapidly and continuously evaluate the credibility of websites. Leveraging the direct and indirect paths users follow to unreliable websites, we develop a website credibility classification and discovery system that integrates both webgraph and large-scale social media contexts. We additionally introduce the concept of *dredge words*—terms or phrases for which unreliable domains rank highly on search engines—and provide the first exploration of their usage on social media. Our graph neural networks that combine webgraph and social media contexts generate to state-of-the-art results in website credibility classification and significantly improves the top-k identification of unreliable domains. Additionally, we release a novel dataset of dredge words, highlighting their strong connections to both social media and online commerce platforms.

## Introduction

On February 24, 2022, the day Russia began its invasion of Ukraine, Jacob Creech, a fringe Qanon conspiracy theorist, posted a series of unsubstantiated claims on Twitter. These tweets insinuated that the US had created COVID-19, and implied Russia’s invasion of Ukraine was actually being carried out to shut down US-funded “biolabs” in Ukraine and to prevent another global pandemic (League 2022). Hours after the tweet, the conspiratorial website InfoWars published an article promoting the tweet, crediting its author for uncovering an “ulterior motive theory” (League 2022). The tweet began circulating to other conspiratorial sites, and Google queries for “US biolabs” and “Ukraine Biolabs” spiked in the following days<sup>1</sup>. Conspiratorial sites were likely the only relevant search results until Snopes debunked the claim later that day (Evon 2022).

In some ways, this is a success story of the current paradigm of combatting misinformation; fact-checkers responded rapidly to a quickly-spreading falsehood. In other ways, this highlights the challenges present in reactive misinformation interventions. Despite quick debunking by fact-checkers, the conspiracy was nonetheless echoed by estab-

lished news sources like Fox News, and later amplified on the floor of the US Senate (League 2022). Researchers later found that a coordinated campaign of social media accounts boosted the narrative on Twitter (Alieva, Ng, and Carley 2022). As of 2024, despite the underlying claims having been debunked by many fact-checkers (Chappell and Yousef 2022; Parachini 2022), a search engine audit study found that Google, Bing, and Yandex all returned URLs on their first page of results that promote the “Ukraine Biolabs” conspiracy (Kuznetsova et al. 2024). The Ukraine Biolab example highlights an important and understudied dimension of misinformation spread: the interaction between social media and search engines.

An alternative to reactive fact-checking approaches are proactive algorithmic content moderation approaches. These can include modifying recommendation and ranking systems to decrease the reach and virality of unreliable information sources. In search engines, this can mean downranking articles from unreliable domains, and on social media, this can mean ranking posts containing unreliable domains lower in user newsfeeds. For proactive approaches to succeed, platforms need systems that can rapidly detect and discover unreliable domains. Both classification and detection are important as unreliable websites can, and do, deploy a number of tactics to avoid blacklists (Carragher, Williams, and Carley 2024a). In this work, we present a novel approach to the tasks of unreliable domain detection and discovery that leverages signals from both large-scale social media data and webgraph data.

Directing users to search engines can be an effective tactic to spread misinformation as, since 2016, global surveys have consistently found that individuals report higher trust in search engines than traditional media (Barometer 2024; McDuling 2015). Thus by pointing users to search engines, either explicitly or implicitly, bad actors can create a false sense of content reliability. Little is understood about these pathways, and research has only recently begun exploring the ways social media users end up in data voids. The concepts of *problematic queries* (Golebiewski and Boyd 2019) and *keyword signaling* (Tripodi 2019) are highly related, but have only been explored in case studies. The recently-proposed concept of *search directives* provides a clear and observable path that could direct users to unreliable content on search engines. A search directive is content that is ex-

explicitly intended to prompt an online search, e.g., user  $a$  directs user  $b$  to “look up Chemtrails on Google” (Robertson et al. 2023). In the context of data voids, search directives as a concept have two limitations: First, while search directives can direct users to unreliable content, they can also direct users to innocuous or helpful information, e.g., directing users to look up song lyrics or mathematical theorems. Second, as the search trends for “Ukraine Biolabs” demonstrate, users can be driven to unreliable content through search engines by querying phrases that appear without explicit search directives. To help fill these gaps, we propose the concept of *dredge words*—terms or keyphrases for which unreliable domains rank highly on search engines.

By attempting to explicitly incorporate each of the paths that users take to unreliable websites into GNNs, we seek to explore the dynamics that connect the spread of unreliable content on social media and search engines. We demonstrate that our relatively-simple curriculum-based heterogeneous graph model that leverage context from both webgraphs and social media data achieves SoTA results on the website credibility classification task. Further, our best model does not incorporate any explicit text or semantic content from the webpages or from social media users, which makes this approach flexible, and easily-extendable to non-English contexts.

Finally, we provide the first exploration of *dredge words* on social media. We incorporate a small set of dredge words into an unreliable domain discovery process in an attempt to mimic how social media users may transition from social platforms to the discovery of misinformation sources via search engines. Surprisingly, we find that dredge words frequently surface social media URLs in top Google Search Engine Result Page (SERP) positions—i.e., the websites returned when a user enters a query on Google Search. This suggests the existence of a bidirectional path that often leads back to social media. We show our heterogeneous model greatly outperforms competing systems in the top- $k$  discovery of unlabeled unreliable websites. We publicly release the code, webgraph data collected for this project, a dataset of 3,939 dredge words for 46 unreliable news domains, and the resulting SERPs for each of the dredge word queries<sup>2</sup>. Our findings demonstrate that both direct and indirect paths to misinformation provide important signals that can be leveraged by researchers and platform designers working to mitigate the spread of misinformation across digital ecosystems.

## Related Works

### Social Media and Webgraphs

Classifying individual texts or articles is a core problem addressed by research in misinformation detection. Such detection methods have typically relied on website content and social media data (Castelo et al. 2019; Chen and Freire 2020; Silva et al. 2021). Castelo et al. proposed a topic-agnostic detection system (Castelo et al. 2019) that identifies unreliable articles based on Linguistic Inquiry and Word Count features. Chen and Freire adopted the method for

<sup>2</sup>Artefacts will be publicly released following anonymous review period.

the task of unreliable domain discovery (Chen and Freire 2020). Their discovery system capitalized on user tendencies within the social graph, wherein a user who tweets a URL from a known unreliable source is likely to also tweet URLs from yet unknown sources. Similarly, Silva et al. combine website content and social context resulting in a misinformation page detection method that leverages heterogeneous data types (Silva et al. 2021), with a focus on early detection across a broad range of topics. The predictive power of webgraphs and social media data have been demonstrated separately in several contexts. Aswani et al. detect SEO manipulation by link-building sites by clustering on Pagerank score and Domain Authority (Aswani et al. 2021). For detecting news site bias, Aires et al. Patricia Aires, G. Nakamura, and F. Nakamura (2019) scrape cross-links from a list of prominent news sites from Media Bias Fact Check (Zandt 2022). Sehgal et al. explore a case where misinformation was spread through coordinated hyperlink and social media networks (Sehgal et al. 2021). Another recent case study demonstrated the manipulated webgraph linkages of unreliable pseudo-thinktanks (Williams and Carley 2023). Additionally, Zhang and Cabage show that social media and SEO promotion have different strengths; they find that social-sharing results in immediate but short-term boosts to traffic, while the benefits of link-building are slower to realize, but last longer (Zhang and Cabage 2017). This hints that a combination of both webgraph and social media data should be used in investigating misinformation sources. However, to our knowledge, this is the first work that attempts to combine the two contexts for unreliable domain classification or discovery.

Despite its importance and relevance, domain-level credibility detection is a relatively uncommon task in the literature—partially as a result of the lack of accepted labels. The most comprehensive label list as of 2024 are those published in Lin et al. (2023), which aggregates the scores of multiple different domain reliability rating lists. The vast majority of work in this space occurs at the article level (e.g., Nakov et al. (2023); Bianchi et al. (2024)). This class of approaches often take a sample of articles from each website and aggregate reliability ratings in some way. These approaches have several important limitations; namely, article-level approaches are restricted to languages with LLM support, model qualities depend heavily on what is sampled, many unreliable news sites often report true information with heavily partisan slants, and articles don’t necessarily reveal the goals of the publisher—e.g., knowing a media outlet has strong ties with a adversarial government can change how readers interpret the site’s content. Consequently, researchers have recently begun exploring content-agnostic domain classification approaches. In 2023, Yang and Menczer (2023) showed that LLMs could be used to evaluate website credibility. More recently, Carragher, Williams, and Carley (2024a) proposed a webgraph-based model for unreliable domain detection and discovery tasks. For discovery, the authors use backlinking domains in the webgraph in a snowball sampling approach. The authors demonstrate that GNN models trained on SEO attributes and webgraph data are effective for detection.

## Data

We construct a heterogeneous graph with different relations based on the direct and indirect paths that users can take to unreliable websites. To capture direct paths to target news sites, we collect the 10 domains which most frequently link to each labeled news site (e.g., website  $i$  has linked 1M times to website  $j$ ). We further extract social media mentions of each target news site (e.g., user  $k$  posts a hyperlink to website  $j$ ). We consider both of these to be *direct paths*, as in both these cases, users would simply click a link to access website  $j$ . Finally we consider an *indirect path* through dredge words. Dredge words connect users to websites through Google SERPs. When browsing social media, users can encounter words or concepts with which they’re unfamiliar and that exist in data voids—for example, a user might see a Twitter post about “indigo children” and search a variation of that query on Google. The results surface numerous pseudoscientific websites and advertisements (see Appendix A). We provide a summary visualization of this heterogeneous network in Figure 1.

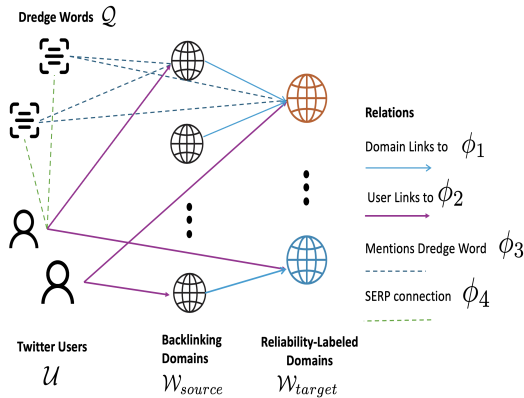


Figure 1: A summary of the heterogeneous graph construction process. Solid lines denote direct paths (a user clicks a hyperlink), and dashed lines denote indirect paths (a user sees a post and then queries a subset of that post on a search engine).

## Webgraph and features

We use the domain credibility labels published by Lin et al. (2023). The authors of the work align the domain reliability ratings of all domains ranked by 6 expert groups and run imputation followed by principal component analysis to generate aggregate ratings for 11,520 domains. We binarize the news domain rankings as “reliable” and “unreliable” using a threshold of 0.5162, corresponding to the bottom two quintiles of the data. Following the methodology of Carragher, Williams, and Carley (2024a), We use the SEO toolkit service Ahrefs<sup>3</sup> to extract the 10 domains which link to each of the 11,520 target domains at the highest volume (the highest-volume back-linking domains). Ahrefs feature

<sup>3</sup>ahrefs.com

values have been found to correlate strongly with ground-truth pagerank calculations and competing traffic estimate systems (Carragher, Williams, and Carley 2024b). In total, we extracted 43,758 domains, each with 23 domain-level attributes. Additional discussion of labels, collection details, and EDA of the webgraph can be found in Appendix A. Each edge in this dataset denotes a direct path, as a user on the source site could click a hyperlink to move to the reliability-labeled target site. We were unable to extract features for 193 domains—the domains largely appeared dead or inactive, so we excluded them from the data. This left us with 11,327 labeled domains.

## Twitter Data

For social media context, we use a Twitter dataset constructed by querying COVID-related keywords<sup>4</sup> via Twitter’s streaming API between January 29, 2020 and June 26, 2022. Due to server issues and API limitations, 121 days over the time period have partial or missing data. However, these gaps are spread relatively evenly over the time period, and so the data still provide strong coverage. Our final Twitter dataset contained 3.6 billion extracted tweets.

From this set of 3.6 billion tweets, we extract all Tweets that mention or link to one of our 11,327 websites, resulting in a dataset of 320M tweets that link to over 840k unique domains. Of the original 11,327 labeled domains, only 5,504 appeared within the Twitter data. To reduce the noise in the dataset we undertake several cleaning and filtration operations, which, due to length constraints, we detail in Appendix A. Following these cleaning operations, we are left with 555k users and 4.9M unique tweets which we observed tweeted or retweeted 91.2M times. This reduced dataset contains mentions of 2,475 reliability-labeled domains and 714 unlabeled back-linking domains.

## Dredge Words

For the 100 websites with the respective lowest and highest reliability rankings, we extract the top-ranked  $k \leq 1,000$  Google keyphrases from Ahrefs, for a total of 34,646 keyphrases. We then used WebSearcher (Robertson and Wilson 2020) to query each of these keyphrases on Google and extracted the first 10 URLs returned in each SERP. We kept all queries for which the target unreliable domain was returned in the top 10 Google search results. As many of the domains for which we collected dredge words did not have any queries for which they ranked in the top 10 on Google, this resulted in a set of 3,939 *dredge words* spanning 46 unreliable domains. We created a separate query to find mentions of these keyphrases in the 3.6B tweet covid dataset. This yielded 5.7 million tweets containing dredge words. Many of the most common mentions were explicit mentions of domain names or organization names (which can be identical to twitter handles—like “gatewaypundit”, “infowars”, and “nvcic” all received over 10,000 mentions. To filter down the data, we use regular expressions to ensure each dredge word begins with a hashtag, starts a tweet, or is preceded by

<sup>4</sup>coronavirus, Wuhan virus, Wuhanvirus, 2019nCoV, NCoV, NCoV2019, covid-19, covid19, covid 19

a white space. This retains 213 dredge words in 421k tweets that qualitatively contain less noise. Of these 421k tweets, only 9,788 (2%) explicitly linked to the unreliable domain associated with the dredge word.

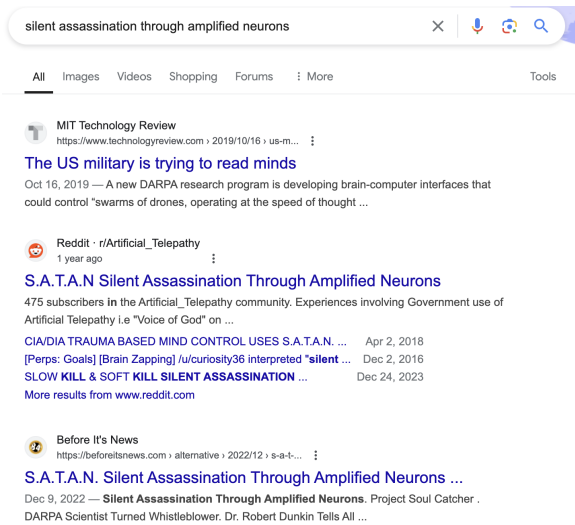


Figure 2: The top search results for the dredge word “silent assassination through amplified neurons”. The query surfaces fringe reddit subreddits followed by “beforeitsnews”, an unreliable news source.

This data pipeline attempts to mirror the way a user might access this information “in the wild”. A user might encounter a Twitter post that contains a reference to “silent assassination through amplified neurons”, or “Project S.A.T.A.N.”, search the query on Google, and encounter unreliable results like those in Figure 2. Some additional examples of dredge words include “psychic attack” (28 Twitter mentions), “akashic record” (12), “flu shot injury” (6), and “fallcabal” (5). However, we note that our current collection pipeline is almost certainly underestimating their actual usage as 1) on Twitter, we only capture dredge word usage mentioned alongside COVID keywords, and 2) we extracted dredge words in 2024, 2-4 years after tweets were posted. While the majority of the dredge words are in English, other languages are present in the list, including Chinese, Hindi, and Arabic. We use this condensed twitter dataset and the set of SERP results they yielded in our dredge-word-based unreliable domain discovery process. While we were initially interested in paths from social media to search engines, we find dredge word SERPs surprisingly demonstrate a strong paths to social media. Youtube was by far the most commonly-returned domain (4,304 times). Wikipedia, Reddit, Quora, Twitter, Amazon, and Facebook were also among the most commonly-returned domains, in part due to the widespread commercialization of pseudo-scientific concepts.

### Case Study

To provide a more concrete illustration of the tasks and our motivation, we’ll consider some of the ways that users might

end up on the unreliable website, Gaia<sup>5</sup>. This website often promotes pseudoscience, vaccine misinformation, and various conspiracy theories. We can imagine two users taking direct paths and a third following an indirect path. The first imaginary user follows paranormal accounts or pages on social media, and sees an account post a link to an article about haunted houses on Gaia. The second individual is interested in UFOs and listens to the “Coast to Coast AM”<sup>6</sup> radio talk show—if that individual visited the website for the talk show, they would find 29.4K hyperlinks that would lead to Gaia. In a third instance, we can imagine a user interested in astrology seeing the post in Figure 3.



Figure 3: A tweet about “Indigo Children”.

The user, who is encountering new information, might then be curious and compelled to search “indigo children meaning” or just “indigo children” on Google—both phrases are dredge words that surface Gaia in the top 10 results. Interestingly, after manually searching these “indigo children meaning” in June 2024, we found that Google’s definition snippet—a summarization box on the top of some SERPs with the text “From sources across the web”—expresses pseudo-scientific concepts. The box states that “Indigo Children are kids with indigo-colored auras”. This snippet was followed by YouTube videos promoting Indigo Children pseudoscience and a Reddit post from the /r/Psychic subreddit. Another user who may have searched only “indigo children” would have seen a snippet from Wikipedia which correctly calls indigo children pseudoscientific. However, adjacent to the snippet, the user would have seen four books for sale about indigo children. After that, the second highest-ranking return was an article from an unreliable domain identifying the “13 signs you’re an indigo child”.

This case study also highlights the importance of conceptualizing misinformation consumption as interconnected; none of our hypothetical users were actively seeking

<sup>5</sup><https://mediabiasfactcheck.com/gaia/>

<sup>6</sup>[https://en.wikipedia.org/wiki/Coast\\_to\\_Coast\\_AM](https://en.wikipedia.org/wiki/Coast_to_Coast_AM)

anti-vaccine content, and yet in pursuing their relatively-innocuous interests, all are exposed to medical misinformation. While all of these paths lead to Gaia, the indirect routes may be the most effective at swaying users, as discovering Gaia through a trusted intermediary (in this case, Google) may confer additional trust to the source (Robertson et al. 2023). The questions we are trying to answer in this work, with respect to this case study, are 1) “how does integrating each of these path contexts into a model impact our ability to identify Gaia as unreliable?” and 2) “What websites that link to Gaia are also promoting misinformation?” Even in this case study, neither tasks are trivial; detecting unreliable websites is challenging, and while many of the websites that link to Gaia are unreliable, others are generic SEO sites. Additionally, there are reliable and .edu sites that link to Gaia in fact-checking articles, which further complicates the task.

## Methods

In order to evaluate the impact of additional levels of context on our models, we construct graphs that capture increasingly granular levels of context present in the data. Let  $\mathcal{W}$  be the set of all labeled and unlabeled websites  $\{w_1, w_2, \dots, w_n\}$  contained in the extracted webgraph data. We define  $\mathcal{W}_{target}$  as the subset of  $\mathcal{W}$  for which we have reliability labels—i.e., the 11,327 reliability-labeled news domains; we define  $\mathcal{W}_{source}$  as the 10 websites that most link to each domain. We note that  $\mathcal{W}_{source}$  contains some websites in  $\mathcal{W}_{target}$ . Next define  $\mathcal{U}$  as the set of all Twitter users  $\{u_1, u_2, \dots, u_n\}$  that link to domains  $\in \mathcal{W}$ . Finally, let dredge words  $\mathcal{Q}$  be the set of keyphrases  $\{q_1, q_2, \dots, q_n\}$  connected to SERPs containing URLs  $\in \mathcal{W}$ .

We define several preliminaries. A Graph Union operation ( $G = G_1 \cup G_2$ ), between graphs  $G_1 = (V_1, E_1)$  and  $G_2 = (V_2, E_2)$  is defined as  $G = (V, E)$  where  $V = V_1 \cup V_2$  and  $E = E_1 \cup E_2$ . A heterogeneous graph is an extension of a homogeneous graph,  $\mathcal{G} = (V, E)$ , where  $V$  and  $E$  are associated with a node type mapping function  $\Psi : V \rightarrow A$  and an edge type mapping function  $\Phi : E \rightarrow \phi$ . In our setting, the set of node types are  $A = \{\mathcal{W}, \mathcal{U}, \mathcal{Q}\}$  and the set of edge types are  $\Phi = \{\phi_1 : domain - to - domain, \phi_2 : user - to - domain, \phi_3 : user - to - dredgeword, \phi_4 : dredgeword - to - domain\}$ . This setup is visualized in Figure 1.

## Homogeneous Graphs

We consider three homogeneous baselines—where all nodes are treated as part of the same class—to justify the added complexity of using heterogeneous networks. We define two homogeneous graphs:  $\mathcal{H}_{domains}$  contains domain-to-domain relationships, i.e.,  $\mathcal{W}_{source}$  to  $\mathcal{W}_{target}$ .  $\mathcal{H}_{users}$  contains relationships between Twitter users and the websites they mentioned  $\in \mathcal{W}$ . Finally, we define  $\mathcal{H}_{domains+users} = \mathcal{H}_{domains} \cup \mathcal{H}_{users}$ . Clearly, these latter two graphs contain different sets of nodes and relations, but we treat them as equivalent in these experiments as a simple baseline.

As the features of domains and users are drawn from different spaces and have different sizes, we elect to use positional node features calculated individually on each of

the three constructed homogeneous graphs. For this graph, we therefore define  $Z_n$  as features calculated using Node2Vec (Grover and Leskovec 2016) parameterized with a walk length to 20, context size to 10, and 10 walks per node, and an embedding dimension of 23, chosen because it is identical to the number of features that we extract for each website from Ahrefs.

$\mathcal{H}_{users}$  presents an additional challenge in that not all websites  $\in \mathcal{W}_{target}$  are mentioned by users  $\in \mathcal{U}$ . We include social-media-only baselines, but these are trained and evaluated on only a network of user interactions with the 2,475 labeled domains mentioned in the social media data, which make these results not directly comparable with our other models.

## Additional Baselines

We include comparisons to two past works that explored website credibility classification without including article or website content. First, we re-implemented the GNN for news domain credibility classification and discovery proposed in (Carragher, Williams, and Carley 2024a), which is a homogeneous model which uses the Ahrefs features of domains. Following the authors, we log-normalize the Ahrefs features of each domain. We train and evaluate their model on all labeled 11,327 reliability-labeled domains.

Second, we compare our results to those from (Yang and Menczer 2023), where the authors asked ChatGPT to return the probability that a website is unreliable. Following the authors recommendation, we take a binary cut-off at 0.5 and compare results accordingly. As there is no hold-out set for the ChatGPT data, we consider two comparisons between our best-performing model and this approach. We first compare accuracy and F1 predictions for all 7,318 sites; however, this comparison is problematic as this guarantees leakage—i.e., some of these sites were in our model’s training data. To account for leakage, we perform a second evaluation where we only evaluate the predictions of our model and of ChatGPT on the hold-out test set of domains that our model never encountered.

## Heterogeneous Graphs

We construct two heterogeneous graphs.  $\mathcal{E}_{domains+users}$  is structurally equivalent to its homogeneous counterparts, but explicitly incorporates the two node types ( $\mathcal{W}, \mathcal{U}$ ) and their different relations ( $\phi_1, \phi_2$ ). We use a heterogeneous graph-neural network architecture that can treat user nodes and domain nodes as different nodetypes. We additionally construct  $\mathcal{E}_{domains+users+dredge}$ , which contains all node types ( $\mathcal{W}, \mathcal{U}, \mathcal{Q}$ ) and all relation types ( $\phi_{1:4}$ ).

In the heterogeneous networks, the features of domain nodes  $\mathcal{W}$  are always the logged domain-level features extracted from Ahrefs, as in Carragher, Williams, and Carley (2024a). For user nodes, we ran each model with positional context—Node2Vec features, and separately with text context. To create textual context, for each user, we randomly sample, without replacement, 10 tweets for each observed user and embed them using multilingual distilBERT (Sanh et al. 2019). This is a naive approach that excludes a large

amount of context for some users, particularly as we observed two users tweet over 1 million times in our filtered dataset. However, considering only 10 tweets is a standard practice in user embedding literature (Pan and Ding 2019). A clear path for future work is to explore the impact of more advanced user embedding strategies within this system. Dredge word embeddings were extracted using multilingual distilBERT, and these embeddings are used as features for dredge word nodes. We note that dredge words were only considered for 46 of the least reliable websites, so their inclusion in models is likely to harm the models, as those features only exist for a small set of the 11,327 labeled domains. We nonetheless report statistics and discovery evaluations.

### Graph Neural Network Training

A label-stratified 80/10/10 split on labeled websites is used to create training, validation, and test sets. Nodes that did not have reliability labels—the majority of nodes in all networks—were masked during training. For our one-mode, heterogeneous, and homogeneous experiments we use a simple 2-layer graph neural network using GraphSAGE convolutions proposed in (Hamilton, Ying, and Leskovec 2017). We ran experiments using graph attention networks (Veličković et al. 2017) and heterogeneous graph transformers (Hu et al. 2020), but found marginal accuracy gains at the cost of longer training times. As our primary classification interest is evaluating the impact of context—i.e., signals from different sources—on domain credibility classification, rather than finding the best architecture, we elect to use homogeneous and heterogeneous GraphSAGE layers for each respective model. We include a single baseline that uses a heterogeneous graph transformer as well. Each model consists of a SAGEConv layer with dropout, with a hidden dimension of 512, followed by a ReLU activation and a second SAGEConv layer with a log softmax activation function. For models trained with user text, we included an additional linear layer to align input feature sizes. For each model, we train for a maximum of 1,000 epochs with early stopping based on validation loss and a patience of 50. We use an Adam optimizer with a starting learning rate of 1e-3 and a cosine annealing learning rate scheduler<sup>7</sup>. The heterogeneous GNN, the most complex network we consider, contains 3.2M parameters, and no model exceeded 5 minutes of training time to reach our early stopping convergence condition. All models in this paper were run or trained on a single NVIDIA GeForce RTX 3080.

### Curriculum Learning

We assume that highly reliable and highly unreliable websites are easier to differentiate in webgraphs than those that are mixed, mostly reliable, or mostly unreliable. A manual examination of the labeled URL data leads us to believe that this assumption is very reasonable when website content is considered (see Appendix B). We implement a slightly-modified version of the “Baby Steps” learning curriculum proposed and explored in Spitkovsky, Alshawi, and

Jurafsky (2010); Cirik, Hovy, and Morency (2016). As domain labels from Lin et al. (2023) contain unified principal component scores of expert ratings of domain reliability, we can develop a curriculum that first learns labels of extremely reliable and extremely unreliable domains, and that gradually works from the extremes towards the websites with mixed reliability. Using the original labeled domain dataset  $\mathcal{D}$ , we calculate quintiles of reliable labels and unreliable labels using principal component scores, and define these as an ordered set of batches  $\{d_1, d_2, \dots, d_{10}\}$ , where  $d_1$  is the first quintile of the most reliable domains and  $d_{10}$  is the fifth quintile of the unreliable domains. When using curriculum learning, we begin training the model  $\mathcal{M}$  using  $\{d_1, d_{10}\}$ , and following convergence, the model considers  $\{d_1, d_{10}\} \cup \{d_2, d_9\}$ . The model continues in this fashion until it converges on all available data. In our Baby Steps implementation, we define model’s corresponding convergence as 10 epochs without an improvement in validation loss. Once the curriculum has incorporated all data, the convergence criterion described in the previous section are used. More generally, for a website reliability curriculum  $\mathcal{C}$ , an even-length dataset  $\mathcal{D}$ , and a model  $\mathcal{M}$ , our implementation of the Baby Steps curriculum can be expressed as the procedure in Algorithm 1.

---

Algorithm 1: Modified Baby Steps Curriculum

---

```

input  $\mathcal{M}, \mathcal{D}, \mathcal{C}$ 
  sort( $\mathcal{D}, \mathcal{C}$ )
   $B \leftarrow \emptyset$ 
  for  $i \in 0, 1, \dots, \frac{k}{2}$  do
    while  $\mathcal{M}$  not converged do
       $B \leftarrow B \cup \mathcal{D}[i] \cup \mathcal{D}[k - i]$ 
       $\mathcal{M}(B)$ 
  return  $\mathcal{M}$ 

```

---

### Unreliable Domain Discovery

While we can evaluate our classifiers on domains in  $\mathcal{W}_{target}$ , we desire to make a tool that can identify unknown unreliable domains. To evaluate our best-performing classifier, we explore its ability to identify unlabeled unreliable domains over the unlabeled domains in  $\mathcal{W}_{source}$ . We outline our discovery processes and we benchmark our discovery process against two previous works.

We implement and evaluate two distinct discovery processes. The first is GNN discovery, where we take predictions for unlabeled domains in the graph from the best performing GNN model. We call the second method “Dredge” Webgraph-Based Discovery (WG-BD<sub>d</sub>), which mimics the path social media users take to reach unreliable domains by observing dredge words on social media, and querying these terms on a search engine. Using WebSearcher (Robertson and Wilson 2020), we create a candidate list of domains from the top 10 SERP results for each of the dredge words we have compiled from our Twitter dataset. We then pull Ahrefs attributes for each of the candidate domains and use the SEO attribute classifiers from Carragher, Williams, and Carley (2024a) to filter down the candidate domains as de-

<sup>7</sup>Implementation is available at [removed for anonymity](#);

tailed in Appendix A.

We compare our discovery processes with the webgraph-based discovery (WG-BD) process proposed in Carragher, Williams, and Carley (2024a) and with the social media-based discovery process (SM-BD) proposed in Chen and Freire (2020). Specifically, we consider Precision@5, @10, @20, and we consider the partial F1 metric proposed in Chen and Freire (2020). This means we run the discovery process twice, once on the full domain list where we evaluate results manually with top-10 and top-20 accuracies, and again on a restricted domain list to compute the partial F1 metric. We additionally report partial precision and recall.

Due to a lack of ground truth labels for evaluating newly discovered domains, Partial F1 measures the ability of the discovery system to find unreliable domains with respect to two known lists of unreliable sources, a seed list and an evaluation list. In this case, the seed list is the Political-News dataset and the evaluation list is drawn from unreliable MBFC domains (Chen and Freire 2020). As such, partial F1 measures the ability of a discovery system seeded on PoliticalNews to discover as many MBFC domains as possible (high partial recall), without discovering domains that are not in the MBFC list (high partial precision) (Castelo et al. 2019). Following Carragher, Williams, and Carley (2024a), we discuss the limitations of the partial F1 metric in more detail in Limitations and Appendix C.

## Results

### Credibility Classification

We present Accuracy and F1 statistics for website reliability classification for homogeneous models ( $\mathcal{H}$ ) and heterogeneous models ( $\mathcal{E}$ ) in Table 1. We find that the heterogeneous model which incorporates both the user network and domain webgraph outperforms all other models with an average accuracy over 10 runs of  $0.7865 \pm .002$ . However, swapping the Heterogeneous GraphSage Convolutions in this model with a Heterogeneous Graph Transformer (*HetGT*) convolutions yielded a slightly better F1 ( $0.789 \pm .003$ ). While the accuracy of the Social Media user model ( $\mathcal{H}_{users}$ ) is higher, this model is only evaluated the 2,475 labeled domains in  $\mathcal{W}_{target}$  to which social media users were connected, and thus are not directly comparable to other models. In the heterogeneous models, we considered embedded user text features (text) as well as user node node2vec features (n2v). Interestingly, including embedded text of social media users as node performed worse than using features that uniquely consider network position.

We compare our best performing model with the approach proposed in Yang and Menczer (2023) in Table 2. The authors in Yang and Menczer (2023) used ChatGPT to return the probability that 7,318 websites—7,317 of which are in our list—were unreliable labeled domains. Following the authors, we use a cutoff of 0.5 to binarize their ChatGPT predictions. Our model was trained on many of the 7,318 websites that GPT evaluated, so (full data) comparisons result in label leakage. Consequently, we provide a second (test set) evaluation, where we only compare labeled websites that our models never encountered in training. On both

the full dataset and the test set evaluations, our model outperformed ChatGPT. Our model yielded an F1 that was 0.03 higher than ChatGPT on the full dataset and 0.04 higher on the test set.

### Unreliable Domain GNN Discovery

Two annotators<sup>8</sup> independently annotated the reliability of the top 20 predictions (sorted by prediction confidence) of the top performing model, heterogeneous model domains+users(n2v), over the set of all unlabeled domains. Inter-annotator agreement in the first round had a Krippendorff’s  $\alpha = 0.78$ . The annotators then met and resolved all disagreements. We compare our model with the webgraph-based discovery (WG-BD) approach in Carragher, Williams, and Carley (2024a)<sup>9</sup>. Again, two independent annotators ranked the results, yielding a Krippendorff’s  $\alpha = 0.69$ .

For comparison with previous unreliable domain discovery approaches, we additionally report partial F1, defined in Chen and Freire (2020) as the set of true positive unreliable domains with credibility labeled “mixed” or worse by Media Bias Fact Check. Thresholding at a prediction confidence level of 0.7 (see Appendix C for sensitivity analysis), the Partial F1 of our top-performing GNN model is 0.25, which is largely previous works; 0.29 for SM-BD (Chen and Freire 2020)) and 0.28 for WG-BD (Carragher, Williams, and Carley 2024a). As demonstrated in Table 3, we observe that our heterogeneous domains+users model outperforms both competing systems at each level of precision we consider.

### Dredge Word Discovery

We consider two dredge word discovery approaches: one (Dredge WG-BD<sub>d</sub>) using the discovery approach proposed in (Carragher, Williams, and Carley 2024a) and the other using the GNN trained with dredge word context ( $\mathcal{E}_{domains+users+dredge}$ ), which we shorten to ( $\mathcal{E}_{d+u(n2v)+dredge}$ ) in Table 3. In the first approach, we observe that WG-BD<sub>d</sub> yields higher precision than the webgraph based discovery for P@5 and P@10, but lower precision for P@20.

In the latter approach, as a consequence of 1) only extracting dredge word networks for only 46 of the least reliable domains 2) the dominance of social media and shopping sites in the dredge word SERPs, the dredge word GNN learns to heavily associate social media sites and online shopping platforms with unreliable domains. The 10 most confident predictions the GNN returns contain 7 social media sites, amazon, itunes, and s3.amazonaws. We find at least several of the pseudo-scientific and conspiratorial dredge words are targeted by dubious sellers, podcasters, and social media influencers. As these websites are out-of-domain for our task, but still often contain unreliable content, we chose not to evaluate Precision@k for this set. A deeper exploration of the link between these conspiratorial dredge words

<sup>8</sup>25-30 year-old PhD candidates studying misinformation

<sup>9</sup>As that paper’s discovery process did not rank discovered domains, we sort results by the misinformation classifier proposed in the work.

Model	Accuracy	F1
$\mathcal{H}_{domains}$	0.7686 $\pm$ .004	0.7545 $\pm$ .005
Carragher et al.	0.7799 $\pm$ .002	0.7714 $\pm$ .002
$\mathcal{H}_{users}^*$	0.8113* $\pm$ .007	0.7582* $\pm$ .009
$\mathcal{H}_{domains+users}$	0.7696 $\pm$ .006	0.7559 $\pm$ .006
$\mathcal{E}_{domains+users(n2v)}$	<b>0.7865 <math>\pm</math> .002</b>	0.7777 $\pm$ .003
$HetGT_{domains+users(n2v)}$	0.7820 $\pm$ .003	<b>0.7895 <math>\pm</math> .003</b>
$\mathcal{E}_{domains+users(text)}$	0.7738 $\pm$ .118	0.7657 $\pm$ .018
$\mathcal{E}_{domains+users+dredge}$	0.7787 $\pm$ .004	0.7675 $\pm$ .007

Table 1: Mean Accuracy, F1, and standard deviations for each GNN ablation over 10 runs.  $\mathcal{H}$  denotes homogeneous and  $\mathcal{E}$ . \* denotes a social-media-only model run and evaluated on the 2,475 labeled domains mentioned in the Twitter data.

	Accuracy	F1
GPT (full data)	0.81	0.751
$\mathcal{E}_{domains+users(n2v)}$ (full data)	<b>0.837</b>	<b>0.78</b>
GPT (test set)	0.782	0.701
$\mathcal{E}_{domains+users(n2v)}$ (test set)	<b>0.819</b>	<b>0.745</b>

Table 2: Our best model outperforms the LLM approach proposed in Yang and Menczer (2023). We compare against all 7,318 websites the authors considered (full data) as well as only the websites our model never encountered during training (test set).

Model	P@5	P@10	P@20	PF1	PP	PR
$\mathcal{E}_{d+u(n2v)}$	<b>1</b>	<b>1</b>	<b>0.9</b>	0.25	0.18	0.35
$\mathcal{E}_{d+u(n2v)+dredge}$	*	*	*	0.07	0.04	0.26
SM-BD	-	-	0.7	<b>0.29</b>	<b>0.24</b>	<b>0.37</b>
WG-BD	0.2	0.5	0.65	0.27	0.24	0.31
WG-BD <sub>d</sub>	0.8	0.7	0.55	0.02	0.17	0.01

Table 3: Precision@K and Partial F1 (PF1), Partial Precision (PP), and Partial Recall (PR) discovery evaluations. (Chen and Freire 2020).

and non-news domains would be a fruitful path for future work.

## Analysis and Discussion

We explore the 25 most confident unreliable predictions of our best performing model over the set of all unlabeled domains in  $\mathcal{W}_{source}$ . We observe that these predictions seem to fall into three broad categories: health misinformation (6 websites), Qanon<sup>10</sup> misinformation (5), and German-language far-right misinformation (9). In all three categories, the majority of the websites express skepticism towards vaccines, the existence of COVID-19, or both. Most interestingly, our investigation of the these categories captures an interplay between websites spreading medical misinformation and the websites profiting off of it.

Six of our model’s 25 most confident predictions, are an likely co-owned network of websites selling dubious med-

<sup>10</sup> A conspiracy theory that claims that a cabal of Satanist, sex-trafficking, child molesters is running the world.

ical products. The  $\mathcal{W}_{target}$  website “holitichealth”<sup>11</sup> offers users advice on how to detox from vaccines, which the site claims “poison your DNA, brain, nervous system and immune system”. The six sites that most frequently link to holitichealth all appeared in our model’s most confident unreliable predictions—all sites have the same HTML template, end in .one, and resolve to the same IP address, and frequently link to one another, heavily suggesting co-ownership. Our model’s second most confident prediction, herbalremedies<sup>12</sup>, sells 17 supplements that the site claims kill cancer cells, including colloidal silver and “parasite cleansing herbs”. Another .one site, “emfprotection”, sells electric and magnetic field protection gear that the site claims will defend customers from psychic mind control and 5G radio waves. While we did not observe any Twitter mentions of the 6 unlabeled sites, holitichealth, was mentioned by 7 Twitter accounts. Interestingly, the 7 Twitter accounts often linked to some reliable news sites, but also linked to Zero Hedge, The Epoch Times, Breitbart, and other low-and-mixed reliability websites.

The second large category of discovered sites promoted conspiratorial—often Qanon (Garry et al. 2021)—content. Three of these sites (wakeup.icu, vintel1776.net, and qaggregator.news), are now dead, but these sites were all active during the period that Twitter data were collected. Two of the sites linked heavily to a website containing all of Q’s drops<sup>13</sup>, and wakeup linked heavily to a Qanon discussion board. The only identified Qanon website that was mentioned on Twitter was Hnewswire<sup>14</sup>, which was mentioned by 100 distinct Twitter accounts that also heavily mentioned Zero Hedge, Gateway Pundit, and many other low and mixed reliability domains. Hnewswire’s navigation menu contains a trending topics bar which includes categories like “Covid Kill Shot”, “Plandemic”, and “Demonic Activity End Times”. Independent annotations of predictions can be found in the Github repository.

The top 25 discovered websites were mentioned by 173

<sup>11</sup> <https://web.archive.org/web/20240329171920/https://holitichealth.one/>

<sup>12</sup> <https://web.archive.org/web/20240225051441/https://herbalremedies.one/herbs-for-cancer/>

<sup>13</sup> <https://web.archive.org/web/20240911060604/https://qagg.news/>

<sup>14</sup> <https://web.archive.org/web/20240903154602/https://hnewswire.com/>



Twitter users in the COVID data who cumulatively mentioned over 3,165 domains. Interestingly, 42 of these users also used dredge words at least once in COVID-19-related tweets during that time period. Most of these are names of unreliable websites, e.g., “creation”, “gateway pundit”, “rense”, “infowars”, and “bitchute”, but the dredge words “what really happened”, “national vaccine”, “being 6”, and “missing links” were also used by this set of users.

This analysis highlights the connectivity of COVID-19 misinformation. Both the Qanon websites and the far-right German-language websites (which we do not discuss due to space constraints) actively promoted COVID misinformation, often alongside other conspiracies. This misinformation was then monetized by the .one websites, which sell, for example, “natural Hydroxychloroquine and Ivermectin alternative[s]” to those concerned about COVID<sup>15</sup>. This is a key advantage of the current method over article-based approaches; incentive structures are often built into networks. There is often overlap in those spreading conspiracies and those monetizing them (Ballard et al. 2022), and having a system that considers the diverse paths that users can take to unreliable content helps us identify that interplay.

## Limitations

While we attempted to mitigate limitations where possible, several substantial ones exist. First, the Twitter data were collected from 2020-2022, but the dredge words used in this paper were based on Google SERPs in 2024. We cannot say that the dredge words we extracted surfaced the same content in 2024 as when the phrases were initially used on Twitter. As with the Ukraine Biolabs example, there are also likely many cases where unreliable websites ranked highly, but were overtaken by fact checkers; our approach would not capture this. Future work could explore the impacts of better temporal alignment, which would have the added benefit of covering data voids formed around breaking news stories.

A key limitation is that the current process for extracting dredge words relies on paid third-party services. While we validated each of the extracted dredge words to ensure they are ranking in Google’s top-10, approaches to extract keyphrases from, for example, common-crawl webgraphs would provide more democratization of this line of research. We publish all dredge word data collected for this project in line with that goal. Additionally, the Partial F1 metric we use for discovery evaluation is limited, as previous work has shown many PoliticalNews and MBFC sites on which the metric relies are dead or no longer active (Carragher, Williams, and Carley 2024a). However, to our knowledge, no better metric exists for evaluating unreliable domain discovery systems. This is a needed avenue for future work.

Finally, dredge words were only extracted for 46 of the least reliable 11,327 labeled domains. Their inclusion in our models is therefore not particularly helpful. We elected to include the results from these models because they point to an interesting and understudied phenomenon: bidirectional

paths between social media and search engines, which appear to be often targeted by monetary interests. In future work, we plan to repeat this process with dredge words extracted for a larger set of unreliable domains, along with keywords extracted from reliable domains.

## Conclusion

Proactive content moderation requires systems that rapidly and continuously identify unreliable information sources. By considering additional direct paths that users can take to unreliable websites, we can improve the ability of models to identify these sources. We propose the idea of *Dredge Words* and highlight their bidirectional connections with social media. Finally, we demonstrate that our best-performing model outperforms competing systems on the tasks of domain reliability classification and unreliable domain discovery. This work demonstrates the signals present in the direct and indirect pathways that users follow to unreliable websites. Better understanding these paths could be a promising area of collaboration between platforms, organizations, and researchers intent on mitigating the spread of misinformation across digital ecosystems.

## Acknowledgements

The research for this paper was supported in part by the Office of Naval Research, MURI: Persuasion, Identity, & Morality in Social-Cyber Environments under grant N000142112749 and by the Knight Foundation. It was also supported by the center for Informed Democracy and Social-cybersecurity (IDeaS) and the center for Computational Analysis of Social and Organizational Systems (CASOS) at Carnegie Mellon University. The views and conclusions are those of the authors and should not be interpreted as representing the official policies, either expressed or implied, of the ONR or the US Government.

## References

- Alieva, I.; Ng, L. H. X.; and Carley, K. M. 2022. Investigating the spread of Russian disinformation about biolabs in Ukraine on Twitter using social network analysis. In *2022 IEEE international conference on big data (big data)*, 1770–1775. IEEE.
- Aswani, R.; Ghrera, S.; Chandra, S.; and Kar, A. 2021. A hybrid evolutionary approach for identifying spam websites for search engine marketing. *Evolutionary Intelligence*, 14(4): 1803–1815.
- Ballard, C.; Goldstein, I.; Mehta, P.; Smothers, G.; Take, K.; Zhong, V.; Greenstadt, R.; Lauinger, T.; and McCoy, D. 2022. Conspiracy brokers: Understanding the monetization of youtube conspiracy theories. In *Proceedings of the ACM Web Conference 2022*, 2707–2718.
- Barometer, E. T. 2024. 2024 Edelman trust barometer global report.
- Bengio, Y.; Louradour, J.; Collobert, R.; and Weston, J. 2009. Curriculum learning. In *Proceedings of the 26th annual international conference on machine learning*, 41–48.

<sup>15</sup><https://web.archive.org/web/20240420185505/https://holistichealth.one/natural-hydroxychloroquine-and-ivermectin/>

- Bianchi, J.; Pratelli, M.; Petrocchi, M.; and Pinelli, F. 2024. Evaluating Trustworthiness of Online News Publishers via Article Classification. In *Proceedings of the 39th ACM/SI-GAPP Symposium on Applied Computing*, 671–678.
- Carragher, P.; Williams, E. M.; and Carley, K. M. 2024a. Detection and Discovery of Misinformation Sources using Attributed Webgraphs. *arXiv preprint arXiv:2401.02379*.
- Carragher, P.; Williams, E. M.; and Carley, K. M. 2024b. Misinformation Resilient Search Rankings with Webgraph-based Interventions. *ACM Transactions on Intelligent Systems and Technology*.
- Castelo, S.; Almeida, T.; Elghafari, A.; Santos, A.; Pham, K.; Nakamura, E.; and Freire, J. 2019. A topic-agnostic approach for identifying fake news pages. In *Companion proceedings of the 2019 World Wide Web conference*, 975–980.
- Chappell, B.; and Yousef, O. 2022. How the false Russian biolab story came to circulate among the U.S. far right.
- Chen, Z.; and Freire, J. 2020. Proactive discovery of fake news domains from real-time social media feeds. In *Companion Proceedings of the Web Conference 2020*, 584–592.
- Cirik, V.; Hovy, E.; and Morency, L.-P. 2016. Visualizing and understanding curriculum learning for long short-term memory networks. *arXiv preprint arXiv:1611.06204*.
- Daniłák, M. 2014. langdetect. <https://github.com/Mimino666/langdetect>.
- Evon, D. 2022. Ukraine, US Biolabs, and an Ongoing Russian Disinformation Campaign.
- Garry, A.; Walther, S.; Rukaya, R.; and Mohammed, A. 2021. QAnon conspiracy theory: examining its evolution and mechanisms of radicalization. *Journal for Deradicalization*, 152–216.
- Golebiewski, M.; and Boyd, D. 2019. Data voids: Where missing data can easily be exploited.
- Grover, A.; and Leskovec, J. 2016. node2vec: Scalable feature learning for networks. In *Proceedings of the 22nd ACM SIGKDD international conference on Knowledge discovery and data mining*, 855–864.
- Hamilton, W.; Ying, Z.; and Leskovec, J. 2017. Inductive representation learning on large graphs. *Advances in neural information processing systems*, 30.
- Hu, Z.; Dong, Y.; Wang, K.; and Sun, Y. 2020. Heterogeneous graph transformer. In *Proceedings of the web conference 2020*, 2704–2710.
- Kuznetsova, E.; Makhortykh, M.; Sydorova, M.; Urman, A.; Vitulano, I.; and Stolze, M. 2024. Algorithmically Curated Lies: How Search Engines Handle Misinformation about US Biolabs in Ukraine. *arXiv preprint arXiv:2401.13832*.
- League, A.-D. 2022. Unmasking “Clandestine,” the Figure Behind the Viral “Ukrainian Biolab” Conspiracy Theory.
- Lin, H.; Lasser, J.; Lewandowsky, S.; Cole, R.; Gully, A.; Rand, D. G.; and Pennycook, G. 2023. High level of correspondence across different news domain quality rating sets. *PNAS nexus*, 2(9): pgad286.
- McDuling, J. 2015. Google is now a more trusted source of news than the websites it aggregates.
- Nakov, P.; Alam, F.; Da San Martino, G.; Hasanain, M.; Azizov, D.; Nandi, R. N.; and Panayot, P. 2023. Overview of the CLEF-2023 CheckThat! lab task 4 on factuality of reporting of news media.
- Norocel, O. C.; and Lewandowski, D. 2023. Google, data voids, and the dynamics of the politics of exclusion. *Big Data & Society*, 10(1): 20539517221149099.
- Pan, S.; and Ding, T. 2019. Social media-based user embedding: A literature review. *arXiv preprint arXiv:1907.00725*.
- Parachini, J. V. 2022. Debunking Russian Lies About Biolabs at Upcoming U.N. Meetings.
- Patricia Aires, V.; G. Nakamura, F.; and F. Nakamura, E. 2019. A link-based approach to detect media bias in news websites. In *Companion Proceedings of The 2019 World Wide Web Conference*, 742–745.
- Robertson, R. E.; Dunphy, A.; Grossman, S.; DiResta, R.; and Thiel, D. 2023. Identifying Search Directives on Social Media. *Journal of Online Trust and Safety*, 2(1).
- Robertson, R. E.; and Wilson, C. 2020. WebSearcher: Tools for Auditing Web Search. In *Proceedings of the 2020 Computation+ Journalism Symposium (Boston, MA, USA)(C+ J 2020)*.
- Sanh, V.; Debut, L.; Chaumond, J.; and Wolf, T. 2019. DistilBERT, a distilled version of BERT: smaller, faster, cheaper and lighter. *ArXiv*, abs/1910.01108.
- Sehgal, V.; Peshin, A.; Afroz, S.; and Farid, H. 2021. Mutual Hyperlinking Among Misinformation Peddlers. *ArXiv:2104.11694 [cs]*.
- Silva, A.; Luo, L.; Karunasekera, S.; and Leckie, C. 2021. Embracing domain differences in fake news: Cross-domain fake news detection using multi-modal data. In *Proceedings of the AAAI conference on artificial intelligence*, volume 35, 557–565.
- Spitkovsky, V. I.; Alshawi, H.; and Jurafsky, D. 2010. From baby steps to leapfrog: How “less is more” in unsupervised dependency parsing. In *Human Language Technologies: The 2010 Annual Conference of the North American Chapter of the Association for Computational Linguistics*, 751–759.
- Tripodi, F. 2019. Devin Nunes and the Power of Keyword Signaling.
- Veličković, P.; Cucurull, G.; Casanova, A.; Romero, A.; Lio, P.; and Bengio, Y. 2017. Graph attention networks. *arXiv preprint arXiv:1710.10903*.
- Williams, E. M.; and Carley, K. M. 2023. Search engine manipulation to spread pro-Kremlin propaganda. *Harvard Kennedy School Misinformation Review*.
- Yang, K.-C.; and Menczer, F. 2023. Large language models can rate news outlet credibility. *arXiv preprint arXiv:2304.00228*.
- Zandt, D. V. 2022. Media Bias Fact Check: A Comprehensive Media Bias Resource.
- Zhang, S.; and Cabage, N. 2017. Search Engine Optimization: Comparison of Link Building and Social Sharing. *Journal of Computer Information Systems*, 57(2): 148–159.

## Ethical Considerations

To avoid unintentionally boosting the search rankings of unreliable domains, we do not directly link to any referenced unreliable domains. For unreliable sites, we link to either archive.org or third-party reliability assessments of those domains. We further acknowledge the inherent challenges in determining the “reliability” of websites, and note that even reliable websites can occasionally publish inaccurate content. We defaulted entirely to third parties in our original acquisition of labels, but emphasize that any reliability-labeling ontology should be scrutinized to minimize harms. We would argue that the system we proposed could be generalized to any reasonable reliability ontology.

Acknowledging that the Twitter data likely contains examples of “sensitive events” which could compromise the privacy or safety of users, we adhere to Twitter’s terms of service and do not release this data<sup>16</sup>. Finally, we acknowledge that by publicly releasing these dredge-word lists, bad actors could use these terms to direct people to unreliable information. However, once data voids are identified, they are often plugged (Norocel and Lewandowski 2023). We hope that by releasing this data, reliable websites can target these phrases to reduce both the visibility and the ease of access of unreliable content.

There are a number of ways that any system built to limit misinformation could be abused. These include using the methodology for targeted censorship, the risks of false positives and false negatives, or abusing the system to promote or demote content based on attributes other than reliability. While these risks are real, misinformation is a pervasive global problem. We believe the benefits of advancing our understanding of how misinformation spreads between social media and search engines outweigh these risks.

## Appendix A: Additional Data Details

To our knowledge, the list created in (Lin et al. 2023) is the most comprehensive public domain reliability rating list as of August 2024. The domains in this list are ranked by the calculated first principal component where low scores correspond to high expert agreement on unreliability and high scores correspond to expert agreement on reliability. While these scores are very sensible across wide principal component score gaps, locally the relative orderings are less clear. Treating website reliability as continuous also muddies the interpretability and the discovery process, as there’s not a transparent reason a website should have a score of 0.571 as opposed to 0.570. To address this issue, we elected to binarize the website reliability labels. After manual inspection of the data, we elected to consider the bottom two quintiles as unreliable (corresponding to a principal component threshold of 0.5162).

From Ahrefs, we were unable to pull backlinks for 193 of the domains. A random sample of 10 of 193 domains and found 9 of them were either dead or unreachable. We therefore elected to drop these 193 domains, leaving us with 11,327 unique reliability-labeled domains and 32,431

<sup>16</sup><https://developer.x.com/en/developer-terms/agreement-and-policy>

unique unlabeled backlinking domains for a total of 43,758 domains. For each of these 43,758 domains, we pull 23 attributes, which for an individual domain, contains fields like the total number of backlinks and outlinks, number of backlinks coming from .edu or .gov domains, and number of referring pages<sup>17</sup>.

Similar to the backlink network constructed in (Carragher, Williams, and Carley 2024a), there is clear assortativity across label-reliability groups as can be seen in Figure 4. The prevalence of unlabeled nodes in our network overwhelms a node attribute assortativity coefficient calculation  $r_A = -0.336$ . We re-calculate node attribute assortativity on an induced subgraph that only maintains edges between labeled nodes. The subgraph contains less structure and 176 components, but nevertheless displays strong positive assortativity  $r_A = 0.376$ . In other words, domains of the same (binary) reliability are more likely to link to one another than linking to a domain of a different reliability. This provides a strong justification for the use of network-based models.

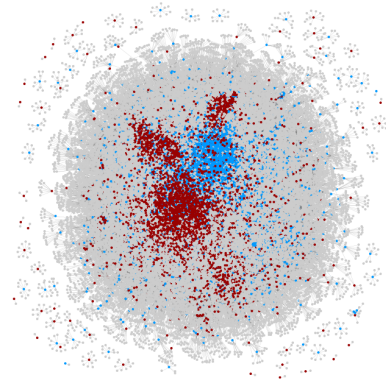


Figure 4: Webgraph colored by domain reliability labels. The network contains 6,861 reliable (blue) websites, 4,466 (red) unreliable websites, and 32,431 unlabeled (grey) backlinking websites.

## Twitter Cleaning

Firstly, we drop all tweets that do not explicitly include a link to the URL. Second, users with fewer than 10 observed tweets over the time period were dropped. To further condense the dataset, we only include tweets which appeared at least 3 times in the dataset. As reposting and retweeting are important influence metrics on Twitter, this drops the tweets that likely did not receive as much attention. We also dropped domains that were only linked to by a single user and users that only linked to a single domain, as we hypothesized these pendulum nodes would be of limited use given the size of the graph. As a result of the expense of the webgraph attribute API, we chose to further restrict the Twitter data to only include tweets that mention at least one of the 43,758 domains for which we extracted attributes. This corresponds to keeping tweets that mention at least one of

<sup>17</sup><https://ahrefs.com/api/documentation/metrics>

the 11,327 labeled domains for which we have attributes or tweets that mention one of the 11,327 and co-mention any of the 32,431 unlabeled domains.

### Dredge EDA

We applied the python library langdetect (Danilák 2014) to the list of 3,933 dredge words used in the paper, but we observe that automated language extraction of dredge words is a challenge. We observed many dredge words are disembodied fragments, names of people, or simply foreign words adopted by various communities. For example, several Hindi-language-origin yoga poses appear in the dredge word list: parivrta anjaneyasana and parivrta utkatasana. These terms surface *gaia*, a conspiracy pseudoscience website<sup>18</sup>. There are additionally arabic and chinese dredge words that surface *creation*, a website that frequently promotes pseudoscience<sup>19</sup>. Qualitatively, hatespeech is fairly uncommon in the dredge words we identified; 11 unique dredge word phrases contain the non-euphemistic writing of the n-word and 3 others contain a homophobic slur.

### Appendix B: Curriculum EDA

Among the websites rated most reliable, the style, content, and widespread name recognition would very likely result in most annotators to correctly identifying the sites as reliable (e.g., reuters.com, nasa.gov, smithsonianmag.com, nature.com). The landing pages of some of the least reliable labeled domains are also typically easy to categorize, with websites that contain toxic green backgrounds accompanied by blurry photos of George Soros<sup>20</sup>, proclamations of white nationalism<sup>21</sup>, or full links to alien siting websites and paid psychic services<sup>22</sup>. Though our webgraph model is content-agnostic, we hypothesize that the webgraph and site attributes will exhibit similarly "easy" patterns across the extremes. To test this hypothesis, we implement a curriculum learning batching procedure (Bengio et al. 2009).

### Appendix C: Partial F1 threshold sensitivity

To investigate the partial F1 metric we experiment with various classifier confidence thresholds. Naturally, as confidence increases, we see higher precision and lower recall (Figure 5). The disparity between partial recall and partial precision implies that our discovery process is not very precise. However, in the manual evaluation of Precision@k, we find precision is actually very high. This indicates a fundamental issue with the partial precision metric; it underestimates model performance, particularly as the MBFC reference list ages. This is in line with previous findings that unreliable domain lists quickly become outdated (Carragher, Williams,

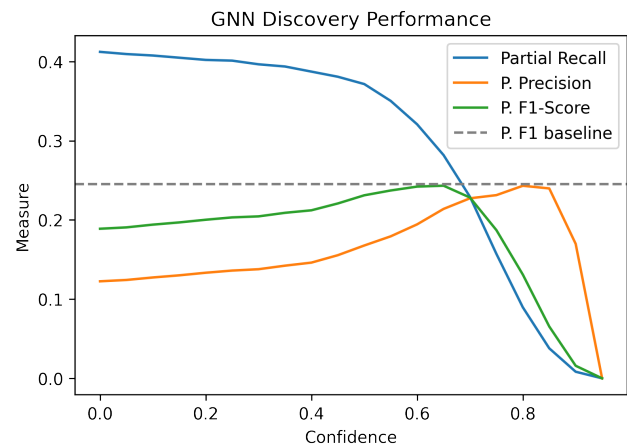


Figure 5: GNN discovery performance vs. classifier confidence reveals that the Partial F1 metric is precision bounded.

and Carley 2024a), and it complicates the evaluation of discovery processes. Further work on domain reliability discovery metrics is needed.

For Precision@k assessments, two annotators were asked "is this website unreliable" and asked to provide a rationale for why or why not. Annotations involved exploration of the domain and lateral reading—looking at what other reliable sources have written about the domain. We publicly release these annotations alongside annotator rationales.<sup>23</sup>

<sup>18</sup><https://mediabiasfactcheck.com/gaia/>

<sup>19</sup><https://mediabiasfactcheck.com/christian-ministries-international/>

<sup>20</sup><https://web.archive.org/web/20240112053008/http://www.endgamethemovie.com/>

<sup>21</sup><https://web.archive.org/web/20240108044820/https://www.stormfront.org/forum/>

<sup>22</sup><https://web.archive.org/web/20240116140224/https://renew.com/>

<sup>23</sup>Following anonymity period.