Vocabulary Expansion for Low-resource Cross-lingual Transfer

Atsuki Yamaguchi¹, Aline Villavicencio^{1,2} and Nikolaos Aletras¹

¹Department of Computer Science, University of Sheffield, United Kingdom

²Department of Computer Science, Institute of Data Science and Artificial Intelligence,

University of Exeter, United Kingdom

{ayamaguchi1,a.villavicencio,n.aletras}@sheffield.ac.uk

Abstract

Large language models (LLMs) have shown remarkable capabilities in many languages beyond English. Yet, LLMs require more inference steps when generating non-English text due to their reliance on English-centric tokenizers, vocabulary, and pre-training data, resulting in higher usage costs to non-English speakers. Vocabulary expansion with target language tokens is a widely used cross-lingual vocabulary adaptation approach to remedy this issue. Despite its effectiveness in inference speedup, the majority of previous work has focused on high-resource settings assuming access to a substantial amount of target language data to effectively initialize the embeddings of the new tokens and adapt the LLM to the target language. However, vocabulary expansion for LLMs in low-resource settings (i.e. languages and compute) has yet to be explored. In this paper, we investigate sample-efficient adaptation strategies from different angles, including target vocabulary size and initialization methods, and the amount of target data available for adaptation. Extensive experiments across typologically diverse languages, tasks and models show that simpler heuristic-based embedding initialization is more efficient and robust to changes in target vocabulary size and adaptation data in low-resource settings, outperforming a popular random initialization and a more sophisticated state-of-the-art approach that relies on external data and model.¹

1 Introduction

Large language models (LLMs) have strong generalization capabilities both in English and many other languages (OpenAI, 2023; Touvron et al., 2023; Jiang et al., 2023; Groeneveld et al., 2024). Yet, processing non-English texts with LLMs is challenging; they tend to require more inference steps due to the reliance on English-centric tokenizers and vocabulary, resulting in higher utility costs for non-English speakers (Ahia et al., 2023; Petrov et al., 2023).

Cross-lingual vocabulary adaptation (CVA) via subword embedding expansion has been proposed for adapting LLMs to specific target languages. Vocabulary expansion approaches extend the vocabulary of a source model with tokens from a target language, followed by continual pre-training on target language data. A wide range of languagespecific LLMs derived from an English-centric LLM such as LLaMA2 (Touvron et al., 2023) have been made available following this method, including Chinese (Cui et al., 2023), Tamil (Balachandran, 2023), Portuguese (Larcher et al., 2023), and Japanese (Fujii et al., 2024), inter alia. However, vocabulary expansion often assumes access to a substantial amount of target language data for adaptation. For example, Chinese and Tamil LLa-MAs make use of 20 and 12GB of target language text, respectively (Cui et al., 2023; Balachandran, However, this is not always available 2023). for the majority of low-resource languages, while adaptation is computationally prohibitive with limited access to compute.

In this paper, we present the first systematic study of vocabulary expansion-based adaptation of generative LLMs in low-resource settings. We explore sample-efficient adaptation strategies from diverse perspectives, including target vocabulary size and initialization methods, and the amount of target data available for adaptation. We conduct experiments on seven typologically diverse languages (i.e. Arabic, German, Greek, Hindi, Japanese, Swahili, and Thai) and three tasks, including text classification, summarization, and span prediction, in low-resource (~30K sentences; up to 7.8MB) settings using two English-centric LLMs. Our contributions are as follows:

• We show that models adapted with simpler heuristics-based embedding initialization ob-

¹Our code is available on GitHub.

tain comparable or better performance in lowresource scenarios than random initialization and a state-of-the-art method that relies on auxiliary representation in up to 90.5% of the cases.

- We demonstrate the robustness of the heuristics-based initialization with respect to the changes in the size of new vocabulary, the amount of target language data, and the source model (§6).
- We provide specific design recommendations for sample-efficient language-specific adaptation of English-centric LLMs (§6 and §7).

2 Related Work

Tokenization. Subword tokenization is the standard approach used in LLMs (OpenAI, 2023; Touvron et al., 2023; Jiang et al., 2023; Groeneveld et al., 2024), including methods such as Word-Piece (Schuster and Nakajima, 2012), Byte Pair Encoding - BPE (Sennrich et al., 2016), and Unigram (Kudo, 2018).

Text Overfragmentation. LLMs tend to overfragment text in underrepresented languages with different scripts (Rust et al., 2021; Muller et al., 2021). Overfragmentation has significant implications in a wide range of aspects for non-English speakers, including higher API costs (Ahia et al., 2023; Petrov et al., 2023), slower inference (Hofmann et al., 2022; Sun et al., 2023; Petrov et al., 2023), and lower downstream performance (Bostrom and Durrett, 2020; Rust et al., 2021; Gow-Smith et al., 2022; Toraman et al., 2023; Fujii et al., 2023).

Cross-lingual Vocabulary Adaptation. To overcome the above challenges, CVA methods have been proposed for adapting base LLMs such as LLaMA2 to specific target languages by incorporating new tokens into the source vocabulary - i.e. *vocabulary expansion* (Chau et al., 2020; Cui et al., 2023; Balachandran, 2023; Larcher et al., 2023; Fujii et al., 2024; Liu et al., 2024), replacing the entire source vocabulary with a new one from the target - i.e. *vocabulary replacement* (Minixhofer et al., 2022; Dobler and de Melo, 2023; Ostendorff and Rehm, 2023; Downey et al., 2023; Yamaguchi et al., 2024), or extending only the language modeling

head (Hong et al., 2024). These methods are typically followed by continual pre-training on target language data — often called language adaptive pre-training (LAPT) (Chau et al., 2020). CVA can reportedly improve downstream performance or inference speed (Cui et al., 2023; Balachandran, 2023; Fujii et al., 2024; Yamaguchi et al., 2024).

Vocabulary expansion is widely used for developing language-specific generative LLMs from a source model, e.g. Chinese LLaMA (Cui et al., 2023), Tamil LLaMA (Balachandran, 2023), and Swallow (Fujii et al., 2024). This line of work assumes access to a substantial amount of target language data, e.g. 312.1B characters \sim 291GB of Japanese text used by Fujii et al. (2024), and computing resources for LAPT. This might not be feasible in low-resource settings with limited target language data or compute. Our work is the first to investigate the effectiveness of vocabulary expansion in low-resource settings.

3 Methodology

3.1 Problem Setting

Let \mathcal{M}_s be a source pre-trained LLM with \mathcal{T}_s and \mathcal{V}_s its corresponding tokenizer and vocabulary. The aim is to learn a model \mathcal{M}_t with the same architecture as \mathcal{M}_s for a target language that supports an additional target vocabulary \mathcal{V}_{new} given a target tokenizer \mathcal{T}_t , whose vocabulary \mathcal{V}_t is composed of $\mathcal{V}_s \cup \mathcal{V}_{new}$.

First, a target language-specific auxiliary tokenizer \mathcal{T}_{aux} is trained on target language data \mathcal{D} . \mathcal{T}_{t} is then derived from \mathcal{T}_s and \mathcal{T}_{aux} along with their corresponding vocabularies \mathcal{V}_s and \mathcal{V}_{aux} by incorporating top k frequent tokens (i.e. V_{new}) that are in $\mathcal{V}_{aux} \setminus (\mathcal{V}_s \cap \mathcal{V}_{aux})$ into \mathcal{V}_s , resulting in \mathcal{V}_t . Subsequently, \mathcal{M}_{t} is initialized with the weights of \mathcal{M}_{s} . Its input embedding and output layer matrices are then expanded such that the former is of dimensionality $|\mathcal{V}_t| \times H_t$ and the latter $H_t \times |\mathcal{V}_t|$, where H_t is the hidden dimensionality of \mathcal{M}_t . The weights of both matrices are not tied, and each new token representation can be initialized by applying one of the target vocabulary initialization methods in §3.2 and §4.3. Finally, \mathcal{M}_t is adapted to the target language by training it on \mathcal{D} using a causal language modeling objective.

3.2 Target Vocabulary Initialization

The simplest way to initialize the weights of the new target tokens is random initialization (Cui

et al., 2023; Balachandran, 2023; Larcher et al., 2023). More sophisticated methods require auxiliary embeddings pre-trained in the target language (Dobler and de Melo, 2023; Ostendorff and Rehm, 2023) such as fastText (Bojanowski et al., 2017) which might not be available or hard to train in low-resource settings. Motivated by this, we investigate a set of heuristics-based initialization methods for sample-efficient adaptation that do not rely on any external data or model and can be applied to any language.

Mean. Each newly added token in \mathcal{V}_{new} is initialized such that its vector representation is the average of the corresponding source tokens obtained by tokenizing it with \mathcal{T}_s . Note that Koto et al. (2021) and Gee et al. (2022) have followed a similar initialization approach for vocabulary replacement in domain adaptation compared to vocabulary expansion of generative LLMs in our study.

Merge. We further propose using merge rules from the target tokenizer \mathcal{T}_t . Merge rules describe how \mathcal{T}_t can combine two subtokens into one, e.g. $(a', t') \rightarrow at'$. Therefore, each new token in \mathcal{V}_{new} can be decomposed into several existing subtokens in \mathcal{V}_s . Our intuition is that existing subtokens should be semantically similar to the corresponding new token to represent the same meaning when combined. We first identify any merge rule in \mathcal{T}_t whose resulting token is in \mathcal{V}_{new} . Subsequently, we generate a mapping from each new target token to source subtokens using the identified merge rules. Finally, for each new token, we compute the hierarchical mean of the vector representations of the associated source subtokens using the mapping information. Algorithm 1 in Appendix §A describes the pseudo-code of this method.

Token Alignment (Align). To retain the same meaning representation of an input sequence before and after vocabulary expansion, a new token in \mathcal{V}_{new} must have a close vector representation with its counterpart tokens in \mathcal{V}_s . Token alignment initialization leverages alignment information between tokens tokenized with \mathcal{T}_s and \mathcal{T}_t .

More specifically, for each sentence $s \in D$, we first tokenize it using \mathcal{T}_s and \mathcal{T}_t . We then compare the two tokenized versions and generate a list of tuples with alignment indices for each new token in *s* (e.g. an index 32000 in \mathcal{V}_t is mapped to [(1234, 12345), (2345, 23456, 3456)] in \mathcal{V}_s .). Subsequently, we concatenate all lists of tuples

with alignment indices for \mathcal{D} per each new token $t \in \mathcal{V}_{\text{new}}$ while replacing all indices with their corresponding tokens (e.g. $(1234, 12345) \rightarrow$ (t_{1234}, t_{12345})). For each t, we then construct a unique list of its constituent tuples, i.e. $T_t =$ $(t_1, t_2, t_3, ...)$, and the corresponding frequency list $F_{T_t} = (f_{t_1}, f_{t_2}, f_{t_3}, ...)$, on the basis of the concatenated list in the previous step. Finally, we compute the weighted mean of average tuple vector representations for each t for initialization, where weights are based on F_{T_t} . In other words, we calculate $\sum_{t \in T_t} \left[f_t \frac{1}{|t|} \sum_{t' \in t} E_{t'} \right]$ for each t, where $E_{t'}$ is the vector representation (embedding or LM head) of the subtoken $t' \in \mathcal{V}_s$.

4 Experimental Setup

4.1 Source Models

We use **LLaMA2-7B** (Touvron et al., 2023), an English-centric model, with its \mathcal{T}_s based on bytelevel BPE and $|\mathcal{V}_s|$ set to 32K in the experiments. We also employ **Mistral-7B** (Jiang et al., 2023), also an English-centric model which has the same tokenization configuration using byte-level BPE and $|\mathcal{V}_s|$ as LLaMA2-7B, for consistency in our analysis. Note that \mathcal{V}_s for Mistral-7B does not match that for LLaMA2-7B.

4.2 Target Languages and Data

We experiment with a typologically diverse set of seven languages with various scripts. This includes German (Indo-European) and Swahili (Niger–Congo) for the Latin script, and Arabic (Afro–Asiatic), Greek (Indo-European), Hindi (Indo-European), Japanese (Japonic), and Thai (Kra–Dai) for non-Latin scripts. We select these languages because of the availability of downstream task datasets with the same task formulation across languages.²

For adapting models, we use the CC-100 (Conneau et al., 2020) language-specific subcorpus for each language. To measure the impact of the size of adaptation data \mathcal{D} , we consider a low-resource setting scenario, i.e. $2^{15} \sim 30$ K sentences that we randomly sample from each language-specific corpus. For reference, we also consider a highresource setting scenario, i.e. $2^{20} \sim 1$ M sentences equal to approximately 250MB of data. Note that our low-resource setup follows Yong et al. (2023),

²Note that data for the same task across languages does not always match. *Model performance is not directly comparable between different languages.*

where they use a similar number of 30K sentences to adapt models in a low-resource language. We later examine the effect of the size of D in §6.2.

4.3 Baselines

We compare data-efficient heuristic-based initialization methods against the following baselines:

- Source. We use the source model \mathcal{M}_s off-the-shelf without any adaptation.
- LAPT. We continue pre-training the *Source* on target language data by keeping the source vocabulary V_s , i.e. no vocabulary expansion.
- **Random**. After vocabulary expansion, we randomly initialize new tokens by sampling from $\mathcal{N}(\mu, \sigma^2)$, where μ and σ are the mean and standard deviation of token embeddings of \mathcal{M}_s . This is common when adapting English-centric LLMs to a target language (Cui et al., 2023; Balachandran, 2023; Larcher et al., 2023).
- FOCUS. A state-of-the-art method for crosslingual transfer via vocabulary replacement (Dobler and de Melo, 2023). We tokenize D using T_t and subsequently train a fast-Text model on it for each language. To use FOCUS for vocabulary expansion, we apply the same initialization procedure only for the newly added tokens instead of re-initializing the entire embeddings in the original method.

4.4 Tasks

We evaluate all methods across three types of tasks per target language in a zero-shot setting:³ (1) textual entailment (NLI) including JNLI (Kurihara et al., 2022) for Japanese and XNLI (Conneau et al., 2018) for the rest; (2) summarization (SUM) including German MLSUM (Scialom et al., 2020), GreekSUM (Evdaimon et al., 2023), and XL-Sum (Hasan et al., 2021) for the rest; and (3) span prediction (SPAN) using JSQuAD (Kurihara et al., 2022) for Japanese, KenSwQuAD (Wanjawa et al., 2023) for Swahili and XQuAD (Artetxe et al., 2020) for the rest. Following Ahia et al. (2023), we use 500 random samples.

4.5 Prompt Templates

We translate the English prompt templates provided by Ahia et al. (2023) for NLI and SUM with a machine translation API, following Yong et al. (2023). For SPAN, we formulate a task-specific English prompt, followed by machine translation for each language. Note that prompts for Arabic, Greek, Hindi, Japanese, and Thai are further manually checked and corrected by native speakers. The prompt templates can be found in Appendix B.

4.6 Evaluation Metrics

Inference Speedup. We calculate the average number of prompt tokens per sample for each dataset and tokenizer, and use its relative ratio to the corresponding source tokenizer as a proxy for inference speedup, following related work (Ahia et al., 2023; Petrov et al., 2023).

Downstream Performance. For downstream performance evaluation, we use standard metrics for each dataset such as accuracy for NLI, ROUGE-L (Lin, 2004) for SUM, and F1 for SPAN.

4.7 Implementation Details

We set $|\mathcal{V}_{aux}|$ to 50,000 across languages. We follow Cui et al. (2023) in expand V_s . Initially, we set k to 100 by default instead of $k = |\mathcal{V}_{aux} \setminus (\mathcal{V}_{s} \cap$ $|\mathcal{V}_{aux}\rangle|$ to test vocabulary expansion under an extremely low-resource setting by only adding a very small number of new tokens. We further investigate the effect of varying k on downstream performance and inference efficiency $(\S6.1)$. For LAPT, we train each model for two epochs with a batch size of 8, a maximum learning rate of 1e-4, and a sequence length of 2,048. For computational efficiency, we use low-rank adaptation (LoRA) (Hu et al., 2021) with LAPT, applied on all linear layers (setting rank r = 8), following (Yong et al., 2023; Cui et al., 2023; Balachandran, 2023; Larcher et al., 2023).⁴

5 Results

5.1 Inference Speedup

We first examine the effect of inference speedups when adding just 100 new tokens to T_s . Figure 1 shows the average relative inference speedups to the source LLaMA2 tokenizer across tasks and language.⁵ We observe that non-Latin script languages, except for Japanese, show substantial average speedups of up to 55.3%. Japanese, on the other hand, exhibits moderate average inference

³Few-shot results are also available in Appendix E.3.

⁴For more implementation details, refer to Appendix C.

⁵Results by task are available in Appendix E.1.

	Arabic		Arabic Ger			Arabic German				Greek			Hindi			Japanese			Swahili			Thai		A	werag	ge
	Afro-Asiatic		atic	Indo-European		Indo-European		Indo-European		Japonic			Niger-Congo			Kra–Dai										
Model	NLI	SUM	SPAN	NLI	SUM	SPAN	NLI	SUM	SPAN	NLI	SUM	SPAN	NLI	SUM	SPAN	NLI	SUM	SPAN	NLI	SUM	SPAN	NLI	SUM	SPAN		
Source	.30	15.7	.08	.37	22.4	.30	.30	23.8	.06	.31	36.7	.33	.17	23.9	.58	.34	24.7	.02	.36	20.6	.28	.31	24.0	.24		
LAPT	.30	14.2	.11	.30	17.0	.25	.33	23.0	.10	.31	36.5	.39	.22	24.7	.52	.33	26.4	.02	.34	20.7	.27	.30	23.2	.24		
+ Random	.32	10.2	.06	.34	18.5	.26	.34	19.6	.03	.32	34.4	.26	.15	24.3	.48	.32	25.3	.02	.35	18.3	.24	.31	21.5	.19		
+ FOCUS	.30	9.6	.08	.35	18.3	.25	.34	19.8	.09	.32	32.8	.18	.19	23.3	.44	.34	25.9	.05	.31	17.2	.21	.31	21.0	.19		
+ Mean	.30	13.9	.11	.38	18.9	.27	.34	19.7	.12	.32	36.1	.31	.19	24.6	.47	.34	25.5	.03	.33	19.9	.28	.31	22.7	.23		
+ Merge	.35	13.1	.10	.36	<u>19.3</u>	.27	.34	18.8	.11	.32	33.4	.27	.18	24.6	.46	.34	25.3	.03	.31	18.5	.28	.31	21.9	.22		
+ Align	.31	14.4	.12	.36	17.9	.26	.34	19.1	.12	.33	36.1	.31	.25	24.8	.46	.34	25.9	.05	.33	18.9	.27	.32	22.4	.23		

Table 1: Zero-shot performance in low-resource settings (30K sentences) on 500 randomly selected test samples for each dataset using LLaMA2-7B as source. The baselines without vocabulary expansion are in grey. **Bold** indicates comparable or better results than Random. <u>Underlined</u> indicates comparable or better results than FOCUS. Darker blue and red shades indicate higher positive and negative relative performance change over Source per language and task, respectively.




Figure 1: Average relative inference speedup ratio to the LLaMA2 tokenizer across tasks for each language when adding 100 new target tokens.

speedups of up to 9.6%. This is possibly due to the inclusion of Japanese (0.1%) and Chinese⁶ data (0.13%) in the LLaMA2 training corpus (Touvron et al., 2023). For a similar reason, German, which accounts for the largest size among non-English languages in the corpus (0.17%), shows no speedups across tasks. Although Swahili is not included in the training corpus, it does not seem to benefit well from vocabulary expansion, possibly due to its Latin script, which accounts for over 91% of the pre-training data.

5.2 Downstream Performance

We compare the downstream performance of the heuristics-based vocabulary expansion methods (§3.2) to the baselines, i.e. Source, LAPT, Random, and FOCUS (§4.3) using LLaMA2-7B as the source model. Table 1 shows the zero-shot performance of all models with in-language prompting. Overall, we find that models adapted with Mean and Align often show comparable or better performance on average than the baselines without vocabulary expansion in the majority of the cases in low-resource settings. Specifically, Mean is competitive or better than Source and LAPT in 12 and 11 out of 21 cases, respectively. Align is

also equal to or better than Source and LAPT in 10 and 14 out of 21 cases, respectively. However, Merge exhibits slightly lower performance against Source and LAPT — 11 and 10 out of 21 cases with at least 0.5 points worse average SUM performance than Mean and Align. We speculate that Merge might be less informative than Mean and Align, as it does not rely on surface information for initialization, resulting in lower performance in low-resource settings. The two vocabulary expansion baseline approaches, Random and FOCUS, do not generally perform well in low-resource settings. All the heuristics-based methods show comparable or better results than Random and FOCUS in the majority of the cases, from 76.2% (Align vs. Random) to 90.5% (Align vs. FOCUS) with the maximum average performance difference of 1, 1.7, and 4 points in NLI, SUM, and SPAN, respectively. Further, Random and FOCUS show on par or better performance than Source and LAPT in up to only 9 out of 21 cases (FOCUS vs. Source). These results confirm our hypothesis ($\S3.2$) that state-of-the-art approaches to vocabulary adaptation in addition to a popular random initialization approach do not work well under low-resource settings. The gap tends to narrow in high-resource scenarios (see Table 7 in Appendix E.2).

Looking at the results by language and script, we first observe that German and Japanese do not benefit well from vocabulary expansion in lowresource settings. We note a substantial drop in performance of up to 4.5 and 12 points between Source and the three heuristics-based methods in German SUM and Japanese SPAN, respectively. These results coincide with the negative effect of language overlap in the LLaMA2 pre-training data against inference speedups discussed in §5.1, sug-

⁶Japanese shares some scripts (i.e. *kanji*) with Chinese.

gesting that training on a small amount of \mathcal{D} could even harm the performance if a target language is included in the pre-training data. Swahili, in contrast, exhibits similar or better performances with adapted models than Source, though its speedup is the second lowest among the seven target languages. Specifically, the models adapted with Align and FOCUS show the largest performance gain of three points in SPAN. This suggests that even if a target language is a Latin script, we may still achieve performance gains with vocabulary expansion-based LLM adaptation unless the target language is not included in the pre-training data of a source model. This trend also seems to hold in high-resource settings (Table 7). For non-Latin script languages, except for Japanese, we generally observe comparable performance to Source in NLI and SPAN. However, there are some exceptions, especially SUM for all four languages and Hindi SPAN. We hypothesize that SUM might require more adaptation data to perform well than NLI and SPAN as long text generation (max 128 generated tokens) with good coherency should be more challenging than NLI (max one token) and SPAN (max eight tokens). For Hindi SPAN, we find that adapted models are more likely to generate mismatched spans than LAPT, leading to lower F1 scores.⁷ We further analyze the effect of different |D| in §6.2.

6 Analysis

This section sheds light on the key aspects of vocabulary expansion-based LLM adaptation in lowresource settings: (1) the size of \mathcal{V}_{new} ; and (2) the amount of \mathcal{D} . We also verify the effectiveness of the heuristics-based embedding initialization methods on a different English-centric LLM, i.e. Mistral-7B. Due to computational resource constraints, we use the two best-performing approaches (Mean and Align) in §5.2 as well as Source, LAPT, and Random as the baselines in our analysis. We also only experiment with three languages with the largest speedups (§5.1): Greek, Hindi, and Arabic.

6.1 Size of New Target Tokens

We examine the effect of different target vocabulary sizes $|\mathcal{V}_{new}|$ on task performance and inference speedups. We experiment with $|\mathcal{V}_{new}| = \{50, 100, 500, 1K, 5K, 10K\}$. Note that previous

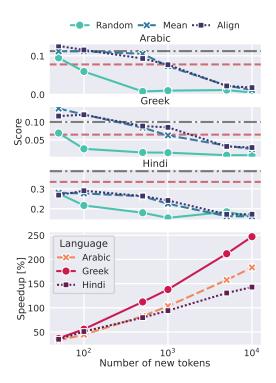


Figure 2: Performance in zero-shot SPAN across different numbers of new target tokens, including inference speedup. Red and grey dotted lines denote the performance of Source and LAPT, respectively.

studies set by default $|\mathcal{V}_{new}|$ to over 10K, e.g. 17,953 for Chinese LLaMA and 11,176 for Swallow (Fujii et al., 2024). Figure 2 shows the performance change in zero-shot SPAN with respect to different number of target tokens along with the corresponding inference speedups.⁸ NLI and SUM results, in addition to those in high-resource settings, are available in Appendix E.5.

Looking at the results by the amount of target data \mathcal{D} available, we see that the larger $|\mathcal{V}_{new}|$, the worse the performance in low-resource settings across initialization methods and languages, especially $|\mathcal{V}_{new}| > 1$ K in all three languages. In particular, Random is less robust to changes than Mean and Align. It results in a substantial drop in performance even from $|\mathcal{V}_{new}| = 50$ to 100. We conclude that *heuristics-based approaches are more likely to be robust to the changes in* $|\mathcal{V}_{new}|$ *in low-resource settings. Using Random is consistently suboptimal, regardless of* $|\mathcal{V}_{new}|$.

Recommendation. Setting $|\mathcal{V}_{new}|$ to around 100 to 500 can be a suitable threshold to maintain competitive performance while benefiting from in-

⁷We provide an analysis in Appendix E.4.

⁸We focus on SPAN as we observe relatively large performance variations between approaches across languages in low-resource settings.




Figure 3: Performance and inference speedup in zeroshot SPAN across different numbers of training sentences. Red dotted line denotes Source performance.

ference speedups. For instance, setting $|\mathcal{V}_{new}|$ to 500 results in speedups of from 79.7% (Hindi) to 112.1% (Greek).⁹

6.2 Adaptation Samples

Although we have confirmed the effectiveness of vocabulary expansion in low-resource settings using heuristics-based approaches, it remains unclear the amount of the target language data \mathcal{D} required to achieve comparable or better performance than Source and LAPT. For that purpose, we train models using $|\mathcal{D}| =$ $\{2^{10}, 2^{11}, 2^{12}, \ldots, 2^{20}\}$. Figure 3 shows the performance and inference speedup changes in zeroshot SPAN with respect to $|\mathcal{D}|$. NLI and SUM results are in Appendix E.6.

We first observe that LAPT consistently obtains similar or better performance than Source regardless of $|\mathcal{D}|$ across languages. In contrast, Mean and Align approach Source at $|\mathcal{D}| = 2^{13}$ in Arabic and Greek, which is a quarter of $|\mathcal{D}|$ for our low-resource settings. However, they require twice the amount of \mathcal{D} than Source (i.e. $|\mathcal{D}| = 2^{14}$) for becoming comparable with LAPT. Both heuristics-based methods show similar trends, but Align demonstrates slightly faster improvement than Mean at early stages between $|\mathcal{D}| = 2^{11}$ and 2^{13} . Lastly, Random exhibits worse sample efficiency than Mean and Align across languages as observed in §5.2. It requires around eight times more \mathcal{D} than the two (i.e. 2^{13} vs. 2^{16}) to surpass the performance of Source in Arabic and Greek.

Next, we look at the results by language. Arabic and Greek show similar trends to each other. However, adapted models in Hindi struggle to outperform Source. They finally become competitive with Source at around $|\mathcal{D}| = 2^{16}$ – twice the size of \mathcal{D} for the low-resource settings. They cannot outperform LAPT regardless of $|\mathcal{D}|$ due to the larger number of mismatched spans generated with them than LAPT (see Appendix E.4 for further analysis).

Examining the effect of $|\mathcal{D}|$ on inference speedup, we observe no large difference across different $|\mathcal{D}|$. The largest difference of 0.74% is observed in Hindi between $|\mathcal{D}| = 2^{14}$ and 2^{15} . This suggests that a training data of around 30K sentences, i.e. our low-resource settings, can still ensure the efficacy of vocabulary expansion in terms of inference speedups, especially for the majority of non-Latin script languages, as observed in §5.1.

Recommendation. We need at least $|\mathcal{D}| = 2^{14}$ to 2^{15} to achieve competitive performance with Source and LAPT when $|\mathcal{V}_{\text{new}}| = 100$. Given the poor performance in Hindi, $|\mathcal{D}| = 2^{16}$ can serve as a safeguard option since all the approaches across languages, including Random, exhibit comparable performance with at least Source while benefiting from speedups, unlike LAPT. For low-resource scenarios, using Align might provide better performance than Mean in SPAN.¹⁰

6.3 Experiments with other Source LLMs

Finally, we briefly investigate whether the models other than LLaMA2-7B adapted with the heuristics-based methods show similar trends to those observed in LLaMA2-7B. We use Mistral-7B as source as a case study. Table 2 shows the zero-shot performance in Mistral-7B.

We observe that adapted models are not competitive with the baselines except for Greek SPAN and Hindi NLI. This can be due to the fact that Source (i.e. Mistral-7B) exhibits substantially better downstream performance than LLaMA2-7B,

⁹For longer text generation tasks like SUM, we recommend setting smaller $|\mathcal{V}_{new}|$ for each setting on the basis of the results in Appendix E.5. For instance, $|\mathcal{V}_{new}| = 100$ can be a suitable size to maintain competitive performance to the baselines in low-resource settings.

 $^{^{10}}$ For longer text generation like SUM, we suggest using a bit more $|\mathcal{D}|$ like 2^{17} and Mean for initialization to obtain competitive performance to the baselines. See Appendix E.6 for details.

	1	Arabi	c		Greek		Hindi					
Approach	NLI	SUM	SPAN	NLI	SUM	SPAN	NLI	SUM	SPAN			
Source	.39	17.1	.20	.37	36.1	.12	.34	38.4	.45			
LAPT	.34	15.3	.15	.39	25.3	.13	.31	38.6	.50			
+ Random	.36	13.6	.13	.35	20.7	.13	.33	33.8	.34			
+ Mean	.33	14.4	.14	.31	23.2	.12	.34	34.4	.37			
+ Align	.33	14.7	.14	.30	23.3	.15	.34	35.1	.37			
Speedup [%]	46.0	44.8	43.5	57.2	57.3	56.4	56.0	59.1	55.1			

Table 2: Zero-shot performance and inference speedup using 30K sentences with Mistral-7B as Source. **Bold** indicates comparable or better results than Random. Darker blue and red indicate higher positive and negative relative performance change over Source.

performing 21% better for NLI, 20% better for SUM, and 64% better for SPAN on average across languages. Nonetheless, the adapted models with Mean or Align outperform Random in the majority of the cases, especially in the two generative tasks: SUM and SPAN. Furthermore, they demonstrate better downstream performance than their LLaMA2-7B counterparts in 14 out of 18 cases across languages and tasks with comparable speedups for Arabic and Greek and better for Hindi. These results suggest that adapted models can successfully benefit from the multilingual capabilities of the base model. Even though there is still a large performance gap to Source in Mistral-7B, this could presumably narrow with larger $|\mathcal{D}|$ as in LLaMA2-7B (Table 7 in Appendix E.2).

7 Discussion and Future Work

Implications of Low-resource Settings. As we have observed in §5.2 and §6, not all embedding initialization methods work well under lowresource settings, as opposed to the high-resource settings that are common in existing studies (Cui et al., 2023; Balachandran, 2023; Larcher et al., 2023). Although random embedding initialization has been popular for adaptation, it requires exploring an optimal parameter space from scratch. Therefore, it ends up performing poorly under low-resource settings. Approaches like FOCUS take advantage of pre-trained vector representations, enabling sample-efficient adaptation. However, they also fail to perform well if there is no access to enough resources to build semantically rich pre-trained representations. Heuristicsbased initialization, not relying on external data, works better than existing popular methods in lowresource settings. Nonetheless, future work can

explore a different aspect like the efficacy of synthetic and artificial data against cross-lingual transfer of LLMs for extremely low-resource languages as has been explored for pre-training (Ri and Tsuruoka, 2022).

Additional Recommendations. In addition to the recommendations in §6.1 and §6.2, we also need to pay attention to (i) target language overlap with pre-training data, (ii) language script, and (iii) target task. As observed in §5.1, both (i) and (ii) greatly affect inference speedups. While (i) negatively affects downstream performance, (ii) seems to have less of an impact on it, as in Swahili (§5.2). Finally, the type of target task (iii) should be taken into account to choose a suitable $|\mathcal{V}_{new}|$ and $|\mathcal{D}|$. Long text generation like SUM seems to require more $|\mathcal{D}|$ and/or smaller $|\mathcal{V}_{new}|$ for adapted models to reach competitive performance to baselines without vocabulary expansion than SPAN.

Remaining Challenges. There are several remaining challenges to be tackled in future. For instance, although adapted Mistral-7B models using heuristics-based initialization generally perform better than LLaMA2-7B and Random, they are mostly not competitive to the baselines without vocabulary expansion. This implies that different base models could have different requirements of $|\mathcal{D}|$ and $|\mathcal{V}_{new}|$. Furthermore, as observed in Hindi SPAN, there may be a more task- and language-specific phenomenon that negatively affects vocabulary expansion-based adaptation of generative LLMs. The identification and mitigation of this phenomenon are beyond the scope of this paper and will be the subject of future work.

8 Conclusion

We investigated the efficacy of vocabulary expansion-based adaptation of generative LLMs under low-resource settings and explored sampleefficient adaptation strategies, targeting initialization methods, target vocabulary and adaptation sample sizes. Our extensive experiments in seven diverse languages demonstrated the effectiveness of heuristics-based initialization methods such as Mean and Align over commonly used Random in terms of downstream performance and robustness to changes in target vocabulary and adaptation data sizes. They are also on par or better than Source and LAPT in the near majority of the cases, while Random fails to surpass the two baselines.

Limitations

Tokenizer. Heuristic-based expansion with Merge assumes the use of a BPE-based tokenizer which is a common choice in recent LLMs, e.g. LLaMA2, Mistral, *inter alia*. Experimenting with other tokenizers, such as Unigram (Kudo, 2018), is beyond the scope of this paper.

Languages. Our work covers seven linguistically diverse languages, i.e. Arabic, German, Greek, Hindi, Japanese, Swahili, and Thai, following previous work on CVA that has also tested a similar number of languages. For instance, Tran (2019) tested six languages, and Minixhofer et al. (2022) tested eight languages. Experimenting with more languages is an interesting avenue for future work but out of the scope of this paper given our limited computing capacity.

Model Size. Our experiments consider LLMs of 7B parameters. Note that inference efficiency measured by the average number of prompt tokens is not affected by the model size. Investigating the performance of vocabulary expansion with larger models would be valuable in future studies. Limited access to computational resources did not allow us to experiment with larger LLMs.

Acknowledgments

We would like to thank Huiyin Xue for the comments. We also would like to thank Constantinos Karouzos, Amin Ekant, and Twin Karmakharm for proofreading the Greek, Hindi, and Thai prompts, respectively. We acknowledge IT Services at the University of Sheffield for the provision of services for high-performance computing.

References

- Orevaoghene Ahia, Sachin Kumar, Hila Gonen, Jungo Kasai, David Mortensen, Noah Smith, and Yulia Tsvetkov. 2023. Do all languages cost the same? tokenization in the era of commercial language models. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 9904–9923, Singapore. Association for Computational Linguistics.
- Mikel Artetxe, Sebastian Ruder, and Dani Yogatama. 2020. On the cross-lingual transferability of monolingual representations. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 4623–4637, Online. Association for Computational Linguistics.

- Abhinand Balachandran. 2023. Tamil-LLaMA: A new Tamil language model based on LLaMA 2. *ArXiv*, abs/2311.05845.
- Piotr Bojanowski, Edouard Grave, Armand Joulin, and Tomas Mikolov. 2017. Enriching word vectors with subword information. *Transactions of the Association for Computational Linguistics*, 5:135–146.
- Kaj Bostrom and Greg Durrett. 2020. Byte pair encoding is suboptimal for language model pretraining. In *Findings of the Association for Computational Linguistics: EMNLP 2020*, pages 4617–4624, Online. Association for Computational Linguistics.
- Ethan C. Chau, Lucy H. Lin, and Noah A. Smith. 2020. Parsing with multilingual BERT, a small corpus, and a small treebank. In *Findings of the Association for Computational Linguistics: EMNLP 2020*, pages 1324–1334, Online. Association for Computational Linguistics.
- Alexis Conneau, Kartikay Khandelwal, Naman Goyal, Vishrav Chaudhary, Guillaume Wenzek, Francisco Guzmán, Edouard Grave, Myle Ott, Luke Zettlemoyer, and Veselin Stoyanov. 2020. Unsupervised cross-lingual representation learning at scale. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 8440– 8451, Online. Association for Computational Linguistics.
- Alexis Conneau, Ruty Rinott, Guillaume Lample, Adina Williams, Samuel Bowman, Holger Schwenk, and Veselin Stoyanov. 2018. XNLI: Evaluating cross-lingual sentence representations. In Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing, pages 2475–2485, Brussels, Belgium. Association for Computational Linguistics.
- Yiming Cui, Ziqing Yang, and Xin Yao. 2023. Efficient and effective text encoding for Chinese LLaMA and Alpaca. *ArXiv*, abs/2304.08177.
- Konstantin Dobler and Gerard de Melo. 2023. FOCUS: Effective embedding initialization for monolingual specialization of multilingual models. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 13440– 13454, Singapore. Association for Computational Linguistics.
- C.M. Downey, Terra Blevins, Nora Goldfine, and Shane Steinert-Threlkeld. 2023. Embedding structure matters: Comparing methods to adapt multilingual vocabularies to new languages. In *Proceedings* of the 3rd Workshop on Multi-lingual Representation Learning (MRL), pages 268–281, Singapore. Association for Computational Linguistics.
- Iakovos Evdaimon, Hadi Abdine, Christos Xypolopoulos, Stamatis Outsios, Michalis Vazirgiannis, and Giorgos Stamou. 2023. GreekBART: The first pretrained Greek sequence-to-sequence model. *ArXiv*, abs/2304.00869.

- Kazuki Fujii, Taishi Nakamura, Mengsay Loem, Hiroki Iida, Masanari Ohi, Kakeru Hattori, Hirai Shota, Sakae Mizuki, Rio Yokota, and Naoaki Okazaki. 2024. Continual pre-training for cross-lingual LLM adaptation: Enhancing Japanese language capabilities. ArXiv, abs/2404.17790.
- Takuro Fujii, Koki Shibata, Atsuki Yamaguchi, Terufumi Morishita, and Yasuhiro Sogawa. 2023. How do different tokenizers perform on downstream tasks in scriptio continua languages?: A case study in Japanese. In Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 4: Student Research Workshop), pages 39– 49, Toronto, Canada. Association for Computational Linguistics.
- Leonidas Gee, Andrea Zugarini, Leonardo Rigutini, and Paolo Torroni. 2022. Fast vocabulary transfer for language model compression. In *Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing: Industry Track*, pages 409–416, Abu Dhabi, UAE. Association for Computational Linguistics.
- Edward Gow-Smith, Harish Tayyar Madabushi, Carolina Scarton, and Aline Villavicencio. 2022. Improving tokenisation by alternative treatment of spaces. In *Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing*, pages 11430–11443, Abu Dhabi, United Arab Emirates. Association for Computational Linguistics.
- Dirk Groeneveld, Iz Beltagy, Pete Walsh, Akshita Bhagia, Rodney Kinney, Oyvind Tafjord, A. Jha, Hamish Ivison, Ian Magnusson, Yizhong Wang, Shane Arora, David Atkinson, Russell Authur, Khyathi Raghavi Chandu, Arman Cohan, Jennifer Dumas, Yanai Elazar, Yuling Gu, Jack Hessel, Tushar Khot, William Merrill, Jacob Daniel Morrison, Niklas Muennighoff, Aakanksha Naik, Crystal Nam, Matthew E. Peters, Valentina Pyatkin, Abhilasha Ravichander, Dustin Schwenk, Saurabh Shah, Will Smith, Emma Strubell, Nishant Subramani, Mitchell Wortsman, Pradeep Dasigi, Nathan Lambert, Kyle Richardson, Luke Zettlemoyer, Jesse Dodge, Kyle Lo, Luca Soldaini, Noah A. Smith, and Hanna Haiishirzi. 2024. OLMo: Accelerating the science of language models. ArXiv, abs/2402.00838.
- Tahmid Hasan, Abhik Bhattacharjee, Md. Saiful Islam, Kazi Mubasshir, Yuan-Fang Li, Yong-Bin Kang, M. Sohel Rahman, and Rifat Shahriyar. 2021. XLsum: Large-scale multilingual abstractive summarization for 44 languages. In *Findings of the Association for Computational Linguistics: ACL-IJCNLP* 2021, pages 4693–4703, Online. Association for Computational Linguistics.
- Valentin Hofmann, Hinrich Schuetze, and Janet Pierrehumbert. 2022. An embarrassingly simple method to mitigate undesirable properties of pretrained language model tokenizers. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*, pages

385–393, Dublin, Ireland. Association for Computational Linguistics.

- Jimin Hong, Gibbeum Lee, and Jaewoong Cho. 2024. A simple framework to accelerate multilingual language model for monolingual text generation. *ArXiv*, abs/2401.10660.
- J. Edward Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, and Weizhu Chen. 2021. LoRA: Low-rank adaptation of large language models. *ArXiv*, abs/2106.09685.
- Albert Qiaochu Jiang, Alexandre Sablayrolles, Arthur Mensch, Chris Bamford, Devendra Singh Chaplot, Diego de Las Casas, Florian Bressand, Gianna Lengyel, Guillaume Lample, Lucile Saulnier, L'elio Renard Lavaud, Marie-Anne Lachaux, Pierre Stock, Teven Le Scao, Thibaut Lavril, Thomas Wang, Timothée Lacroix, and William El Sayed. 2023. Mistral 7B. ArXiv, abs/2310.06825.
- Fajri Koto, Jey Han Lau, and Timothy Baldwin. 2021. IndoBERTweet: A pretrained language model for Indonesian Twitter with effective domain-specific vocabulary initialization. In Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing, pages 10660–10668, Online and Punta Cana, Dominican Republic. Association for Computational Linguistics.
- Taku Kudo. 2018. Subword regularization: Improving neural network translation models with multiple subword candidates. In Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers), pages 66–75, Melbourne, Australia. Association for Computational Linguistics.
- Taku Kudo and John Richardson. 2018. SentencePiece: A simple and language independent subword tokenizer and detokenizer for neural text processing. In Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing: System Demonstrations, pages 66–71, Brussels, Belgium. Association for Computational Linguistics.
- Kentaro Kurihara, Daisuke Kawahara, and Tomohide Shibata. 2022. JGLUE: Japanese general language understanding evaluation. In *Proceedings of the Thirteenth Language Resources and Evaluation Conference*, pages 2957–2966, Marseille, France. European Language Resources Association.
- Celio H. N. Larcher, Marcos Piau, Paulo Finardi, Pedro Gengo, Piero Esposito, and Vinicius F. Carid'a. 2023. Cabrita: Closing the gap for foreign languages. ArXiv, abs/2308.11878.
- Quentin Lhoest, Albert Villanova del Moral, Yacine Jernite, Abhishek Thakur, Patrick von Platen, Suraj Patil, Julien Chaumond, Mariama Drame, Julien Plu, Lewis Tunstall, Joe Davison, Mario Šaško, Gunjan Chhablani, Bhavitvya Malik, Simon Brandeis, Teven Le Scao, Victor Sanh, Canwen Xu, Nicolas Patry, Angelina McMillan-Major, Philipp Schmid,

Sylvain Gugger, Clément Delangue, Théo Matussière, Lysandre Debut, Stas Bekman, Pierric Cistac, Thibault Goehringer, Victor Mustar, François Lagunas, Alexander Rush, and Thomas Wolf. 2021. Datasets: A community library for natural language processing. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*, pages 175–184, Online and Punta Cana, Dominican Republic. Association for Computational Linguistics.

- Chin-Yew Lin. 2004. ROUGE: A package for automatic evaluation of summaries. In *Text Summarization Branches Out*, pages 74–81, Barcelona, Spain. Association for Computational Linguistics.
- Yihong Liu, Peiqin Lin, Mingyang Wang, and Hinrich Schuetze. 2024. OFA: A framework of initializing unseen subword embeddings for efficient largescale multilingual continued pretraining. In *Findings of the Association for Computational Linguistics: NAACL 2024*, pages 1067–1097, Mexico City, Mexico. Association for Computational Linguistics.
- Sourab Mangrulkar, Sylvain Gugger, Lysandre Debut, Younes Belkada, Sayak Paul, and Benjamin Bossan. 2022. PEFT: State-of-the-art parameter-efficient fine-tuning methods. https://github.com/hug gingface/peft.
- Joshua Maynez, Priyanka Agrawal, and Sebastian Gehrmann. 2023. Benchmarking large language model capabilities for conditional generation. In Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers), pages 9194–9213, Toronto, Canada. Association for Computational Linguistics.
- Benjamin Minixhofer, Fabian Paischer, and Navid Rekabsaz. 2022. WECHSEL: Effective initialization of subword embeddings for cross-lingual transfer of monolingual language models. In Proceedings of the 2022 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, pages 3992– 4006, Seattle, United States. Association for Computational Linguistics.
- Anthony Moi and Nicolas Patry. 2023. HuggingFace's Tokenizers.
- Benjamin Muller, Antonios Anastasopoulos, Benoît Sagot, and Djamé Seddah. 2021. When being unseen from mBERT is just the beginning: Handling new languages with multilingual language models. In Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, pages 448–462, Online. Association for Computational Linguistics.
- OpenAI. 2023. GPT-4 technical report. ArXiv, abs/2303.08774.
- Malte Ostendorff and Georg Rehm. 2023. Efficient language model training through cross-lingual and progressive transfer learning. *ArXiv*, abs/2301.09626.

- Adam Paszke, Sam Gross, Francisco Massa, Adam Lerer, James Bradbury, Gregory Chanan, Trevor Killeen, Zeming Lin, Natalia Gimelshein, Luca Antiga, Alban Desmaison, Andreas Kopf, Edward Yang, Zachary DeVito, Martin Raison, Alykhan Tejani, Sasank Chilamkurthy, Benoit Steiner, Lu Fang, Junjie Bai, and Soumith Chintala. 2019. Py-Torch: An imperative style, high-performance deep learning library. In H. Wallach, H. Larochelle, A. Beygelzimer, F. d'Alché-Buc, E. Fox, and R. Garnett, editors, *Advances in Neural Information Processing Systems 32*, pages 8024–8035. Curran Associates, Inc.
- Aleksandar Petrov, Emanuele La Malfa, Philip Torr, and Adel Bibi. 2023. Language model tokenizers introduce unfairness between languages. In *Thirty*seventh Conference on Neural Information Processing Systems.
- Ryokan Ri and Yoshimasa Tsuruoka. 2022. Pretraining with artificial language: Studying transferable knowledge in language models. In *Proceedings* of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers), pages 7302–7315, Dublin, Ireland. Association for Computational Linguistics.
- Phillip Rust, Jonas Pfeiffer, Ivan Vulić, Sebastian Ruder, and Iryna Gurevych. 2021. How good is your tokenizer? on the monolingual performance of multilingual language models. In Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers), pages 3118–3135, Online. Association for Computational Linguistics.
- Mike Schuster and Kaisuke Nakajima. 2012. Japanese and Korean voice search. In 2012 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP), pages 5149–5152.
- Thomas Scialom, Paul-Alexis Dray, Sylvain Lamprier, Benjamin Piwowarski, and Jacopo Staiano. 2020. MLSUM: The multilingual summarization corpus. In Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP), pages 8051–8067, Online. Association for Computational Linguistics.
- Rico Sennrich, Barry Haddow, and Alexandra Birch. 2016. Neural machine translation of rare words with subword units. In Proceedings of the 54th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers), pages 1715– 1725, Berlin, Germany. Association for Computational Linguistics.
- Jimin Sun, Patrick Fernandes, Xinyi Wang, and Graham Neubig. 2023. A multi-dimensional evaluation of tokenizer-free multilingual pretrained models. In *Findings of the Association for Computational Linguistics: EACL 2023*, pages 1725–1735, Dubrovnik, Croatia. Association for Computational Linguistics.

- Cagri Toraman, Eyup Halit Yilmaz, Furkan ahinuç, and Oguzhan Ozcelik. 2023. Impact of tokenization on language models: An analysis for Turkish. ACM Trans. Asian Low-Resour. Lang. Inf. Process., 22(4).
- Hugo Touvron, Louis Martin, Kevin R. Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, Daniel M. Bikel, Lukas Blecher, Cristian Cantón Ferrer, Moya Chen, Guillem Cucurull, David Esiobu, Jude Fernandes, Jeremy Fu, Wenyin Fu, Brian Fuller, Cynthia Gao, Vedanuj Goswami, Naman Goyal, Anthony S. Hartshorn, Saghar Hosseini, Rui Hou, Hakan Inan, Marcin Kardas, Viktor Kerkez, Madian Khabsa, Isabel M. Kloumann, A. V. Korenev, Punit Singh Koura, Marie-Anne Lachaux, Thibaut Lavril, Jenya Lee, Diana Liskovich, Yinghai Lu, Yuning Mao, Xavier Martinet, Todor Mihaylov, Pushkar Mishra, Igor Molybog, Yixin Nie, Andrew Poulton, Jeremy Reizenstein, Rashi Rungta, Kalyan Saladi, Alan Schelten, Ruan Silva, Eric Michael Smith, R. Subramanian, Xia Tan, Binh Tang, Ross Taylor, Adina Williams, Jian Xiang Kuan, Puxin Xu, Zhengxu Yan, Iliyan Zarov, Yuchen Zhang, Angela Fan, Melanie Kambadur, Sharan Narang, Aurelien Rodriguez, Robert Stojnic, Sergey Edunov, and Thomas Scialom. 2023. LLaMA 2: Open foundation and fine-tuned chat models. ArXiv, abs/2307.09288.
- Ke M. Tran. 2019. From English to foreign languages: Transferring pre-trained language models. *ArXiv*, abs/2002.07306.
- Barack W. Wanjawa, Lilian D. A. Wanzare, Florence Indede, Owen Mconyango, Lawrence Muchemi, and Edward Ombui. 2023. KenSwQuAD—A question answering dataset for swahili low-resource language. *ACM Trans. Asian Low-Resour. Lang. Inf. Process.*, 22(4).
- Thomas Wolf, Lysandre Debut, Victor Sanh, Julien Chaumond, Clement Delangue, Anthony Moi, Pierric Cistac, Tim Rault, Remi Louf, Morgan Funtowicz, Joe Davison, Sam Shleifer, Patrick von Platen, Clara Ma, Yacine Jernite, Julien Plu, Canwen Xu, Teven Le Scao, Sylvain Gugger, Mariama Drame, Quentin Lhoest, and Alexander Rush. 2020. Transformers: State-of-the-art natural language processing. In Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing: System Demonstrations, pages 38–45, Online. Association for Computational Linguistics.
- Linting Xue, Noah Constant, Adam Roberts, Mihir Kale, Rami Al-Rfou, Aditya Siddhant, Aditya Barua, and Colin Raffel. 2021. mT5: A massively multilingual pre-trained text-to-text transformer. In Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, pages 483–498, Online. Association for Computational Linguistics.

- Atsuki Yamaguchi, Aline Villavicencio, and Nikolaos Aletras. 2024. An empirical study on cross-lingual vocabulary adaptation for efficient generative LLM inference. *ArXiv*, abs/2402.10712.
- Zheng Xin Yong, Hailey Schoelkopf, Niklas Muennighoff, Alham Fikri Aji, David Ifeoluwa Adelani, Khalid Almubarak, M Saiful Bari, Lintang Sutawika, Jungo Kasai, Ahmed Baruwa, Genta Winata, Stella Biderman, Edward Raff, Dragomir Radev, and Vassilina Nikoulina. 2023. BLOOM+1: Adding language support to BLOOM for zero-shot prompting. In Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers), pages 11682–11703, Toronto, Canada. Association for Computational Linguistics.

Hyperparameters	Values
Batch size	8
Maximum number of training epochs	2
Adam ϵ	1e-8
Adam β_1	0.9
Adam β_2	0.999
Sequence length	2,048
Learning rate	1e-4
Learning rate scheduler	cosine
Warmup steps	100
Weight decay	0.01
Attention dropout	0.0
Dropout	0.05
LoRA rank r	8
LoRA dropout	0.05
LoRA α	32
Training precision	FP16
Model quantization	int 8

Table 3: Hyperparameters for LAPT.

Parameters	Values
Maximum prompt length	4,096
Temperature	0.8
Repetition penalty	1.1
Top k	40
Top p	0.9
Beam width	5
Sampling	True
Early stopping	True
	1 for NLI
Maximum number of generated tokens	128 for SUM
C C	8 for SPAN

Table 4: Parameters for generation.

Appendix

A Pseudo-code for Merge Rule-based Initialization

Algorithm 1 describes the pseudo-code of vocabulary initialization using merge rules.

B Prompt Templates

Table 5 shows the prompt templates used in our evaluation.

C Implementation Details

C.1 Language Adaptive Pre-training

Table 3 lists the hyperparameters in LAPT.

C.2 Evaluation

NLI. Following Cui et al. (2023) and the LightEval implementation, we pick up a token with the maximum log-likelihood among candidate label words to compute accuracy in NLI. SUM. To compute ROUGE-L, we use SumEval¹¹ for Japanese. For the rest of the languages, we split sentences with an mT5 (Xue et al., 2021) tokenizer as preprocessing following Maynez et al. (2023) and subsequently call rouge_scorer¹² to compute the metric.

Hyperparameters. Table 4 lists the parameters used during evaluation. To make a fair comparison, we do not conduct any generation parameter tuning and use the same ones across all approaches. For SUM, we truncate an article whenever it exceeds the maximum prompt length of 4,096 to avoid the CUDA out-of-memory error.

C.3 Libraries and Hardware

We train tokenizers using SentencePiece (Kudo and Richardson, 2018) and convert them into the Hugging Face Tokenizers (Moi and Patry, 2023) format. We implement our models using Py-Torch (Paszke et al., 2019), Hugging Face Transformers (Wolf et al., 2020) and PEFT (Mangrulkar et al., 2022). We preprocess datasets with Hugging Face Datasets (Lhoest et al., 2021). For evaluation, we use Hugging Face LightEval¹³. We use a single NVIDIA A100 (80GB) for all experiments.

C.4 Code

Our code is available on GitHub: https://gith ub.com/gucci-j/lowres-cva. We will make our models publicly available on Hugging Face Hub.

D Licenses

This study uses various publicly available models and datasets with different licenses, as detailed below, all of which permit their use for academic research.

D.1 Models

LLaMA2-7B is licensed under the LLaMA 2 Community License Agreement.¹⁴ Mistral-7B is licensed under the Apache-2.0 License.

¹¹https://github.com/chakki-works/sumeval ¹²https://github.com/google-research/google-r

esearch/tree/master/rouge

¹³https://github.com/huggingface/lighteval ¹⁴https://ai.meta.com/llama/license/




Figure 4: Relative inference speedup ratio to the LLaMA2 tokenizer for each task and language when adding 100 new target tokens.

Score	Source	LAPT	Random	FOCUS	Mean	Merge	Align
F1 = 1.0	10	16	5	7	6	6	6
$0.9 \leq F1 < 1.0$	5	17	7	8	6	10	6
$0.8 \leq F1 < 0.9$	20	59	40	34	35	42	44
$0.7 \leq F1 < 0.8$	15	26	14	9	10	10	12
$0.6 \leq F1 < 0.7$	42	46	16	25	19	14	13
$0.5 \leq F1 < 0.6$	28	37	32	29	38	36	24
$0.4 \leq F1 < 0.5$	47	69	41	42	43	53	48
$0.3 \leq F1 < 0.4$	85	57	74	74	69	62	62
$0.2 \leq F1 < 0.3$	89	67	106	116	98	113	97
$0.1 \leq F1 < 0.2$	88	67	107	95	108	96	114
0.0 < F1 < 0.1	12	7	22	20	17	19	28
F1 = 0.0	59	32	36	41	51	39	46

Table 6: F1 score breakdowns in zero-shot Hindi SPAN. The baselines without vocabulary expansion are in grey. **Bold** indicates the largest number of samples among approaches in the same score range.

D.2 Datasets

XNLI is distributed under CC BY-NC 4.0. JNLI, XQuAD, and JSQuAD are distributed under CC BY-SA 4.0. KenSwQuAD is licensed under CC0 – no rights reserved. XL-Sum is licensed under CC BY-NC-SA 4.0, while MLSUM is distributed under an MIT license. GreekSUM is not made public, but the official script for reproduction is available on GitHub: https://github.com/iakovos evdaimon/GreekSUM.

E Results

E.1 Inference Speedup

Figure 4 shows the relative speedups to the base LLaMA2 tokenizer for each task and language.

E.2 Results in High-resource Settings

Table 7 shows the zero-shot performance of all models with in-language prompting in high-




Figure 5: F1 score distributions of all approaches in zero-shot Hindi SPAN.

resource settings.

E.3 Few-shot Results

Table 8 shows the few-shot performance of all models with in-language prompting. We use five demonstrations for NLI and three for SPAN to avoid CUDA out-of-memory error. Note that due to the computational constraints, we do not conduct few-shot experiments on SUM.

E.4 Further Analysis for Hindi SPAN

Figure 5 shows F1 score distributions of all approaches in zero-shot Hindi SPAN. Table 6 lists the corresponding score breakdowns per score range. We observe from Figure 5 that the model adapted with LAPT shows a substantially large third quartile of 0.67, suggesting that it successfully generates more accurate spans than any other approaches. Table 6 also supports this trend, showing that LAPT consistently achieves the largest number of samples for the ranges above F1 \geq 0.6. Moreover, LAPT generates a far smaller number of mismatched spans (i.e. F1 \leq 0.1) than other approaches. These trends must have led to huge performance gaps between LAPT and others.

E.5 Size of New Target Tokens

Figure 8 shows the performance change in zeroshot SPAN with respect to different $|\mathcal{V}_{new}|$ along with the corresponding inference speedups in highresource settings. In high-resource settings, Mean and Align tend to exhibit better or the same task performance with larger $|\mathcal{V}_{new}|$, especially in Arabic and Hindi. Random still generally shows the worst performance across languages, except for Hindi with $|\mathcal{V}_{new}| \leq 100$.

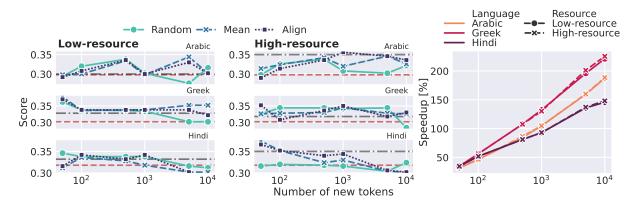


Figure 6: Performance change in zero-shot NLI with respect to the number of new target tokens, along with the corresponding inference speedups. Red and grey dotted lines denote the performances of Source and LAPT, respectively.

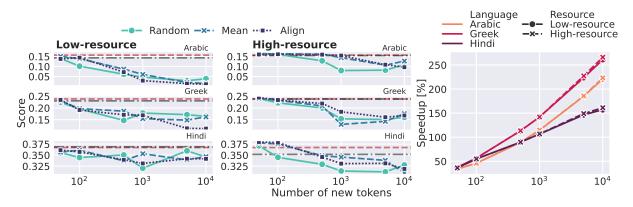


Figure 7: Performance change in zero-shot SUM with respect to the number of new target tokens, along with the corresponding inference speedups. Red and grey dotted lines denote the performances of Source and LAPT, respectively.

Figures 6 and 7 show the performance change in zero-shot NLI and SUM with respect to different $|\mathcal{V}_{new}|$ along with the corresponding inference speedups in both low- and high-resource settings. For NLI, we generally see no consistent pattern in Arabic, except for Align in high-resource settings, where performance improves as we increase $|\mathcal{V}_{new}|$. Greek shows almost no change in performance across different $|\mathcal{V}_{new}|$. Increasing $|\mathcal{V}_{new}|$ often leads to performance degradation in Hindi both in low- and high-resource settings.

For SUM, we often observe that the larger $|\mathcal{V}_{new}|$, the worse the performance both in low- and highresource settings, except for Random for Hindi in low-resource settings. This is different from SPAN as we do not observe negative performance changes across different $|\mathcal{V}_{new}|$ in high-resource settings. These results can be related to our hypothesis in §5.2 that long text generation like SUM requires more adaptation data to perform well, suggesting that even $|\mathcal{D}|$ for our high-resource settings might not be enough to accommodate large $|\mathcal{V}_{new}|$.

E.6 Adaptation Samples

Figures 9 and 10 show the performance change in zero-shot NLI and SUM with respect to $|\mathcal{D}|$. For NLI, we generally see no consistent pattern across languages and approaches, except for LAPT for Hindi, where performance tends to improve as we increase $|\mathcal{D}|$. For SUM, we observe similar trends to SPAN in that Random tends to exhibit worse sample efficiency than Mean and Align, except for Greek, where Align and Random perform similarly to each other. However, they seem to require more \mathcal{D} in SUM to achieve comparable performances to Source and LAPT than in SPAN. For instance, all approaches require around $|\mathcal{D}| = 2^{17}$ to approach Source in Arabic, which is 16 times more \mathcal{D} than what is required for Mean and Align to achieve competitive performance with Source in SPAN.

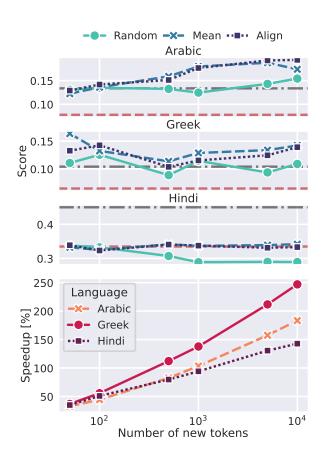


Figure 8: Performance change in zero-shot SPAN with respect to the number of new target tokens, along with the corresponding inference speedups, in high-resource settings. Red and grey dotted lines denote the performances of Source and LAPT, respectively.

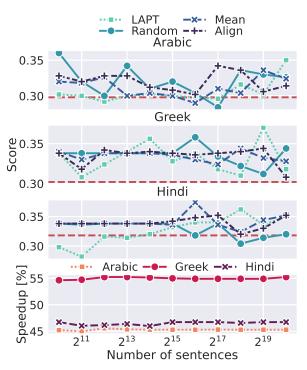


Figure 9: Performance and inference speedup in zeroshot NLI across different numbers of training sentences. Red dotted line denotes Source performance.

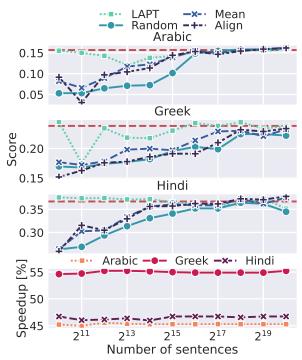


Figure 10: Performance and inference speedup in zeroshot SUM across different numbers of training sentences. Red dotted line denotes Source performance.

Algorithm 1: Merge Rule-based Initialization

Data: \mathcal{V}_s , \mathcal{V}_t , \mathcal{V}_{new} , Merge rules of \mathcal{V}_t : Merges, Embeddings of \mathcal{M}_t : E **Result:** Updated *E* /* Identify any merge rule in \mathcal{T}_t whose resulting token is in $\mathcal{V}_{\mathsf{new}}$ */ 1 $Merges_{new} \leftarrow List[];$ 2 for $m \in Merges$ do $t_1, t_2 \leftarrow m.split("");$ 3 $t \leftarrow t_1 + t_2;$ 4 5 if $t \in \mathcal{V}_{new}$ then $AddToMerges_{new}(m);$ 6 end 7 8 end /* Generate a mapping from a new token to source subtokens using $Merges_{new}$ */ 9 $Maps \leftarrow \text{Dict}[t \in \mathcal{V}_{\text{new}}, \text{List}[]];$ 10 while $|Merges_{new}| \neq 0$ do $UnmapMerges \leftarrow List[];$ 11 for $m \in Merges_{new}$ do 12 $t_1, t_2 \leftarrow m.split("");$ 13 $t \leftarrow t_1 + t_2;$ 14 15 if $t_1 \in \mathcal{V}_s \cap t_2 \in \mathcal{V}_s$ then $AddToMaps[t]([t_1, t_2]);$ 16 else if $t_1 \in \mathcal{V}_{new} \cap t_2 \in \mathcal{V}_s$ then 17 if $Maps[t_1] \neq List[]$ then 18 $AddToMaps[t]([Maps[t_1], t_2])$ 19 else 20 AddToUnmapMerges(m)21 end 22 else if $t_1 \in \mathcal{V}_s \cap t_2 \in \mathcal{V}_{new}$ then 23 if $Maps[t_2] \neq List[]$ then 24 $AddToMaps[t]([t_1, Maps[t_2]])$ 25 else 26 AddToUnmapMerges(m)27 end 28 else 29 if $Maps[t_1] \neq List[] \cap Maps[t_2] \neq List[]$ then 30 $AddToMaps[t]([Maps[t_1], Maps[t_2]])$ 31 else 32 AddToUnmapMerges(m)33 end 34 end 35 end 36 if |UnmapMerges| = 0 then 37 break; 38 end 39 $Merges_{new} \leftarrow UnmapMerges;$ 40 41 end /* Obtain vector representation for each new token using Maps*/ 42 for $t \in \mathcal{V}_{new}$ do $\boldsymbol{E}[t] \leftarrow Compute Hierarchical Mean(\boldsymbol{E}[Maps[t]]);$ 43 44 end

Task	Language	Template
	English	{premise} Question: {hypothesis} True, False, or Neither? Answer:
	Arabic	:إجابة ذاك؟ ولا هذا لا أو خطأ ، صحيح {hypothesis} :سؤال {premise
	German	{premise} Frage: {hypothesis} Wahr, Falsch oder Weder? Antwort:
NLI	Greek	{premise} Ερώτηση: {hypothesis} Αληθές, Ψευδές, ή Κανένα από τα δύο;
NLI		Απάντηση:
	Hindi	{premise} प्रश्न: {hypothesis} सही, ना तो सही ना गलत, गलत? उत्तर:
	Japanese	{premise} 質問: {hypothesis} 真、偽、どちらでもない?答え:
	Swahili	{premise} Swali: {hypothesis} Kweli, Uongo au Wala? Jibu:
	Thai	{premise} คำถาม: {hypothesis} จริง, เท็จ, ไม่แน่ใจ? คำตอบ:
	English	Write a short summary of the following text in {language}. Article: {text} Summervi
	Arabic	mary: :الملخص {text} :المقالة العربية. باللغة التالي للنص قصيرًا ملخصًا اكتب
	German	Schreiben Sie eine kurze Zusammenfassung des folgenden Textes auf Deutsch.
SUM		Artikel: {text} Zusammenfassung:
	Greek	Γράψε μια σύντομη περίληψη του παρακάτω κειμένου στα ελληνικά.
		Άρθρο: {text} Περίληψη:
	Hindi	निम्नलिखित का संक्षेप हिंदी में लिखे। लेख: {text} संक्षेप:
	Japanese	次の文章の要約を日本語で書きなさい。記事: {text} 要約:
	Swahili	Andika muhtasari mfupi wa maandishi yafuatayo kwa Kiswahili. Makala: {text} Muhtasari:
	Thai	เขียนสรุปสั้น ๆ ของข้อความต่อไปนี้เป็นภาษาไทย บทความ: {text} สรุป:
	English	Answer the following question. Context: {context} Question: {question} Answer:
	Arabic	:الإجابة {question} :السؤال {context} :سياق التالي. السؤال على أجب
	German	Beantworten Sie die folgende Frage. Artikel: {context} Frage: {question}
SPAN	Caral	Antwort:
	Greek	Απάντησε στην παρακάτω ερώτηση. Κείμενο: {context} Ερώτηση: {ques-
	Hindi	tion} Απάντηση: इस प्रश्न का उत्तर दें। संदर्भ: {context} प्रश्न: {question} उत्तर:
	Japanese	次の文章の質問に答えなさい。文章: {context} 質問: {question} 答え:
	Swahili	Jibu swali lifuatalo. Makala: {context} Swali: {question} Jibu:
	Thai	ตอบคำถามอันต่อไปนี้ บทความ: {context} ร่ายกาม: {question} ภอน.
	11121	מוסטא ואסאטאטענטע טאאיזא. (context) א ונו וא: {question} או ואסט:

Table 5: Prompt template for each task and language.

	Arabic					n	Greek				Hindi			Japanese			Swahili			Thai			Average		
	Afro-Asiatic			Indo-European			Indo-European			Indo-European		Japonic			Niger-Congo			Kra–Dai							
Model	NLI	SUM	SPAN	NLI	SUM	SPAN	NLI	SUM	SPAN	NLI	SUM	SPAN	NLI	SUM	SPAN	NLI	SUM	SPAN	NLI	SUM	SPAN	NLI	SUM	SPAN	
Source	.30	15.7	.08	.37	22.4	.30	.30	23.8	.06	.31	36.7	.33	.17	23.9	.58	.34	24.7	.02	.36	20.6	.28	.31	24.0	.24	
LAPT	.35	15.8	.13	.36	20.5	.30	.32	23.8	.10	.32	37.2	.44	.19	24.7	.58	.34	27.9	.11	.36	21.6	.38	.32	24.5	.29	
+ Random	.33	16.0	.13	.36	20.4	.27	.34	22.2	.13	.32	34.5	.33	.23	25.8	.57	.33	26.8	.12	.36	21.0	.36	.32	23.8	.27	
+ FOCUS	.32	16.1	.14	.35	21.4	.29	.34	22.3	.12	.34	33.2	.33	.22	25.4	.56	.31	27.3	.12	.37	21.6	.35	.32	23.9	.27	
+ Mean	.32	16.3	.14	.35	21.8	.28	.33	23.2	.13	.35	37.5	.32	.24	24.8	.59	.34	27.2	.12	.38	21.9	.39	.33	24.7	.28	
+ Merge	.36	16.8	.14	.35	21.6	.28	.33	22.5	.14	.38	34.3	.35	.22	24.8	.54	.33	27.2	.10	.37	21.3	.37	.33	24.1	.28	
+ Align	.31	16.2	.14	.35	21.0	.28	.31	23.4	.14	.35	35.0	.34	.31	25.0	.58	.33	26.9	.13	.37	21.7	.37	.33	24.2	.28	

Table 7: Zero-shot performance in high-resource settings on 500 randomly selected test samples for each dataset using LLaMA2-7B as source. The baselines without vocabulary expansion are in grey. **Bold** indicates comparable or better results than Random. <u>Underlined</u> indicates comparable or better results than FOCUS. Darker blue and red shades indicate higher positive and negative relative performance change over Source per language and task, respectively.

	Ara	abic	Ger	man	Gr	eek	Hi	ndi	Japa	anese	Swa	ahili	T	nai	Ave	rage
	Afro-	Asiatic	Indo-E	Indo-European Indo-Euro		uropean	Indo-E	uropean	Jaj	ponic	Niger-	-Congo	Kra	–Dai		
Approach	NLI	SPAN	NLI	SPAN	NLI	SPAN	NLI	SPAN	NLI	SPAN	NLI	SPAN	NLI	SPAN	NLI	SPAN
Source	.37	.15	.34	.24	.34	.12	.34	.35	.15	.54	.33	.02	.36	.30	.32	.25
High-resource $(2^{20} \sim 1 \text{M sentences})$																
LAPT	.34	.23	.36	.25	.37	.13	.33	.36	.21	.69	.34	.05	.36	.34	.33	.29
+ Random	.34	.15	.38	.25	.40	.17	.34	.35	.17	.68	.35	.06	.34	.40	.33	.30
+ FOCUS	.35	.16	.38	.30	.37	.19	.34	.34	.20	.69	.33	.06	.37	.37	.33	.30
+ Mean	.34	.16	.37	.25	.36	.19	.39	.34	.22	.71	.35	.07	.34	.41	.34	.31
+ Merge	.34	.15	.37	.25	.39	.20	.40	.35	.15	.69	.33	.06	.33	.38	.33	.30
+ Align	.41	.14	.38	.24	.35	.20	.38	.34	.33	.68	.33	.06	.39	.39	.37	.29
Low-resour	ce (2 ¹	$^{5}\sim 3$	0K se	ntenc	es)											
LAPT	.36	.18	.42	.25	.34	.13	.36	.35	.15	.66	.33	.01	.36	.29	.33	.27
+ Random	.30	.08	.38	.26	.34	.06	.34	.22	.15	.62	.34	.02	.35	.23	.31	.21
+ FOCUS	.32	.09	.36	.28	.34	.15	.34	.21	.19	.60	.34	.04	.30	.22	.31	.23
+ Mean	.35	.14	.37	.27	.34	.17	.34	.31	.15	.64	.32	.03	.33	.32	.31	.27
+ Merge	.30	.12	.38	.26	.34	.16	.34	.29	.15	.65	.33	.02	.36	.31	.31	.26
+ Align	.35	.13	.37	.28	.34	.16	.34	.30	.15	.65	.34	.04	.32	.31	.32	.27

Table 8: Few-shot performance with in-language prompting on 500 randomly selected test samples for each dataset using LLaMA2-7B as source. The baselines without vocabulary expansion are in grey. **Bold** indicates comparable or better results than Random. <u>Underlined</u> indicates comparable or better results than FOCUS. Darker blue and red shades indicate higher positive and negative relative performance change over Source per language and task, respectively.