

Decentralized Credential Verification

Patrick Herbke
Service-centric Networking
Technische Universität Berlin
Berlin, Germany
p.herbke@tu-berlin.de

Anish Sapkota
Service-centric Networking
Technische Universität Berlin
Berlin, Germany
anish.sapkota@campus.tu-berlin.de

Abstract—This paper presents a decentralized application (dApp) for secure and efficient digital credential management using blockchain and verifiable credentials. The dApp supports OID4VC and SD-JWT-compliant wallets for privacy-preserving credential management. Primarily demonstrated through resume verification, the framework is versatile across various domains. By integrating Decentralized Identifiers and advanced cryptographic methods, the dApp addresses inefficiency, high costs, and fraud vulnerabilities, providing a robust solution for modern credential management.

Index Terms—Blockchain, Decentralized Credential Status Management, Public Key Infrastructure, Verifiable Credentials, Self-Sovereign Identity

I. INTRODUCTION

Traditional credential management systems are inefficient, costly, and prone to fraud. Centralized methods introduce delays and security risks, further complicated by a lack of standardization and interoperability [1], [2].

Contribution This paper introduces a decentralized application (dApp) leveraging blockchain and verifiable credentials to address credential management challenges. The dApp acts as an intermediary, enabling secure interactions between issuers, holders, and verifiers. By integrating decentralized identifiers (DIDs), verifiable credentials (VCs), and cryptographic signatures, our solution ensures tamper-proof and verifiable credentials [3]. The dApp supports elliptic curve cryptography [4], SD-JWT [5] compliant wallets, and OID4VC [6] protocols, enhancing interoperability and efficiency.

II. BACKGROUND

Our dApp integrates DIDs, VCs, and blockchain technology for secure digital credential management, supporting SD-JWT-compliant wallets and OID4VC protocols. Stakeholders, including issuers, holders, verifiers, and administrators, manage the creation, management, and verification of credentials. Future research may explore decentralized autonomous organizations (DAOs) [7] and smart contracts [8] for automated credential processes.

Blockchain: Blockchain technology offers a decentralized, transparent, and immutable framework, improving security and transparency. Blockchain technology ensures the decentralized recording of credential-related events without a central authority. Our system uses blockchain to manage DID documents and public keys of issuers, holders, and verifiers [9].

Decentralized Identifiers (DIDs) and DID Documents: Unlike traditional identifiers, DIDs operate independently of central registries, allowing direct authentication for humans, machines, materials and products. Entities manage DIDs for secure ownership. In our resume verification demo, DIDs ensure credential authenticity, allowing direct verification by employers or educational institutions, without third-party validation.

Verifiable Credentials: Verifiable Credentials (VCs) are cryptographically signed digital documents exchanged between issuers, holders, and verifiers. Issuers create and issue VCs to holders who present them for verification. In our demo, VCs are essential for the holder’s resume, which universities or employers use. Our dApp uses DIDs to verify ownership and enhance trust without central authorities.

Cryptography: Cryptography ensures data integrity, authenticity, and confidentiality in credential ecosystems and dApps. VCs and VPs use JSON Web Signatures (JWS) ¹ and CBOR Object Signing and Encryption (COSE) methods. Our dApp uses JWS with ECDSA on the NIST P-256 curve for digital signatures and supports EdDSA on Curve25519 to encode and enable credential data.

Communication Protocols: Credential ecosystems and dApps use protocols like HTTP/HTTPS, WebSockets, and the publish/subscribe (pub/sub) model for secure, real-time interactions. HTTP/HTTPS ensures encrypted data exchanges, WebSockets provide immediate data transmission, and the pub/sub model (implemented with Redis) supports interservice communication. Alternatives include RabbitMQ, Kafka, and MQTT. In our resume verification dApp, HTTPS handles initial requests and exchanges, including QR code link requests and EBSI communication. WebSockets enable real-time VP transmissions post QR code scans. Redis Pub/Sub synchronizes backend services, ensuring prompt responses and enhancing user experience.

III. CONCEPT OF THE RESUME CREDENTIAL USE CASE

The resume credential use case exemplifies the secure, efficient, and tamper-proof management of digital credentials through a decentralized application (dApp). This system includes key stakeholders: issuers, holders, verifiers, and administrators. The dApp facilitates user authentication (Figure 1)

¹JWS: <https://www.w3.org/TR/vc-jws-2020/>, accessed 16.06.2024

and job application processes (Figure 1), by using verifiable credentials (VC). Specifically, it involves generating and submitting verifiable presentations (VPs). VPs are created by the VC holder to present claims to the verifier, utilizing the verifiable presentation functionality.

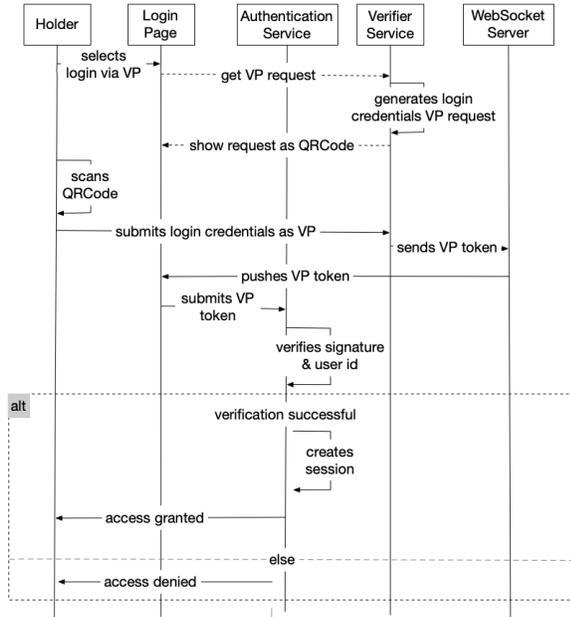


Fig. 1. Sequence diagram illustrating the login process using verifiable presentations (VPs) in the dApp, involving the holder, login page, authentication service, verifier service, and WebSocket server.

Figure 1 shows the login flow.

- 1) Login Request: The holder selects login via VP on the login page.
- 2) QR Code Generation: The authentication service generates a VP request as a QR code, displayed to the holder.
- 3) QR Code Scanning: The holder scans the QR code, submitting login credentials as a VP.
- 4) Credential Submission: The VP token is sent through the WebSocket server to the verifier service.
- 5) Verification: The verifier service validates the VP by checking the cryptographic signature and user ID.
- 6) Result Handling: If verification is successful, a session is created, and access is granted. Otherwise, access is denied.

Figure 2 shows the verifiable presentation flow.

- 1) Presentation Definition: The verifier sends a presentation definition.
- 2) VP Request: The verifier service generates and publishes a VP request to the holder's topic.
- 3) QR Code Generation and Scanning: The holder scans the QR code and submits the VP.
- 4) VP Submission: The VP is published to the verifier's topic and relayed to the verifier service.
- 5) Verification: The verifier service checks the VP against the issuer's DID document retrieved from the European Blockchain Services Infrastructure (EBSI).

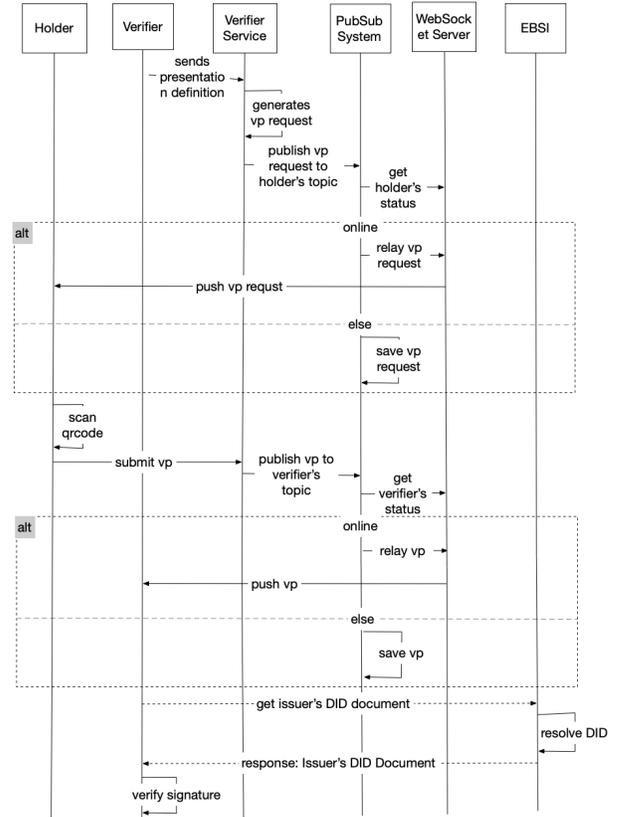


Fig. 2. Sequence diagram showing the credential verification process in the dApp, involving the holder, verifier, verifier service, pub/sub system, WebSocket server, and EBSI.

- 6) Result Handling: The verification result is returned, confirming the credential's validity.

IV. RESUMÉ CREDENTIAL IMPLEMENTATION

The implementation of the resume credential dApp integrates components to ensure secure, efficient, and decentralized credential management. The architectural diagram illustrates the interactions between issuers, holders, verifiers, and administrators.

Frontend: The frontend, built with Next.js, enables user interaction. Holders can log in, create resumes, and apply for jobs using VPs. Verifiers can request and verify VPs and holders submit VPs by scanning QR codes.

Backend: The backend handles issuance, storage, and verification of credentials. It includes a verifier service for processing requests and validating credentials against the blockchain and an authentication service for user login. Data management uses Prisma ORM and PostgreSQL.

WebSocket Server: The WebSocket Server supports real-time communication between holders and verifiers, ensuring immediate VP transmission and improving user experience.

Publish/Subscribe Model: Redis as Pub/Sub supports inter-service communication within the backend, allowing timely responses to VP requests and maintaining data integrity.

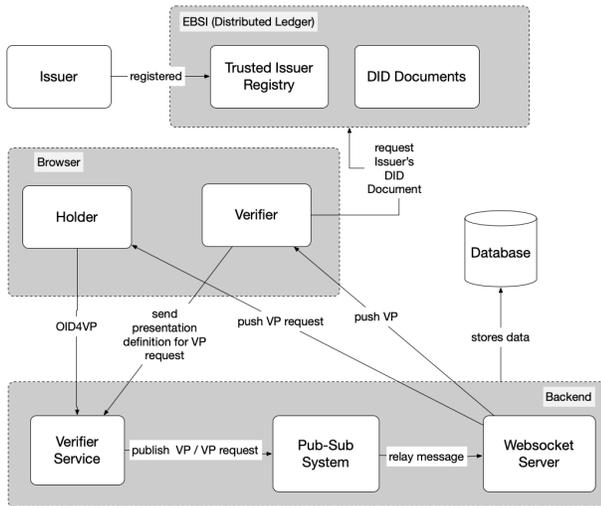


Fig. 3. The architecture of the resume verification dApp integrates issuers, holders, and verifiers, using blockchain for credential integrity, WebSockets for real-time communication, and a pub/sub model for efficient interactions.

European Blockchain Services Infrastructure (EBSI): EBSI provides DIDs and DID documents to verify issuers and ensure the integrity of credentials. This integration improves trust and security, and issuers use `did:ebasi` and holders use `did:key` for GDPR privacy.

Wallet: The wallet securely stores verifiable credentials, supporting SD-JWT and cryptographic algorithms like EdDSA on Curve25519. It facilitates secure signing, presentation, and QR code scanning for credential verification, ensuring efficient and trustworthy interactions.

V. CONCLUSION

This project demonstrates a practical application of a credential-based ecosystem, allowing users to log in using verifiable credentials issued by trusted entities, such as companies, universities, or government institutions. The system supports secure issuance, storage, and presentation of verifiable credentials (VCs), allowing verifiers to authenticate credentials directly. Using advanced technologies, including Decentralized Credential Status Management (DCSM), multiparty computation (MPC) [10], fully homomorphic encryption (FHE) [11] and zero-knowledge proofs (ZKP) [12], our framework significantly enhances traditional credentialing systems, ensuring robust, secure, and efficient digital credential management.

VI. DISCUSSION

The proposed dApp offers a secure and efficient credential-based ecosystem using blockchain and VCs. Leveraging DIDs and advanced cryptographic techniques ensures digital credentials' integrity, authenticity, and confidentiality. Our dApp enables direct interactions between issuers, holders, and verifiers, eliminating third-party validation. The system supports secure issuance, storage, and presentation of VCs for academic certification, professional licensing, and asset management.

Enhancing privacy-preserving techniques is crucial to prevent tracking and profiling. Integrating MPC, FHE, and ZKP

can improve privacy measures, such as validating credentials without revealing data. Improving decentralized credential status management (DCSM), especially the (un)revocation of credentials, is vital for high-throughput domains. These technologies mitigate tracking risks, ensuring robust security and stakeholder trust. The WebSocket Server supports real-time communication between holders and verifiers, enhancing the user experience with immediate VP transmission.

VII. FUTURE WORK

Future research will integrate smart contracts and DAOs to automate credential processes, reducing human intervention, and increasing efficiency. Investigating DCSM, particularly (un)revocation, is crucial for high-throughput domains. Exploring MPC, FHE, and ZKP will enhance privacy and security in credential verification.

Beyond resume verification, our framework can be applied to healthcare, finance, and supply chain management, improving security and efficiency across sectors. Future work will compare our approach with existing research and evaluate costs, performance, and security.

REFERENCES

- [1] Y. Liu, W. Tome, L. Zhang, D. R. Choffnes, D. Levin, B. M. Maggs, A. Mislove, A. Schulman, and C. Wilson, "An End-to-End Measurement of Certificate Revocation in the Web's PKI," in *Internet Measurement Conference*. ACM, 2015, pp. 183–196.
- [2] H. Yildiz, A. Küpper, D. Thatmann, S. Göndör, and P. Herbeke, "Toward Interoperable Self-Sovereign Identities," *IEEE Access*, vol. 11, pp. 114 080–114 116, 2023.
- [3] C. Brunner, U. Gellersdörfer, F. Knirsch, D. Engel, and F. Matthes, "DID and VC: Untangling Decentralized Identifiers and Verifiable Credentials for the Web of Trust," in *ICBTA*. ACM, 2020, pp. 61–66.
- [4] D. Hankerson and A. Menezes, "Elliptic curve cryptography," in *Encyclopedia of Cryptography, Security and Privacy*. Springer, 2021, pp. 1–2.
- [5] D. Fett, K. Yasuda, and B. Campbell, "Selective disclosure for jwts (sd-jwt)," Internet-Draft draft-ietf-oauth-selective-disclosure-jwt-03, June 2024, work in Progress. [Online]. Available: <https://datatracker.ietf.org/doc/draft-ietf-oauth-selective-disclosure-jwt/>
- [6] T. Lodderstedt, K. Yasuda, and T. Looker, "Openid connect for verifiable credential issuance," 2024, openID Foundation. [Online]. Available: https://openid.net/specs/openid-4-verifiable-credential-issuance-1_0.html
- [7] C. Santana and L. Albareda, "Blockchain and the emergence of Decentralized Autonomous Organizations (DAOs): An integrative model and research agenda," *Technological Forecasting and Social Change*, vol. 182, p. 121806, 2022.
- [8] Z. Zheng, S. Xie, H. Dai, W. Chen, X. Chen, J. Weng, and M. Imran, "An overview on smart contracts: Challenges, advances and platforms," *Future Gener. Comput. Syst.*, vol. 105, pp. 475–491, 2020.
- [9] D. Brandon, "The blockchain: The future of business information systems," *International Journal of the Academic Business World*, vol. 10, no. 2, pp. 33–40, 2016.
- [10] D. Evans, V. Kolesnikov, and M. Rosulek, "A pragmatic introduction to secure multi-party computation," *Found. Trends Priv. Secur.*, vol. 2, no. 2-3, pp. 70–246, 2018.
- [11] V. Vaikuntanathan, "Fully Homomorphic Encryption References," <https://people.csail.mit.edu/vinodv/FHE/FHE-refs.html>, accessed: 2024-06-09.
- [12] S. Goldwasser, S. Micali, and C. Rackoff, "The Knowledge Complexity of Interactive Proof-Systems (Extended Abstract)," in *STOC*. ACM, 1985, pp. 291–304.