miniCodeProps: a Minimal Benchmark for Proving Code Properties

Evan Lohn Carnegie Mellon University evanlohn@cmu.edu Sean Welleck Carnegie Mellon University wellecks@cmu.edu

Abstract

Neural networks have shown initial promise in automating mathematical theorem proving in proof assistants such as Lean. The same proof assistants can be used to verify the correctness of code by pairing code with specifications and proofs that the specifications hold. Automating the writing of code, specifications, and proofs could lower the cost of verification, or, ambitiously, enable a machine learning system to output provably correct code. However, it remains unclear whether current neural theorem provers can automatically verify even relatively simple programs. We present miniCodeProps, a benchmark of 177 program specifications in the Lean proof assistant, aimed at the subproblem of automatically generating a proof for a provided program and specification. miniCodeProps contains specifications about simple, self-contained programs (e.g., lists, natural numbers, binary trees) with varied proof difficulty. Despite its simplicity, miniCodeProps is challenging for current LLM-based provers, which succeed in proving about 25 percent of the specifications. We publicly release miniCodeProps as a benchmark for furthering automated theorem proving in the context of formally verified code.

1 Introduction

Writing code that meets a specification is a desirable, yet difficult task. In safety-critical contexts, users require stronger safeguards than code reviews and test cases provide. To address this need, the formal methods community has produced a variety of tools for specifying and proving properties of code [1, 2, 3, 4, 5]. One approach uses interactive theorem provers (ITPs) such as Isabelle [6], Coq [7], and Lean [8]. In an ITP, a user writes code, a specification, and a proof that the specification holds (Figure 1). The ITP checks each step of the proof as it is written, and a complete proof means that the specification is guaranteed to hold. A complete proof thus gives guarantees on the underlying code, which is valuable in practice. For instance, the Lean proof assistant was recently used to verify properties of Amazon's Cedar Policy language.¹ More speculatively, future code generation models could in principle output provably correct code if they are able to write code, specifications, and proofs [9].

Despite its promise, interactive theorem proving remains a difficult task, and better automation-be it writing specifications, proofs, or combinations thereof-could help make it easier to verify code. Recently, machine learning techniques based on large language models (LLMs) have shown promise in automatically generating code [10], proving mathematical theorems in ITPs [11], and generating proofs of properties from verification projects [12]. However, evaluating the capabilities of LLMs for program verification remains a challenge. For example, benchmarks often evaluate across projects with complex dependencies such as the CompCert compiler or Archive of Formal Proofs [13, 12], making it difficult to isolate and reason about a model's core capabilities and weaknesses.

¹https://github.com/cedar-policy/cedar-spec

Formally verified code

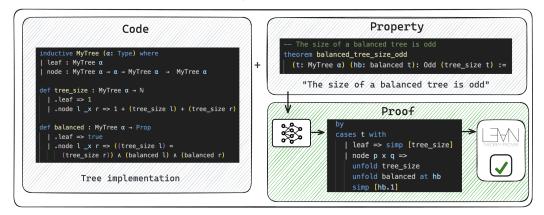


Figure 1: Formal verification of code in an interactive proof assistant (here, Lean) consists of writing (i) code (e.g., an implementation of a Tree), (ii) a property that you want to verify (e.g. that the size of a balanced tree is odd), and (iii) a proof that the code satisfies the property. The underlying language verifies that the proof is correct, providing certainty that the property holds. miniCodeProps focuses on the important subproblem of proof generation: given a property and associated code, a model must generate a proof (e.g., shown here in green) that the property holds. miniCodeProps contains 177 properties about simple and self-contained code blocks, and measures a range of proving abilities.

To address this need, we introduce miniCodeProps, a benchmark for evaluating the ability to prove properties of relatively simple, self-contained programs in the Lean proof assistant. miniCodeProps contains 177 specifications about simple, self-contained programs (involving e.g., lists, natural numbers, binary trees) with varied proof difficulty, sourced by translating Haskell programs from Tons of Inductive Programs [14] into Lean 4. Despite its simplicity, miniCodeProps is challenging for current LLM-based provers. For example, our best baseline approach based on GPT-4 proved very few specifications requiring proofs longer than a few lines. We publicly release miniCodeProps as a benchmark for furthering automated theorem proving in the context of formally verified code.²

2 Related Work

Automating mathematical theorem proving. Recently there has been wide interest in automating mathematical theorem proving in interactive proof assistants; see [15, 11] for surveys. A typical approach [16] is to train on a large corpus of mathematical proofs such as Lean's Mathlib [17, 18, 19, 20, 21]. A model learns to call automation that is designed for mathematics, such as nonlinear arithmetic tactics, and to use definitions and theorems from within the corpus. It is unclear whether such methods transfer to the distribution of proofs encountered in program verification, which may rely on calling different automation, using program-specific definitions or lemmas, or different proof strategies. By focusing on Lean, miniCodeProps allows for testing this transferability. A second class of methods design prompting strategies with mathematical problems in mind, such as conditioning generation on an informal proof [22, 23, 24] or examples from Mathlib [25]. We hope that miniCodeProps motivates development of similar methods for program verification.

Automating formal code verification. There is a rich history of developing automation for formal verification of code; see [4] for a survey. For machine learning in interactive theorem proving, many methods that preceded large language models focused on Coq, such as ProverBot9000 [26], ASTactic [13], TacTok [27], Diva [28], and Passport [29]. Recent work with LLMs includes exploring prompting strategies in Coq [30], and Baldur [12] which explores proof generation and repair in Isabelle's Archive of Formal Proofs. We are not aware of machine learning-based proof automation targeting program verification in Lean, despite the activity in automated mathematical proving in

²Our benchmark and baselines can be found here: https://huggingface.co/datasets/elohn/miniCodeProps

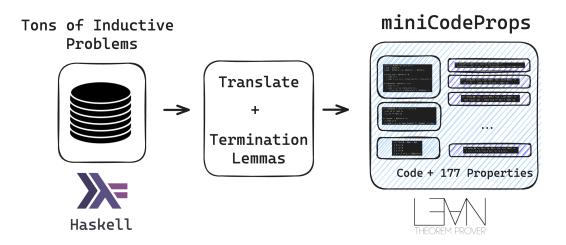


Figure 2: miniCodeProps is sourced from Tons of Inductive Problems [14], a collection of programs and specifications written in Haskell. We translate the programs into Lean, and write and prove termination lemmas that are needed to state and prove properties of recursive functions.

Lean. One of our motivations is bridging this gap. Finally, some methods such as COPRA [24] aim to be language-agnostic; miniCodeProps could participate in evaluating and developing such systems.

A second paradigm of verification is based on automated reasoning (SAT/SMT-based) languages such as Dafny [1] and Verus [5] (Rust). Recent work explores LLM-based automation in these languages, such as Clover [9] for Dafny, and [31] for Verus. These are complementary to studying automated ITP verification. Finally, Tons of Inductive Problems [14]–from which we derive our data–targets automated reasoning-based verification, while miniCodeProps targets interactive theorem proving.

Interactive theorem proving benchmarks. The CoqGym [13] benchmark tests on over 100 repositories in Coq, while some papers use code properties from a single large, complex repository such as the CompCert compiler verification project in Coq [32, 24], which arguably tests different aspects of automated code verification than those tested by miniCodeProps. In Isabelle, the Archive of Formal Proofs contains some verification-related sections that are used for evaluation, e.g., in Baldur [12]. Benchmarks for automated theorem proving in Lean are focused on theorems from mathematical domains. For example, miniF2F [33] contains 488 self-contained, easy-to-state theorems from math competitions, while ProofNet [34] contains self-contained textbook problems. miniF2F's simplicity and impact as a benchmark motivated the creation (and naming) of miniCodeProps.

3 Benchmark Contents

We create miniCodeProps by translating programs from Tons of Inductive Programs (TIP) [14] (https://github.com/tip-org/benchmarks) from Haskell into Lean 4. We manually translated code from three files in TIP that contain a mix of function definitions, propositions describing the results of calling those functions, and termination lemmas used in the function definitions. In total, this yields 177 Lean 4 theorem statements.

3.1 Collection Process

The properties in TIP describe induction in both programming and purely mathematical contexts. We first filtered out files that contained primarily mathematical induction, then translated the remaining Haskell code into Lean 4. We then associated each property in the translated files with dependencies and metadata useful for different evaluation modes of the benchmark.

	Numbers	Lists	Trees	Heaps
Medley Functions	0	15	2	0
Medley Properties	21	64	1	0
Termination+Sorting Functions	3	49	2	5
Termination Properties	3	22	0	3
Sorting Properties	0	63	0	0

Table 1: **miniCodeProps Composition** We classified each function and property in the Lean source files by their primary subject matter. We also separate these numbers by the splits of miniCodeProps: Medley, Termination lemmas, and Sorting algorithms. Termination and Sorting algorithm functions are grouped because the properties in both splits describe the same set of functions.

3.2 Source Code Composition

3.2.1 Functions

Most of the translated functions operate on linked lists, while the rest involve natural numbers and binary trees. With a few notable exceptions, the functions perform conceptually simple operations such as filtering, returning the last element, and counting the elements of a list. The more complicated functions are increasingly esoteric sorting functions. In total, miniCodeProps is derived from 76 TIP functions. A breakdown of the primary subject of each function is provided in Table 1.

3.2.2 Properties

The properties to be proven in miniCodeProps express intuitively correct properties of the function(s) being described. See Section 3.4 for examples, and Table 1 for a breakdown by subject type.

3.2.3 Termination Lemmas

In Lean 4, recursive functions must be paired with a proof of termination. While Lean automatically infers the proof in simple cases, more complicated recursive calls require the user to explicitly prove termination. As the vast majority of our function definitions are recursive, our benchmark includes 28 lemmas that support 4 termination proofs of nonstandard sorting algorithms from TIP. These lemmas themselves represent practically useful and highly nontrivial properties of code.

3.3 Dataset Splits

To improve understanding of the precise capabilities of theorem proving agents when evaluated on miniCodeProps, we section the 177 properties into 3 data splits: Medley, Termination lemmas, and Sorting algorithms. Medley properties are named "prop_n" for $n \in [1, 86]$, and tend to involve simple functions on numbers and lists. Sorting algorithm properties are those remaining theorems named beginning with "prop", and the remainder are Termination lemma properties.

The benchmark is formatted as a jsonlines file with the information in Table 2 per line. The "full_name" property is used to determine the split the property belongs to.

3.4 Qualitative Examples

We present several examples from the benchmark and describe what makes them interesting and difficult.

3.4.1 Zip over Concatenation

We begin with a reimplementation of the standard 'zip' function that combines two lists into a single list of paired elements. 'prop_84' states that zipping a list xs with the concatenation of two other lists ys, zs is equivalent to separately zipping appropriate sections of xs with each of ys and zs, then concatenating the results. To the best of our knowledge, Mathlib does not contain an equivalent lemma for the standard definition of the zip function.

Key	Description	Examples	
full_name	Unique name of the property in the benchmark	'prop_60'	
prop_defn	The text of the code property to be proven	lemma prop_60 (xs: List Nat) (ys: List Nat) : not (null ys) \rightarrow last (xs ++ ys) = last ys:= by sorry	
prop_loc	The file name and line num- ber where the property defi- nition begins	LeanSrc/LeanSrc/Properties.lean:257	
score	An integer in the range [1-5] used as a difficulty heuristic	5	
deps	Text containing all the depen- dencies (functions and lem- mas) that the property re- quires to be fully defined	<pre>import Mathlib def last: List Nat \rightarrow Nat $[] \Rightarrow 0$ $[x] \Rightarrow x$ $_x::xs \Rightarrow (last xs)$ def null : List $\alpha \rightarrow$ Bool $[] \Rightarrow$ True $_= \Rightarrow$ False</pre>	
proof_state	The initial proof state of the property	xs ys : List \mathbb{N} \vdash (!null ys) = true \rightarrow last (xs ++ ys) = last ys	
file_locs	A list of the last line in each file needed to define the prop- erty. Appending each file up to this line before the prop- erty fully defines the prop- erty.	[["LeanSrc/LeanSrc/Definitions.lean", 249], ["LeanSrc/LeanSrc/Properties.lean", 258]]	

Table 2: Example code property and associated data
--

```
\begin{array}{l} \texttt{def zip': List } \alpha \to \texttt{List } \beta \to \texttt{List } (\alpha \times \beta) \\ | [], \_ => [] \\ | \_, [] => [] \\ | x::xs, y::ys => \langle x, y \rangle :: \texttt{zip' xs ys} \end{array}\begin{array}{l} \texttt{lemma prop_84 (xs: List } \alpha) (ys: \texttt{List } \beta) (zs: \texttt{List } \beta) : \\ (\texttt{zip' xs (ys ++ zs) =} \\ \texttt{zip' (List.take (List.length ys) xs) ys ++} \\ \texttt{zip' (List.drop (List.length ys) xs) zs):= \texttt{by} \end{array}
```

This property is intuitively correct, but requires some intuition about proofs of recursive structures to correctly prove in Lean. The following is an incorrect proof generated by GPT4. It contains one semantic error (failing to generalize xs in the inductive hypothesis) and one misuse of Lean internals; the 'cases' keyword should be used instead of 'match.'

```
induction ys with
  | nil =>
    simp [zip', List.take, List.drop]
  | cons y ys ih => match xs with
    | [] => simp [zip', List.take,
    List.drop, List.length]
    | cons x xs =>
```

```
unfold zip'
unfold List.take at ih
unfold List.drop at ih
simp [List.length]
rw [ih]
```

The following is a correct proof of prop_84 generated by GPT4. There are several unnecessary definitions passed to the calls to the simplifier (the 'simp' tactic). However, in both the correct and incorrect proofs, GPT4 demonstrates the main ideas of the proof: induct on ys, pair off the first elements of xs and ys, then apply the inductive hypothesis to what remains.

```
induction ys generalizing xs with
    | nil => simp [zip', List.take, List.drop]
    | cons y ys ih =>
    cases xs with
    | nil => simp [zip', List.take, List.drop]
    | cons x xs =>
    simp [List.cons_append, zip', List.take,
    List.drop, List.length]
    rw [ih]
```

3.4.2 Non-standard Insertion Increments Length

Although the zip concatenation property is not part of Mathlib, one can argue that because the property involves a utility function defined in Mathlib with its own associated properties and proofs, it is not altogether surprising that GPT4 was able to infer a proof of a novel property of a re-definition of the function. We therefore present a property of a function 'ins' not included in Mathlib that inserts an element into a list before the first element it is less than. Proving this property requires the ability to reason about previously unseen code.

The following is an incorrect proof of 'prop_15' by GPT4. Interestingly, GPT4's main failing in this case is syntactic; the proof can be manually corrected by using the correct 'by_cases' tactic in place of 'byCases' unrecognized by Lean 4 and manual removal of the following case matching (the 'l in...' statements), at which point the proof is completed at the 'rw [ih]' step.

```
induction xs with
  | nil =>
    simp [ins, List.length, Nat.succ]
  | cons y ys ih =>
    simp [ins]
    byCases h : x < y
    | inl h_lt =>
        simp [h_lt, List.length, Nat.succ]
    | inr h_geq =>
        simp [h_geq]
    rw [ih]
        simp [Nat.succ_assoc]
```

As one might expect from the "nearly correct" proof above, GPT4 also produces a correct proof. This proof is remarkable for its simplicity. Unlike the previous correct proof there is little wasted space, a feature often sought after by human proof experts. GPT4 demonstrates understanding of how to work with the 'ins' function via the 'split_ifs' tactic, and the usage of the inductive hypothesis only in the second branch where it is necessary.

```
induction xs with
| nil => simp [ins]
| cons y ys ih =>
    simp [ins]
    split_ifs with h
    { simp }
    { simp [ih] }
```

3.4.3 Sorting Properties

The Lean source code of miniCodeProps contains implementations of 9 sorting algorithms, with associated properties to prove for each algorithm. We display several of the functions and lemmas associated with one of our two heapsort implementations (each uses a different strategy for merging heaps). The 'toList' function contains an example of a termination lemma: the line beginning with 'have _h' references a lemma that is used by Lean to prove that the recursion in 'toList' terminates, a property required by default for recursive functions in Lean. Several of the functions and lemmas referenced are omitted from the code for brevity.

```
def toHeap : List Nat \rightarrow MyHeap
xs => hmerging (xs.map (fun x => MyHeap.node MyHeap.nil x MyHeap.nil))
lemma numElem_merge_branches_lt (p q: MyHeap) (x: Nat): numElem (hmerge p q) <</pre>
    numElem (MyHeap.node p x q) := by
  rw [←merge_elems _ _];
  have h': numElem (MyHeap.node p x q) = 1 + numElem p + numElem q; rfl
  rw [h']
  linarith;
def toList : MyHeap \rightarrow List Nat
 MyHeap.nil => []
 MyHeap.node p x q =>
    have _h := numElem_merge_branches_lt p q x
    x :: toList (hmerge p q)
termination_by hp => numElem hp
def hsort : List Nat \rightarrow List Nat
xs => toList (toHeap xs)
theorem prop_HSortSorts (xs: List Nat) : ordered (hsort xs) == True := by sorry
theorem prop_HSortCount (x: Nat) (xs: List Nat) : count x (hsort xs) == count x xs
    := by sorry
theorem prop_HSortPermutes (xs: List Nat) : isPermutation (hsort xs) xs == True :=
    by sorry
theorem prop_HSortIsSort (xs: List Nat) : hsort xs == isort xs := by sorry
```

The properties above express the following intuitive properties: heapsort orders list elements, preserves the list size, returns a permutation of the original list, and returns the same result as insertion sort. These properties are repeated for each sorting algorithm. However, given the complexity of the sorting functions involved, we expect that proving such properties will be very difficult. miniCodeProps also includes termination lemmas such as 'numElem_merge_branches_lt' with the human-produced proof removed. An example of an incorrect proof of one of the sorting properties produced by GPT4 can be found in Appendix A.

3.5 Availability and Usage

We have published our benchmark as a public dataset on Huggingface, including a link to our example benchmarking code. The TIP repo our benchmark is based on uses the BSD-3-Clause license, permitting re-use and modification with license redistribution; we therefore use the same. Given the information in Table 2, there are many possible tasks relevant for testing an agent's proof generation capabilities. We propose the following as interesting evaluation modes.

1. **Proof State only**: Past work has trained next-step tactic prediction models taking only the proof state provided by the proof assistant as input [16, 19, 21, 35]. This input is justifiable in contexts such as mathematical theorem proving where most proofs involve a shared mathematical library, because agents will be exposed to most of the definitions and lemmas used in the goal during training. We expect this input to be insufficient for many proofs about programs, as the programs referenced in the proof state are only described in the file context. However, this mode will test an agent's ability to apply reasonable proof techniques when lacking knowledge of certain terms in the proof state.

Model	Medley (Easy)	Termination (Med.)	Sorting (Hard)
llmstep+Pythia2.8B [35]	44/86	1/28	0/63
llmstep+Llemma-7B [25]	46/86	2/28	0/63
<pre>llmstep+ntp-context-1.3B [36]</pre>	38/86	0/28	0/63
GPT-4-turbo	44/86	1/28	0/63

Table 3: **miniCodeProps results.** Number of specifications proven when applying next-step tactic generation with LLMStep and full proof generation with GPT4 to the problem of verifying program specifications. The Medley section contains mostly of specifications that can be proven in several lines. Proofs of the sorting algorithm properties and termination lemmas are expected to require at least tens of lines and hours of programmer effort.

- Proof State + Dependencies: In this mode, agents have access to all newly written (i.e. not from Lean core or Mathlib) code and lemmas required to define the given code property. This can be accomplished with the "deps" and "proof_state" fields of each benchmark entry.
- 3. **Proof State + Full File Context:** In this mode, the full contents of the file(s) prior to the property definition are made available. Similar to Proof State + Dependencies mode, this input form gives an agent access to all definitions in the proof state. However, full file context mode requires the agent to filter its input for useful context, and additionally may give the agent access to potentially useful lemmas defined in the file that were not necessary to define the property. Further, this mode most closely matches what a human expert must do when proving such properties.
- 4. **Feedback Refinement:** In this mode, error feedback from (potentially partial) proof suggestions is used as input to continued attempts at proving the property until a given number of attempts is reached. In practice, Lean is intended to be used interactively. Even for simple proofs, it may take human experts several iterations of error feedback from Lean to construct a correct proof. Enabling this feedback loop for theorem proving agents allows more fair comparison of current neural theorem proving approaches with human capabilities.

4 Baselines

We use two main approaches: full proof generation via few-shot prompting a language model and next-step tactic generation. In the full-proof context, the model generates one or more potential proofs that are verified by the proof checker (in our case, the Lean 4 kernel). For next-step tactic prediction, we follow the common practice of taking the proof state (and optionally file context) as input and returning suggestions for the next tactic to use in the proof. Each suggestion is then given as input to the Lean 4 kernel, and the resulting proof state is used to prompt the model for the next tactic.

Experimental Setup: Next-Step Tactic Generation Our experiments with next-step tactic generation used the LLMStep [35] framework, modified to return cumulative log probabilities in addition to next step suggestions from each backend language model. The Pythia2.8B experiments were run with proof state only as input to match the model's fine-tuning set. The remaining models received proof state + dependencies as input. These experiments were run on a single A100 GPU running Ubuntu 20.04 with 30 CPU cores rented from LambdaLabs.

Experimental Setup: Full Proof Generation We employed a few-shot prompting approach. Our prompt contained examples of code, properties, and proofs of properties not seen in the benchmark. As such, the evaluation mode used was proof state + dependencies, although in practice we opted to use only the dependencies and the theorem statement itself. All experiments were performed using the OpenAI chat completions API with GPT4-turbo using pass@8.

Results. Our baseline results are displayed in Table 3. As expected, our baseline approaches were unable to prove complex function properties such as those in Section 3.4.3. However, failures on many of the comparatively simple Medley properties support the claim that current approaches to neural theorem for mathematics transfer imperfectly to the domain of ITP code verification. However, small measures of success on the termination lemmas indicate that neural theorem proving approaches have the potential to improve on miniCodeProps in the near future.

5 Discussion

Baselines Interpretation The baselines we present are a reasonable representation of the state of neural theorem proving on code properties at the moment. Current systems can prove the simpler lemmas in the Medley section (especially those with closer ties to math), and are only able to prove the simpler types of lemmas one might use in a larger proof in practice. Proofs of more complex properties requiring understanding larger bodies of code (the Sorting section) remain out of reach for the time being.

Scope We chose to source miniCodeProps from the TIP dataset to provide some assurance that the code and properties involved were of interest to the broader code verification community. However, we selected a subset of the properties in TIP we judged to be relevant to code, along with termination lemmas, which is a subset of all code properties. Clearly, performing well on this subset is only a proxy for the ability to perform well on all realistic code properties. However, we designed miniCodeProps to target a minimal set of code properties that we would expect a reasonable automated system to be able to prove.

Societal Context The broader goal of our work is to facilitate the development of automated (likely, neural) theorem proving agents that can prove properties of code in ITPs. Verification engineers already draw from a wide variety of automated tools in their work. An automated version of ITP still requires a human in the loop to generate (or validate) the statement of the property to be proven, similar to the type of work these engineers perform while using SMT-based verification. Arguably, the main benefit to society of the ITP approach is that it induces our automated tools to use different reasoning patterns than the ones commonly used in Automated Reasoning (SAT/SMT) approaches, which may in turn lead to different subsets of formal guarantees that can be obtained in practice.

6 Conclusion

miniCodeProps is intended as a meaningful benchmark for evaluating techniques that automate ITP-based code verification. It contains a diverse array of functions and properties from Tons of Inductive Problems, allowing the possibility of incremental progress in verifying the types of programs contained in TIP. We show that simple baseline approaches from mathematical neural theorem proving currently fall short on much of our benchmark, and hope that miniCodeProps spurs development of future ITP code verification agents.

References

- Rustan Leino. Dafny: An automatic program verifier for functional correctness. In 16th International Conference, LPAR-16, Dakar, Senegal, pages 348–370. Springer Berlin Heidelberg, April 2010.
- [2] Rustan Leino and Philipp Rümmer. A polymorphic intermediate verification language: Design and logical encoding. In *Conference: Tools and Algorithms for the Construction and Analysis* of Systems, 16th International Conference, TACAS 2010, Held as Part of the Joint European Conferences on Theory and Practice of Software, ETAPS 2010, Paphos, Cyprus, March 20-28, 2010., March 2010.
- [3] Nikhil Swamy, Cătălin Hriţcu, Chantal Keller, Aseem Rastogi, Antoine Delignat-Lavaud, Simon Forest, Karthikeyan Bhargavan, Cédric Fournet, Pierre-Yves Strub, Markulf Kohlweiss, Jean-Karim Zinzindohoue, and Santiago Zanella-Béguelin. Dependent types and multi-monadic effects in f*. In *Proceedings of the 43rd Annual ACM SIGPLAN-SIGACT Symposium on Principles of Programming Languages*, POPL '16, page 256?270, New York, NY, USA, 2016. Association for Computing Machinery.
- [4] Talia Ringer, Karl Palmskog, Ilya Sergey, Milos Gligoric, and Zachary Tatlock. Qed at large: A survey of engineering of formally verified software. *Foundations and Trends in Programming Languages*, 5(2?3):102?281, 2019.
- [5] Andrea Lattuada, Travis Hance, Chanhee Cho, Matthias Brun, Isitha Subasinghe, Yi Zhou, Jon Howell, Bryan Parno, and Chris Hawblitzel. Verus: Verifying rust programs using linear ghost types (extended version), 2023.

- [6] Makarius Wenzel, Lawrence C Paulson, and Tobias Nipkow. The isabelle framework. In Theorem Proving in Higher Order Logics: 21st International Conference, TPHOLs 2008, Montreal, Canada, August 18-21, 2008. Proceedings 21, pages 33–38. Springer, 2008.
- [7] The Coq Development Team. The coq proof assistant, oct 2019.
- [8] Leonardo de Moura, Soonho Kong, Jeremy Avigad, Floris Van Doorn, and Jakob von Raumer. The lean theorem prover (system description). In *Automated Deduction-CADE-25: 25th International Conference on Automated Deduction, Berlin, Germany, August 1-7, 2015, Proceedings* 25, pages 378–388. Springer, 2015.
- [9] Chuyue Sun, Ying Sheng, Oded Padon, and Clark Barrett. Clover: Closed-loop verifiable code generation, 2024.
- [10] Mark Chen, Jerry Tworek, Heewoo Jun, Qiming Yuan, Henrique Ponde de Oliveira Pinto, Jared Kaplan, Harri Edwards, Yuri Burda, Nicholas Joseph, Greg Brockman, Alex Ray, Raul Puri, Gretchen Krueger, Michael Petrov, Heidy Khlaaf, Girish Sastry, Pamela Mishkin, Brooke Chan, Scott Gray, Nick Ryder, Mikhail Pavlov, Alethea Power, Lukasz Kaiser, Mohammad Bavarian, Clemens Winter, Philippe Tillet, Felipe Petroski Such, Dave Cummings, Matthias Plappert, Fotios Chantzis, Elizabeth Barnes, Ariel Herbert-Voss, William Hebgen Guss, Alex Nichol, Alex Paino, Nikolas Tezak, Jie Tang, Igor Babuschkin, Suchir Balaji, Shantanu Jain, William Saunders, Christopher Hesse, Andrew N. Carr, Jan Leike, Josh Achiam, Vedant Misra, Evan Morikawa, Alec Radford, Matthew Knight, Miles Brundage, Mira Murati, Katie Mayer, Peter Welinder, Bob McGrew, Dario Amodei, Sam McCandlish, Ilya Sutskever, and Wojciech Zaremba. Evaluating large language models trained on code, 2021.
- [11] Zhaoyu Li, Jialiang Sun, Logan Murphy, Qidong Su, Zenan Li, Xian Zhang, Kaiyu Yang, and Xujie Si. A survey on deep learning for theorem proving, 2024.
- [12] Emily First, Markus N. Rabe, Talia Ringer, and Yuriy Brun. Baldur: Whole-proof generation and repair with large language models, 2023.
- [13] Kaiyu Yang and Jia Deng. Learning to prove theorems via interacting with proof assistants. *ArXiv*, abs/1905.09381, 2019.
- [14] Koen Claessen, Moa Johansson, Dan Rosén, and Nicholas Smallbone. Tip: Tons of inductive problems. In *TIP: Tons of Inductive Problems*, volume 9150, 07 2015.
- [15] Pan Lu, Liang Qiu, Wenhao Yu, Sean Welleck, and Kai-Wei Chang. A survey of deep learning for mathematical reasoning. In Anna Rogers, Jordan Boyd-Graber, and Naoaki Okazaki, editors, *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics* (Volume 1: Long Papers), pages 14605–14631, Toronto, Canada, July 2023. Association for Computational Linguistics.
- [16] Stanislas Polu and Ilya Sutskever. Generative language modeling for automated theorem proving, 2020.
- [17] mathlib. The lean mathematical library. In CPP 2020 Proceedings of the 9th ACM SIGPLAN International Conference on Certified Programs and Proofs, co-located with POPL 2020, 2020.
- [18] Jesse Michael Han, Jason Rute, Yuhuai Wu, Edward Ayers, and Stanislas Polu. Proof artifact co-training for theorem proving with language models. In *International Conference on Learning Representations*, 2022.
- [19] Stanislas Polu, Jesse Michael Han, Kunhao Zheng, Mantas Baksys, Igor Babuschkin, and Ilya Sutskever. Formal mathematics statement curriculum learning, 2022.
- [20] Guillaume Lample, Timothee Lacroix, Marie anne Lachaux, Aurelien Rodriguez, Amaury Hayat, Thibaut Lavril, Gabriel Ebner, and Xavier Martinet. Hypertree proof search for neural theorem proving. In Alice H. Oh, Alekh Agarwal, Danielle Belgrave, and Kyunghyun Cho, editors, Advances in Neural Information Processing Systems, 2022.
- [21] Kaiyu Yang, Aidan Swope, Alex Gu, Rahul Chalamala, Peiyang Song, Shixing Yu, Saad Godil, Ryan Prenger, and Anima Anandkumar. LeanDojo: Theorem proving with retrieval-augmented language models. In *Neural Information Processing Systems (NeurIPS)*, 2023.
- [22] Albert Qiaochu Jiang, Sean Welleck, Jin Peng Zhou, Timothee Lacroix, Jiacheng Liu, Wenda Li, Mateja Jamnik, Guillaume Lample, and Yuhuai Wu. Draft, sketch, and prove: Guiding formal theorem provers with informal proofs. In *The Eleventh International Conference on Learning Representations*, 2023.

- [23] Haiming Wang, Huajian Xin, Chuanyang Zheng, Zhengying Liu, Qingxing Cao, Yinya Huang, Jing Xiong, Han Shi, Enze Xie, Jian Yin, Zhenguo Li, and Xiaodan Liang. LEGO-prover: Neural theorem proving with growing libraries. In *The Twelfth International Conference on Learning Representations*, 2024.
- [24] Amitayush Thakur, George Tsoukalas, Yeming Wen, Jimmy Xin, and Swarat Chaudhuri. An in-context learning agent for formal theorem-proving, 2024.
- [25] Zhangir Azerbayev, Hailey Schoelkopf, Keiran Paster, Marco Dos Santos, Stephen Marcus McAleer, Albert Q. Jiang, Jia Deng, Stella Biderman, and Sean Welleck. Llemma: An open language model for mathematics. In *The Twelfth International Conference on Learning Representations*, 2024.
- [26] Joseph Redmon and Alex Sanchez-Stern. Proverbot 9000 : Neural networks for proof assistance. 2016.
- [27] Emily First, Yuriy Brun, and Arjun Guha. Tactok: semantics-aware proof synthesis. Proc. ACM Program. Lang., 4(OOPSLA), nov 2020.
- [28] Emily First and Yuriy Brun. Diversity-driven automated formal verification. In *Proceedings* of the 44th International Conference on Software Engineering, ICSE '22, page 749?761, New York, NY, USA, 2022. Association for Computing Machinery.
- [29] Alex Sanchez-Stern, Emily First, Timothy Zhou, Zhanna Kaufman, Yuriy Brun, and Talia Ringer. Passport: Improving automated formal verification using identifiers. ACM Trans. Program. Lang. Syst., 45(2), jun 2023.
- [30] Shizhuo Dylan Zhang, Talia Ringer, and Emily First. Getting more out of large language models for proofs, 2023.
- [31] Jianan Yao, Ziqiao Zhou, Weiteng Chen, and Weidong Cui. Leveraging large language models for automated proof synthesis in rust, 2023.
- [32] Xavier Leroy. A formally verified compiler back-end. *Journal of Automated Reasoning*, 43(4):363–446, 2009.
- [33] Kunhao Zheng, Jesse Michael Han, and Stanislas Polu. minif2f: a cross-system benchmark for formal olympiad-level mathematics. In *International Conference on Learning Representations*, 2022.
- [34] Zhangir Azerbayev, Bartosz Piotrowski, Hailey Schoelkopf, Edward W. Ayers, Dragomir Radev, and Jeremy Avigad. Proofnet: Autoformalizing and formally proving undergraduate-level mathematics, 2023.
- [35] Sean Welleck and Rahul Saha. Llmstep: Llm proofstep suggestions in lean. *arXiv preprint arXiv:2310.18457*, 2023.
- [36] Sean Welleck. Neural theorem proving tutorial ii. https://github.com/cmu-13/ ntptutorial-II, 2023.

A Appendix

This is an incorrect proof of the 'heap sort orders list elements' property. GPT4 leaves in "placeholders" as arguments to lemmas from the environment that it does not use in the proof. It also attempts the invalid operation of induction generalizing the inductive type 'MyHeap'. Transforming this proof into a correct one is non-trivial.

```
unfold hsort
unfold ordered
induction xs generalizing MyHeap with
| nil => unfold toHeap; unfold toList; simp
| cons x xs' ih =>
unfold toHeap
unfold toList
unfold hmerge
have h := numElem_merge_branches_lt ... -- Placeholder for specific heaps if
needed
have m := merge_elems ... -- Placeholder for specific heaps if needed
```

```
specialize ih (xs'.map (fun x => MyHeap.node MyHeap.nil x MyHeap.nil))
induction (toList (toHeap xs')) generalizing (toList (toHeap (x :: xs')))
| nil =>
  apply ih
| cons y ys' ysih =>
  unfold toList at ih
  unfold toHeap at ih
  unfold ordered at ih +
  unfold hsort at ih
  have h := numElem_merge_branches_lt ... -- Placeholder for specific values if
  needed
  have m := merge_elems ... -- Placeholder for specific values if needed
  case h_1 =>
    unfold ordered
    simp [List.map]
    simp [toList]
  case h_2 =>
    unfold toHeap
    unfold ordered
    simp [toList]
    rfl
```