Intermediate Distillation: Data-Efficient Distillation from Black-Box LLMs for Information Retrieval

Zizhong Li Haopeng Zhang Jiawei Zhang IFM Lab, University of California, Davis {zzoli, hapzhang, jiwzhang}@ucdavis.edu

Abstract

Recent research has explored distilling knowledge from large language models (LLMs) to optimize retriever models, especially within the retrieval-augmented generation (RAG) framework. However, most existing training methods rely on extracting supervision signals from LLMs' weights or their output probabilities, which is not only resource-intensive but also incompatible with black-box LLMs. In this paper, we introduce Intermediate Distillation, a data-efficient knowledge distillation training scheme that treats LLMs as black boxes and distills their knowledge via an innovative LLMranker-retriever pipeline, solely using LLMs' ranking generation as the supervision signal. Extensive experiments demonstrate that our proposed method can significantly improve the performance of retriever models with only 1,000 training instances. Moreover, our distilled retriever model significantly boosts performance in question-answering tasks within the RAG framework, demonstrating the potential of LLMs to economically and effectively train smaller models.

1 Introduction

The rapid growth and superior performance of large language models (LLMs) (Ouyang et al., 2022; OpenAI, 2023; Wang et al., 2024b) have made them a preferred choice for a wide range of NLP applications (Xi et al., 2023; Wang et al., 2024b; Wu et al., 2023; Zhang et al., 2023a,b). LLMs have demonstrated robust zero-shot ranking abilities in English and various low-resource languages (Adeyemi et al., 2023; Sun et al., 2023). Consequently, researchers have applied LLMs to the task of information retrieval, where they outperform previous text search and similarity measurement methods (Ma et al., 2023; Xu et al., 2024).

The retrieval-augmented generation (RAG) framework has been widely adopted to alleviate




Figure 1: Previous distillation methods (left) rely on extracting supervision signals from LLM's weights or using LLM's output probabilities to train the retriever model. In contrast, our approach (right) bypasses the need for LLM's likelihood, directly using the LLM's ranking responses as supervision signals.

hallucination problems in LLMs generation, especially for knowledge-intensive tasks (Lewis et al., 2020). The RAG framework consists of two key components: a retriever to locate relevant information from a large corpus based on a given input, and a reader, typically a LLM, to integrate this information into its generation (Izacard et al., 2023; Shi et al., 2023).

How to distill knowledge from LLMs to optimize the retriever in the RAG framework with indomain data has been a crucial challenge. Early efforts proposed training the retriever with whitebox LLM readers by extracting supervision signals directly from the LLMs' weights (Izacard et al., 2023; Rubin and Berant, 2023; Guu et al., 2020). However, this approach becomes more computationally intensive and time-consuming as LLMs increase in size. Meanwhile, it is incompatible with closed-source models.

Recently, researchers have also turned to knowledge distillation for the retriever from black-box LLMs by training the retriever directly from generated outputs, such as RePLUG (Shi et al., 2023) and In-Context RALM (Ram et al., 2023). However, both methods use the generation log probabilities for correct answers as the distillation signal to train the retriever, which may suffer from: 1) Limited application scenarios, as the output probabilities are not always available for closed-source LLMs. 2) Discrepancy between retrieval and generation, where training LLMs' next-token prediction is not optimal for retriever training. 3) High computing costs, since hundreds of thousands of training instances are required in their training process.

To address these limitations, we propose *Intermediate Distillation*, a data-efficient training scheme that leverages LLM-generated ranking responses to guide the training of the retriever. Our model employs a rerank-then-retrieve pipeline, where LLMs indirectly influence the retriever training via an intermediate ranker model. We chose this pipeline for three main reasons: 1) The robust zero-shot ranking capabilities of LLMs establish a strong foundation for knowledge distillation. 2) Using LLMs to generate a relevance-based ranking order is more suitable for retriever training than depending on LLMs output probabilities, making the supervision signals more reliable. 3) There are no restrictions on accessing this generated ranking order.

Specifically, we first train a ranker model using the ranking orders generated by LLMs as supervision signals. We then employ this trained ranker to further train the retriever model. We conduct a series of experiments using advanced, closedsource LLMs that restrict output probability access. The empirical results demonstrate the effectiveness of our method, requiring 100x to even 1000x less data than previous methods (Ram et al., 2023; Shi et al., 2023), thereby significantly reducing computational costs. Our main contributions are:

- We introduce Intermediate Distillation, a data-efficient knowledge distillation training scheme that optimizes retrieval models from black-box LLMs via an intermediate ranker model in a two-stage process.
- We conduct extensive experiments with cutting-edge LLMs and demonstrate the efficacy and efficiency of the proposed method in enhancing information retrieval performance compared to other supervision signals.
- We deploy our distilled retriever model within the RAG framework and demonstrate its effectiveness in downstream tasks such as opendomain question-answering.

2 Related Work

In this section, we provide a comprehensive background of information retrieval systems and knowledge distillation research related to LLMs.

2.1 Retrieval-Augmented Generation

Information retrieval plays a crucial role in various knowledge-intensive NLP tasks, including question-answering (Siriwardhana et al., 2023; Zhang et al., 2024), fact-verification (Hang et al., 2024; Khaliq et al., 2024) and open-domain dialogue (Wang et al., 2024a; Shuster et al., 2021). A prevalent approach in information retrieval is the multi-stage retrieval process (Nogueira et al., 2020), which first uses a retriever model to search several most relevant documents from the large corpus, then employs a ranker model to further optimize the ranking order based on relevance, and returns the top few most relevant documents finally.

Recently, the retriever models are increasingly used to enhance the generation quality of LLMs for knowledge-intensive tasks due to their flexibility and effectiveness, leading to the development of the retrieval-augmented generation (RAG) framework (Guu et al., 2020; Izacard et al., 2023). This framework integrates information retrieval into the generation process of LLMs, which helps overcome the models' limitations, such as hallucination, by utilizing external up-to-date information. In the RAG framework, the retrieved information can be in the form of tokens, entities, or text chunks (i.e., documents), and the retrieval can occur once or repeatedly every n tokens, for finding a balance between the performance and time-cost. Additionally, the retrieval model in RAG is adaptable to both encoder-to-decoder (Guu et al., 2020; Izacard et al., 2023) and decoder-only language models (Borgeaud et al., 2022; Ram et al., 2023), and is applicable during both the pre-training (Zhong et al., 2022; Min et al., 2022) and inference stages (Menick et al., 2022; Min et al., 2023).

In this paper, we use the advanced knowledge from LLMs as the supervision signal to train the retriever models through a multi-stage (i.e., rerank-then-retrieve) training scheme. We then integrate our well-trained retriever model into the RAG framework, demonstrating the effectiveness of our proposed training framework in questionanswering tasks.

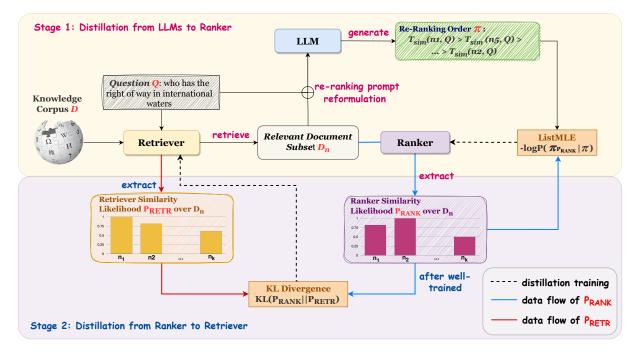


Figure 2: The two-stage knowledge distillation process of our proposed Intermediate Distillation scheme. In Stage 1, we use re-ranking order π (highlighted in the green background color) as the supervisory signal to train a ranker model. In Stage 2, this distilled ranker unsupervised trains the retriever model to enhance its performance.

2.2 Knowledge Distillation in LLMs.

Knowledge distillation is widely used to transfer knowledge from complex, large teacher models to smaller student models (Hinton et al., 2015). Influenced by the outstanding performance of LLMs, more and more studies focus on using LLMs as teacher models to distill knowledge into smaller task-specific models (Brown et al., 2023), and the distillation methods can be categorized into two types: white-box (Gu et al., 2023; Agarwal et al., 2023; Udagawa et al., 2023) and black-box (Li et al., 2022; Ho et al., 2022; Hsieh et al., 2023). Specifically, white-box training leverages both the predictions and the parameters of LLMs to exact knowledge, which can be memory-intensive and computationally demanding. In contrast, black-box training only relies on the predictions of LLMs, making it less resource-intensive.

Many studies have successfully integrated knowledge distillation within the RAG framework to train the retriever models. For white-box LLM distillation training, previous researches employ LLM likelihood, such as attention scores, to assess the relevance distribution of retrieved documents (Izacard et al., 2023, 2022). Meanwhile, some recent studies have also explored methods for training RAG using black-box LLMs, like In-Context RALM (Ram et al., 2023) and RePLUG (Shi et al., 2023). The remaining problem is that these methods still rely on the generation log probabilities for the ground truth as the supervision signals in distillation training, which tend to have a degree of randomness and are limited to the availability of the output probabilities. Furthermore, aligning LLM predictions with the goals of retriever training is not the optimal choice since there remains a gap between retrieval and generation.

In contrast, our proposed distillation method only requires black-box LLMs to output a relevance-based ranking order of the candidate relevant documents, yielding more consistent, matching, and interpretable results than output probability-based methods. Moreover, our method is much more data efficient, requiring about 100x and 1000x less data compared to previous approaches (Shi et al., 2023; Ram et al., 2023), significantly saving computational resources and increasing the flexibility of the training process.

3 Method

Our two-stage distillation scheme uses a ranker model and a retriever model as the student models and a LLM as the teacher model. As shown in Figure 2, we initially employ an off-the-shelf retriever to select a subset of documents D_n from a large corpus D based on their relevance to a query Q. The LLM then re-ranks these documents, creating a ranking order π , which is used to train the ranker model in the distillation *Stage 1*. In *Stage 2*, this ranker enhances the original retriever by minimizing the KL-divergence between their similarity likelihood. In detail, Section 3.1 provides the formal definitions of the related tasks. In Section 3.2 and Section 3.3, we show how knowledge is directly transferred from LLMs to a ranker model and then further conveyed to a retriever model, respectively.

3.1 Problem Formulation

Given a question Q, the goal of a retriever model is to find a subset of the most relevant documents $D_n = \{n_1, n_2, ..., n_k\} \subseteq D$ from a large knowledge corpus $D = \{d_1, d_2, ..., d_m\}$, where each d_i, n_i represents a unique document. In the retrieval-augmented generation (RAG) framework, this subset D_n is combined with the question Q to form the reader's prompt input and then generates the corresponding answer A.

For the re-ranking task in our distillation framework, the teacher ranker model (i.e., LLMs) is tasked with reordering the documents D_n according to their relevance to the question Q. The re-ranking order can be represented as π : $T_{sim}(n_i, Q) > T_{sim}(n_k, Q) > ... > T_{sim}(n_j, Q)$, indicating the descending order of relevance from the documents $n_i, n_j, ..., n_k$ in the subset D_n . This order information π is first transferred to the ranker model, which serves as an intermediary between the LLM and the retriever model. Subsequently, the ranker model conveys this knowledge to the retriever, thereby enhancing its performance.

3.2 Stage 1: Distillation from LLMs to Ranker

The initial step of our knowledge distillation workflow is data initialization, where we find the relevant document subsets D_n from corpus D for each specified question Q. These subsets then serve as the input for the *Stage 1* training. In practice, we employ a widely-used information retrieval model, Contriever (Izacard et al., 2022), as the retriever model for data initialization.

Re-ranking by LLMs. In this stage, we utilize LLM's guaranteed zero-shot ranking capabilities to generate high-quality re-ranking orders for each subset D_n based on the relevance to the corresponding question Q. We use a list-wise ranking prompt, which is adapted from the RankGPT (Sun et al., 2023), as our input ranking prompt. Figure 3 illus-

trates a LLM re-ranking process, where the LLM generates a re-ranking order $\pi_{D_n} : T_{sim}(n_1, Q) > T_{sim}(n_5, Q) > T_{sim}(n_4, Q) > T_{sim}(n_3, Q) > T_{sim}(n_2, Q)$. Following this, we use these re-ranking orders to transfer LLM's knowledge into a smaller but more efficient ranker model.

Ranker Distillation Training We initialize our ranker model by using the dual-encoder structure *Contriever* checkpoint. For each question Q and its retrieved document $n_i \subseteq D_n$, we represent the question and document using the average value from the last hidden layer of the ranker model, denoted as \hat{Q} and \hat{n}_i , respectively. For each training data instance, once we have the representative embeddings \hat{Q} and \hat{n}_i , we proceed to calculate the similarity likelihood P_{RANK} over D_n , which can be defined as:

$$P_{RANK}(n_i|Q) = \frac{exp(s(\hat{n}_i, Q)/\theta)}{\sum_{k=1}^{K} exp(s(\hat{n}_k, \hat{Q})/\theta)} \quad (1)$$

where s denotes the dot-product between the ranker's representation vectors of the question and each retrieved document, and θ is the temperature hyper-parameter.

After obtaining the ranker model's similarity likelihood $P_{RANK}(n_i|Q)$ over its relevant document subset D_n , and the LLM-generated reranking order π_{D_n} , we use ListMLE (Xia et al., 2008), a list-wise loss function for distillation training from LLMs to the ranker model. ListMLE considers the similarity likelihood $P_{RANK}(D_n)$ as the predicted list and π_{D_n} as the ground truth, aiming to minimize the following loss function:

$$L(P_{RANK}, \pi) = -log P(\pi_{P_{RANK}} | \pi)$$

= $-log \prod_{j=1}^{k} \frac{exp(P_{RANK}(n_i))}{\sum_{m=j}^{k} exp(P_{RANK}(n_m))}$
(2)

where $\pi_{P_{RANK}}$ represents the permutation of documents ordered by the ground truth ranking π . The loss function calculates an exponential probability distribution over all elements of $P(\pi_{P_{RANK}}|\pi)$, expressing the loss as the negative log-likelihood of the ground truth order π .

3.3 Stage 2: Distillation from Ranker to Retriever

In *Stage 2*, this well-train ranker model is used to enhance the retriever model's performance by transferring knowledge from LLMs.

Raw Data Pair	Ranking Prompt Template	LLM Generation Examples
Question Q who has the right of way in international waters	I will provide one query with {num} documents, each indicated by identifier x. Please answer me with a list of identifier id in descending order of relevance, which	<pre>[1st]Document1: directly addresses the misconception about the "right of way" [2nd]Document5: discuss the operational aspect of maritime</pre>
Relevant Document Subset D _n (part)	represents the similarity between query and each document. <question> {question}</question>	right of way With Explanation
<pre>n1: International regulations n2: Internal waters</pre>	<pre><document1> {document n₁} <document2> {document n₂}</document2></document1></pre>	Document1, Document5, Document4, Document2, Document3 Without Explanation-

Figure 3: An example of our LLM teacher model's re-ranking process.

We initialize our retriever model using a dualencoder Contriever checkpoint, similar to the ranker. For each question and its retrieved document, we also compute their representations \tilde{Q} and \tilde{n}_i by calculating the average value from the retriever model's last hidden layer and the similarity distribution P_{RETR} of the retriever model over D_n is defined as:

$$P_{RETR}(n_i|Q) = \frac{exp(s(\tilde{n}_i, \tilde{Q})/\theta)}{\sum_{k=1}^{K} exp(s(\tilde{n}_k, \tilde{Q})/\theta)} \quad (3)$$

where s represents the dot-product between the retriever's representation vectors of the question and each retrieved document, and θ is the temperature hyper-parameter.

We then leverage the similarity likelihood P_{RANK} from the previously trained ranker model to enhance the retriever model's performance under an unsupervised learning process by minimizing the KL-divergence between P_{RANK} and P_{RETR} :

$$D_{KL}(P_{RANK}||P_{RETR}) \tag{4}$$

This process ensures the retriever model aligns more closely with the text similarity knowledge from the LLMs. Through this two-stage distillation scheme, we enhance the retrieval accuracy and effectiveness of the retriever model, which can be further applied to the RAG framework to improve its performance on knowledge-intensive NLP tasks.

4 Experiment

4.1 Experiment Setup

Dataset We conduct experiments on two benchmark open-domain question-answering datasets: *NaturalQuestions (NQ)* (Kwiatkowski et al., 2019) and *TriviaQA* (Joshi et al., 2017). The *NQ* dataset includes queries from *google.com query* and their corresponding Wikipedia pages, each with an annotated passage containing the answer. We use the

dataset version provided by ATLAS (Izacard et al., 2023) and follow its training, validation, and testing splits: 79,168/8,757/3,610. Similarly, we also use the *TriviaQA*, which contains question-answer pairs sourced from Wikipedia and the web, that ATLAS provides and following its training, validation, and testing splits: 78,785/8,837/11,313. For the knowledge corpus base, we utilize data from Wikipedia as of December 20, 2018, adapting the passage embeddings provided by ATLAS.

For our experiments, we selectively sample 1,000 instances from each training set from NQ and *TriviaQA*, keeping validation and testing sets unchanged. We further discuss the impact of selecting different types of training data in Section 5.2. This training set size is about 100 to 1,000 times smaller than those used in previous black-box LLM distillation methods within the RAG framework, demonstrating the superior data efficiency of our approach. The impact of training set size on performance is discussed further in Section 5.3.

Baseline We evaluate our distillation framework, Intermediate Distillation, against the following established text similarity methods: ROUGE-2, an evaluation metric frequently used in NLP, and BM25, a popular information retrieval algorithm. The idea of employing NLP evaluation metrics like ROUGE-2 for knowledge distillation in retriever models is first proposed by (He et al., 2022), which also uses a multi-step distillation approach to solve the Commonsense Reasoning tasks ¹. For both ROUGE-2 and BM25, we use the similarity likelihood between the query and its relevant documents via their calculation to generate re-ranking order as the supervision signals. Meanwhile, we do not consider the previous work RePLUG (Shi et al., 2023) as a baseline since it uses a larger data scale and relies on LLMs output probabilities, which is not a fair comparison.

¹We choose ROUGE-2 as our compared baseline metric, as it outperforms other metrics in this prior study.

Distillation Methods	NQ			TriviaQA				
Distination Methods	HR@5 ↑	HR@10 ↑	EM↑	F1 ↑	HR@5 ↑	HR@10 ↑	EM↑	F1 ↑
w/o Distillation	0.478	0.583	26.09	36.75	0.595	0.678	54.99	63.55
Supervised Distillation								
BM25	0.186	0.262	18.17	27.88	0.120	0.175	46.90	55.38
Rule-Based	0.223	0.303	19.75	29.64	0.277	0.356	50.08	58.45
Metric (ROUGE-2)	0.534	0.643	27.76	38.16	0.641	0.716	56.17	64.92
Intermediate Distillation (Ours)								
GPT-3.5 Turbo	0.505	0.606	25.84	36.13	0.587	0.664	53.72	62.16
GPT-40	0.553	0.652	27.01	37.38	0.664	0.734	56.27	64.98
GPT-4 Turbo	0.545	0.656	28.31	38.68	0.662	0.727	56.15	65.07
Claude3 Opus	0.562	0.665	28.45	38.83	0.669	0.733	56.68	65.36

Table 1: The performance comparison of our proposed Intermediate Distillation scheme with other baseline supervised distillation methods on question-answering tasks.

In addition, we conduct a *Rule-Based* experiment that ranks documents containing the answer at the top in re-ranking order, which aims to demonstrate that effective re-ranking distillation signals should not only highlight answers.

Experimental Settings We initialize our ranker and retriever models using the Contriever checkpoint (Izacard et al., 2022) with a dual-encoder structure. For our proposed distillation scheme, we select several cutting-edge and representative LLMs as the teacher models, including GPT-3.5 Turbo, GPT-40, GPT-4 Turbo, and Claude3 Opus. To comprehensively evaluate the performance of our retriever model, we integrate the distilled retriever model into the RAG framework for questionanswering tasks, which allows us to measure the improvement in the quality of responses generated by the language model. In the RAG framework, we use the reader model Llama-3-8B-Instruct (Touvron et al., 2023) to generate answers. We also evaluate a baseline version of this RAG framework without additional distillation training for the retriever (i.e., w/o Distillation experiment).

Implantation Details We set both the ranker and retriever models with a hidden layer size of 768, thus totally have approximately 10 million training parameters for each model. The learning rates are set as 5e-5 for the ranker model and 2e-5 for the retriever model. Both models are trained for 5 epochs on the NQ and TriviaQA datasets, using a batch size of 20 and optimized with the Adam optimizer. Additionally, we restrict the size of the relevant document subset D_n to 5, each retrieved document with a maximum length of 128. We further discuss the impact of the retrieve subset (i.e.,

re-ranking list) size in Section 5.4.

Evaluation Metrics We evaluate the retrieval performance of our distilled retriever model through the *top-5* and *top-10* retrieval Hit Rates (HR@5 and HR@10), which is the percentage of questions where the relevant document subset D_n includes at lease one correct answers with the top-5 and top-10 documents. For question-answering tasks in the RAG framework, we use the standard Exact Match (EM) metric and F1-Score to evaluate the accuracy and precision of the language model generated responses.

4.2 Experimental Results

We present our experimental results, including all the baseline methods and settings evaluated on the testing set of NQ and *TriviaQA* in Table 1². The experimental results show that the retriever model, under our proposed Intermediate Distillation scheme and supervised by Claude3, achieves the best performance in most evaluation metrics, confirming the effectiveness of our proposed method.

Moreover, the quality of supervision signals from LLMs greatly influences the performance of the distilled retriever models. For example, the retriever model trained under GPT-4 Turbo supervision outperforms the one supervised by GPT-3.5 Turbo within our Intermediate Distillation scheme, aligning with GPT-4 Turbo's higher performance across various NLP tasks (OpenAI, 2023). As the rapid development of LLMs, this improvement in supervision quality has also evolved: from being less effective than the ROUGE-2 metric (i.e., as

²The highest values in the table are highlighted in bold on both the NQ and TriviaQA datasets.

seen the retriever under supervised by GPT-3.5 Turbo) to significantly surpass it (i.e., supervised by GPT-4 Turbo).

In the RAG framework for question-answering tasks, a stronger retriever model is more likely to enhance the output quality of the reader model, demonstrating the effectiveness and adaptability of the Intermediate Distillation framework for NLP downstream tasks. However, according to our experimental results, while Intermediate Distillation using GPT-40 typically outperforms Supervised Distillation using ROUGE-2 in retrieval performance, the latter can still produce higher quality generations within RAG. This divergence may be due to the different objectives of the retriever and the reader: the retriever focuses on accurately identifying the ground truth, whereas the reader wants the retriever to provide information that more effectively helps the reader in generating accurate responses. This discrepancy remains a topic that can be further explored in future work.

5 Analysis

In this section, we conduct ablation studies and a series of quantitative analyses to evaluate how various experimental designs and settings affect the outcomes of our distillation results.

5.1 Ablation Studies

In this subsection, we conduct an experiment named *Direct Distillation*, where we train the retriever model directly using the relevance likelihood generated by LLM. More details of experiment setting can be found in Appendix A. We compare the results of this approach with our proposed two-stage distillation scheme under the same LLM teacher model (i.e., GPT-40), and the experimental results are shown in Table 2. The results indicate that the Direct Distillation method is less effective than our proposed Intermediate Distillation scheme, which further validates the rationality of the two-stage design of our proposed framework.

5.2 Impact of the Training Data Type

Our previous experiment demonstrate that Rule-Based supervision signals, which places documents containing answers at the top, are ineffective and detrimentally impacting the retriever's performance. This indicates that simply re-ranking documents based solely on the presence of ground truth (i.e., the correct answer) does not provide the

		Evaluation Metrics		
Method	Dataset	EM↑	F1↑	HR@5 ↑
Direct Distillation	NQ TriviaQA	26.23 55.39		0.505 0.623
Intermediate Distillation	NQ TriviaQA	27.01 56.27		0.553 0.664

Table 2: Ablation studies on the effectiveness of two-stage distillation scheme design.




Figure 4: The performance of retriever models across three types of training sets, which vary based on the initial appearance and placement of ground truth in the retrieved subsets.

high-quality text similarity insights required for effective distillation. To delve deeper into the influence of the appearance and placement of ground truth in the re-ranking process, we categorize the initial retrieved document subsets D_n based on NQ's queries into three categories: (1) Following-Answer: contains at least one document with the correct answer, but this kind of document is not at the first position in the subset. This data type is used in our experiments detailed in Section 4. (2) First-Answer: contains at least one document with the correct answer, and this kind of documents is at the first position in the subset. (3) No-Answer: no documents in the subset contain the correct answer.

We follow the same training setting used in our primary experiments in Section 4, and use GPT-4 Turbo as the LLM teacher model. Together with findings from the *Rule-Based* experiments in Section 4, the experiment results shown in Figure 4 indicate that considering the semantic similarity of the text is far more important than arranging documents containing the answers to the top for reranking in distillation training, as even the retriever under the *No-Answer* data set training has notable improvements.

Moreover, as the *Following-Answer* training data, where the correct answers are not ranked first




Figure 5: The performance of retriever models under different training set size.

initially, yields better training results than using the the *First-Answer* training data, indicating that optimizing the ground truth placement in re-ranking also has a positive effect on the experimental results after the consideration of text similarity.

5.3 Impact of the Training Set Size

Our previous experiments demonstrate that our distillation framework significantly enhances retriever model performance with just 1,000 training instances. In this subsection, we explore how different training set sizes affect distillation effectiveness. We use training sets of of 50, 100, 200, 500, 1000, and 2000 data instances from the *Following-Answer* data type, with other settings consistent with our experiments in Section 4. In addition, we use GPT-4 Turbo as our LLM teacher model.

Results in Figure 5 show that the performance of the retriever model improves significantly with training data with thousands of or even only hundreds of instances. These empirical findings highlight the data efficiency of our proposed distillation scheme. In addition, although initial performance increases are notable with small training sets, the rate of improvement decreases as more training data is used. This pattern indicates a *scaling law* in distillation training, where further enhancements become increasingly difficult as the model's performance improves. For models that already perform well, even marginal improvements require much more data, demanding greater training resources.

5.4 Impact of the Re-ranking List Size

In previous experiments, we set the re-ranking list to five documents (i.e., we retrieve five rele-




Figure 6: The performance of retriever models under different size of the re-ranking list. The performance corresponding to 0 re-ranking list size represents the baseline retriever model performance.

vant documents each time). Generally, larger reranking lists offer more supervision signals from LLMs, thus potentially enhancing the effectiveness of distillation training. To explore the impact of re-ranking list size on our distillation method, we vary the re-ranking list sizes, using the top-3, top-5, top-7, and top-10 documents from each relevant retrieved subset to conduct the distillation training. We keep other training settings consistent with those in our primary experiments in Section 4 and use GPT-4 Turbo as the LLM teacher model.

The experimental results shown in Figure 6 show that increasing the re-ranking list size progressively improves the effectiveness of the distillation training. As the list expands from re-ranking three documents to ten documents, the performance of the distilled retriever model consistently improves. Moreover, compared with the retriever model's baseline performance, setting the size of the re-ranking list to 3 still significantly improves the retriever model's performance not only in HitRate@3 but also across broader metrics from HitRate@5 to HitRate@10.

6 Conclusion

We propose Intermediate Distillation, a two-stage data-efficient knowledge distillation scheme that uses the remarkable capabilities of black-box LLMs to train an information retrieval model through an intermediate ranker model. We conduct extensive experiments with advanced LLMs, demonstrating that our method enhances the effectiveness and efficiency of the retriever model performance compared to other supervision signals.

7 Limitation

This paper proposes a data-efficient distillation scheme using black-box LLMs to train smaller information retrieval models, which prove its effectiveness with training data on the scale of thousands. However, we do not evaluate our proposed distillation scheme with larger scales of training data, such as tens of thousands or millions of instances, due to budget limitations on accessing responses from closed-source LLMs and insufficient computational resources to utilize high-quality open-source LLMs like Llama-70B. In the future work, we will focus on extending this study to larger-scale training data, using either closed-source or advanced open-source LLMs to further analysis the effectiveness of our proposed distillation scheme.

References

- Mofetoluwa Adeyemi, Akintunde Oladipo, Ronak Pradeep, and Jimmy Lin. 2023. Zero-shot cross-lingual reranking with large language models for low-resource languages. *arXiv preprint arXiv:2312.16159*.
- Rishabh Agarwal, Nino Vieillard, Piotr Stanczyk, Sabela Ramos, Matthieu Geist, and Olivier Bachem. 2023. Gkd: Generalized knowledge distillation for auto-regressive sequence models. *arXiv preprint arXiv:2306.13649*.
- Sebastian Borgeaud, Arthur Mensch, Jordan Hoffmann, Trevor Cai, Eliza Rutherford, Katie Millican, George Bm Van Den Driessche, Jean-Baptiste Lespiau, Bogdan Damoc, Aidan Clark, et al. 2022. Improving language models by retrieving from trillions of tokens. In *International conference on machine learning*, pages 2206–2240. PMLR.
- Nathan Brown, Ashton Williamson, Tahj Anderson, and Logan Lawrence. 2023. Efficient transformer knowledge distillation: A performance review. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing: Industry Track*, pages 54–65, Singapore. Association for Computational Linguistics.
- Yuxian Gu, Li Dong, Furu Wei, and Minlie Huang. 2023. Minillm: Knowledge distillation of large language models. In *The Twelfth International Conference on Learning Representations*.
- Kelvin Guu, Kenton Lee, Zora Tung, Panupong Pasupat, and Mingwei Chang. 2020. Retrieval augmented language model pre-training. In *International conference on machine learning*, pages 3929–3938. PMLR.
- Ching Nam Hang, Pei-Duo Yu, and Chee Wei Tan. 2024. Trumorgpt: Query optimization and semantic reasoning over networks for automated fact-checking. In

2024 58th Annual Conference on Information Sciences and Systems (CISS), pages 1–6. IEEE.

- Xingwei He, Yeyun Gong, A Jin, Weizhen Qi, Hang Zhang, Jian Jiao, Bartuer Zhou, Biao Cheng, Siu Ming Yiu, Nan Duan, et al. 2022. Metric-guided distillation: Distilling knowledge from the metric to ranker and retriever for generative commonsense reasoning. *arXiv preprint arXiv:2210.11708*.
- Geoffrey Hinton, Oriol Vinyals, and Jeff Dean. 2015. Distilling the knowledge in a neural network. *arXiv* preprint arXiv:1503.02531.
- Namgyu Ho, Laura Schmid, and Se-Young Yun. 2022. Large language models are reasoning teachers. *arXiv* preprint arXiv:2212.10071.
- Cheng-Yu Hsieh, Chun-Liang Li, Chih-Kuan Yeh, Hootan Nakhost, Yasuhisa Fujii, Alexander Ratner, Ranjay Krishna, Chen-Yu Lee, and Tomas Pfister. 2023. Distilling step-by-step! outperforming larger language models with less training data and smaller model sizes. *arXiv preprint arXiv:2305.02301*.
- Gautier Izacard, Mathilde Caron, Lucas Hosseini, Sebastian Riedel, Piotr Bojanowski, Armand Joulin, and Edouard Grave. 2022. Unsupervised dense information retrieval with contrastive learning. *Preprint*, arXiv:2112.09118.
- Gautier Izacard, Patrick Lewis, Maria Lomeli, Lucas Hosseini, Fabio Petroni, Timo Schick, Jane Dwivedi-Yu, Armand Joulin, Sebastian Riedel, and Edouard Grave. 2023. Atlas: Few-shot learning with retrieval augmented language models. *Journal of Machine Learning Research*, 24(251):1–43.
- Mandar Joshi, Eunsol Choi, Daniel Weld, and Luke Zettlemoyer. 2017. TriviaQA: A large scale distantly supervised challenge dataset for reading comprehension. In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 1601–1611, Vancouver, Canada. Association for Computational Linguistics.
- M Abdul Khaliq, P Chang, M Ma, Bernhard Pflugfelder, and F Miletić. 2024. Ragar, your falsehood radar: Rag-augmented reasoning for political fact-checking using multimodal large language models. *arXiv* preprint arXiv:2404.12065.
- Tom Kwiatkowski, Jennimaria Palomaki, Olivia Redfield, Michael Collins, Ankur Parikh, Chris Alberti, Danielle Epstein, Illia Polosukhin, Jacob Devlin, Kenton Lee, Kristina Toutanova, Llion Jones, Matthew Kelcey, Ming-Wei Chang, Andrew M. Dai, Jakob Uszkoreit, Quoc Le, and Slav Petrov. 2019. Natural questions: A benchmark for question answering research. *Transactions of the Association for Computational Linguistics*, 7:452–466.
- Patrick Lewis, Ethan Perez, Aleksandra Piktus, Fabio Petroni, Vladimir Karpukhin, Naman Goyal, Heinrich Küttler, Mike Lewis, Wen-tau Yih, Tim Rocktäschel, et al. 2020. Retrieval-augmented generation

for knowledge-intensive nlp tasks. Advances in Neural Information Processing Systems, 33:9459–9474.

- Shiyang Li, Jianshu Chen, Yelong Shen, Zhiyu Chen, Xinlu Zhang, Zekun Li, Hong Wang, Jing Qian, Baolin Peng, Yi Mao, et al. 2022. Explanations from large language models make small reasoners better. *arXiv preprint arXiv:2210.06726*.
- Xueguang Ma, Liang Wang, Nan Yang, Furu Wei, and Jimmy Lin. 2023. Fine-tuning llama for multi-stage text retrieval. *arXiv preprint arXiv:2310.08319*.
- Jacob Menick, Maja Trebacz, Vladimir Mikulik, John Aslanides, Francis Song, Martin Chadwick, Mia Glaese, Susannah Young, Lucy Campbell-Gillingham, Geoffrey Irving, and Nat McAleese. 2022. Teaching language models to support answers with verified quotes. *Preprint*, arXiv:2203.11147.
- Sewon Min, Kalpesh Krishna, Xinxi Lyu, Mike Lewis, Wen tau Yih, Pang Wei Koh, Mohit Iyyer, Luke Zettlemoyer, and Hannaneh Hajishirzi. 2023. Factscore: Fine-grained atomic evaluation of factual precision in long form text generation. *Preprint*, arXiv:2305.14251.
- Sewon Min, Weijia Shi, Mike Lewis, Xilun Chen, Wentau Yih, Hannaneh Hajishirzi, and Luke Zettlemoyer. 2022. Nonparametric masked language modeling. arXiv preprint arXiv:2212.01349.
- Rodrigo Nogueira, Zhiying Jiang, and Jimmy Lin. 2020. Document ranking with a pretrained sequence-tosequence model. *arXiv preprint arXiv:2003.06713*.
- OpenAI. 2023. Gpt-4 technical report. *Preprint*, arXiv:2303.08774.
- Long Ouyang, Jeffrey Wu, Xu Jiang, Diogo Almeida, Carroll Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, et al. 2022. Training language models to follow instructions with human feedback. *Advances in neural information processing systems*, 35:27730–27744.
- Ori Ram, Yoav Levine, Itay Dalmedigos, Dor Muhlgay, Amnon Shashua, Kevin Leyton-Brown, and Yoav Shoham. 2023. In-context retrieval-augmented language models. *Transactions of the Association for Computational Linguistics*, 11:1316–1331.
- Ohad Rubin and Jonathan Berant. 2023. Long-range language modeling with self-retrieval. *arXiv preprint arXiv:2306.13421*.
- Weijia Shi, Sewon Min, Michihiro Yasunaga, Minjoon Seo, Rich James, Mike Lewis, Luke Zettlemoyer, and Wen-tau Yih. 2023. Replug: Retrievalaugmented black-box language models. arXiv preprint arXiv:2301.12652.
- Kurt Shuster, Spencer Poff, Moya Chen, Douwe Kiela, and Jason Weston. 2021. Retrieval augmentation reduces hallucination in conversation. *arXiv preprint arXiv:2104.07567*.

- Shamane Siriwardhana, Rivindu Weerasekera, Elliott Wen, Tharindu Kaluarachchi, Rajib Rana, and Suranga Nanayakkara. 2023. Improving the domain adaptation of retrieval augmented generation (rag) models for open domain question answering. *Transactions of the Association for Computational Linguistics*, 11:1–17.
- Weiwei Sun, Lingyong Yan, Xinyu Ma, Pengjie Ren, Dawei Yin, and Zhaochun Ren. 2023. Is chatgpt good at search? investigating large language models as re-ranking agent. *arXiv preprint arXiv:2304.09542*.
- Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, et al. 2023. Llama: Open and efficient foundation language models. *arXiv preprint arXiv:2302.13971*.
- Takuma Udagawa, Aashka Trivedi, Michele Merler, and Bishwaranjan Bhattacharjee. 2023. A comparative analysis of task-agnostic distillation methods for compressing transformer language models. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing: Industry Track*, pages 20–31, Singapore. Association for Computational Linguistics.
- Hongru Wang, Wenyu Huang, Yang Deng, Rui Wang, Zezhong Wang, Yufei Wang, Fei Mi, Jeff Z Pan, and Kam-Fai Wong. 2024a. Unims-rag: A unified multi-source retrieval-augmented generation for personalized dialogue systems. *arXiv preprint arXiv:2401.13256*.
- Lei Wang, Chen Ma, Xueyang Feng, Zeyu Zhang, Hao Yang, Jingsen Zhang, Zhiyuan Chen, Jiakai Tang, Xu Chen, Yankai Lin, et al. 2024b. A survey on large language model based autonomous agents. *Frontiers* of Computer Science, 18(6):1–26.
- Shijie Wu, Ozan Irsoy, Steven Lu, Vadim Dabravolski, Mark Dredze, Sebastian Gehrmann, Prabhanjan Kambadur, David Rosenberg, and Gideon Mann. 2023. Bloomberggpt: A large language model for finance. arXiv preprint arXiv:2303.17564.
- Zhiheng Xi, Wenxiang Chen, Xin Guo, Wei He, Yiwen Ding, Boyang Hong, Ming Zhang, Junzhe Wang, Senjie Jin, Enyu Zhou, et al. 2023. The rise and potential of large language model based agents: A survey. *arXiv preprint arXiv:2309.07864*.
- Fen Xia, Tie-Yan Liu, Jue Wang, Wensheng Zhang, and Hang Li. 2008. Listwise approach to learning to rank: theory and algorithm. In *Proceedings of the* 25th international conference on Machine learning, pages 1192–1199.
- Ran Xu, Wenqi Shi, Yue Yu, Yuchen Zhuang, Yanqiao Zhu, May D Wang, Joyce C Ho, Chao Zhang, and Carl Yang. 2024. Bmretriever: Tuning large language models as better biomedical text retrievers. arXiv preprint arXiv:2404.18443.

- Haopeng Zhang, Xiao Liu, and Jiawei Zhang. 2023a. Extractive summarization via chatgpt for faithful summary generation. *Preprint*, arXiv:2304.04193.
- Haopeng Zhang, Xiao Liu, and Jiawei Zhang. 2023b. Summit: Iterative text summarization via chatgpt. *Preprint*, arXiv:2305.14835.
- Tianjun Zhang, Shishir G Patil, Naman Jain, Sheng Shen, Matei Zaharia, Ion Stoica, and Joseph E Gonzalez. 2024. Raft: Adapting language model to domain specific rag. *arXiv preprint arXiv:2403.10131*.
- Zexuan Zhong, Tao Lei, and Danqi Chen. 2022. Training language models with memory augmentation. *arXiv preprint arXiv:2205.12674*.

A Analysis of Different Distillation Signal Generated by LLMs

Here we provide more details about the prompt design of the *Direct Distillation* experiment. We also analyze the corresponding generation quality of LLMs, including the stability and interpretability, and compare it with the re-ranking generation.

A.1 Direct Distillation Prompt Design

We follow the re-ranking prompt format design and replace the re-ranking task with quantifying the similarity scores of the retrieved documents for LLM's supervised signals generation. An example input prompt and the generated responses without explanations is as follows:

Input Prompt:

```
I will provide one query with {num}
documents, each indicated by number
identifier x.
Please answer me with a list of the
similarity score between the provided
query and documents based on your judgment.
The score should be between 0-1.
Please don't use interoperator and only
output the score list.
<Question> {question}
<Document1> {document n1}
...
```

Generated Response:

[0.1, 0.1,, 0.8, 0.2]

A.2 Comparison with Re-ranking Response

We compare the responses generated from reranking prompts and those derived from similarity score prompts used in the Direct Distillation experiment. Specifically, we randomly select 1,000 data instances from the NQ dataset, using the queries and their retrieved documents to prompt the LLM to generate both list-wise re-ranking orders and similarity scores. Examples of responses generated by the LLM, specifically using GPT-4 Turbo, are shown in Table 3.

Table 3 shows that responses generated from reranking prompts are more interpretable than those from similarity score prompts, which often use scaled values that are ambiguous. Additionally, responses from the similarity score-based prompt frequently yield extreme values, such as 0.0 (completely dissimilar) or 1.0 (highly similar), in some




Figure 7: Spearman Correlation between the responses from the re-ranking prompt and the responses from the similarity score prompt.

cases, which means that that supervision signals based on similarity scores are less informative and act more like binary signals in certain data instances.

Moreover, we use the Spearman Correlation to assess the consistency between responses generated from re-ranking prompts and those from similarity score prompts, and the analysis result is visualized in Figure 7. A higher Spearman correlation value suggests a stronger positive correlation between the two types of responses. From Figure 7, we can see that many response pairs are closely related, indicating the stability and reliability of LLMs in generating responses for similar tasks. In addition, based on our previous analysis, we can see that the responses from re-ranking prompts are not only reliable but also possess a higher information density compared to those from similarity score prompts, showing that responses from re-ranking prompts have higher-quality supervision capabilities.

A.3 Implantation Details of Direct Distillation Experiment

We use the same training settings as those used in Intermediate Distillation experiments. Superficially, we set the retriever model with a hidden layer size to 768 and initialize it using a dualencoder Contriever checkpoint. The model is trained over five epochs using the same dataset as described in Section 4, with a learning rate of 5e-5, a batch size of 20, and optimization via the Adam optimizer. In addition, we also limit the size of the relevant document subset D_n to five, and each retrieved document with a maximum length of 128.

Question & Retrieved Documents	Туре	LLM's Generation
[Question] membership in the european union	Re-ranking	[Re-ranking order] Document5, Document3,
requires countries to have which type of		Document2, Document1, Document4. [Explana-
government [Document1] the european		tion] Document5 directly discusses the govern-
continent. the eu's example is being followed by		mental systems used by most European nations,
the african union, the union of south American		particularly the parliamentary system, which
nations [Document2] powers of states, the		is relevant since the EU generally comprises
considerable level of translation and the choice		nations with parliamentary democracies. This
of a lesser city as the capital [Document3]		makes it the most relevant to the query about the
principal characteristic of classical democracy.		type of government required for EU membership.
the concept of a mixed government was studied		Document3 talks about mixed constitutions
during the renaissance and the age of reason by	Similarity Score	[Similarity scores from Document1 to Docu-
niccolo machiavelli, giambattista vico		<i>ment5</i>] Doc1:0.0, Doc2:0.1, Doc3:0.3, Doc4:0.1,
[Document4] thus essentially preventing it		Doc5:0.7. [Explanation] Document1 talks about
from participating in government. the european		the EU and various other international organi-
union (eu) is an association of twenty - eight		zations, focusing on aspects like the single mar-
sovereign member states [Document5]		ket and policy integration but does not mention
civiletti opinions, not all funding gaps led to		government types required for EU membership.
shutdowns. of the nine funding gaps between		Hence, the score is 0.0. Document2 discusses
1980 and 1990, only four led to furloughs		the structure of EU governance
	Re-ranking	[<i>Re-ranking order</i>] Document3, Document1,
[Question] when was the immigration reform	Ke-ranking	
and control act passed [Document1] united		Document4, Document5, Document2. [Expla-
states temporarily for money or a better life. an		<i>nation</i> Document3 directly answers the query
increase in legal immigrants migrating to the		by explicitly mentioning the "Immigration Re-
united states also led to an increase of illegal		form and Control Act of 1986" and stating it was
aliens [Document2] there are noted		signed into law by Ronald Reagan on November
communists, socialists, and anti - american		6, 1986. It provides the most specific informa-
sympathizers. parts of the act remain in place		tion related to the query
today [Document3]the immigration	Similarity Score	[Similarity scores from Document1 to Docu-
reform and control act (irca), also known as		<i>ment5</i>] Doc1:0.0, Doc2:0.0, Doc3:1.0, Doc4:0.0,
the simpson 2013 mazzoli act or the reagan		Doc5:0.0. [Explanation] Document1 discusses
amnesty, signed into law by ronald reagan on		general immigration trends and issues but does
november 6, 1986 [Document4] five percent		not provide the specific date of the passage of the
of the u. s. workforce. it was also estimated that		Immigration Reform and Control Act, which is
about 70 percent of those illegal workers		directly asked in the query. Therefore, it receives
[Document5] to reduce them as restrictionists.		a score of 0.0. Although Document2 mentions
"fry traced" restrictions roots " to a surprising		other immigration-related legislation and acts, it
surge in illegal and legal immigration		does not specify
[Question] who sings in there's something	Re-ranking	[<i>Re-ranking order</i>] Document2, Document5,
about mary [Document1] melody. mary		Document4, Document1, Document3. [Expla-
described the completed song as "whitney -		<i>nation]</i> Document2 is the most relevant sentence
fied". meron maintains that [Document2]		as it directly answers the query. It mentions that
he film concludes with the two engaging in a		Jonathan Richman narrated parts of the story
kiss while singer / songwriter jonathan richman,		through song throughout the film "There's Some-
who has periodically narrated the story in song		thing About Mary," which clearly identifies the
throughout the film [Document3] day but her.		singer related to your query
minutes later bing notices his tackle box has	Similarity Score	[Similarity scores from Document1 to Docu-
been disturbed, and an instant later the kids see		<i>ment5</i>] Doc1:0.0, Doc2:1.0, Doc3:0.0, Doc4:0.0,
the door to the tent is open [Document4] true		Doc5:0.0. [Explanation] Document1 discusses
opinions of other contestants and her stance on		a song in a completely different context, related
the judges. the book achieves in combining fifty		to "Cinderella" and Whitney Houston's music
years of a'salt of the earth' existence with a new -		adjustments, not related to the film "There's
found life of fame [Document5] and breezy		Something About Mary." Thus, it doesn't an-
number and the narrator opens up the story		swer the query about whaty. Thus, it doesn't an-
about bing and his family. and while bing is		film, receives a score of 0.0. Document2 directly
cleaning the fish, he tells the story of "		answers the query. It mentions that Jonathan
goldilocks"		Richman narrated parts of the story
golullocks		Kienman narrateu parts of the story

Table 3: Examples of two different LLM-generated responses. We also let LLM generate the corresponding explanations in these examples. The red color indicates the corresponding answer to the question.