

# Toward Exploring the Code Understanding Capabilities of Pre-trained Code Generation Models

Jiayi Lin<sup>1</sup>, Yutao Xie<sup>1</sup>, Yue Yu<sup>2</sup>, Yibiao Yang<sup>3</sup>, Lei Zhang<sup>1</sup>,

<sup>1</sup>International Digital Economy Academy,

<sup>2</sup>National University of Defense Technology,

<sup>3</sup>Nanjing University,

Correspondence: [jiayilin1024@gmail.com](mailto:jiayilin1024@gmail.com)

## Abstract

Recently, large code generation models trained in a self-supervised manner on extensive unlabeled programming language data have achieved remarkable success. While these models acquire vast amounts of code knowledge, they perform poorly on code understanding tasks, such as code search and clone detection, as they are specifically trained for generation. Pre-training a larger encoder-only architecture model from scratch on massive code data can improve understanding performance. However, this approach is costly and time-consuming, making it suboptimal. In this paper, we pioneer the transfer of knowledge from pre-trained code generation models to code understanding tasks, significantly reducing training costs. We examine effective strategies for enabling decoder-only models to acquire robust code representations. Furthermore, we introduce CL4D, a contrastive learning method designed to enhance the representation capabilities of decoder-only models. Comprehensive experiments demonstrate that our approach achieves state-of-the-art performance in understanding tasks such as code search and clone detection. Our analysis shows that our method effectively reduces the distance between semantically identical samples in the representation space. These findings suggest the potential for unifying code understanding and generation tasks using a decoder-only structured model.

## 1 Introduction

Recently, there has been an explosion of pretrained code generation models that have achieved remarkable success (Nijkamp et al., 2023; Guo et al., 2024; Lozhkov et al., 2024). These models are pre-trained in a self-supervised manner on vast amounts of code data, exhibiting robust code generation capabilities. They have been developed into tools that assist software developers in their daily programming tasks, such as GitHub Copilot.

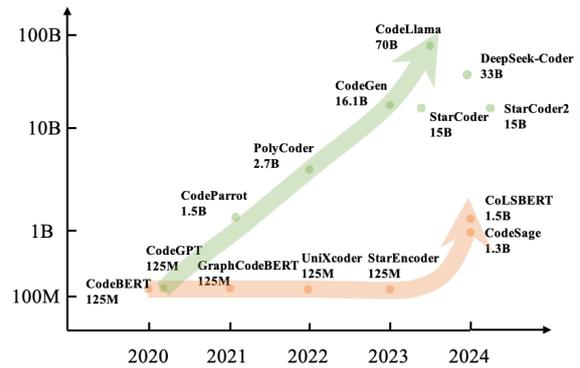


Figure 1: Timeline of code-large models. For visual clarity, only the largest size of representative models is plotted. The orange arrows indicate the development trends of encoder-only code understanding models, while the green arrows represent the trends of decoder-only code generation models.

Although these decoder-only code generation models have acquired substantial code knowledge during pre-training, they perform poorly on code comprehension tasks, as they are specifically trained for generation tasks using autoregression. Some studies have shown that better code understanding performance can be achieved by pre-training a larger encoder-only model from scratch with more training data (Hoffmann et al., 2022; Lin et al., 2024). However, this process is not only expensive but also time-consuming, making it suboptimal. As shown in Figure 1, numerous increasingly larger code generation models have been proposed, such as the 1.1B SantaCoder (Allal et al., 2023), the 15B StarCoder (Li et al., 2023), and the 70B CodeLlama (Rozière et al., 2023). These models are significantly larger than the current largest code understanding models, namely the 1.3B CodeSage (Zhang et al., 2024) and the 1.5B CoLSBERT (Lin et al., 2024), and have been exposed to more code data. However, leveraging these pre-trained code generation models for code

understanding tasks has not been previously explored.

In this paper, we investigate the effective application of a pre-trained code generation model with a decoder-only Transformer architecture to code understanding tasks. As illustrated in Figure 2, we explore two methods for extracting code representations from the decoder-only Transformer: 1) using the encoding of the last token after passing through the decoder, and 2) using the average of the encodings of all tokens after passing through the decoder. Additionally, we introduce CL4D, which employs contrastive learning to continue pre-training code generation models, thereby enhancing their representational capabilities. We follow Gao et al. (Gao et al., 2021) by selecting code snippets that are semantically different but close to the query in the representation space as hard negatives to improve training efficiency.

To ensure objectivity, we compare code understanding models with code generation models of equivalent size on two understanding tasks: code search and clone detection. Experimental results indicate that our proposed CL4D method effectively utilizes decoder-only code generation pre-trained models for code understanding tasks. After continued pre-training on a small code corpus, these models outperform pre-trained encoder-only code understanding models on most tasks. Furthermore, we observe that code understanding tasks can benefit from larger decoder-only models.

In summary, the contributions of this paper are as follows:

- We identify the value of pre-trained code generation models and are the first to effectively apply them to code understanding tasks.
- Our proposed CL4D method improves the representation ability of decoder-only models, enabling them to outperform encoder-only models in code understanding tasks without fine-tuning.
- Our findings demonstrate the potential for a decoder-only model to unify both code understanding and code generation tasks.
- We will release model training code and pre-trained model parameters to contribute to the further research of code understanding large models.

## 2 Related works

**Code Representation for Programming Languages** Recently, obtaining programming language representations for a wide range of downstream code understanding tasks has garnered significant attention. Models such as CodeBERT (Feng et al., 2020), StarEncoder (Li et al., 2023), CodeSage (Zhang et al., 2024), and CoLSBERT (Lin et al., 2024) have been inspired by the success of the Masked Language Modeling (MLM) objective in natural language processing tasks. They optimize this objective on serialized code data, treating the code as text. Some studies have introduced additional tasks commonly used in text understanding, such as the replaced token detection objective (Devlin et al., 2019) or the next sentence prediction objective (Clark et al., 2020), for source code. However, recognizing that code is different from text, some works propose leveraging the structural information of code during training to enhance semantic learning. For instance, GraphCodeBERT (Guo et al., 2021) uses data flow to encode variable value flows in functions, TreeBERT (Jiang et al., 2021) extracts syntactic structure from the abstract syntax tree (AST) to guide the training process, and SynCoBERT (Wang et al., 2021) and UniXcoder (Guo et al., 2022) incorporate the serialized AST as part of the input for model training.

While these works based on encoder-only Transformer contribute to the development of code understanding tasks, they are limited by the “small” model sizes and the relatively “small” code corpora they are trained on, typically consisting of millions of samples. The largest model among them is only 1.5B parameters, namely CoLSBERT. By contrast, decoder-only code generation models, such as the 15B parameter StarCoder (Li et al., 2023) trained on a 1T token corpus, have significantly larger model sizes and training data. Motivated by these limitations, our research aims to transfer the extensive code knowledge from pre-trained code generation models to code understanding tasks. We utilize their decoder-only architecture to obtain code representations for downstream code understanding tasks, achieving state-of-the-art performance.

**Contrastive Learning for Code** Contrastive learning is widely employed in representation learning of deep learning networks. Recent works have applied contrastive learning to code corpora, proposing various methods to construct pos-

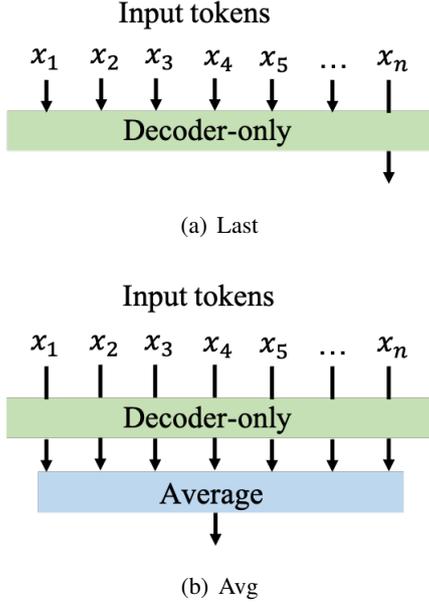


Figure 2: Different ways to get code representation in decoder-only models.

itive or negative samples to enhance code representation. For example, CoSQA (Huang et al., 2021) constructs positive samples by rewriting the query, SynCoBERT (Wang et al., 2021) and Code-MVP (Wang et al., 2022) create positive sample pairs across different code modalities using diverse information obtained during program compilation, and UniXcoder (Guo et al., 2022), inspired by SimCLR (Chen et al., 2020), uses dropout to construct positive samples in the latent vector space. Additionally, ChatDANCE (Wang et al., 2023) uses large language models such as ChatGPT to synthesize positive code samples. CodeRetriever (Li et al., 2022), R2 (Dong et al., 2023), and CodeSage (Zhang et al., 2024) construct hard negatives for queries using rankers. In this paper, to address the insufficient representation ability of decoder-only models due to the unidirectional attention mechanism, we select code snippets with different semantics but close to the query in the representation space as hard negatives.

### 3 Methodology

In this section, we explore obtaining encoding from decoder-only pre-trained code generation models to address code understanding tasks, with models ranging from 125 million to several billion parameters. We first introduce methods to effectively obtain code representation from decoder-only models, followed by how to continue pre-training these

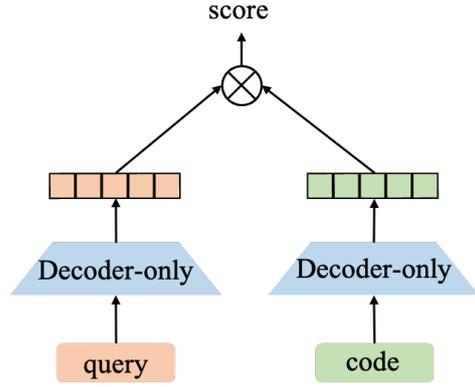


Figure 3: Architecture of the dual-encoder model.

models using contrastive learning to enhance their representation capabilities.

#### 3.1 Model Architecture

As illustrated in Figure 2, we investigated two methods for obtaining code representation from decoder-only models: 1) using the embedding of the last token, and 2) averaging the embeddings of all tokens. Encoder-only models like BERT typically use the embedding of the first token  $[CLS]$  in the last hidden layer as the feature representation of the input code snippet, utilizing a bidirectional attention mechanism. By contrast, decoder-only models use a unidirectional attention mechanism, where only subsequent tokens can refer to previous information. Consequently, only the last token aggregates the information of the entire sample. In the first method, we use the embedding of the last token in the last hidden layer as the feature representation of the input code snippet. In the second method, we calculate the average of the embeddings of all input tokens in the last hidden layer as the feature representation.

Following previous work (Guo et al., 2021; Zhang et al., 2024), we adopt a dual-encoder architecture to continue pre-training the code encoding model. As depicted in Figure 3, this architecture consists of two Transformer decoder modules with shared weights to encode the input code snippet. In our experiments, we initialize the Transformer decoder module with the pre-trained code generation models.

#### 3.2 Training

The traditional left-to-right training method for predicting the next token limits the representation capability of code generation models. To fully lever-

Language	#Functions
Python	714,352
Java	718,902
Go	715,664
Php	707,424
JavaScript	707,778
Ruby	64,157
Total	3,628,277

Table 1: Statistics of training data.

age the extensive code knowledge in the existing open-source code generation models and to avoid the high costs of retraining code understanding models, we employ contrastive learning to further train these models, thereby improving their representation abilities.

### 3.2.1 Training data

We train decoder-only Transformer models on six programming languages from The Stack dataset (Kocetkov et al., 2022): Python, Java, Go, PHP, JavaScript, and Ruby. To enhance the ability of model to differentiate between natural language and programming language, we use Tree-Sitter<sup>1</sup> to extract bimodal data from The Stack dataset for training, i.e.,  $(query, code)$  pairs. The query is the first line of the function docstring, which approximates the query of user. Additionally, we apply the following filtering rules to improve the quality of the training corpus:

- Exclude samples where the query is not in English.
- Exclude samples where the query is less than 3 tokens or more than 256 tokens.
- Exclude samples where the function name contains “test”.
- Exclude constructor samples.
- Exclude samples where the function body is fewer than 3 lines.

Given that pre-trained code generation models have already learned a vast amount of code knowledge, we construct millions of data samples for continued pre-training. The statistical results of the pre-training data are shown in the Table 1.

<sup>1</sup><https://tree-sitter.github.io/tree-sitter/>

### 3.2.2 Contrastive Learning

Contrastive learning is the primary method for enhancing the representation ability of models (Zhang et al., 2023). Here, we employ contrastive learning tasks to train pre-trained code generation models, addressing the limited representation ability of decoder-only Transformer due to the unidirectional attention mechanism.

Specifically, we randomly sample  $n$  samples from the training corpus to form a batch of data  $B = (q_1, c_1), \dots, (q_n, c_n)$ . For a  $(q_i, c_i)$  pair, we take  $c_i$  as the positive sample  $c^+$  for  $q_i$ , and the other  $n - 1$  codes in the batch, excluding  $c_i$ , as negative samples for  $q_i$ . Additionally, following Gao et al. (Gao et al., 2021), we construct hard negative samples  $c^h$  for  $q_i$ , i.e., code snippets that are close to the query in the representation space but have different semantics from the query. The loss function can be formulated as:

$$\mathcal{L} = -\log \frac{\exp(s(q, c^+)/\tau)}{\sum_{i=1}^n \exp(s(q, c_i)/\tau) + \exp(s(q, c^h)/\tau)}, \quad (1)$$

where  $\tau$  is the temperature hyper-parameter, which we set to 0.05.  $s(q, c)$  denotes the correlation score between the two, calculated using cosine similarity. The training objective is to minimize the distance between related pairs of samples in the representation space while maximizing the distance between unrelated pairs. Each batch is randomly sampled from the entire corpus, allowing for mixed programming languages within a batch, which helps the pre-trained model learn a unified semantic space for codes in different programming languages.

## 4 Experiments

In this section, we conduct experiments to address the following research questions:

- Q1: What is the optimal method for extracting code representations from decoder-only Transformer?
- Q2: How well do raw pre-trained code generation models perform on code understanding tasks?
- Q3: To what extent does contrastive learning enhance the code representations of decoder-only Transformer?
- Q4: Why does our approach work?

## 4.1 Experimental Setup

**Understanding Tasks** We evaluate the code understanding capabilities of decoder-only Transformer on two primary tasks:

- **Code Search:** This task aims to find the most semantically similar code snippet in a candidate codebase based on a given natural language query. We perform experiments on two datasets: CodeSearchNet (CSN) (Husain et al., 2019) and CoSQA (Huang et al., 2021). CSN is a multi-language code corpus collected from GitHub, including Python, Java, Go, PHP, JavaScript, and Ruby. CoSQA contains real user queries from Microsoft Bing search logs, with code snippets from CSN. We use Mean Reciprocal Rank (MRR) as the evaluation metric, which is widely adopted in previous studies (Guo et al., 2022; Zhang et al., 2024).
- **Clone Detection:** This task aims to identify the most semantically similar code snippet in a candidate codebase based on a given code snippet as query. We conduct experiments on the POJ-104 dataset (Mou et al., 2016), designed to measure semantic similarity between code snippets. Mean Average Precision (MAP) is the evaluation metric for this task.

**Baseline** We compare the code understanding capabilities of encoder-only models and decoder-only models of similar sizes, and evaluate the improvements in understanding capabilities provided by the proposed CL4D method for decoder-only models.

For encoder-only models, we select four state-of-the-art pre-trained models:

- **CodeBERT** (Feng et al., 2020) (125M) is trained with masked language modeling and replaced token detection on six programming languages in CodeSearchNet.
- **GraphCodeBERT** (Guo et al., 2021) (125M) is trained with additional code structure understanding tasks, including edge prediction and node alignment.
- **UniXcoder** (Guo et al., 2022) (125M) is trained with multiple language modeling and contrastive learning tasks. It is an encoder-decoder architecture model, where only the encoder is used for code understanding tasks via a special token  $\langle encoder\_only \rangle$ .

- **CodeSage** (Zhang et al., 2024) (1.3B) is trained with masked language modeling and contrastive learning on the extensive code corpus from The Stack dataset.

For decoder-only models, we select four state-of-the-art pre-trained models:

- **CodeGPT** (Lu et al., 2021) (125M) is trained on CodeSearchNet with the same structure and training objectives as GPT-2 (Radford et al., 2019).
- **CodeGen** (Nijkamp et al., 2023) (350M) is a model for program analysis trained on extensive natural language and programming language data. We choose the 350M version to facilitate comparison with similarly sized encoder-only models.
- **SantaCoder** (Allal et al., 2023) (1.1B) is trained with multi-query attention and fill-in-the-middle on Java, JavaScript, and Python subsets of The Stack, with additional near-deduplication and comments-to-code filtering.
- **phi-1** (Gunasekar et al., 2023) (1.3B) is a code generation model trained using textbook data sourced from the internet and textbooks synthesized by GPT-3.5.

The network architectures of these models are detailed in Table 3.

**Training details** During the pre-training phase, we utilize the tokenizer from each decoder-only model directly for tokenization. These models are trained using the AdamW optimizer, with a learning rate set to  $2e-5$ . We train the decoder-only models for 2 epochs on the dataset presented in Table 1, employing a batch size of 64. The experiments are conducted on 8 GPUs (80G A100). The longest pre-training duration is observed for phi-1, which takes approximately 3 days. In the fine-tuning phase, we adhere to the experimental settings of UniXcoder to minimize the impact of hyper-parameters on the fine-tuning results.

## 4.2 Q1: What is the optimal method for extracting code representations from decoder-only Transformer?

Decoder-only models generate the next token in an autoregressive manner, using a unidirectional attention mechanism that references only previous

Type	CSN							CoSQA
	Python	Java	Go	Php	JavaScript	Ruby	Avg	
Left padding + Avg	68.0	67.7	89.1	62.9	59.5	62.2	68.23	66.0
Right padding + Avg	<b>69.0</b>	<b>70.6</b>	<b>90.1</b>	<b>64.4</b>	<b>64.8</b>	<b>69.6</b>	<b>71.42</b>	<b>71.6</b>
Left padding + Last	<b>70.1</b>	<b>71.0</b>	90.1	<b>64.9</b>	<b>65.7</b>	<b>70.1</b>	<b>71.98</b>	67.9
Right padding + Last	67.4	70.1	<b>90.2</b>	54.7	64.1	56.1	67.10	<b>68.9</b>

Table 2: The performance of code representations acquired in different ways on code search tasks. Bold indicates optimal performance, and bold and underlined indicates suboptimal performance.

	Model	size	L.	A.	H.
Encoder-only	CodeBERT	125M	12	12	768
	GraphCodeBERT	125M	12	12	768
	UniXcoder	125M	12	12	768
	CodeSage	1.3B	24	16	2048
Decoder-only	CodeGPT	125M	12	12	768
	CodeGen	350M	20	16	1024
	SantaCoder	1.1B	24	16	2048
	phi-1	1.3B	24	32	2048

Table 3: Model Architecture.

information during encoding. To determine the optimal method for obtaining code representations in decoder-only Transformer models, we investigated two approaches: decoder-only last token (**Last**) and decoder-only average (**Avg**), as depicted in Figure 2. Additionally, we examined the impact of padding on the effectiveness of code representations.

Using CodeGen (350M) as an example, we conducted an ablation experiment on the downstream task of code search, with results presented in Table 2. Our findings indicate that the optimal method for obtaining code representations varies with different padding strategies. When right padding is used, averaging all token embeddings yields better results than using only the embedding of the last token. Conversely, with left padding, the embedding of the last token outperforms the average of all embeddings. Considering results from both the CSN and CoSQA datasets, the decoder-only Transformer achieves the best representation with right padding and averaging all token embeddings. Subsequent experiments employed this setting to obtain code representations.

#### 4.3 Q2: How well do raw pre-trained code generation models perform on code understanding tasks?

We evaluated baseline models without fine-tuning on code search and clone detection tasks. As shown in Table 4, the zero-shot performance of encoder-only models on two downstream code understand-

ing tasks improves with the introduction of more code structure-related tasks or scaling up strategies. Notably, UniXcoder and CodeSage leverage contrastive learning tasks during pre-training, significantly enhancing zero-shot performance compared to other encoder-only models. By contrast, decoder-only models underperform on downstream tasks related to code understanding, as they primarily learn to predict the next token during the pre-training.

#### 4.4 Q3: To what extent does contrastive learning enhance the code representations of decoder-only Transformer?

The experimental results from Q2 indicate that the extensive code knowledge acquired by pre-trained code understanding models remains underutilized. To leverage this knowledge for code understanding tasks, we applied the CL4D method described in Section 3 for continued pre-training of these decoder-only models. The experimental outcomes, presented in Table 4, demonstrate that: 1) Our proposed method significantly enhances the zero-shot performance of decoder-only models on both code search and clone detection tasks, with average improvements ranging from 40% to 60%, and a maximum improvement of 74.11%. 2) Our method enables the zero-shot and fine-tune performance of decoder-only models on various code understanding tasks to surpass that of encoder-only models of comparable size. 3) Our method enables decoder-only models to achieve performance comparable to state-of-the-art, fine-tuned encoder-only models of the same size on the CSN dataset, even without fine-tuning. 4) As the number of parameters in decoder-only models increases, their performance on downstream code understanding tasks progressively improves.

#### 4.5 Q4: Why does our approach work?

The experimental results from Q3 indicate that our proposed method significantly enhances the per-

Method	Code Search		Clone Detection	
	CSN	CoSQA	POJ-104	
<b>Zero-shot</b>				
Encoder-only	CodeBERT (Feng et al., 2020) (125M)	0.10	0.24	20.38
	GraphCodeBERT (Guo et al., 2021) (125M)	11.26	16.20	31.27
	UniXcoder (Guo et al., 2022) (125M)	46.40	42.11	42.08
	CodeSage (Zhang et al., 2024) (1.3B)	71.24	47.53	<b>73.07</b>
Decoder-only	CodeGPT (Lu et al., 2021) (125M)	0.12	0.04	9.41
	CodeGen (Nijkamp et al., 2023) (350M)	1.42	0.45	13.20
	SantaCoder (Allal et al., 2023) (1.1B)	0.07	0.11	15.57
	phi-1 (Gunasekar et al., 2023) (1.3B)	6.66	6.75	27.62
	CodeGPT (Lu et al., 2021) (125M) + CL4D	<u>67.57</u> (↑ 67.45)	<b>53.5</b> (↑ 53.46)	25.93 (↑ 16.52)
Decoder-only	CodeGen (Nijkamp et al., 2023) (350M) + CL4D	72.00 (↑ 70.58)	51.2 (↑ 50.75)	45.84 (↑ 32.64)
	SantaCoder (Allal et al., 2023) (1.1B) + CL4D	<b>74.18</b> (↑ 74.11)	52.8 (↑ 52.69)	<b>71.14</b> (↑ 55.57)
	phi-1 (Gunasekar et al., 2023) (1.3B) + CL4D	<b>73.20</b> (↑ 66.54)	<b>52.9</b> (↑ 46.15)	69.99 (↑ 42.37)
<b>Fine-tune</b>				
Encoder-only	CodeBERT (Feng et al., 2020) (125M)	70.17	65.7	83.79
	GraphCodeBERT (Guo et al., 2021) (125M)	72.10	68.4	85.50
	UniXcoder (Guo et al., 2022) (125M)	74.40	70.1	89.56
	CodeSage (Zhang et al., 2024) (1.3B)	<b>75.80</b>	68.0	87.70
Decoder-only	CodeGPT (Lu et al., 2021) (125M) + CL4D	70.20	69.0	87.96
	CodeGen (Nijkamp et al., 2023) (350M) + CL4D	73.30	71.5	<b>89.68</b>
	SantaCoder (Allal et al., 2023) (1.1B) + CL4D	74.98	<b>72.2</b>	83.98
	phi-1 (Gunasekar et al., 2023) (1.3B) + CL4D	<b>75.83</b>	<b>72.8</b>	<b>92.72</b>

Table 4: Comparison of the performance of encoder-only models and decoder-only models on code understanding tasks in zero-shot and fine-tune settings. Bold indicates optimal performance, and bold and underlined indicates suboptimal performance.

Model	Python	Java	Go	Php	JavaScript	Ruby	Avg
Encoder-only	CodeBERT (Feng et al., 2020) (125M)	0.05	0.03	0.14	0.02	0.04	0.10
	GraphCodeBERT (Guo et al., 2021) (125M)	10.37	8.59	12.47	8.07	7.29	11.26
	UniXcoder (Guo et al., 2022) (125M)	42.17	43.92	61.39	35.21	40.46	46.40
	CodeSage (Zhang et al., 2024) (1.3B)	70.77	70.21	83.71	61.33	69.50	71.24
Decoder-only	CodeGPT (Lu et al., 2021) (125M) + CL4D	67.1	66.3	83.1	58.0	61.8	67.57
	CodeGen (Nijkamp et al., 2023) (350M) + CL4D	70.6	71.5	86.5	63.0	67.3	72.00
	SantaCoder (Allal et al., 2023) (1.1B) + CL4D	73.3	72.9	86.6	65.3	71.4	74.18
	phi-1 (Gunasekar et al., 2023) (1.3B) + CL4D	72.9	71.6	86.3	63.8	69.1	73.20

Table 5: Results of code search task over six programming languages of CSN in the zero-shot setting.

formance of existing decoder-only models on various downstream code understanding tasks, both in zero-shot and fine-tuning scenarios. To investigate the effectiveness of our method, we designed ablation experiments to analyze the contributions of different components in CL4D. Additionally, we visualized the impact of our method on the semantic encoding capabilities of decoder-only models to provide a more intuitive understanding of its effectiveness.

**Ablation Study** We trained three groups of models based on the CodeGen model: 1) the original Codegen; 2) the model trained using the contrastive learning method with in-batch negatives; 3) the model trained using the contrastive learning method with in-batch negatives and hard negatives. We compared their zero-shot performance

on downstream code understanding tasks, with results shown in Table 6. The findings reveal that using in-batch negatives significantly enhances the code understanding ability of decoder-only models. Adding hard negatives further improves performance by approximately 1.5%. Contrastive learning is expected to become an effective method for the decoder-only Transformer architecture to unify code understanding and code generation tasks.

Method	Code Search		Clone Detection
	CSN	CoSQA	POJ-104
CL4D	72.00	51.20	45.84
- Hard Negative	70.80	50.40	44.65
- In-Batch Negative	1.42	0.45	13.20

Table 6: Ablation study results of CL4D in zero-shot setting.

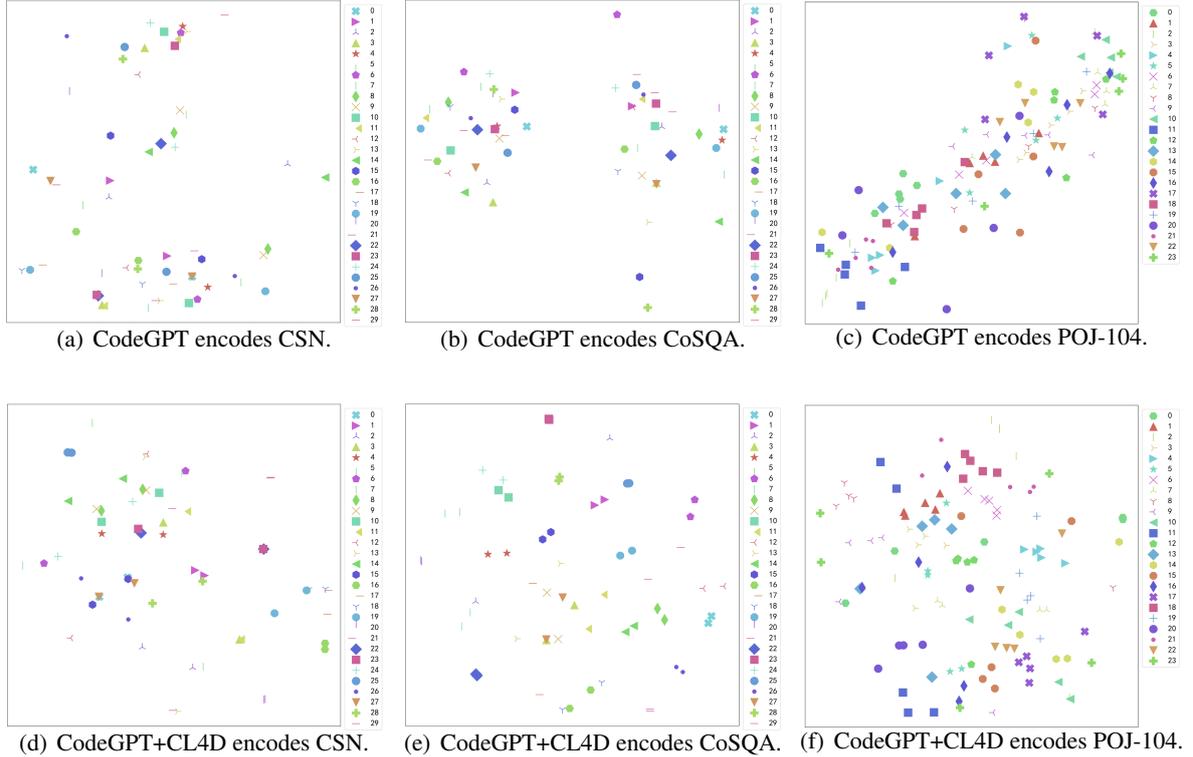


Figure 4: Visualization of code representations. The first row shows the encoding results of CodeGPT, while the second row illustrates the encoding results of CodeGPT+CL4D.

**Visualization** To explore why CL4D effectively improves the performance of decoder-only models on code understanding tasks, we visualized the representation distribution of CodeGPT and CodeGPT+CL4D on CSN, CoSQA, and POJ-104 datasets. For the CSN dataset, each query has only one correct answer, so we randomly sampled 30 query-code pairs from the test set to form 30 categories, with 2 samples in each category. The same approach was applied to the CoSQA dataset. In the POJ-104 test set, which has 24 problems, each with multiple correct answers, we sampled 5 correct answers per problem, forming 24 categories with 5 samples each.

We then feed the sampled data into the models to obtain their high-dimensional feature space representations. Using t-SNE (Van der Maaten and Hinton, 2008), we reduce the dimensionality of these representations and visualize their distribution, as shown in Figure 4. Points with the same color and shape represent samples with the same semantics. Ideally, their representations in the vector space should be as close as possible. The results show that the representations encoded by the original decoder-only model are highly scattered, with semantically similar samples far apart in the vector

space. The decoder-only model pre-trained with CL4D aligns the representations of semantically similar samples, bringing them closer together in the semantic space.

Overall, the visualization clearly demonstrates that our method significantly enhances the representation capability of the decoder-only models.

## 5 Conclusion

In this paper, we have presented a novel application of pre-trained decoder-only code generation models to code understanding tasks. We explore four distinct methods by which these decoder-only models develop code representations. Our study includes a comparative analysis of encoder-only and decoder-only models, examining their performance on downstream code understanding tasks in a zero-shot setting. To enhance the representational capabilities of the decoder-only model, we introduce a contrastive learning method, CL4D, which constructs in-batch negatives and hard negatives for training. Experimental results demonstrate that CL4D enables decoder-only models to significantly outperform encoder-only models in most tasks. Our findings indicate that decoder-only Transformer have the potential to unify code un-

derstanding and generation tasks. We will focus on further exploring this direction to preserve the code generation capabilities of larger decoder-only models while enhancing their code understanding abilities in the future work.

## References

- Loubna Ben Allal, Raymond Li, Denis Kocetkov, Chenghao Mou, Christopher Akiki, Carlos Muñoz Ferrandis, Niklas Muennighoff, Mayank Mishra, Alex Gu, Manan Dey, Logesh Kumar Umapathi, Carolyn Jane Anderson, Yangtian Zi, Joel Lamy-Poirier, Hailey Schoelkopf, Sergey Troshin, Dmitry Abulkhanov, Manuel Romero, Michael Lappert, Francesco De Toni, Bernardo García del Río, Qian Liu, Shamik Bose, Urvashi Bhattacharyya, Terry Yue Zhuo, Ian Yu, Paulo Villegas, Marco Zocca, Sourab Mangrulkar, David Lansky, Huu Nguyen, Danish Contractor, Luis Villa, Jia Li, Dzmitry Bahdanau, Yacine Jernite, Sean Hughes, Daniel Fried, Arjun Guha, Harm de Vries, and Leandro von Werra. 2023. [Santacoder: don't reach for the stars!](#) *CoRR*, abs/2301.03988.
- Ting Chen, Simon Kornblith, Mohammad Norouzi, and Geoffrey E. Hinton. 2020. [A simple framework for contrastive learning of visual representations](#). In *Proceedings of the 37th International Conference on Machine Learning, ICML 2020, 13-18 July 2020, Virtual Event*, volume 119 of *Proceedings of Machine Learning Research*, pages 1597–1607. PMLR.
- Kevin Clark, Minh-Thang Luong, Quoc V. Le, and Christopher D. Manning. 2020. [ELECTRA: pre-training text encoders as discriminators rather than generators](#). In *8th International Conference on Learning Representations, ICLR 2020, Addis Ababa, Ethiopia, April 26-30, 2020*. OpenReview.net.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. [BERT: pre-training of deep bidirectional transformers for language understanding](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, NAACL-HLT 2019, Minneapolis, MN, USA, June 2-7, 2019, Volume 1 (Long and Short Papers)*, pages 4171–4186. Association for Computational Linguistics.
- Hande Dong, Jiayi Lin, Yichong Leng, Jiawei Chen, and Yutao Xie. 2023. [Retriever and ranker framework with probabilistic hard negative sampling for code search](#). *CoRR*, abs/2305.04508.
- Zhangyin Feng, Daya Guo, Duyu Tang, Nan Duan, Xiaocheng Feng, Ming Gong, Linjun Shou, Bing Qin, Ting Liu, Daxin Jiang, and Ming Zhou. 2020. [Codebert: A pre-trained model for programming and natural languages](#). In *Findings of the Association for Computational Linguistics: EMNLP 2020, Online Event, 16-20 November 2020*, volume EMNLP 2020 of *Findings of ACL*, pages 1536–1547. Association for Computational Linguistics.
- Luyu Gao, Yunyi Zhang, Jiawei Han, and Jamie Callan. 2021. [Scaling deep contrastive learning batch size under memory limited setup](#). In *Proceedings of the 6th Workshop on Representation Learning for NLP, RepL4NLP@ACL-IJCNLP 2021, Online, August 6, 2021*, pages 316–321. Association for Computational Linguistics.
- Suriya Gunasekar, Yi Zhang, Jyoti Aneja, Caio César Teodoro Mendes, Allie Del Giorno, Sivakanth Gopi, Mojan Javaheripi, Piero Kauffmann, Gustavo de Rosa, Olli Saarikivi, Adil Salim, Shital Shah, Harkirat Singh Behl, Xin Wang, Sébastien Bubeck, Ronen Eldan, Adam Tauman Kalai, Yin Tat Lee, and Yuanzhi Li. 2023. [Textbooks are all you need](#). *CoRR*, abs/2306.11644.
- Daya Guo, Shuai Lu, Nan Duan, Yanlin Wang, Ming Zhou, and Jian Yin. 2022. [Unixcoder: Unified cross-modal pre-training for code representation](#). In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers), ACL 2022, Dublin, Ireland, May 22-27, 2022*, pages 7212–7225. Association for Computational Linguistics.
- Daya Guo, Shuo Ren, Shuai Lu, Zhangyin Feng, Duyu Tang, Shujie Liu, Long Zhou, Nan Duan, Alexey Svyatkovskiy, Shengyu Fu, Michele Tufano, Shao Kun Deng, Colin B. Clement, Dawn Drain, Neel Sundaresan, Jian Yin, Daxin Jiang, and Ming Zhou. 2021. [Graphcodebert: Pre-training code representations with data flow](#). In *9th International Conference on Learning Representations, ICLR 2021, Virtual Event, Austria, May 3-7, 2021*. OpenReview.net.
- Daya Guo, Qihao Zhu, Dejian Yang, Zhenda Xie, Kai Dong, Wentao Zhang, Guanting Chen, Xiao Bi, Y. Wu, Y. K. Li, Fuli Luo, Yingfei Xiong, and Wenfeng Liang. 2024. [Deepseek-coder: When the large language model meets programming - the rise of code intelligence](#). *CoRR*, abs/2401.14196.
- Jordan Hoffmann, Sebastian Borgeaud, Arthur Mensch, Elena Buchatskaya, Trevor Cai, Eliza Rutherford, Diego de Las Casas, Lisa Anne Hendricks, Johannes Welbl, Aidan Clark, Tom Hennigan, Eric Noland, Katie Millican, George van den Driessche, Bogdan Damoc, Aurelia Guy, Simon Osindero, Karen Simonyan, Erich Elsen, Jack W. Rae, Oriol Vinyals, and Laurent Sifre. 2022. [Training compute-optimal large language models](#). *CoRR*, abs/2203.15556.
- Junjie Huang, Duyu Tang, Linjun Shou, Ming Gong, Ke Xu, Daxin Jiang, Ming Zhou, and Nan Duan. 2021. [Cosqa: 20, 000+ web queries for code search and question answering](#). In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing, ACL/IJCNLP 2021, (Volume 1: Long Papers), Virtual Event, August 1-6, 2021*, pages 5690–5700. Association for Computational Linguistics.

- Hamel Husain, Ho-Hsiang Wu, Tiferet Gazit, Miltiadis Allamanis, and Marc Brockschmidt. 2019. [CodeSearchNet challenge: Evaluating the state of semantic code search](#). *CoRR*, abs/1909.09436.
- Xue Jiang, Zhuoran Zheng, Chen Lyu, Liang Li, and Lei Lyu. 2021. [Treebert: A tree-based pre-trained model for programming language](#). In *Proceedings of the Thirty-Seventh Conference on Uncertainty in Artificial Intelligence, UAI 2021, Virtual Event, 27-30 July 2021*, volume 161 of *Proceedings of Machine Learning Research*, pages 54–63. AUAI Press.
- Denis Kocetkov, Raymond Li, Loubna Ben Allal, Jia Li, Chenghao Mou, Carlos Muñoz Ferrandis, Yacine Jernite, Margaret Mitchell, Sean Hughes, Thomas Wolf, Dzmitry Bahdanau, Leandro von Werra, and Harm de Vries. 2022. [The stack: 3 TB of permissively licensed source code](#). *CoRR*, abs/2211.15533.
- Raymond Li, Loubna Ben Allal, Yangtian Zi, Niklas Muennighoff, Denis Kocetkov, Chenghao Mou, Marc Marone, Christopher Akiki, Jia Li, Jenny Chim, Qian Liu, Evgenii Zheltonozhskii, Terry Yue Zhuo, Thomas Wang, Olivier Dehaene, Mishig Davaadorj, Joel Lamy-Poirier, João Monteiro, Oleh Shliazhko, Nicolas Gontier, Nicholas Meade, Armel Zebaze, Ming-Ho Yee, Logesh Kumar Umapathi, Jian Zhu, Benjamin Lipkin, Muhtasham Oblokulov, Zhiruo Wang, Rudra Murthy V, Jason Stillerman, Siva Sankalp Patel, Dmitry Abulkhanov, Marco Zocca, Manan Dey, Zhihan Zhang, Nour Moustafa-Fahmy, Urvashi Bhattacharyya, Wenhao Yu, Swayam Singh, Sasha Luccioni, Paulo Villegas, Maxim Kunakov, Fedor Zhdanov, Manuel Romero, Tony Lee, Nadav Timor, Jennifer Ding, Claire Schlesinger, Hailley Schoelkopf, Jan Ebert, Tri Dao, Mayank Mishra, Alex Gu, Jennifer Robinson, Carolyn Jane Anderson, Brendan Dolan-Gavitt, Danish Contractor, Siva Reddy, Daniel Fried, Dzmitry Bahdanau, Yacine Jernite, Carlos Muñoz Ferrandis, Sean Hughes, Thomas Wolf, Arjun Guha, Leandro von Werra, and Harm de Vries. 2023. [StarCoder: may the source be with you!](#) *CoRR*, abs/2305.06161.
- Xiaonan Li, Yeyun Gong, Yelong Shen, Xipeng Qiu, Hang Zhang, Bolun Yao, Weizhen Qi, Daxin Jiang, Weizhu Chen, and Nan Duan. 2022. [Codertriever: A large scale contrastive pre-training method for code search](#). In *Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing, EMNLP 2022, Abu Dhabi, United Arab Emirates, December 7-11, 2022*, pages 2898–2910. Association for Computational Linguistics.
- Jiayi Lin, Hande Dong, Yutao Xie, and Lei Zhang. 2024. [Scaling laws behind code understanding model](#). *CoRR*, abs/2402.12813.
- Anton Lozhkov, Raymond Li, Loubna Ben Allal, Federico Cassano, Joel Lamy-Poirier, Nouamane Tazi, Ao Tang, Dmytro Pykhtar, Jiawei Liu, Yuxiang Wei, Tianyang Liu, Max Tian, Denis Kocetkov, Arthur Zucker, Younes Belkada, Zijian Wang, Qian Liu, Dmitry Abulkhanov, Indraneil Paul, Zhuang Li, Wen-Ding Li, Megan Risdal, Jia Li, Jian Zhu, Terry Yue Zhuo, Evgenii Zheltonozhskii, Nii Osae Osae Dade, Wenhao Yu, Lucas Krauß, Naman Jain, Yixuan Su, Xuanli He, Manan Dey, Edoardo Abati, Yekun Chai, Niklas Muennighoff, Xiangru Tang, Muhtasham Oblokulov, Christopher Akiki, Marc Marone, Chenghao Mou, Mayank Mishra, Alex Gu, Binyuan Hui, Tri Dao, Armel Zebaze, Olivier Dehaene, Nicolas Patry, Canwen Xu, Julian J. McAuley, Han Hu, Torsten Scholak, Sébastien Paquet, Jennifer Robinson, Carolyn Jane Anderson, Nicolas Chapados, and et al. 2024. [StarCoder 2 and the stack v2: The next generation](#). *CoRR*, abs/2402.19173.
- Shuai Lu, Daya Guo, Shuo Ren, Junjie Huang, Alexey Svyatkovskiy, Ambrosio Blanco, Colin B. Clement, Dawn Drain, Daxin Jiang, Duyu Tang, Ge Li, Lidong Zhou, Linjun Shou, Long Zhou, Michele Tufano, Ming Gong, Ming Zhou, Nan Duan, Neel Sundaresan, Shao Kun Deng, Shengyu Fu, and Shujie Liu. 2021. [Codexglue: A machine learning benchmark dataset for code understanding and generation](#). In *Proceedings of the Neural Information Processing Systems Track on Datasets and Benchmarks 1, NeurIPS Datasets and Benchmarks 2021, December 2021, virtual*.
- Lili Mou, Ge Li, Lu Zhang, Tao Wang, and Zhi Jin. 2016. [Convolutional neural networks over tree structures for programming language processing](#). In *Proceedings of the Thirtieth AAAI Conference on Artificial Intelligence, February 12-17, 2016, Phoenix, Arizona, USA*, pages 1287–1293. AAAI Press.
- Erik Nijkamp, Bo Pang, Hiroaki Hayashi, Lifu Tu, Huan Wang, Yingbo Zhou, Silvio Savarese, and Caiming Xiong. 2023. [Codegen: An open large language model for code with multi-turn program synthesis](#). In *The Eleventh International Conference on Learning Representations, ICLR 2023, Kigali, Rwanda, May 1-5, 2023*. OpenReview.net.
- Alec Radford, Jeffrey Wu, Rewon Child, David Luan, Dario Amodei, Ilya Sutskever, et al. 2019. Language models are unsupervised multitask learners. *OpenAI blog*, 1(8):9.
- Baptiste Rozière, Jonas Gehring, Fabian Gloeckle, Sten Sootla, Itai Gat, Xiaoqing Ellen Tan, Yossi Adi, Jingyu Liu, Tal Remez, Jérémy Rapin, Artyom Kozhevnikov, Ivan Evtimov, Joanna Bitton, Manish Bhatt, Cristian Canton-Ferrer, Aaron Grattafiori, Wenhan Xiong, Alexandre Défossez, Jade Copet, Faisal Azhar, Hugo Touvron, Louis Martin, Nicolas Usunier, Thomas Scialom, and Gabriel Synnaeve. 2023. [Code llama: Open foundation models for code](#). *CoRR*, abs/2308.12950.
- Laurens Van der Maaten and Geoffrey Hinton. 2008. Visualizing data using t-sne. *Journal of machine learning research*, 9(11).
- Xin Wang, Yasheng Wang, Fei Mi, Pingyi Zhou, Yao Wan, Xiao Liu, Li Li, Hao Wu, Jin Liu, and Xin Jiang.

2021. Syncobert: Syntax-guided multi-modal contrastive pre-training for code representation. *arXiv preprint arXiv:2108.04556*.
- Xin Wang, Yasheng Wang, Yao Wan, Jiawei Wang, Pingyi Zhou, Li Li, Hao Wu, and Jin Liu. 2022. [CODE-MVP: learning to represent source code from multiple views with contrastive pre-training](#). In *Findings of the Association for Computational Linguistics: NAACL 2022, Seattle, WA, United States, July 10-15, 2022*, pages 1066–1077. Association for Computational Linguistics.
- Yanlin Wang, Lianghong Guo, Ensheng Shi, Wenqing Chen, Jiachi Chen, Wanjun Zhong, Menghan Wang, Hui Li, Hongyu Zhang, Ziyu Lyu, and Zibin Zheng. 2023. [You augment me: Exploring chatgpt-based data augmentation for semantic code search](#). In *IEEE International Conference on Software Maintenance and Evolution, ICSME 2023, Bogotá, Colombia, October 1-6, 2023*, pages 14–25. IEEE.
- Dejiao Zhang, Wasi Ahmad, Ming Tan, Hantian Ding, Ramesh Nallapati, Dan Roth, Xiaofei Ma, and Bing Xiang. 2024. [Codesage: Code representation learning at scale](#). In *The Twelfth International Conference on Learning Representations*.
- Junlei Zhang, Zhenzhong Lan, and Junxian He. 2023. [Contrastive learning of sentence embeddings from scratch](#). In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing, EMNLP 2023, Singapore, December 6-10, 2023*, pages 3916–3932. Association for Computational Linguistics.