
WebCanvas: Benchmarking Web Agents in Online Environments

Yichen Pan^{1*†} Dehan Kong^{1*‡} Sida Zhou^{1*†} Cheng Cui^{1*†}
Yifei Leng¹ Bing Jiang¹ Hangyu Liu¹ Yanyi Shang¹
Shuyan Zhou² Tongshuang Wu² Zhengyang Wu¹
¹iMean AI ²Carnegie Mellon University
dehan@imean.ai

Abstract

For web agents to be practically useful, they must adapt to the continuously evolving web environment characterized by frequent updates to user interfaces and content. However, most existing benchmarks only capture the *static* aspects of the web. To bridge this gap, we introduce WebCanvas, an innovative online evaluation framework for web agents that effectively addresses the dynamic nature of web interactions. WebCanvas contains three main components to facilitate realistic assessments: (1) A novel evaluation metric which reliably capture critical intermediate actions or states necessary for task completions while disregarding noise caused by insignificant events or changed web-elements. (2) A benchmark dataset called Mind2Web-Live, a refined version of original Mind2Web static dataset containing 542 tasks with 2439 intermediate evaluation states; (3) Lightweight and generalizable annotation tools and testing pipelines that enables the community to collect and maintain the high-quality, up-to-date dataset. Building on WebCanvas, we open-source an agent framework with extensible modules for reasoning, providing a foundation for the community to conduct online inference and evaluations. Our best-performing agent achieves a task success rate of 23.1% and a task completion rate of 48.8% on the Mind2Web-Live test set. Additionally, we analyze the performance discrepancies across various websites, domains, and experimental environments. We encourage the community to contribute further insights on online agent evaluation, thereby advancing this field of research.¹

1 Introduction

The enhanced reasoning capabilities of foundational models [24, 1, 30, 31, 16, 2] demonstrate the potential for autonomous agents performing on navigation and information retrieval tasks in real-time within web environment, thereby augmenting the human workforce [27, 22]. However, the journey towards autonomous web agents delivering accurate, robust, fast, and cost-effective outcomes to end-users remains fraught with challenges. These include the inherent scarcity of data, the lack of knowledge and reasoning abilities of high-level actions on certain websites, and the absence of accurate and effective process feedback during execution, among others [7, 6]. We posit that a significant barrier to realizing the value of web agents is the lack of an easy-to-use platform for the community to drive effort towards real-time data gathering and web agent online benchmarking. This belief is grounded in following observations.

*Equal contribution.

†Work done when interning at iMean AI.

‡Corresponding author.

¹Our platform, tool and dataset are publically available at <https://www.imean.ai/web-canvas> and <https://huggingface.co/datasets/iMeanAI/Mind2Web-Live>

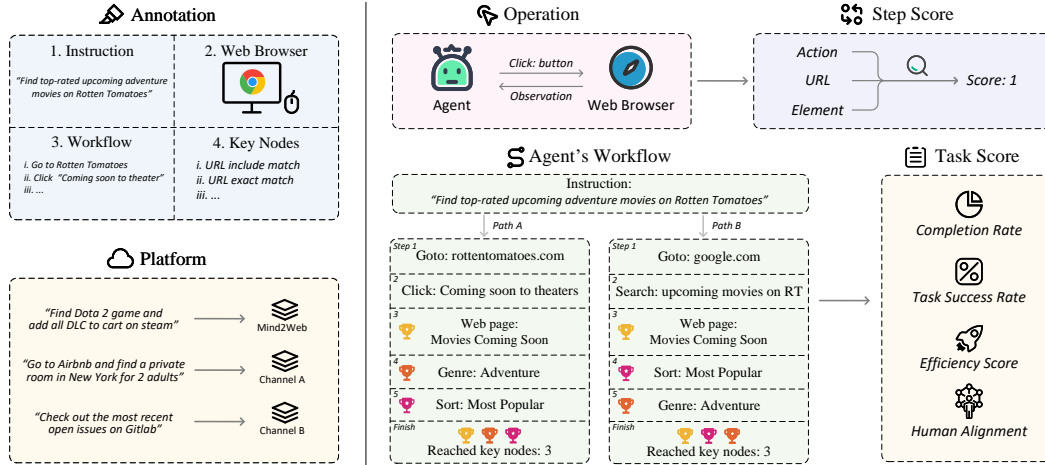


Figure 1: WebCanvas framework. The left side depicts the annotation process addressing each task, while the right side demonstrates the evaluation process during inference time, which involves collection of predicted actions, URLs, and elements targeted for interaction in online web environment, allowing for dynamic assessment. The framework accounts for the non-uniqueness of paths in online web interactions, with “Trophies” representing step scores earned upon successfully reaching each key node. The process of data maintenance related to these activities is detailed in §3.2.

Digital agents require environmental observations and feedback for context. Thus, dynamic, real-world environments are essential for agent evaluation and data collection. The Internet itself emerges as the most extensive arena for the assessment of agents, offering an unparalleled complexity for environmental interaction [15, 38]. However, the rapid evolution of the web environment introduces significant data distribution shifts over time. Figure 2 summarizes three prevalent patterns of changes in web tasks over time. For example, the Mind2Web dataset [3], which archives web-based interactions as static HTML snapshots and was released one year ago, shows that 96 out of 780 tasks (12%) are completely expired on their corresponding live websites. This shift may potentially create discrepancies between the offline and online development and evaluation of real-world web agents. In addition, the accumulated knowledge and training data of static websites leads to the saturation of existing benchmarks, making it increasingly difficult to compare models and reasoning frameworks fairly and rigorously. We found the MindAct model trained in 2023 outperformed closely-held models like GPT-3.5 [24] and GPT-4 [1] in Mind2Web static test set, but lagged behind in 2024 online evaluations (§4.1). Although previous works have attempted to evaluate the performance of web agents in online environments through human assessments [37, 8], achieving an objective, quantitative, and reproducible evaluation remains challenging.

To bridge this gap, we introduce WebCanvas, a dynamic and real-time framework designed for online evaluation of web agents with three key features. (1) **Progress-aware evaluation with key node annotation.** Existing evaluation metrics that focuses on action prediction accuracy [3, 37] can falsely penalize valid alternative solutions while outcome-based evaluation [38, 13, 21] requires fully reproducible standalone web environments. To address this gap, we introduce a novel concept termed “key nodes” – essential milestones that any task process must traverse, irrespective of the path taken. Key node annotation allows for a detailed, continuous analysis of agent behaviors, thereby enhancing insight into their decision-making strengths and weaknesses. (2) **Collaborative platform for community-driven annotations.** WebCanvas supports recording and annotation of web-based tasks and their corresponding key node evaluation through an advanced recording browser plugin with transparent data access. Furthermore, we have open-sourced an agent reasoning framework that enhances the integration and customization of various agent modules for online web tasks. This initiative provided guidelines and toolkits for the community to effectively scale data for online evaluation within real-world settings in their own scenario. (3) **Cost-effective maintenance to sustain evaluation validity.** Online environment is continuously evolving, making maintaining data validity a challenge. To address this, WebCanvas employs an efficient maintenance strategy with scheduled monitoring and automated alerts that quickly identify action sequences and key nodes validity. When data shifts occur, our test report with error messages guide data owner through quick

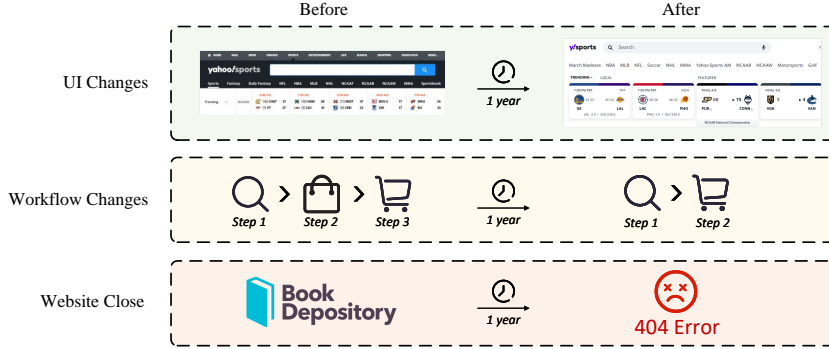


Figure 2: An illustration of how web tasks change with time.

and effective data corrections. This approach allows us to dynamically adjust our evaluation sets in response to real-time changes in web content with acceptable cost.

Based on WebCanvas framework, we create **Mind2Web-Live** dataset for the community. This dataset contains 524 tasks sampled from Mind2Web [3], and we annotate each task with key node verification. Extensive comparisons show that GPT-4-turbo with memory and ReAct [34] reasoning achieved the best task success rate of 23.1%. In addition, our online evaluation reveals discrepancies with offline settings, demonstrating that models which perform competitively in static offline evaluations do not necessarily maintain their competency in dynamic online environments. We further analyze the impact of various factors specific to online evaluation, such as IP location variability, and suggest maintaining a consistent setup within our framework to ensure reliable results. Finally, we investigate the use of key node annotations as a form of intermediate reward. Our findings suggest that web agents can benefit from human-provided key node annotations, whereas even advanced models exhibit inaccuracies when generating such intermediate progress indicators without any reference. These inaccuracies subsequently impair execution performance.

2 WebCanvas: An Online Evaluation Framework for Web Agents

2.1 Problem Formulation of Interactive Web-Based Task

The real-world web environment can be formulated as: $(\mathcal{S}, \mathcal{A}, \mathcal{T}, \mathcal{O})$ with state space \mathcal{S} , action space \mathcal{A} (Table 10), deterministic transition function $\mathcal{T} : \mathcal{S} \times \mathcal{A} \rightarrow \mathcal{S}$ and a state observation space \mathcal{O} (§4). Given a task instruction i , current observation $o_t \in \mathcal{O}$ and the action history a_1^{t-1} , an agent issues an action $a_t \in \mathcal{A}$. Consequently, after the execution of the action, the environment transitions to a new state $s_{t+1} \in \mathcal{S}$, and the corresponding observation updates to $o_{t+1} \in \mathcal{O}$. To measure the completion of tasks, we have defined key nodes and evaluation metrics, which are elaborated in §2.2 and §2.3.

2.2 Definition of Key Nodes

The concept of “key nodes” is one of the pivotal ideas in our work. Key nodes refer to indispensable steps in the process of completing specific web tasks, meaning that regardless of the path taken to accomplish a task, these steps are required. These may involve navigation to certain webpages or the performance of specific actions on web pages, such as filling out forms or clicking buttons. This design philosophy not only reflects the dynamic nature of the web environment but also captures the diversity of paths present in real-world web pages.

As illustrated in Figure 1, consider the task of “Find top-rated upcoming adventure movies on Rotten Tomatoes” as an example. Users might start directly at the Rotten Tomatoes homepage or use a search engine to navigate straight to the “New Movies Coming Soon” page of the Rotten Tomatoes. Moreover, when filtering the movies, users might choose to first apply a filter for the “adventure” genre and then sort by popularity, or alternatively, sort by popularity before applying the genre filter. Despite the availability of different paths to achieve the goal, entering the specific page and performing the genre and popularity sorting are essential steps in accomplishing the task. Therefore, these three steps are identified as “key nodes”.

In the dynamic and noisy real-world web environment, identifying these key nodes is challenging due to the potential changes in page content and UI updates, which could render element selector paths obsolete. Therefore, we preferred to use URL state as identifiers for key nodes rather than element interaction, which enhanced the Benchmark’s robustness against layout changes. Only element class methods are considered for key nodes that cannot be represented by URLs. The detailed judgment method is described in Appendix C. By defining key nodes, WebCanvas is able to dynamically assess the execution capabilities of web agents in real-world web environments, offering a practical and flexible evaluation method for the development of web agents.

2.3 Evaluation Metrics

The evaluation metrics of WebCanvas comprised of two main components: step score and task score. The step score evaluates the agent’s performance with regard to each key node, defining three types of evaluation targets along with three evaluation functions at each step. The task score includes two functions to assess the task’s completeness and overall execution efficiency.

Step Score Inspired by previous works [38, 13], we introduced three evaluation targets in calculating step score, allowing us to examine from different aspects: **URL**, **Element Path**, and **Element Value**. We implemented three match functions for these targets: **Exact Match**, **Include Match**, and **Semantic Match**. Each key node is associated with an evaluation function, which comprises an evaluation target and a match function. One step score is awarded when the agent successfully reaches a key node and passes the associated evaluation function verification. Table 1 shows a list of applicable evaluation functions and their introductions for reference. To facilitate the presentation of experimental results, the “Completion Rate” will be used to represent the proportional scoring of Step Scores.

Table 1: Overview of evaluation functions. “E” is short for Web Element.

Match Function	Description	URL	E. Path	E. Value
Exact Match	Precise matching, such as URL parameters or form fields.	✓	✓	✓
Include Match	Evaluates if output includes the reference, ideal for keyword detection.	✓	✗	✓
Semantic Match	Uses LLM for complex content reasoning tasks, like product identification.	✓	✗	✓

Task Score Task-level score consists of two parts: **Task Finish Score** and **Efficiency Score**, which evaluate the effectiveness and efficiency of the agent’s task execution. (1) Task Finish Score is awarded based exclusively on the agent’s success in completing all the designated key nodes within the task. This design emphasizes the value of completing the task itself, encouraging agents to focus on the task’s entirety, not just individual steps. To facilitate the presentation of experimental results, the Task Finish Score will be represented by the “Task Success Rate”. (2) Recognizing that even successful task completions can vary significantly in resource consumption, the Efficiency Score (ES) is devised to evaluate the resource utilization effectiveness during task execution. The Efficiency Score is calculated based on the average number of steps required for the agent to achieve each step score: $ES = \frac{L}{P}$. L represents the trajectory length to complete the task, P is the total step score achieved by the agent upon task completion.

3 Mind2Web-Live: a Real-time Online Benchmark for Web Agents

3.1 Dataset Construction

To develop a real-world online benchmark for web agents, we introduce Mind2Web-Live, which is derived from tasks present in the Mind2Web dataset. We employed WebCanvas framework as a guidance for the sampling and re-annotation of these tasks. Consequently, we selectively excluded all tasks that contained time-sensitive descriptions, such as those involving specific dates or times. We

Table 2: Data distribution

Statistic	Number
Total selected tasks	780
- Expired Tasks	96
- Unable to annotate	142
- Mind2Web-Live	542
- training set	438
- test set	104
Annotate steps	4550
Avg. steps	8.39 / task
Eval functions	2439
Avg. Eval functions	4.5 / task

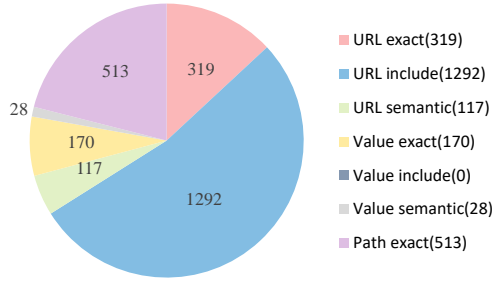


Figure 4: Evaluation Function distribution

randomly sample 601 tasks from the training set, and include all 179 tasks from the cross-task subset of the test set. These tasks are then re-annotated in the real-world online environment.

The annotation process presented multiple challenges. Notably, due to updates in website content and operational changes, we discovered 96 tasks that were no longer applicable and subsequently removed them from the dataset. Additionally, 142 tasks were discarded due to ambiguous task definitions and the difficulty in clearly defining key nodes. To enhance the clarity and reliability of task execution, we revised the instructions for 51 tasks.

After a rigorous annotation and review process, which is described in Appendix A, 542 high-quality tasks were established for the Mind2Web-Live dataset, including 438 of the training set and 104 of the test set. As shown in Table 2, Mind2Web-Live encompasses 2439 key nodes and 4550 detailed annotation steps. The tasks in the dataset cover a wide range of webpage types and operations, designed to comprehensively evaluate the performance of web agents in a dynamic and variable online environment. The distribution of the evaluation function within the dataset is illustrated in Figure 4. The annotation is conducted in iMean Builder platform with the iMean Builder Plugin.²

3.2 Dataset Maintenance

We pay special attention to the dynamic nature of the benchmark to adapt to the constantly changing web environment. We recognize that updates and changes to website content, such as UI updates, database changes, or website close-down, are inevitable as time progresses. Such changes may lead to the obsolescence of previously defined tasks or key nodes.

We thus implemented a regular data maintenance schedule. During data collection process, in addition to key nodes annotation, we recorded detailed information about workflow execution, including action types, selector paths, element value, and element coordinates at each step. We managed to stably playback these stored action workflows by an element matching strategy in iMean AI replaySDK, which is available for open use³, and report any invalidity in the workflows or the evaluation functions. We periodically reassess key nodes by the above methods and a human check to ensure that each task reflects the current web environment, as illustrated in Figure 3. In this work, we fixed 18 data in three months, with around half human engagement for each task compared with the annotation stage. The detailed statistics are shown in Appendix H.1, along with an example of a regular test report.

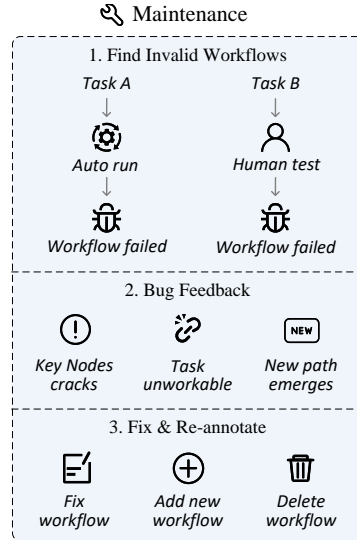


Figure 3: System of maintenance

²<https://builder.imean.ai/>

³<https://stellarover.gitbook.io/replaysdk>

Table 3: Performance of different models without the reward module on the Mind2Web-Live test set. The values are accompanied by standard deviations from three experimental runs, denoted by the \pm symbol. GPT-3.5 denotes gpt-3.5-turbo-0125, and GPT-4 denotes gpt-4-0125-preview. Qualitative analysis of agent performance in online environment are illustrated in Appendix G.

Model	Completion Rate (%)	Task SR (%)	Efficiency Score
GPT-3.5	40.2(\pm 0.38)	16.5(\pm 2.00)	3.03(\pm 0.28)
GPT-4	48.8 (\pm 3.04)	23.1 (\pm 1.11)	2.47 (\pm 0.28)
Claude-3-Opus	40.3(\pm 1.46)	14.4(\pm 1.47)	3.52(\pm 0.10)
Gemini-Pro	35.3(\pm 3.16)	13.4(\pm 1.57)	4.69(\pm 0.30)
DeepSeek-V2	41.2(\pm 3.59)	18.3(\pm 3.47)	4.44(\pm 0.26)
Mixtral-8x22B	37.2(\pm 1.51)	17.3(\pm 4.00)	4.80(\pm 0.49)

Table 4: Comparison of web agent performance in online and offline evaluations. We randomly sampled 40 instances from the Mind2Web-Live test set. These were then tested in both online and offline settings. ‘Task SR(0)’ and ‘Task SR(1)’ denote the Task Success Rates with zero tolerance and tolerance for error at one step (or key node), respectively.

Model	Offline			Online		
	Step SR(%)	Task SR(0)(%)	Task SR(1)(%)	Completion Rate(%)	Task SR(0)(%)	Task SR(1)(%)
MindAct	44.3	10.0	25.0	25.5	7.50	12.5
GPT-3.5	15.5	2.50	7.50	35.4	10.0	17.5
GPT-4	28.4	5.00	22.5	41.1	10.0	25.0

4 Agent Framework

Inspired by previous work [34, 38, 37], we introduce a universal agent framework⁴, as illustrated in Figure 7, which includes four key modules: Planning, Observation, Memory and Reward. This framework is engineered to perform complex tasks within real-world online web environments. Experimental settings are detailed in Appendix E.

Planning Integrates past action history, current observations, and task instruction to plan future actions and determine operational values based on the ReAct [34] reasoning framework. It can be formally expressed as: $\text{Planning}(\mathbf{h}_1^t, \mathbf{o}_t, \mathbf{i}) \rightarrow (\mathbf{z}_t, \mathbf{a}_t)$, where \mathbf{h}_1^t represents history information until time t , \mathbf{o}_t is the observation at time t , \mathbf{i} is the task instruction, while the outputs \mathbf{z}_t and \mathbf{a}_t are the thought and action at time t respectively.

Observation Processes the current webpage’s source code and screenshots, producing an accessibility tree [38] and visual observations as \mathbf{o}_t .

Memory Responsible for storing the task instruction and tracking the agent’s operational history, including thoughts and actions history across states. It can be formally expressed as $\mathbf{h}_1^t = (\mathbf{z}_1^t, \mathbf{a}_1^t, \mathbf{r}_1^t)$ within the framework, where \mathbf{r}_1^t denotes the history of reward signal if presents.

Reward Utilizes a self-reflection structure [28], providing a series of reward signal, including a verbal reflection and signal on whether the task is completed. This can be formalized as $\text{Reward}(\mathbf{h}_1^t, \mathbf{i}, \mathbf{o}_{t+1}) \rightarrow r_t$.

4.1 Discrepancy between Offline and Online Evaluation

The settings of evaluation on offline datasets that reflect real-world intents, such as Mind2Web [3], are inherently different from WebCanvas framework. Nevertheless, we managed to compare the experimental results between offline and online testing. During online inference, we attempted to reproduce the setting of the MindAct model, which was trained and evaluated on the offline dataset, as proposed in the Mind2Web paper. It is important to note that the evaluation metrics used in offline evaluation differ from those proposed in our online evaluation framework. The Step Success Rate in

⁴<https://github.com/iMeanAI/WebCanvas>

Table 5: The complete comparison of model performance on Mind2Web-Live test set, sorted by Completion Rate from highest to lowest. Due to rate limitations, we did not test Gemini-1.5-Pro.

Model	Completion Rate (%)	Task SR (%)	Efficiency Score
GPT-4-0125-preview	48.8	23.1	2.47
Claude-3-Sonnet-20240620	47.9	22.1	2.92
GPT-4o-2024-05-13	47.6	22.1	2.88
GPT-4-turbo-2024-04-09	44.3	21.1	2.78
Claude-3-Sonnet-20240229	43.9	20.2	3.34
Qwen1.5-110B-Chat	43.9	20.2	4.02
DeepSeek-V2	41.2	18.3	4.44
Qwen2-72B-Instruct	40.9	15.4	4.60
Claude-3-Opus-20240229	40.3	14.4	3.52
GPT-3.5-turbo-0125	40.2	16.5	3.03
Mixtral-8x22B	37.2	17.3	4.80
Qwen1.5-72B-Chat	35.6	15.4	4.29
Gemini-Pro	35.3	13.4	4.69
Claude-3-Haiku-20240307	33.4	16.3	4.27
Mistral-7B-Instruct-v0.3	25.6	11.7	7.44
Qwen1.5-7B-Chat	24.5	10.6	8.34
Qwen1.5-14B-Chat	22.7	10.6	8.09

offline testing assesses the accuracy of single-step action prediction, and for the entire task dimension, a positive reward is given only when all single-step actions are correctly predicted, which is not the case in online evaluation, as we evaluate the intermediate state, not the referenced action.

5 Main Result

In experiments with a reward module, we employ reward module to determine whether a process has been completed, otherwise we set a maximum execution step length of 1.5 times the annotated task length. Our experiments have led us to several key findings. First, Table 3 and Table 5 indicates that GPT-4 outperforms other models in both effectiveness and efficiency in web agent tasks in live environment, and Qwen is the best performing open-sourced model. However, overall performance across all models remains considerable room for future enhancements. In addition, as shown in Table 4, the model trained on the Mind2Web training set does not generalize well to the online environment one year later. The comparative relationship between the results of MindAct-Large [3], GPT-3.5, and GPT-4 is the opposite of that in offline testing. Moreover, the metrics used in offline testing only evaluate the accuracy of action prediction and do not consider the complexity of the decision space in the real-world environment, thus can falsely penalize valid alternative solutions. Consequently, the Task Success Rate of GPT-3.5 and GPT-4 in offline testing is inconsistent with the results in online testing.

6 Analysis

6.1 Factors Influencing Agent Performance

In this section, we delve into the factors influencing agent performance across a range of web tasks. Through a series of experiments, we assessed the impact of task complexity, website dynamics, task domain, key node distribution in the dataset, and the experimental setup—including system specifications, browser engine, and IP location.

Our findings reveal that increased task complexity directly correlates with diminished agent performance. The domain of the task also significantly affects performance, with agents handling entertainment-related tasks more adeptly than those involving shopping or travel. This variation suggests LLMs’ capacity of semantic understanding and reasoning differs across domains and websites. Moreover, the experimental environment plays a crucial role agent performance. We recommend

Table 6: Performance of different models with reward module, based on a random sample of 130 tasks from the Mind2Web-Live dataset. “(+)” indicates the inclusion of a reward module with human-labeled reward. Bold numbers represent the best values across different planning models. Model notation follows Table 3, except for gpt-4-vision-preview(GPT-4V). Human Alignment score represents agents’ alignment with human decision on task completion, while the larger indicates better alignment, detailed in Appendix D.

Planning Model	Reward Model	Completion Rate (%)	Task Success Rate (%)	Efficiency Score	Human Alignment
GPT-3.5	/	34.6	13.8	5.25	/
GPT-4	/	46.9	16.9	3.77	/
GPT-4	GPT-3.5	43.5	16.2	3.24	0.445
GPT-4	GPT-4	42.1	13.8	3.07	0.430
GPT-3.5	GPT-4	36.6	10.8	3.73	0.385
GPT-4	GPT-4V	42.4	8.5	3.42	0.419
GPT-3.5	GPT-4(+)	43.6	13.8	3.28	0.452
GPT-4	GPT-4(+)	52.3	12.3	3.27	0.506
GPT-4	GPT-4V(+)	51.3	12.3	2.71	0.502

experimenting on a Windows platform using Chrome or Firefox browser engines, preferably on servers located in the United States. Statistics and experiment results are detailed in Appendix F.2.

6.2 Analysis of Key Node Evaluation

Previous agent evaluation methods primarily focus on two aspects: reference-based evaluation [3, 37] and outcome-based evaluation [38, 13, 21]. However, these methods falter when applied to the unpredictable nature of live web tasks. To address the inherent variability in task completion paths within an online evaluation framework, we employed Sankey diagrams to visualize the trajectories of our web agent and human demonstrations on tasks where our agent successfully navigated all designated key nodes in Figure 11 within §F.2. We further annotate Mind2Web-Live test set to identify whether the final key node is a sufficient condition for task completion. It turns out only 46 out of 104 tasks met this criterion. This finding starkly illustrates that solely evaluating the final state or outcome is inadequate for web environments that are not fully reproducible.

6.3 Planning with Human-Labeled Reward

Reward modeling for agent tasks is crucial in scenarios such as enhancing learning efficiency, improving policy generalization, and providing online and offline decision support. Self-reward module has proven to enhance performance across various agent tasks [28, 25]. However, recent research adopting an un-tuned foundation model for self-reward prediction shows that their effectiveness is not consistent in specific domains [23, 28]. Our preliminary experiments indicate that agent performance do not benefit from a self-reward module in the online web environment. This is attributed to several factors, such as overconfidence in task completion assessments and the long-term impact of poor-quality reward signals accumulated in agent memory. Thus it raises a natural question - *Does the quality of the reward signal hinder the self-reward module’s effectiveness in online web environments?* In our study, we introduced a reward module with human-labeled reward. The experimental results on Mind2Web-Live, which confirm our hypothesis, are detailed in Table 6.

From the original data, we extracted post-action URLs, action types, CSS selector paths, and key nodes functions as metadata for our golden reference synthesis. We then employed a carefully designed prompt available in Appendix L, using GPT-4 to generate a structured linguistic guidance for task progress estimation for each task. This guidance includes the overall goal of the task and task completion criteria, specifically highlighting all key nodes for the task to be considered fully completed. We then integrate the content of the current task’s golden reference with the original design of history and current observation for reward reasoning. From comprehensive experiments, we find that the integration of a reward module does not enhance agent performance and may even lead

Table 7: Case study of previous benchmarks

Benchmark	Real-world Intents	Dynamic Environment	Keep Updated	Intermediate Env. State	Easy to Scale	Disk Usage
MiniWoB++ [15]	✗	✓	✓	✗	✗	< 1GB
WebShop [35]	✗	✓	✗	✗	✗	~ 10GB
Mind2Web [3]	✓	✗	✗	✗	✗	~ 10GB
WebArena [38]	✓	✓	✗	✗	✓	> 100GB
VWebArena [13]	✓	✓	✗	✗	✓	> 100GB
GAIA [21]	✓	✓	✗	✗	✓	< 1GB
WEBLINX [19]	✓	✗	✗	✓	✗	< 1GB
OmniACT [10]	✓	✗	✗	✓	✗	< 1GB
WebCanvas	✓	✓	✓	✓	✓	< 1GB

to a decline in Task Success Rate and Task Completion Rate. This finding aligns with findings in [28] about the effect of self-reflection modules in web agent tasks. However, we find the performance of web agent improves with the integration of a reward module with human-labeled reward. These experimental findings point out future directions on better reward modeling in web agent tasks.

7 Related Works

Agent Benchmarks Early researches [27] [15] provided relatively simple simulations and assessment methods for web navigation tasks. However, with the rise of Large Language Models, these methods have become inadequate for assessing agents’ capability. Recent studies have chosen to construct realistic simulated environments [35, 38, 13, 4], use offline saved datasets [3, 19], or select relatively stable answers to assess the capabilities of web agents [21]. In terms of dynamic evaluation methods, many studies [11, 20, 9] have proposed their own solutions. Moreover, beyond network platforms, several initiatives have also been undertaken on other platforms such as Android mobile devices, operating systems, and databases [26, 17, 33]. We perform a more comprehensive case study on previous web agent benchmarks in Table 7, WebCanvas aims to more comprehensively test agents’ capability in the real world through key nodes and corresponding evaluation functions.

Agent Frameworks In the area of reasoning frameworks, several studies have achieved notable success in logical reasoning challenges [32, 36, 34, 28, 29]. Regarding web agent reasoning frameworks, many researches has been conducted to enhance the capabilities of web agents [22, 6, 7, 12, 18, 14]. Some studies have introduced multi-modal modules that integrate visual and semantic information, thereby enhancing the capabilities of agents on web platforms [37, 5, 8].

8 Discussion & Limitations

Developing a suitable evaluation framework is a fundamental component in the advancement of autonomous web agents. This research addresses the challenge of live evaluation in a real-world web environment. Among these are the need to define key nodes in a completely open environment, unify the inference processes across different digital autonomous agents, and reduce the maintenance costs associated with real-time data and evaluation functions. Through our efforts, we have made significant strides toward establishing a robust and accurate online evaluation system for web agents.

However, the transition to live, dynamic evaluations in unpredictable online environments introduces new complexities not present in controlled, offline settings. The unsolved challenges we encountered in online evaluation of web agents include network instability, dynamic and complex task pathways, and the limitations of static evaluation functions. These challenges highlight the necessity for ongoing research and community efforts to refine and enhance evaluation frameworks for autonomous web agents in complex, real-world environments. For more details, please refer to Appendix J.

9 Conclusion

In this work, we have pioneered the development of framework for online evaluation of web agents, and investigated the challenges associated with online evaluation and the difficulties faced by current web agent reasoning frameworks in online inference. Simultaneously, we have constructed a community-driven platform that empowers web agent researchers and developers to build datasets and evaluate their web agent frameworks and models in an online environment while collecting feedback on dataset design, data annotation quality, and data validity throughout the process. We strongly encourage further work on online datasets, web agents, and evaluation function designs. By fostering a collaborative and iterative value to dataset creation and evaluation, we eagerly anticipate the continued growth of advancement of autonomous intelligence.

Acknowledgement

We extend our sincere gratitude to the outstanding contributions of five undergraduate students—Yan Yu, Hanwen Liu, Wenhan Li, Lintong Du, and Beini Chen—for data annotation. Thanks to the UI design Lead Junjie Tao for enhancing the platform’s usability. Special thanks go to our front-end and back-end development teams, Yujing Zheng and Zexu Jin, for their technical expertise. We are also grateful to Stellarrover.inc for the financial support, which has been pivotal in advancing our research.

References

- [1] Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altenschmidt, Sam Altman, Shyamal Anadkat, et al. Gpt-4 technical report. *arXiv preprint arXiv:2303.08774*, 2023.
- [2] Jinze Bai, Shuai Bai, Shusheng Yang, Shijie Wang, Sinan Tan, Peng Wang, Junyang Lin, Chang Zhou, and Jingren Zhou. Qwen-vl: A frontier large vision-language model with versatile abilities. *arXiv preprint arXiv:2308.12966*, 2023.
- [3] Xiang Deng, Yu Gu, Boyuan Zheng, Shijie Chen, Sam Stevens, Boshi Wang, Huan Sun, and Yu Su. Mind2web: Towards a generalist agent for the web. *Advances in Neural Information Processing Systems*, 36, 2024.
- [4] Alexandre Drouin, Maxime Gasse, Massimo Caccia, Issam H Laradji, Manuel Del Verme, Tom Marty, Léo Boisvert, Megh Thakkar, Quentin Cappart, David Vazquez, et al. Workarena: How capable are web agents at solving common knowledge work tasks? *arXiv preprint arXiv:2403.07718*, 2024.
- [5] Hiroki Furuta, Ofir Nachum, Kuang-Huei Lee, Yutaka Matsuo, Shixiang Shane Gu, and Izzeddin Gur. Multimodal web navigation with instruction-finetuned foundation models. *arXiv preprint arXiv:2305.11854*, 2023.
- [6] Izzeddin Gur, Hiroki Furuta, Austin Huang, Mustafa Safdari, Yutaka Matsuo, Douglas Eck, and Aleksandra Faust. A real-world webagent with planning, long context understanding, and program synthesis. *arXiv preprint arXiv:2307.12856*, 2023.
- [7] Izzeddin Gür, Ofir Nachum, Yingjie Miao, Mustafa Safdari, Austin Huang, Aakanksha Chowdhery, Sharan Narang, Noah Fiedel, and Aleksandra Faust. Understanding html with large language models. In *Findings of the Association for Computational Linguistics: EMNLP 2023*, pages 2803–2821, 2023.
- [8] Hongliang He, Wenlin Yao, Kaixin Ma, Wenhao Yu, Yong Dai, Hongming Zhang, Zhenzhong Lan, and Dong Yu. Webvoyager: Building an end-to-end web agent with large multimodal models. *arXiv preprint arXiv:2401.13919*, 2024.
- [9] Naman Jain, King Han, Alex Gu, Wen-Ding Li, Fanjia Yan, Tianjun Zhang, Sida Wang, Armando Solar-Lezama, Koushik Sen, and Ion Stoica. Livecodebench: Holistic and contamination free evaluation of large language models for code. *arXiv preprint arXiv:2403.07974*, 2024.
- [10] Raghav Kapoor, Yash Parag Butala, Melisa Russak, Jing Yu Koh, Kiran Kamble, Waseem Alshikh, and Ruslan Salakhutdinov. Omniaact: A dataset and benchmark for enabling multimodal generalist autonomous agents for desktop and web. *arXiv preprint arXiv:2402.17553*, 2024.

- [11] Douwe Kiela, Max Bartolo, Yixin Nie, Divyansh Kaushik, Atticus Geiger, Zhengxuan Wu, Bertie Vidgen, Grusha Prasad, Amanpreet Singh, Pratik Ringshia, et al. Dynabench: Rethinking benchmarking in nlp. In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 4110–4124, 2021.
- [12] Geunwoo Kim, Pierre Baldi, and Stephen McAleer. Language models can solve computer tasks. *Advances in Neural Information Processing Systems*, 36, 2024.
- [13] Jing Yu Koh, Robert Lo, Lawrence Jang, Vikram Duvvur, Ming Chong Lim, Po-Yu Huang, Graham Neubig, Shuyan Zhou, Ruslan Salakhutdinov, and Daniel Fried. Visualwebarena: Evaluating multimodal agents on realistic visual web tasks. *arXiv preprint arXiv:2401.13649*, 2024.
- [14] Hanyu Lai, Xiao Liu, Iat Long Iong, Shuntian Yao, Yuxuan Chen, Pengbo Shen, Hao Yu, Hanchen Zhang, Xiaohan Zhang, Yuxiao Dong, et al. Autowebglm: Bootstrap and reinforce a large language model-based web navigating agent. *arXiv preprint arXiv:2404.03648*, 2024.
- [15] Evan Zheran Liu, Kelvin Guu, Panupong Pasupat, and Percy Liang. Reinforcement learning on web interfaces using workflow-guided exploration. In *International Conference on Learning Representations (ICLR)*, 2018.
- [16] Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. Visual instruction tuning. *Advances in neural information processing systems*, 36, 2024.
- [17] Xiao Liu, Hao Yu, Hanchen Zhang, Yifan Xu, Xuanyu Lei, Hanyu Lai, Yu Gu, Hangliang Ding, Kaiwen Men, Kejuan Yang, et al. Agentbench: Evaluating llms as agents. *arXiv preprint arXiv:2308.03688*, 2023.
- [18] Robert Lo, Abishek Sridhar, Frank F Xu, Hao Zhu, and Shuyan Zhou. Hierarchical prompting assists large language model on web navigation. In *Findings of the Association for Computational Linguistics: EMNLP 2023*, pages 10217–10244, 2023.
- [19] Xing Han Lù, Zdeněk Kasner, and Siva Reddy. Weblinx: Real-world website navigation with multi-turn dialogue. *arXiv preprint arXiv:2402.05930*, 2024.
- [20] Zhiyi Ma, Kawin Ethayarajh, Tristan Thrush, Somya Jain, Ledell Wu, Robin Jia, Christopher Potts, Adina Williams, and Douwe Kiela. Dynaboard: An evaluation-as-a-service platform for holistic next-generation benchmarking. *Advances in Neural Information Processing Systems*, 34:10351–10367, 2021.
- [21] Grégoire Mialon, Clémentine Fourrier, Craig Swift, Thomas Wolf, Yann LeCun, and Thomas Scialom. Gaia: a benchmark for general ai assistants. *arXiv preprint arXiv:2311.12983*, 2023.
- [22] Reiichiro Nakano, Jacob Hilton, Suchir Balaji, Jeff Wu, Long Ouyang, Christina Kim, Christopher Hesse, Shantanu Jain, Vineet Kosaraju, William Saunders, et al. Webgpt: Browser-assisted question-answering with human feedback. *arXiv preprint arXiv:2112.09332*, 2021.
- [23] Theo X Olausson, Jeevana Priya Inala, Chenglong Wang, Jianfeng Gao, and Armando Solar-Lezama. Is self-repair a silver bullet for code generation? In *The Twelfth International Conference on Learning Representations*, 2023.
- [24] Long Ouyang, Jeffrey Wu, Xu Jiang, Diogo Almeida, Carroll Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, et al. Training language models to follow instructions with human feedback. *Advances in neural information processing systems*, 35:27730–27744, 2022.
- [25] Jiayi Pan, Yichi Zhang, Nicholas Tomlin, Yifei Zhou, Sergey Levine, and Alane Suhr. Autonomous evaluation and refinement of digital agents, 2024.
- [26] Christopher Rawles, Alice Li, Daniel Rodriguez, Oriana Riva, and Timothy Lillicrap. Androidinthewild: A large-scale dataset for android device control. *Advances in Neural Information Processing Systems*, 36, 2024.
- [27] Tianlin Shi, Andrej Karpathy, Linxi Fan, Jonathan Hernandez, and Percy Liang. World of bits: An open-domain platform for web-based agents. In *International Conference on Machine Learning*, pages 3135–3144. PMLR, 2017.
- [28] Noah Shinn, Federico Cassano, Ashwin Gopinath, Karthik Narasimhan, and Shunyu Yao. Reflexion: Language agents with verbal reinforcement learning. *Advances in Neural Information Processing Systems*, 36, 2024.
- [29] Theodore Sumers, Shunyu Yao, Karthik Narasimhan, and Thomas Griffiths. Cognitive architectures for language agents. *Transactions on Machine Learning Research*, 2024. ISSN 2835-8856. URL <https://openreview.net/forum?id=1i6ZCvf1QJ>. Survey Certification.

- [30] Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, et al. Llama: Open and efficient foundation language models. *arXiv preprint arXiv:2302.13971*, 2023.
- [31] Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, et al. Llama 2: Open foundation and fine-tuned chat models. *arXiv preprint arXiv:2307.09288*, 2023.
- [32] Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Fei Xia, Ed Chi, Quoc V Le, Denny Zhou, et al. Chain-of-thought prompting elicits reasoning in large language models. *Advances in neural information processing systems*, 35:24824–24837, 2022.
- [33] Tianbao Xie, Danyang Zhang, Jixuan Chen, Xiaochuan Li, Siheng Zhao, Ruisheng Cao, Toh Jing Hua, Zhoujun Cheng, Dongchan Shin, Fangyu Lei, et al. Osworld: Benchmarking multimodal agents for open-ended tasks in real computer environments. *arXiv preprint arXiv:2404.07972*, 2024.
- [34] S. Yao, J. Zhao, D. Yu, N. Du, I. Shafran, K. Narasimhan, , and Y. Cao. React: Synergizing reasoning and acting in language models. In *International Conference on Learning Representations (ICLR)*, 2023.
- [35] Shunyu Yao, Howard Chen, John Yang, and Karthik Narasimhan. Webshop: Towards scalable real-world web interaction with grounded language agents. *Advances in Neural Information Processing Systems*, 35: 20744–20757, 2022.
- [36] Shunyu Yao, Dian Yu, Jeffrey Zhao, Izhak Shafran, Tom Griffiths, Yuan Cao, and Karthik Narasimhan. Tree of thoughts: Deliberate problem solving with large language models. *Advances in Neural Information Processing Systems*, 36, 2024.
- [37] Boyuan Zheng, Boyu Gou, Jihyung Kil, Huan Sun, and Yu Su. Gpt-4v (ision) is a generalist web agent, if grounded. *arXiv preprint arXiv:2401.01614*, 2024.
- [38] Shuyan Zhou, Frank F Xu, Hao Zhu, Xuhui Zhou, Robert Lo, Abishek Sridhar, Xianyi Cheng, Tianyue Ou, Yonatan Bisk, Daniel Fried, et al. Webarena: A realistic web environment for building autonomous agents. In *NeurIPS 2023 Foundation Models for Decision Making Workshop*, 2023.

A Data Collection Details

A.1 Recording process

In the construction of Mind2Web-Live, the quality and reliability of the data are paramount. To this end, we have employed the iMean Builder plugin, an efficient tool for recording browser operations. This tool precisely captures browser interaction from the users, covering a wide range of activities such as clicks and input actions. The recorded details include the type of operation, execution parameters, target element’s selector path, element content, and its coordinates on the webpage. Moreover, iMean Builder accompany each step with a webpage screenshot, not only facilitating process replication but also providing a visual reference for workflow validation and review. This approach enables us to comprehensively record all the steps required to complete specific tasks, forming the foundation of Mind2Web-Live. Upon completion of the data recording, we meticulously annotated the key nodes of each process along with their corresponding Evaluation Functions.




A.2 Annotation process

In our study, the annotation process plays a pivotal role in ensuring data quality and task validity. To ensure the accuracy and consistency of data annotations, we assembled an annotation team comprised of several authors of this paper and five senior undergraduate students majoring in Computer Science. Not only do the members of the annotation team possess a solid background in Computer Science, but they also received specialized training to ensure consistency in their understanding and identification abilities in annotating key nodes.

During the annotation phase, we employed a comprehensive reward mechanism. Each annotator was compensated based on the number of tasks they completed, with additional bonuses awarded for high-quality annotations to encourage precise and consistent results. This combined reward system not only bolstered work enthusiasm but also enhanced the overall quality of the annotation work, laying a solid foundation for the construction of an efficient web agent benchmark.

To guarantee the quality of annotations, we instituted a variety of strategies. Each task was annotated independently by one annotator, followed by individual reviews by two other members to verify the accuracy of the key nodes. Throughout the annotation process, we regularly organized discussion sessions for the annotation team to share their experiences and challenges encountered, thereby improving the overall efficiency and quality of the team’s annotations.

Table 8: Example annotations of the Evaluation Functions

State	Title	Annotation Details
	Locate a large store in Washington that has kids' and maternity products in uniqlo	Evaluation Function: <code>Element value semantic match</code> Instructions: <code>Decide Whether is searching for Washington D.C.</code>
	Find parking in California city for Limos which also offers free wi-fi in yelp	Evaluation Function: <code>URL include match</code> Param: <code>attrs</code> Value: <code>WiFi.free</code>
	Find Dota 2 game and add all DLC to cart in steam	Evaluation Function: <code>Element path exact match</code> Selector: <code>//*[@id="dlc_purchase_action"]/div[2]/a/span</code>

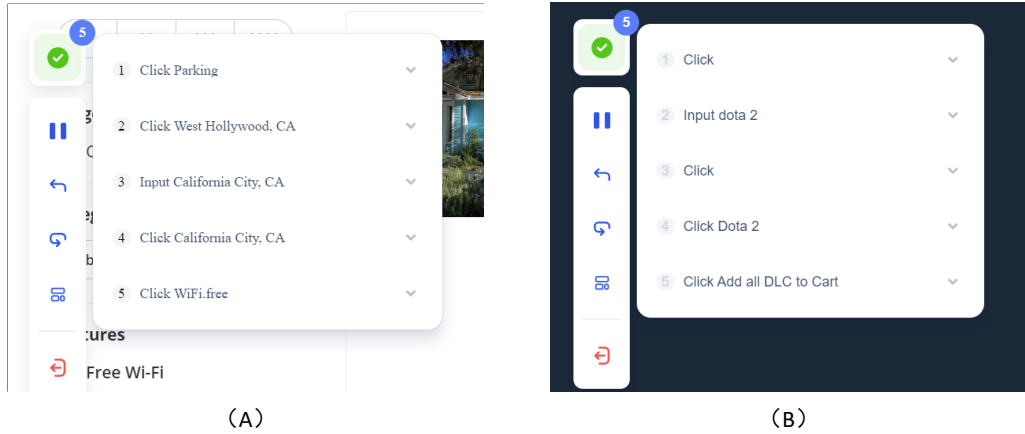


Figure 5: Illustration of the iMean Builder Plugin annotating two diverse tasks: (A) “Find parking in California city for Limos which also offers free wi-fi in yelp”, and (B) “Find Dota 2 game and add all DLC to cart in steam”.

B Comparison of the Mind2Web-Live and Mind2Web Datasets

Table 9: Comparison of the Mind2Web-Live and Mind2Web Datasets. “Ele.” indicates “Element”, “Op.” indicates “Option” and “SR” indicates “success rate”.

Attributes	Mind2Web-Live	Mind2Web
Dataset Size	542	2350
Evaluation Environment	Real-world Online	Offline
Evaluation State	Key Nodes	Each Step
Target Element	Element, URL	Element, Option
Evaluation Metrics	Step Score & Task Score	Step(Ele., Op.) SR & Task SR
Avg. Steps	8.39 / task	7.3 / task

C How to define evaluation functions

For input operations on the page First, determine whether it is a necessary condition for task completion. If it is a necessary condition, then judge whether the execution result can be reflected by the change of the URL. If so, simply take the state after execution as the key node and select the evaluation function as URL exactly/included/semantic match.

If it cannot be reflected by changes in the URL, it needs to be defined as a key node based on click or input operations. Select element path exactly match or element value exactly/included/semantic match for input operations (to determine whether the content of the input element matches).

For click operations on the page Firstly, determine whether it is a necessary condition for completing the task. If it is a necessary condition, then judge whether the execution result can be reflected by the change of the URL. If so, simply take the state after execution as the key node and select the match rule as URL exactly/included/semantic match.

If it cannot be reflected by the change of URL, each click operation should be defined as a key node, and the match can be selected as element element path exactly match or element value match.

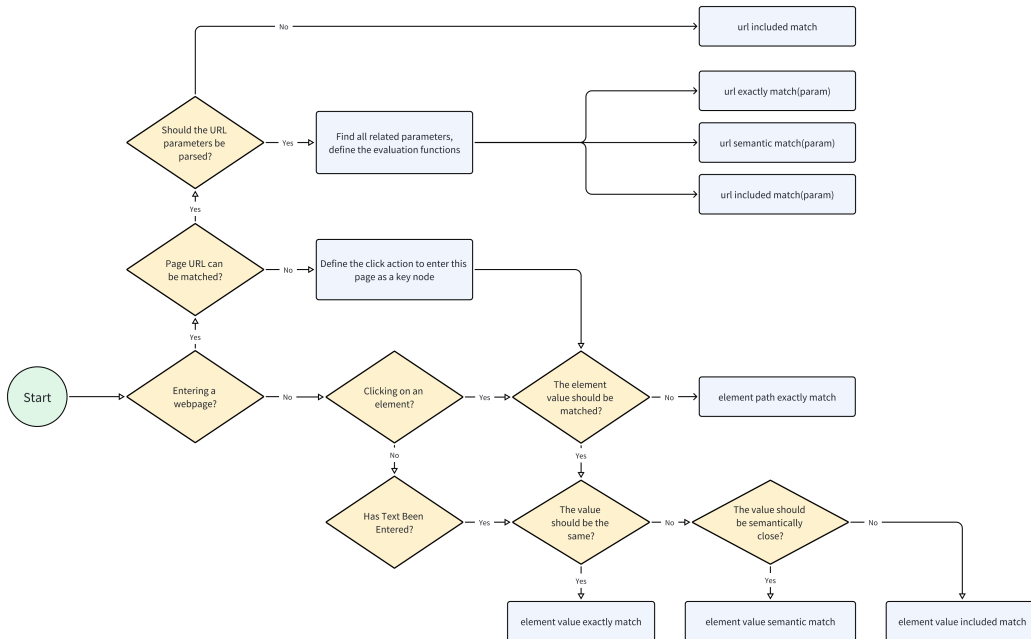


Figure 6: Guidance on how to define an evaluation function for a key node.

D Additional Evaluation Metrics

Human Alignment Score The Human Alignment Score(HAS) assesses how well an agent’s workflow aligns with human behavior. It’s crucial for agents not just to be efficient, but to operate in ways that resemble human actions. The evaluation of this aspect is conducted by contrasting the agent’s task completion signal with the ground truth annotations provided by humans, to gauge the level of consistency. An agent that accurately issues a completion signal upon task completion is deemed to exhibit a high degree of alignment with human behavior, thus earning a full score of one point. Conversely, a delay in issuing the completion signal upon task completion results in a deduction of 0.05 points from the full score as a penalty for decision latency. In instances where an agent stops its operation before accomplishing all the task objectives, the score is determined by the ratio of the step score attained to the maximum step score achievable for that task. Furthermore, if a task is not fully completed and the system forcibly terminates the process due to reaching the maximum step limit, the score awarded is 0.8 times the proportion of the step score attained. The specific algorithm is shown in the formula, where P represents achieved step scores, P_{max} denotes the max step scores of the task.

$$HAS = \begin{cases} 1 & \text{if task is completed with completion signal} \\ 0.95 & \text{if task is completed without completion signal} \\ \frac{P}{P_{max}} & \text{if task is incomplete but completion signal} \\ 0.8 \times \frac{P}{P_{max}} & \text{if task is incomplete and is terminated} \end{cases} \quad (1)$$

E Experimental Settings

E.1 Agent Framework

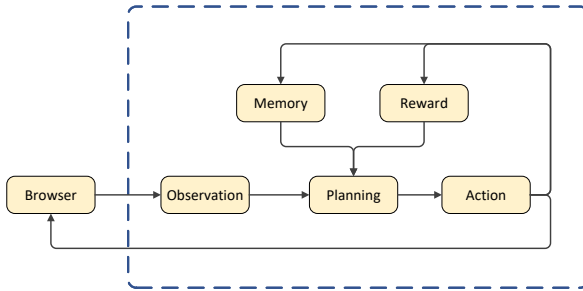


Figure 7: Agent framework

E.2 Action Space

Table 10: Action space

Action	Operation value
Goto	Value
Google Search	Value
Click	Target id
Hover	Target id
Fill Form	Target id, value
Fill Search	Target id, value
Select	Target id, value
Switch Tab	Target id
Go Back	/

E.3 Additional Experiment Settings

Dataset Sampling Our main experiments were conducted on the Mind2Web-Live test set to avoid data contamination. For experiments involving self-reward, we sampled 130 cases from the complete Mind2Web-Live dataset, ensuring a broad representation free from any dataset-specific biases.

Parameters & Computational Resources The foundation models used across our experiments were standardized with a maximum token of 500 and a temperature setting of 0.7. Computational resources were provided by AWS EC2. While most experiments were conducted on standard compute instances, experiments involving the MindAct model utilized two T4 GPUs to accommodate the model’s computational demands. In addition to using APIs provided by the model developers, our model inference services also incorporated Mixtral-8x22B inference services from Together.ai⁵.

E.4 Observation Space

Accessibility Tree We employ an accessibility tree-based approach to extract the fundamental textual feature representation from the web environment. The accessibility tree serves as an abstract representation of the structure of a web page, detailing the characteristics of each element within the page. However, the accessibility tree contains a significant amount of redundant information, necessitating the use of a stringent set of filtering criteria to select interactive elements. These filtering criteria include the element’s tag, visibility, usability, as well as textual or image content. Concurrently with the construction of the accessibility tree, we annotate each filtered interactive element, providing information such as element ID, tag, and content. For example, ([1] input ‘search’, etc.). This annotation method facilitates the precise generation of corresponding CSS selector paths during subsequent LLM prediction and execution phases, thereby accurately locating the required elements.

Screenshot We capture screenshots of the current web page to obtain its visual representation and provide this visual context to visual language models, such as GPT-4V. This input method mimics human visual perception, allowing the model to gather the most comprehensive information from the web page. Compared to relying solely on the accessibility tree, using screenshots enhances the ability to identify the layout, appearance, and positioning of web elements more effectively. Additionally, it captures interactive elements and other crucial page information that the accessibility tree might miss. To balance inference costs and recognition effectiveness, the original resolution of the screenshots is set to 1080×720 , though users can define the screenshot resolution according to their specific needs in practical applications.

F More Results of Experiments

F.1 Additional Main Results

F.1.1 Results on Mind2Web-Live Training Set

See Table 11.

Table 11: Performance of different models on Mind2Web-Live training set without reward module. As for the model, we experiment with gpt-3.5-turbo-0125 (GPT-3.5), gpt-4-0125-preview (GPT-4).

Model	Completion Rate (%)	Task SR (%)	Efficiency Score
GPT-3.5	34.6	13.8	5.25
GPT-4	46.9	20.1	3.77
Gemini-Pro	31.3	9.23	6.50
DeepSeek-V2	31.8	12.4	5.55
Mixtral-8x22B	29.7	9.44	6.52

⁵<https://api.together.xyz/models>

F.1.2 Ablation Study

See Table 12.

Table 12: Ablation study on memory and ReAct reasoning architecture [34]. Results show interesting findings that less capable models like GPT3.5 and Mistral-8x22B do not benefit from memory and advanced reasoning architecture in online web tasks. We encourage more comprehensive evaluation of these modules in web agent framework in future research.

Model	Memory	ReAct	Completion Rate	Task SR	Efficiency Score
GPT-3.5	✓	✓	40.2%	16.5%	3.03
GPT-4	✓	✓	48.8%	23.1%	2.47
Mixtral-8x22B	✓	✓	37.2%	17.3%	4.80
GPT-3.5	✗	✓	43.5%(↑ 3.3%)	19.2%(↑ 2.7%)	3.12(↓ 0.09)
GPT-3.5	✓	✗	42.5%(↑ 2.3%)	22.1%(↑ 5.6%)	2.98(↑ 0.05)
Mixtral-8x22B	✗	✓	42.3%(↑ 5.1%)	17.3%(−)	4.39(↑ 0.41)
Mixtral-8x22B	✓	✗	42.5%(↑ 5.3%)	19.2%(↑ 1.9%)	4.40(↑ 0.40)
GPT4	✗	✓	48.6%(↓ 0.2%)	20.9%(↓ 2.2%)	2.70(↓ 0.23)
GPT4	✓	✗	46.6%(↓ 2.2%)	22.1%(↓ 1.0%)	2.67(↓ 0.20)

F.2 Additional Analysis

See Table 13, Figure 8, Figure 9, Figure 10, Figure 11, Figure 12, Figure 13.

Table 13: Experiment on IP Regions and devices. It presents the results of experiments conducted using the GPT-3.5 planning model across different IP regions, systems and devices. We recommend experimenting on a Windows server using Chrome or Firefox browser engines, preferably on servers located in the United States or Singapore.

Planning Model	IP Region	System	Browser	Completion Rate	Task Success Rate	Efficiency Score
GPT-3.5	United States	Windows	Chrome	40.2%	16.5%	3.03
GPT-3.5	United States	Windows	Firefox	42.1%	20.2%	2.79
GPT-3.5	United States	Linux	Chrome	36.5%	15.4%	3.33
GPT-3.5	United Kingdom	Windows	Chrome	23.6%	8.65%	7.78
GPT-3.5	Singapore	Windows	Chrome	42.3%	21.2%	2.95

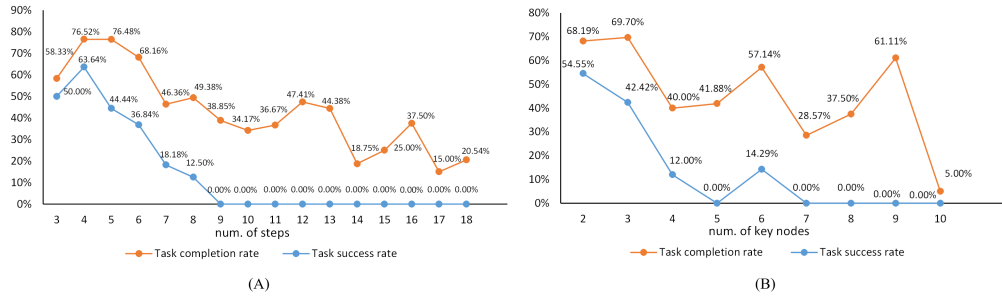


Figure 8: The relationship between task complexity and task difficulty. The “step count” refers to the length of the action sequence in the annotated data, which, along with the number of key nodes, serves as a reference for task complexity.

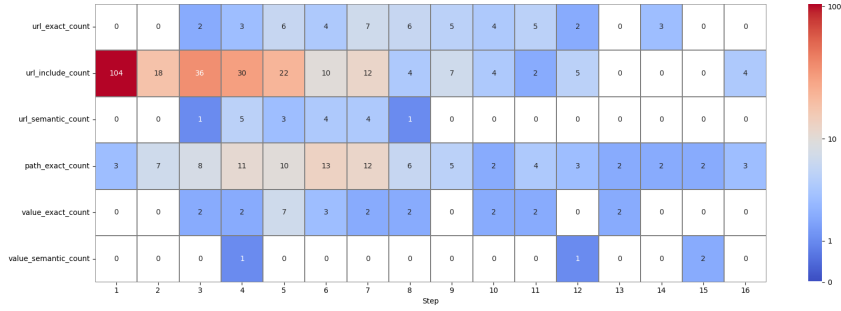


Figure 9: Heatmap of evaluation function counts over annotation steps for the Mind2Web-Live test set. It shows logarithmically transformed counts over various steps. White represents a count of 0, blue indicates smaller counts, and red indicates larger counts. The logarithmic scale helps to evenly distribute the color intensity for better visualization.

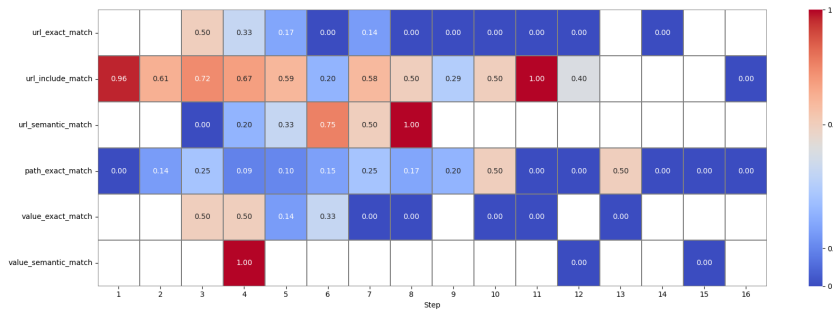


Figure 10: Heatmap of evaluation function accuracy over annotation steps for the Mind2Web-Live test set. The experimental data is derived from GPT-4’s performance on the test sets. The heatmap displays logarithmically transformed accuracy of evaluation functions across different steps. Blue indicates lower accuracy, while red indicates higher accuracy.

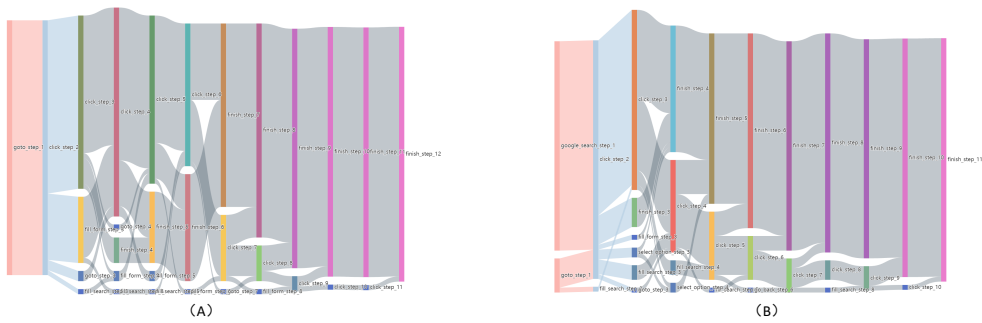


Figure 11: Sankey diagram comparing human demonstration trajectories(A) and agent’s trajectories(B). We randomly sampled 50 success tasks from GPT-4 based agent on the Mind2Web-Live training and testing set to analyze the discrepancy between these trajectories.

G Qualitative Analysis of Experiments

In this section, we conducted a qualitative analysis of error cases in our experimental results. Typical errors include: local optima, premature termination of tasks, and information loss during inference.

G.1 Local Optima

In our online environment experiments, a task may involve multiple constraints or requirements. Web pages often contain numerous clickable links, and frequently feature interactable elements with similar or even identical names. Due to a lack of prior knowledge about the web domain associated with current task and confusion caused by similar elements, the planning module’s local decision-making for the current web state is not always accurate. Moreover, our web agent lacks proactive thinking to revert to an intermediate state within a limited number of steps, thus stuck in a local optima of the task. This is one of the main reasons for the low task success rate. As shown in the first line in Table 14, in the task “Check the rating and user reviews for the game ‘Deathloop’ on IGN”, the web agent ended up at the review article page for ‘Deathloop’ on IGN due to incorrect path selection from the Google search results, rather than the expected page for ratings and user reviews. In other cases, when actions like filling out forms are required, the greedy nature of LLMs leads them to input more task-relevant information than necessary. This results in a narrower range of information that can be extracted from the webpage, as shown in the second line in Table 14. Meanwhile, the limitations of browser automation tools currently prevent the complete restoration of a web page to its state before action execution. Memory management of web agents also could not eliminate the effect of past incorrect trajectories. These all highlight the challenges of autonomous agent reasoning.




G.2 Premature Termination of Tasks

In the experiments, we also discovered that the web agent sometimes only partially completes tasks. This typically indicates that web agent sometimes prematurely judges itself as having finished the task. The reasons for premature termination are varied. For instance, the agent might hallucinate during inference (such as simplifying a task of reaching a page and filling out content to just reaching the page), leading it to self-judge the task as complete after only finishing intermediate steps and not continuing further. In other instances, it may have the right thought process in earlier steps, but fails to deliver the correct action input or effectively execute the action on the page, yet in subsequent steps, it “reads” this thought and mistakenly believes the action has been executed. Lastly, when it is difficult to continue along the current path, the agent might lower its standards for task completion and erroneously judge the task as complete, thus terminating the task prematurely. As shown in the third line in Table 14, in the task “Track the status of a rebate for Monty Lue, house number 4847, zip code 10019 in Menards”, the web agent reached the “Track Your Rebate” page but did not continue to complete the form, instead prematurely deciding the task was complete and ending the task.

G.3 Information Loss in Observation

The relationships between web elements are varied and complex. Often, the essential information of an element is not contained within the element itself but is instead found within its child elements, parent, or even sibling elements. For instance, a button tag might not always contain useful attributes; sometimes, they are empty or irrelevant. Based on our understanding of the DOM tree on the web, we map information from specific elements (like span) to interactive elements such as buttons. Due to the diversity of these mapping relationships, our framework currently only considers mapping valuable information from certain special elements to their parent elements, recursively iterating until an interactive element is identified, as shown in Figure 14. If this recursive search fails to find an interactive element or reaches the recursion limit, the element is discarded, as illustrated in Figure 15. Given the complexity of webpage elements, our initial implementations focus predominantly on parent-child mapping relationships. Future work will delve deeper into inter-element mappings to ensure the accuracy and correctness of element mappings.

Table 14: Case study of failure trajectories.

State	Task Instruction	Agent's Thought
	Check the rating and user reviews for the game "Deathloop" in ign	To view the full review and user comments for 'Deathloop' on IGN, I need to click on the IGN review link provided in the search results.
	Find a Ricky Kej track to listen and share which has been added in the last year and is between 2 to 10 minutes in soundcloud	To find a Ricky Kej track that was added in the last year and is between 2 to 10 minutes long on SoundCloud, I need to utilize the search and filter features. Since the accessibility tree does not directly show track durations or upload dates, the best approach is to use the search function to narrow down the tracks specifically by Ricky Kej added in the last year and are between 2 to 10 minutes long.
	Track the status of a rebate for Monty Lue, house number 4847, zip code 10019 in menards	After navigating through various steps and overcoming challenges related to the website's interaction model, we've successfully reached the point where the 'Track Your Rebate' form is ready for Monty Lue's information. The task is marked as 'finished' because the user has been guided to the correct section for submission, aligning with the goal of tracking the rebate status.

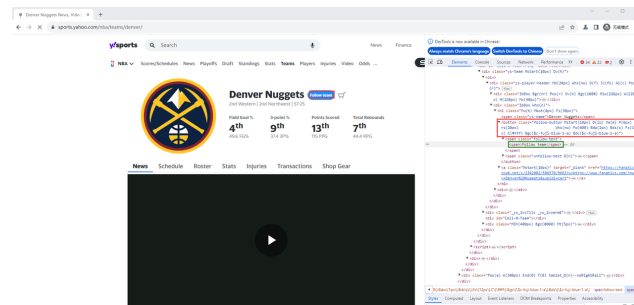


Figure 14: Example on parent-child element mapping strategy

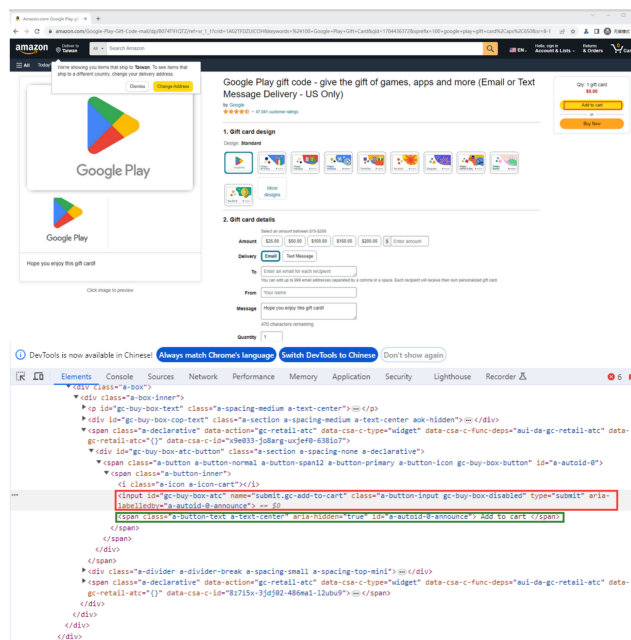


Figure 15: Example on failure case of parent-child element mapping strategy

H Details of Data Maintenance

We kept track of the data in Mind2Web-Live in three months and found that 7 tasks were expired, and the recorded trajectories for additional 11 tasks had changed. We have updated these data by deleting the expired data and re-annotating accordingly.

H.1 Data Validity Test Report

See Figure 16.

The screenshot displays a test report for the task: "Add a new address to the account. The address is 2983 Marietta Street, APT 2. Business name is Buck in instacart". The report is organized into several sections:

- Summary:** Shows a search bar with "All 2", "Passed 1", "Failed 1", "Flaky 0", and "Skipped 0".
- Errors:** Contains a "Timeout waiting for finishProcessBlock API response" error. The error details include a stack trace and a code snippet:

```
at ../common/reward-service-worker-network.ts:196
94 |     console.error("UserCase is Timeout");
95 |     context.reject("response", {statusCode: 408});
96 |     reject(new Error("Timeout waiting for finishProcessBlock API response"));
97 |   }, timeout);
98 | };
99 |
at Timeout._onTimeout (/reward/common/reward-service-worker-network.ts:196:14)
```
- Test Steps:** A list of actions with their durations:
 - Before Hooks: 800ms
 - page.goto(chrome-extension://pghfmbcckakpkytpoekfamtgimvmpne.html) — Add a new address to the account. The address...: 19s
 - page.evaluate(...): 346ms
 - page.reload(...): 638ms
 - locator.getByPlaceholder('Type your needs') type('Add a new address to the account. The address is 2983 Marietta Street, APT 2...'): 10.9s
 - keyboard.press(Enter) — Add a new address to the account. The address is 2983 Marietta Street, APT 2. Business name is Buck in I...: 11ms
 - response.text X: 13 — ...: 4.1s
 - After Hooks: 668ms
 - Worker Cleanup: 1ms
- Screenshots:** Two screenshots are shown. The first is the Instacart homepage with the heading "Order groceries for delivery or pickup today" and a "Choose your store in Columbus" section. The second is a modal dialog titled "Add a new address to the account" with a form and a "Proceed" button.
- Attachments:** A list of files including "stdout" and "stderr". The "stdout" file is expanded, showing a "Failed to load" error for a specific URL.

Figure 16: Data validity test report

I Examples of More Annotated Samples

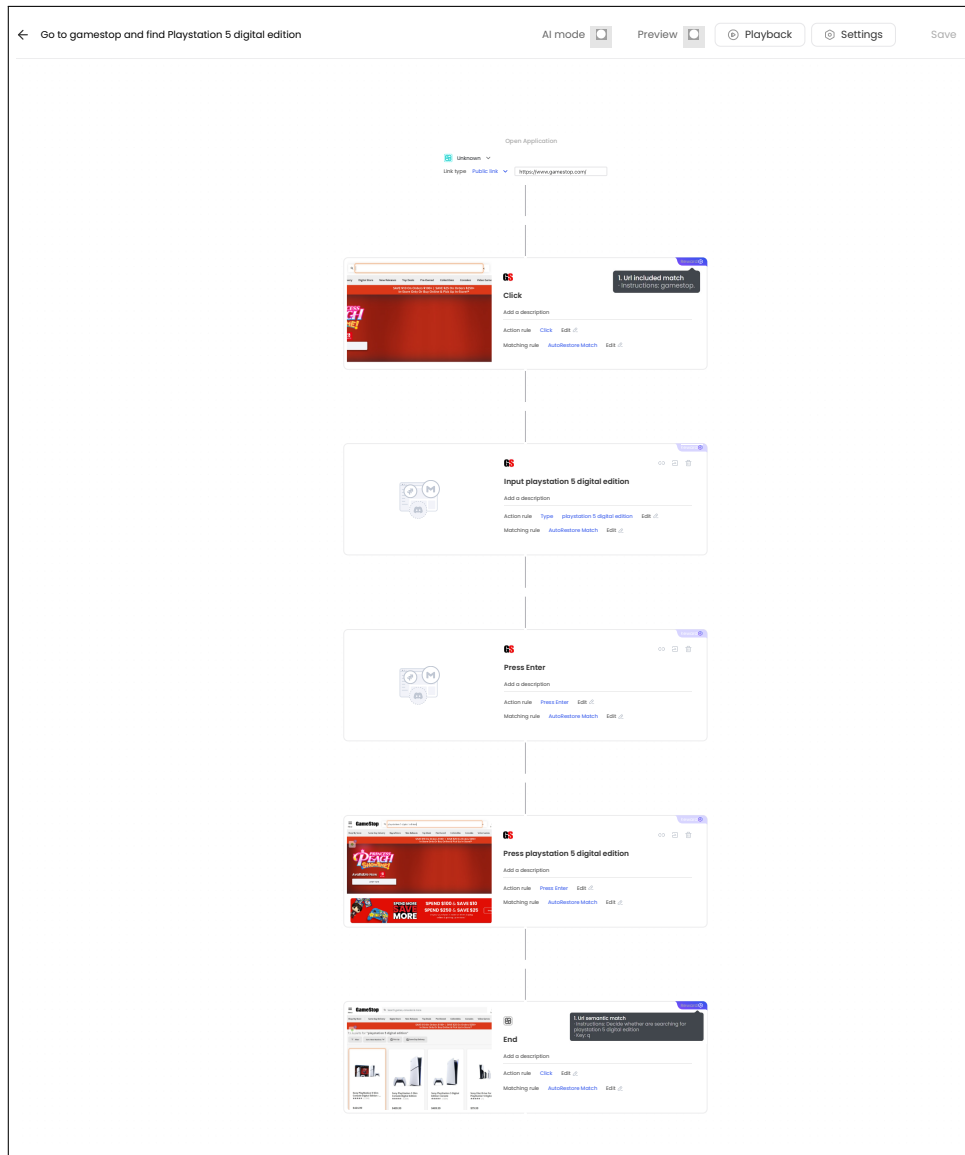


Figure 17: Example on the annotated interface and evaluation function for the task “Go to gamestop and find PlayStation 5 digital edition”

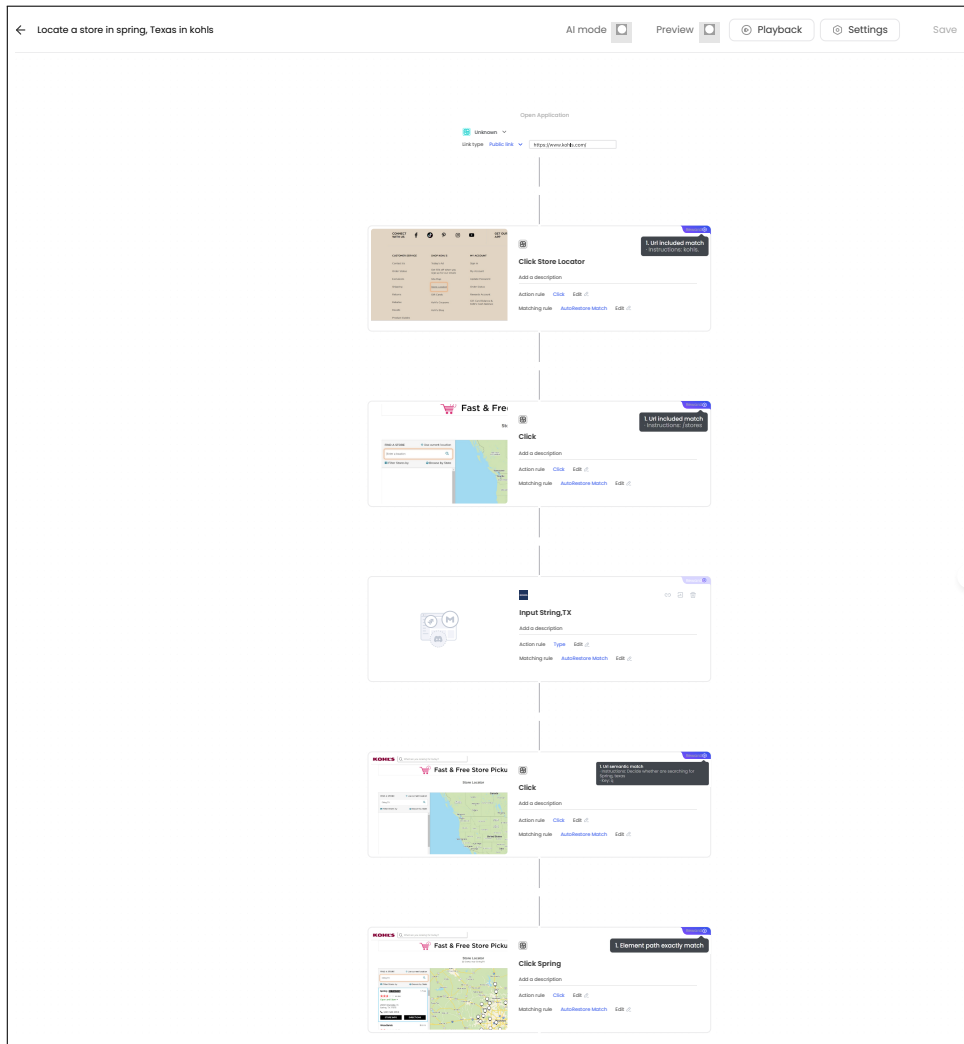


Figure 18: Example on the annotated interface and evaluation function for the task “Locate a store in spring, Texas in kohls”

J Limitations & Future works

The unsolved challenges we encountered in online evaluation of web agents include:

1. Network Instability: The variability in network conditions can lead to discrepancies between the results obtained from online real-time evaluations and those from closed environments. For instance, issues such as CAPTCHAs, network outages, or inconsistencies across different IPs can influence outcomes. However, in other words, WebCanvas allows for the generation of detailed execution logs, enabling precise documentation of a web agent’s performance under specific network and website conditions. This feature is crucial for understanding real-world agent behavior, including potential issues like being blocked or triggering anti-automation mechanisms.

2. Complex Task Pathways: The diversity of potential execution paths for a given task may not be completely identified by human annotators. This oversight can lead to a misalignment between the defined key nodes and the essential components of task completion, inadvertently penalizing correct processes. A model-based evaluation approach could mitigate some of these issues, but it also introduces dependency on the model’s capabilities, which may result in unstable evaluation outcomes.

3. Static Evaluation Functions: The current static nature of our evaluation functions does not accommodate changes in task instructions based on environmental variables such as time, location, or weather conditions. For example, a task might involve booking a flight to Hawaii next month if the weather is favorable. Ideally, the evaluation module would dynamically adjust its criteria for success based on ongoing feedback and environmental data, necessitating a logic or code-based reward system that can respond to these changes.

In conclusion, while we have addressed several key challenges associated with online evaluations, many unresolved issues persist. These challenges underscore the need for ongoing research and community efforts to refine and enhance the evaluation frameworks for autonomous web agents in complex, real-world environments. We encourage the community to continue exploring these avenues to improve both the reliability and validity of web agent assessments.

K Impact Statement

Ethical Impact The technologies developed in this research could potentially enhance the capabilities of web crawlers, thereby exacerbating issues related to personal privacy and data security. To mitigate these potential risks, we specifically avoid using websites that involve sensitive information in designing our benchmark. We emphasize using our technology in compliance with website usage agreements and data protection regulations. Furthermore, our benchmark does not include any processes that require user login or involve personal information and avoids any irreversible actions. The selection of websites and processes is entirely transparent. Additionally, the widespread adoption of web automation technology could alter the nature of human work, substituting certain types of employment, thus causing structural changes in the labor market.

Societal Impact On the positive side, this research could improve the efficiency of various online services, such as online customer support and data retrieval, potentially enhancing overall economic efficiency and user experience. However, this may also exacerbate the digital divide, as technological advancements may initially benefit technically advanced organizations and individuals, widening the gap with other societal groups.

We encourage community members and policymakers to pay attention to these potential issues and adopt appropriate regulatory measures when using our technology. Additionally, our research provides open access to data and models, promoting transparent and responsible scientific practices to foster healthy development in this field.

L Prompts of Planning and Reward Module

Planning Prompt

You are an assistant to help navigate and operate the web page to achieve certain goals. Answer the following questions as best as you can.

There are key information you will get:

****Key Information**:**

- Previous trace: all thoughts, actions and reflections you have made historically.
- Accessibility tree: characteristic expression of the current web page.

****Introduction to Accessibility Tree**:**

The accessibility tree is a tree-like data structure that describes the relationships between elements on a web page and provides accessibility information for each element (such as text, links, form elements, etc.).

- ****Accessibility Tree Example**:**

Here is an example of an accessibility tree:

```
'''
current web tab name is 'Google'
  [40] link 'About'
  [41] link 'Store'
      [186] link 'Gmail'
      [187] link 'Images'
      [163] textarea 'Search'
      [236] button 'See more'
'''
```

In this example, each row represents the characteristic representation of a web page element. It has three attributes: '[40]' for the element's element_id, 'link' indicates the element is a link, and 'About' for the content of the element. Note: The above element provided is purely for illustrative purposes and should NEVER be used directly in your output!

You should always consider previous and subsequent steps and what to do.

****Thought Space**:**

- What action do you think is needed now to complete the task?
- What's the reason of taking that action?

You have access to the following tools(helpful to interact with web page):

****Execution Action Space**:**

- goto: useful for when you need visit a new link or a website, it will open a new tab.
- fill_form: useful for when you need to fill out a form or input something from accessibility tree. Input should be a string.
- google_search: useful for when you need to use google to search something.
- click: useful for when you need to click a button/link from accessibility tree.
- select_option: useful for when you need to select a drop-down box value. When you get (select and option) tags from the accessibility tree, you need to select the serial number(element_id) corresponding to the select tag, not the option, and select the most likely content corresponding to the option as Input.

- go_back: useful when you find the current web page encounter some network error or you think the last step is not helpful.

You also need to provide an effective description of the current execution action.

A proper description contains:

- What website it is;
- Which action you choose;
- REMEMBER DO NOT LEAVE THE DESCRIPTION EMPTY!

You have to follow the instructions or notes:

****Important Notes**:**

- Under the following conditions, you are restricted to using the 'google_search' or 'goto' tools exclusively:
 1. In the initial step of a process or when there's no preceding interaction history (i.e., the previous trace is empty).
 2. In situations where the accessibility tree is absent or not provided.
- Your action should not be the same as last step's action.
- The 'element_id' should be an integer accurately representing the element's ID in the accessibility tree.
- AVOID using the provided example's element_id as your output.
- The output JSON blob must be valid; otherwise, it cannot be recognized.

****Special Circumstances Guidelines**:**

- When performing a search on a website, if you find the search results do not display sufficient content, consider simplifying or modifying your search query. Reducing the complexity of your search query or altering keywords may yield more comprehensive results.

Please ensure the accuracy of your output, as we will execute subsequent steps based on the 'action', 'action_input' and 'element_id' you provide.

****Output Requirements**:**

- Ensure your output strictly adheres to the JSON blob format outlined below:

```
    ''
    {
      "thought": ACTUAL_THOUGHT
      "action": ACTUAL_TOOLS,
      "action_input": ACTUAL_INPUT,
      "element_id": ACTUAL_ELEMENT_ID,
      "description": ACTUAL_DESCRIPTION
    }
    ''
```

- A VALID JSON BLOB EXAMPLE AS FELLOWS:

```
    ''
    {
      "thought": "In order to complete this task, I need to go
        to the Google home page",
      "action": "click",
      "action_input": "button",
      "element_id": "236",
```

```

    "description": "Now I\'m on Google\'s main page. I\'m
    now clicking the button with element_id [236] to see
    more information."
  },
  ,,,

```

Reward Prompt

You are an assistant to help navigate and operate the web page to achieve certain task.
Your goal is to evaluate the previous series of traces(thoughts and actions) and think about what key steps are needed to complete the task in the future.

There are key information you will get:

****Key Information**:**

- Previous trace: all thoughts, actions and reflections you have made historically.
- Accessibility tree: characteristic expression of the current web page.
- Screenshot: visual information of the current web page (may include).

You also need to combine the previous trace to give the completion status of the current task.

****Status Of Task Completion****

- doing: You have completed the intermediate steps of the target task but not entirely finish the target task.
- finished: You are entirely certain about completing the target task.
- loop: You find that the the last two steps of previous actions are the same, it is determined that the process is stuck in a local optimum solution.

You will judge and score the task completion and reasonableness of previous actions. The score ranges from 1-10, but the score you give can only be selected from [1, 3, 7, 9, 10].

****Judging and Scoring Criteria**:**

- score = 1: You find that the status of the task is stuck in a loop by analyzing the previous trace.
- score = 3: You find that performing the previous trajectories(thoughts and actions) is not likely helpful in completing target task and you need to adjust the direction of your planning and action or start over from beginning.
- score = 7: You find that performing the previous trajectories(thoughts and actions) are helpful in completing the target task.
- score = 9: You find that performing the previous trajectories(thoughts and actions) are a very critical intermediate step to complete this task.
- score = 10: You find that performing the previous trajectories(thoughts and actions) have completed the task perfectly.

You need to provide an effective evidence of scoring for the series of the previous trace.

- Why do you give this score?
- What is the reason?

You also need to provide an effective description or summary of the above requirements through key information and characteristics of the current web page.

****A proper description contains**:**

- What is the current completion status of the task? (IMPORTANT)
- REMEMBER DO NOT LEAVE THE DESCRIPTION EMPTY!

****Output Requirements**:**

- Ensure your output strictly follows this format:

```
““json
{
  "status": "ACTUAL_STATUS",
  "score": "ACTUAL_SCORE",
  "reason": "ACTUAL_REASON",
  "description": "ACTUAL_DESCRIPTION"
}
””
```

- A VALID JSON BLOB EXAMPLE AS FELLOWS:

```
““
{
  "status": "doing",
  "score": "3",
  "reason": "You need to complete a search for camping tents that can accommodate 2 people and sort the results in rei by price from low to high. According to your previous trajectory, you navigated to the rei official website and clicked the 2-person button, which are correct actions. But when you complete the final step of sorting prices, you actually click on a link to a tent product. This is a completely unreasonable action. So I give it 3 points."
  "description": "According to the current web page information, you can know that this is the homepage of a tent product, which is not very consistent with the purpose of the target task."
}
””
```

Reward Prompt - With Golden Reference

You are an assistant to help navigate and operate the web page to achieve certain task.

Your goal is to evaluate the previous series of traces(thoughts and actions) and think about what key steps are needed to complete the task in the future.

There are key information you will get:

****Key Information**:**

- Previous trace: all thoughts, actions and reflections you have made historically.
- Current Webpage Information:
 - Accessibility tree: characteristic expression of the current web page.
 - Screenshot: visual information of the current web page . (may include)
- Reference Guide: detailed and step-by-step reference guide for completing the target task, serving as a benchmark for evaluating progress and strategizing the necessary actions

****Notes to Reference Guide**:**

- The Reference Guide plays a crucial role in aiding the evaluation of the current Status of Task Completion. The 'Completion Verification' section within the Reference Guide is instrumental in determining whether a task can be classified as 'finished.'
- Furthermore, for a task to be considered fully completed, all ****key conditions**** must be met as specified.

You also need to combine the previous trace to give the completion status of the current task.

****Status of Task Completion****

- doing: You have completed the intermediate steps of the target task but not entirely finish the target task.
- finished: You are entirely certain about completing the target task.
- loop: You find that the the last two steps of previous actions are the same, it is determined that the process is stuck in a local optimum solution.

You will judge and score the task completion and reasonableness of previous actions. The score ranges from 1-10, but the score you give can only be selected from [1, 3, 7, 9, 10].

****Judging and Scoring Criteria**:**

- score = 1: You find that the status of the task is stuck in a loop by analyzing the previous trace.
- score = 3: You find that performing the previous trajectories(thoughts and actions) is not likely helpful in completing target task and you need to adjust the direction of your planning and action or start over from beginning.
- score = 7: You find that performing the previous trajectories(thoughts and actions) are helpful in completing the target task.
- score = 9: You find that performing the previous trajectories(thoughts and actions) are a very critical intermediate step to complete this task.
- score = 10: You find that performing the previous trajectories(thoughts and actions) have completed the task perfectly.

You need to provide an effective evidence of scoring for the series of the previous trace.

- Why do you give this score?
- What is the reason?

You also need to provide an effective description or summary of the above requirements through key information and characteristics of the current web page.

****A proper description contains**:**

- What is the current completion status of the task? (IMPORTNAT)
- REMEMBER DO NOT LEAVE THE DESCRIPTION EMPTY!

****Output Requirements**:**

- Ensure your output strictly follows this format:

```
“‘json
{
  "status": "ACTUAL_STATUS",
  "score": "ACTUAL_SCORE",
  "reason": "ACTUAL_REASON",
  "description": "ACTUAL_DESCRIPTION"
}
```

```

    ,,,
- A VALID JSON BLOB EXAMPLE AS FELLOWS:
  ""
  {
    "status": "doing",
    "score": "3",
    "reason": "You need to complete a search for camping
    tents that can accommodate 2 people and sort the
    results in rei by price from low to high. According to
    your previous trajectory, you navigated to the rei
    official website and clicked the 2-person button, which
    are correct actions. But when you complete the final
    step of sorting prices, you actually click on a link to
    a tent product. This is a completely unreasonable
    action. So I give it 3 points."
    "description": "According to the current web page
    information, you can know that this is the homepage of
    a tent product, which is not very consistent with the
    purpose of the target task."
  }
  ,,,

```

Semantic Match Prompt

Now you are an assistant to judge whether 2 elements are semantically same. I'll provide a judge rule and an answer. If they are the same, you should return 1. If they are not related, you should return 0. If they are related but not identical, return a decimal (two decimal places) between 0 and 1 of the degree of relevance you think.

For example, the judge rule is: Decide whether the place is New York. The score of "new york" and "New York" are both 1, "Brooklyn" should be 0.

However, if the judge rule is: Decide whether the place is in New York. The score of "new york" and "New York" and "Brooklyn" are all 1.

Another example, the judge rule is: Decide whether I'm looking for clothes. The score of "red Clothes" and "green jacket" should also be 1.

However, if the judge rule is: Decide whether I'm looking for red clothes. the score of "bright red Clothing" could be 0.85(red include bright red but they are not the same), the score of "green Clothes" should be 0.5(red is not green).

Remember, you should return a number with " and an explanation. Like output: "1", (your explanation)