DialSim: A Real-Time Simulator for Evaluating Long-Term Dialogue Understanding of Conversational Agents

Jiho Kim¹, Woosog Chay¹, Hyeonji Hwang¹, Daeun Kyung¹, Hyunseung Chung¹, Eunbyeol Cho¹, Yohan Jo², Edward Choi¹ KAIST¹ SNU² {jiho.kim, edwardchoi}@kaist.ac.kr

Abstract

Recent advancements in Large Language Models (LLMs) have significantly enhanced the capabilities of conversational agents, making them applicable to various fields (e.g., education). Despite their progress, the evaluation of the agents often overlooks the complexities of real-world conversations, such as real-time interactions, multi-party dialogues, and extended contextual dependencies. To bridge this gap, we introduce DialSim, a real-time dialogue simulator. In this simulator, an agent is assigned the role of a character from popular TV shows, requiring it to respond to spontaneous questions using past dialogue information and to distinguish between known and unknown information. Key features of DialSim include evaluating the agent's ability to respond within a reasonable time limit, handling long-term multi-party dialogues, and managing adversarial settings (e.g., swap character names) to challenge the agent's reliance on pre-trained knowledge. We utilized this simulator to evaluate the latest conversational agents and analyze their limitations. Our experiments highlight both the strengths and weaknesses of these agents, providing valuable insights for future improvements in the field of conversational AI. DialSim is available at https://github.com/jiho283/Simulator.

1 Introduction

Recent advancements in Natural Language Generation (NLG) within Large Language Models (LLMs) have significantly enhanced the capabilities of conversational agents. These agents are now integral to various fields, including customer service [4, 18, 39] and education [2, 35], providing personalized interactions that cater to individual preferences and interests. To ensure high user satisfaction and continuously improve these agents, it is essential to accurately evaluate their performance.

Traditionally, evaluating conversational agents has involved qualitative assessments of their responses. This process typically involves human evaluators or an LLM judging the quality of an agent's utterances [1, 14, 15, 29, 31, 41] or comparing the responses between different agents (*e.g., Chatbot Arena* [8]). However, for conversational agents to truly engage with humans, they need to cover a wide range of communication skills, not just the ability to generate natural responses. Real-world conversations happen in real-time, often involving multiple participants and recalling previous interactions. This complexity necessitates a novel evaluation method that accurately assesses an agent's ability to respond within a reasonable time limit, its thorough understanding of the multi-party dialogue context, and its capacity to reason across previous sessions.

To address this, we propose DialSim, a dialogue simulator for real-time evaluation of a conversational agent's long-term dialogue understanding. As illustrated in Figure 1, DialSim places an agent in the role of the main character of a TV show, engaging it in an extensive conversation based on the

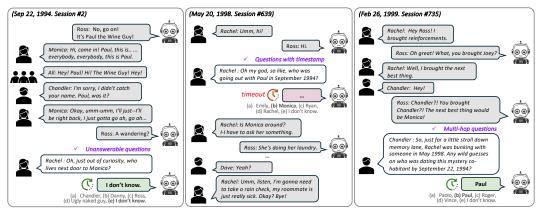


Figure 1: An overall process of DialSim. Gray speech bubbles indicate predetermined utterances from the script, and white speech bubbles indicate spontaneous questions asked during the simulation. Colored speech bubbles indicate the agent's responses to the questions. (Left) An unanswerable question. (Center) A question that references a specific time. (Right) A multi-hop question that requires understanding past sessions (*i.e.*, the Left and Center boxes).

show's scripted content. During this conversation, the agent is evaluated for its ability to respond appropriately to spontaneous questions from other speakers within a predefined time limit (*e.g.*, 1s / 3s / 5s). The agent should be able to answer questions based on the information from the past dialogue and acknowledge when it does not know the answer.

DialSim simulates three different dialogue environments based on scripts from popular TV shows (*i.e.*, Friends, The Big Bang Theory, and The Office), and it has the following four main features.

- **Real-Time Simulator**: For a conversational agent to function effectively in real-time, the agent should be capable of updating its memory and generating responses on the fly. To evaluate this, DialSim measures the accuracy of responses within a predefined time limit. To the best of our knowledge, this is the first work that evaluates the performance of a conversational agent in a time-constrained environment.
- Evaluating Long-Term Multi-Party Dialogue Understanding: DialSim includes multi-party dialogues with an average length of 350k tokens, making it the longest among existing long-term dialogue datasets. Throughout the simulation, the agent faces complex questions that demand comprehension and reasoning across several multi-party sessions, ensuring a thorough assessment of its understanding capabilities.
- **Randomized Test**: In our simulator, there is an average of 1,300 sessions of conversations occurring over a period of 5 years as assumed in the corresponding TV show. For each session, a randomly picked character asks a question that is randomly sampled from an average of 1,000 candidates, at a random time. This setup allows us to test whether an agent can respond appropriately in an unpredictable environment, resembling real-world settings. Additionally, since a random set of questions is given for each test, repeating the tests multiple times allows us to measure the agent's performance variability and reliability.
- Adversarial Test: LLM-based agents are likely to have prior knowledge about these TV shows from the pre-training process (see Appendix B). Since such agents can provide answers without referencing the actual dialogue history, it is crucial to ensure that the agent relies strictly on the history for its responses. To achieve this, we developed adversarial tests that modify character names in two specific ways: by swapping their names with each other (*e.g.*, Joey ↔ Monica) or by assigning new names to them (*e.g.*, Joey → John). This approach ensures that the agent's responses depend strictly on the context of the dialogue history.

2 Related Works

Long-Term Dialogue Datasets Widely used dialogue datasets include DailyDialog [17], which features everyday conversations; PersonaChat [40], which contains the persona of each character; Empathetic Dialogues [26], designed for emotional conversations. However, conversational agents

Table 1: Comparison of DialSim with other long-term dialogue datasets.

Dataset	# of Turns †	# of Sessions [†]	# of Tokens †	Collection	Avg. # of Speakers	Real-Time Evaluation
MSC (train; 1-4 sessions)	53.3	4	1225.9	Crowdsourcing	2.0	×
MSC (valid + test; 1-5 sessions)	61.7	5	1670.9	Crowdsourcing	2.0	X
Conversation Chronicles	58.5	5	1054.7	LLM	2.0	X
LoCoMo	304.9	19.3	9209.2	Crowdsourcing + LLM	2.0	×
DialSim (ours)	18986.3	1313.3	351996.3	Scripts	3.4	1

†: averaged over dialogues

built with these datasets were limited to single-session interactions. To address this, Multi Session Chat [36] was created, featuring up to five sessions per dialogue. Despite this improvement, generating longer dialogues via crowdsourcing remained challenging. To overcome this challenge, Conversation Chronicles [11] was developed by leveraging an LLM. Furthermore, LoCoMo [19] evaluates dialogue comprehension of an agent through various tasks (*e.g.*, event summarization) in long-term dialogues. In contrast to other datasets generated through crowdsourcing or LLMs, the dialogues in DialSim are derived from TV show scripts, offering a unique set of benefits. These scripts feature multiple characters engaged in extended dialogues spanning several years, with character details (*e.g.*, relationships) evolving over time. Leveraging these characteristics, we developed a dialogue simulator that replicates extremely long-term dialogues with evolving relationships. Table 1 provides a detailed comparison between DialSim and other long-term dialogue datasets.

Datasets Based on the Scripts of TV Shows While both TV show scripts and other dialogue datasets effectively capture dialogue characteristics, scripts offer a significant advantage due to their abundance and accessibility. This makes them particularly valuable for various dialogue understanding tasks such as question answering (QA) [30, 37], coreference resolution [5, 7, 42], relation extraction [25, 38], and summarization [6, 9, 24]. Notable datasets derived from scripts include FriendsQA [37] and TVShowGuess [30]. FriendsQA treats each scene in every episode as an independent conversation. Each question inquires about information related to the conversation, and the task is to find the corresponding answer spans. TVShowGuess is a multiple-choice QA dataset consisting of five different popular TV shows. The task is to identify anonymized speakers in a scene using information from all previous scenes. While many studies have utilized TV show scripts to create such datasets, only DialSim includes unanswerable questions, conducts real-time evaluations, and fully utilizes the extended context of scripts to assess conversational agents.

3 DialSim

Our simulator, illustrated in Figure 1, features an agent taking on the role of a main character in a dialogue (*i.e.*, Friends: Ross, The Big Bang Theory: Sheldon, The Office: Michael¹), encompassing around 350,000 tokens. Throughout the simulation, an agent is randomly asked questions by other characters that must be answered accurately within a time limit (§ 3.1). For each session, we prepare a large pool of questions in advance, from which one is randomly selected and presented to the agent every time a new simulation is initiated, simulating an environment for randomized tests (§ 3.2).

3.1 Task

3.1.1 Definition

Let the k-th utterance of the n-th session be denoted as $u_{n,k}$, and the n-th session consisting of r utterances be $S_n = \{\{u_{n,1}, u_{n,2}, ..., u_{n,r}\}, d_n\}$, where d_n is the date of S_n . The sub-session including up to the k-th utterance of the n-th session is $S_{n,k} = \{\{u_{n,1}, u_{n,2}, ..., u_{n,k}\}, d_n\}$. The entire dialogue consisting of N sessions is denoted as $\mathcal{D} = \{S_1, S_2, ..., S_N\}$. The agent's memory up to the k-th utterance of the n-th session is $\mathcal{M}_{n,k}$. The agent answering question $q_{n,m,c}$ asked by character c in the m-th utterance of the n-th session using the memory is $a_{n,m} = Agent(\mathcal{M}_{n,m}, q_{n,m,c}) \in \{A, B, C, D, E\}$, where A, B, C, D, E are the answer choices (*i.e.*, multiple-choice question answering²).

¹The characters with the most lines in each script were selected.

²To ensure the accuracy and efficiency of the evaluation, questions are presented in a multiple-choice format rather than as open-ended questions.

Algorithm 1 DialSim

Input: Dialogue $\mathcal{D} = \{S_1, S_2, \dots, S_N\}$, Time interval t, Agent **Output:** CorrectAnswers / TotalQuestions 1: CorrectAnswers $\leftarrow 0$ 2: TotalQuestions $\leftarrow 0$ 3: $\mathcal{M}_{1,0} \leftarrow \phi$ 4: for $n \leftarrow 1$ to N do if $|Characters(\mathcal{S}_n)| < 2$ then 5: continue 6: else 7: $u_{n,m} \leftarrow QuestionTimingSelection(\mathcal{S}_n)$ 8: $c \leftarrow RandomCharacterInThreeTurns(u_{n,m})$ ٩. 10: $q_{n,m,c}$, TrueAnswer $\leftarrow RandomQuestion(n,m,c)$ TotalQuestions \leftarrow TotalQuestions + 1 11: for $k \leftarrow 1$ to $|\mathcal{S}_n|$ do 12: $\mathcal{M}_{n,k} \leftarrow UpdateMemoryInTime(\mathcal{M}_{n,k-1}, u_{n,k}, d_n, t)$ 13: 14: if k = m then $a_{n,m} \leftarrow AgentAnswerInTime(\mathcal{M}_{n,m}, q_{n,m,c}, d_n, t)$ 15: if $a_{n,m}$ = TrueAnswer then 16: $CorrectAnswers \leftarrow CorrectAnswers + 1$ 17: end if 18. 19. end if 20: $\mathcal{M}_{n+1,0} \leftarrow \mathcal{M}_{n,k}$ 21: end for 22: end if 23: end for

3.1.2 Simulator

Algorithm 1 outlines the simulation process of DialSim, designed to emulate a real-time conversation. In this simulator, each participant's utterance (including the agent's) occurs at a predefined time interval (same as time limit), and the agent should update its memory³ within this interval. If updating the memory is not completed within the interval, the simulator will move on to the next utterance (Line 13). During the simulation, other characters ask questions to the agent (Line 8-10), except in sessions where the agent is the only one talking (Line 5-6). The timing to ask a question is chosen randomly within the session (Line 8), and the speaker who asks the question is also chosen randomly. However, to make the simulation realistic, it is crucial to ensure that the chosen speaker is still present and hasn't left the session. We achieved this by randomly choosing from characters who were present within three turns of the agent's last utterance (Line 9). Then, a question is randomly selected and asked in the style of the corresponding speaker (Line 10). The agent then must respond to the question using its memory, all within the time limit (Line 15). The prompt for the response is created by combining the question with the dialogue history stored in the simulator will move on to the next utterance. The prompt we used is provided in Appendix C.

3.2 Data Construction

DialSim was developed using scripts from five consecutive seasons of popular TV shows (*i.e.*, Friends, The Big Bang Theory, and The Office⁴). These scripts were first preprocessed to serve as dialogue data (§ 3.2.1). Next, questions were generated for each script, drawing from fan quizzes (§ 3.2.2) and a temporal knowledge graph (TKG) (§ 3.2.3). Each question was then paired with multiple choices and the correct answer. Finally, character style transfer was applied to refine the questions, resulting in the final pool of questions for each session (§ 3.2.4).

³The memory can be incrementally updated in various ways (*e.g.*, as per each utterance, a summary of each session up until the current utterance). A detailed discussion of these methods is provided in § 4.2.

⁴The scripts were downloaded from the website Kaggle (https://www.kaggle.com/).



Figure 2: The overall process of question generation based on fan quizzes. First, we crawled fan quizzes from the web (1). Then, we applied filtering and revision processes to the crawled data (2-a, b). From this, we created secondary versions of the questions by adding dates to each (3-a). Then, we mapped each question to the scenes by determining whether it is answerable in that scene or not $(3-b)^5$. Finally, we applied character style transfer to make the questions more natural (4).

3.2.1 Script Preprocessing

The script we used includes 5 consecutive seasons per TV show, with each season containing approximately 20 episodes. Each episode is composed of multiple scenes (*i.e.*, session). Each script includes not only utterances but also descriptions of characters' actions and scenes, as well as metadata unrelated to the plot (*e.g.*, names of writers and directors). We manually filtered out all irrelevant parts to create $Script_{pre}$, which contains only the conversations between characters. Additionally, since some of our questions involve time conditions (*e.g.*, "Which friend wasn't allowed to drive Monica's Porsche in October 1994?"), we manually assigned a date to each scene in $Script_{pre}$ to provide time information to the agent. These dates were determined based on the contents of the conversations and the air dates of the episodes. The specific rules for date assignments are detailed in Appendix D. We then selected scenes involving the main character (*i.e.*, Ross, Sheldon, and Michael) from $Script_{pre}$ and sequentially numbered them as sessions S_i . This process resulted in the final dialogue $\mathcal{D} = \{S_1, S_2, ..., S_N\}$.

3.2.2 Question Generation based on Fan Quizzes

We utilized a fan quiz website FunTrivia⁶ to generate our questions. Fan quizzes cover a range of difficulty levels and focus on major events from each episode, making them promising for evaluating dialogue comprehension. Figure 2 illustrates our process for generating questions using fan quizzes. We began by extracting episode-specific quizzes from the site. Since these quizzes were created by dedicated fans, many required knowledge unrelated to the dialogue itself (*e.g.*, "What is the name of the actor who played the clerk?"). To filter out these questions, we first selected quizzes that could be answered by referencing *Script_{pre}* using ChatGPT-4 [20].⁷ Additionally, ChatGPT-4 annotated the scenes that served as evidence for each question. These annotations were verified by the authors to ensure accurate filtering and scene-mapping.

We then annotated the answerability of each question, i.e., whether it is possible for the main character to know the answer in the corresponding scene. For example, in Friends, consider the question, "How

⁵Questions without dates (*e.g.*, Q#2 in Figure 2) are episode-specific, so the answers to such questions can vary across episodes. Therefore, for questions without dates, we mapped them only to the scenes within the episode to which the question belongs. On the other hand, questions with specified dates (*e.g.*, Q#2-1 in Figure 2) are episode-agnostic. However, asking them on dates before the specified dates in the question would not be natural; thus we did not map such scenes to such questions.

⁶https://www.funtrivia.com/

⁷Fan quizzes exist for each episode, so we annotated them based on $Script_{pre}$. Since $Script_{pre}$ contains scenes where the main character is absent, questions about these scenes would be unanswerable, which allowed us to design adversarial tests. Therefore, we first generated questions for each scene based on $Script_{pre}$ and then matched them to the sessions of \mathcal{D} .

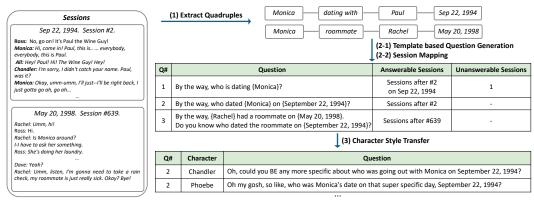


Figure 3: The overall process of question generation based on the temporal knowledge graph. We first extracted quadruples and constructed a temporal knowledge graph (1). Then, we generated questions based on this and mapped each question to the sessions by determining whether it was answerable in that session or not, similar to fan quiz-based questions (2-1, 2-2). Character style transfer was performed afterwards (3).

did Rachel buy her new boots?" If the evidence scene was 14, Ross would not know the answer if Ross was absent in the scene. Even if he was present in scene 14, Ross wouldn't be able to answer if the question was asked in scene 1. However, if Ross appeared in scene 14 and the question was asked in scene 15, he would know the answer. Using this principle, we determined whether each question is answerable. Additionally, to create questions that require long-term memory, new questions were generated by adding the date information of each scene to the questions (*e.g.*, "How did Rachel buy her new boots on September 22, 1994?"). Detailed question generation processes are provided in Appendix E.

3.2.3 Question Generation Based on a Temporal Knowledge Graph

Fan quizzes are useful for generating our questions, but since they are episode-specific and usergenerated, the questions don't span multiple episodes and their numbers are limited (~1K). To address this, we constructed a knowledge graph for each session and used it to generate questions. Initially, we used ChatGPT-4 to extract triples (*i.e.*, [head, relation, tail]) from each session S_i in \mathcal{D} . These triples were then refined by the authors. We employed 32 relations (*e.g.*, girlfriend) derived from DialogRE [38], a high-quality dataset where human annotators manually extracted relations from Friends scripts, classifying relationships between characters into 37 categories. We adapted and slightly modified these relations for our purpose. More details about the relations are provided in Appendix F.1. Finally, we combined the triples from each session with their respective dates to create a temporal knowledge graph (TKG) composed of quadruples (*i.e.*, [head, relation, tail, date]).

Using the constructed TKG, we created questions that the main character could either answer or not for each session. We generated these questions by extracting one (*i.e.*, one-hop) or two (*i.e.*, two-hop) quadruples from the TKG. The form and answer of the question may change depending on the time it is asked, even if the same quadruple is used. For instance, if we select [Rachel, boyfriend, Ross, 1994-08-08] and ask the question in 1996, it would be: "Who was Rachel's boyfriend on August 8th, 1994?" If asked on August 8th, 1994, the question would be: "Who is Rachel's boyfriend?" In both cases, the answer is Ross. Conversely, if we inquire about Rachel's boyfriend in 1992, when no information is available, the correct answer would be: "I don't know." In this manner, we manually verified the answer of each question. We applied the same principle to create more complex two-hop questions (*e.g.*, "Rachel had a roommate on August 8th, 1994. Who is the boyfriend of the roommate now?"). The overall process of generating questions using TKG is illustrated in Figure 3. Examples of question templates and corresponding questions we created can be found in Appendix F.2.

3.2.4 Final Data Processing

Answer Choices Generation To create multiple-choice questions, we carefully crafted a set of answer choices for each question. First, for all questions, we included an option "(E) I don't know.", which agents must choose if the questions are unanswerable. For questions sourced from the fan

	Friends	The Big Bang Theory	The Office
Total Number of Tokens	335439	367636	352914
Total Number of Sessions	785	805	2338
Average Fan Quiz Questions per Session	56.7	7.8	12.7
Average TKG Questions per Session	1127.7	1158.5	508.5
Average Question Candidates per Session	1196.8 (1115.1 / 81.7)	1196.9 (1011.0 / 185.9)	511.5 (486.5 / 25.0)
Approximate Number of Possible Tests	1196.8^{785}	1196.9^{805}	511.5^{2338}

Table 2: Statistics of DialSim. The values in parentheses for Average Question Candidates per Session refer to the number of answerable questions and unanswerable questions, respectively.

quizzes, the four answer choices were taken from the original quiz. The correct answers for these questions were the same as the original quiz, while the unanswerable questions were fixed to (E). For questions based on the TKG, the incorrect choices were derived from the tails of other quadruples that shared the same relation as the original quadruple. For example, for the question "Who is Rachel's boyfriend?", we extracted quadruples from the whole TKG where the relation is "boyfriend" and randomly selected three tails to form the incorrect choices. Additionally, to create a more adversarial test, if Rachel has a boyfriend in the past or future, we prioritized including these in the incorrect choices. In this case, for answerable questions (*i.e.*, past or present), the correct answer is the tail of the original quadruple, while for unanswerable questions (*i.e.*, future), the correct answer is (E).

Question Style Transfer In the simulator, questions are rephrased to reflect each character's unique tone, creating the impression that the characters themselves are asking the questions (*e.g.*, Generic style: "How did Rachel buy her new boots?" \rightarrow Style of Joey Tribbiani from Friends: "Hey, how did Rachel manage to snag those killer boots, huh?"). This transformation is powered by ChatGPT-4, and subsamples are reviewed by the authors to ensure that the original intent was preserved. More examples of style-transferred questions for each character can be found in Appendix G.

4 Experiments

4.1 Experimental Setting

Table 2 presents the statistics of DialSim. Since each question has five choices, unanswerable questions were set to comprise 20% of the total to fairly stratify the correct answers. Additionally, our simulator operates in real-time, requiring precise control of the experimental environment. Therefore, we conducted all experiments using the same hardware: NVIDIA RTX A6000 GPUs and an AMD EPYC 7702 64-Core Processor. The time limit used in the experiment was set to 6 seconds, based on the average time interval between utterances in the TV shows (detailed in Appendix H).

4.2 Baselines

We experimented with two methods for using an agent's memory. The first method, namely Base LLM, is to simply prefix latest utterances as much allowed by the model's context length. The second method, namely RAG-based, employs a retriever to search for relevant dialogue history from the agent's memory (external storage) and includes it in the prompt [16]. This method can be broken down into three ways for storing dialogue history: each speaker's utterance individually, the entire session, and a summarized version of each session. The retrieval from the memory was performed using BM25 [28] and cosine similarity with the OpenAI embeddings [23]. Agents were tested with both API-based models (*i.e.*, Gemini-1.0 Pro [32], Gemini-1.5 Pro [27], Claude 3 Opus [3], ChatGPT-3.5 [21], and ChatGPT-40 [22])⁸ and open-source models (*i.e.*, Tulu2-7B, 70B [10], Llama2-7B, 70B [34], Mistral-7B [12], Mixtral-8x7B [13], and Gemma-2B, 7B [33]). To emulate conversational settings, we used chat templates for instruction-tuned models or directly used chat models.

4.3 Results

Table 3 shows that API-based models outperformed open-source models due to their superior inference capabilities and faster response times. However, the performances of all baselines were below 40%, suggesting that current LLMs function poorly as conversational agents for multi-party long-term

⁸Gemini-1.5 Pro, Claude 3 Opus, and ChatGPT-40 were evaluated only in the Session Entire-BM25 and oracle setting to measure their performance upper bound due to their high prices.

Table 3: The performance of the agents on Friends dialogue in DialSim (time limit = 6 seconds). We conducted experiments three times and reported the accuracy and standard deviations.

			RAG-based					
Туре	Model	Base LLM		BM25		()penAI Embeddi	ng
			Utterance	Session Entire	Session Sum	Utterance	Session Entire	Session Sum
API	ChatGPT-3.5	31.82 (1.31)	25.58 (1.78)	39.70 (1.86)	32.09 (0.84)	32.06 (1.60)	36.84 (1.77)	36.69 (1.25)
API	Gemini 1.0 pro	2.96 (0.31)	28.77 (1.83)	25.07 (2.40)	35.27 (1.80)	34.22 (0.49)	31.83 (0.41)	35.75 (2.93)
	Tulu2-70B	0.37 (0.15)	20.94 (0.75)	20.27 (0.99)	19.75 (0.08)	31.76 (1.84)	10.15 (0.55)	18.87 (0.30)
	Tulu2-7B	0.84 (0.15)	12.68 (0.24)	19.58 (1.04)	26.84 (0.85)	14.08 (0.89)	17.39 (1.37)	25.21 (1.28)
	Llama2-70B	0.05 (0.08)	0.00 (0.00)	1.26 (0.77)	0.21 (0.08)	0.00 (0.00)	0.16 (0.00)	0.05 (0.08)
	Llama2-7B	22.01 (1.50)	22.63 (1.61)	23.14 (1.17)	19.24 (0.51)	25.41 (1.38)	21.22 (1.44)	19.23 (1.32)
Open	Mixtral-8x7B	1.88 (0.26)	16.84 (0.95)	26.23 (0.90)	17.11 (1.94)	17.94 (1.32)	26.78 (1.04)	15.40 (1.39)
	Mistral-7B	2.82 (0.46)	24.22 (2.04)	33.07 (1.01)	29.29 (1.76)	28.30 (1.93)	29.15 (1.67)	25.41 (1.53)
	Gemma-7B	16.60 (0.84)	22.11 (1.73)	24.30 (2.04)	18.33 (1.37)	26.42 (2.48)	22.54 (0.78)	18.80 (0.64)
	Gemma-2B	0.68 (0.20)	24.06 (2.03)	24.22 (1.34)	25.79 (1.00)	25.31 (1.55)	24.48 (1.62)	25.78 (1.12)

Table 4: The performance of the agents on Friends dialogue in DialSim (without time limit). We conducted experiments three times and reported the accuracy and standard deviations.

					RAG	-based			
Туре	Model	Base LLM	BM25			OpenAI Embedding			
			Utterance	Session Entire	Session Sum	Utterance	Session Entire	Session Sum	
API	ChatGPT-3.5	31.81 (1.33)	26.91 (2.30)	39.45 (1.40)	32.77 (1.31)	32.41 (0.96)	35.78 (0.74)	35.98 (1.75)	
API	Gemini 1.0 pro	28.36 (0.97)	28.10 (1.08)	39.90 (1.08)	34.11 (1.64)	34.26 (2.91)	30.93 (2.17)	33.96 (2.11)	
	Tulu2-70B	3.31 (0.32)	29.87 (0.65)	35.87 (2.56)	34.72 (1.63)	37.07 (0.72)	33.63 (1.32)	38.62 (1.94)	
	Tulu2-7B	1.57 (0.12)	28.93 (2.81)	28.72 (1.80)	30.86 (2.29)	34.55 (0.47)	31.04 (0.96)	32.12 (0.75)	
	Llama2-70B	35.55 (2.06)	33.67 (0.58)	35.62 (1.74)	35.71 (1.87)	38.80 (0.98)	34.92 (1.62)	37.45 (1.98)	
	Llama2-7B	21.80 (1.02)	25.29 (1.34)	27.47 (1.92)	23.31 (1.22)	29.34 (1.79)	25.58 (2.47)	24.22 (1.40)	
Open	Mixtral-8x7B	42.19 (1.76)	31.84 (0.78)	46.47 (1.75)	32.31 (1.09)	35.51 (0.19)	41.24 (2.90)	34.18 (0.96)	
	Mistral-7B	32.93 (0.59)	28.20 (1.17)	35.09 (1.76)	30.16 (1.82)	30.12 (1.45)	31.00 (1.93)	30.80 (1.75)	
	Gemma-7B	18.78 (0.87)	22.26 (1.52)	23.62 (2.09)	19.83 (1.74)	25.07 (0.49)	22.48 (0.25)	20.08 (0.76)	
	Gemma-2B	1.16 (0.26)	25.03 (1.54)	24.64 (1.31)	24.84 (2.05)	28.06 (1.38)	24.56 (2.60)	28.28 (1.94)	

complex dialogues. The experimental results for Friends, The Big Bang Theory, and The Office exhibited similar trends. The detailed results are described in Appendi I.

Time Limit We conducted additional experiments without time limit and reported the results in Table 4. Under time limit, there were often no significant differences in performances based on model size when comparing the same type of LLM, and sometimes smaller models outperformed larger ones. However, in the absence of time limit, larger models typically exhibited better performances than their smaller counterparts. Additionally, larger open-source models have shown remarkable inference capabilities, often on par with the performance of API-based models. This is because larger models often exceed the time limit due to their slower inference speed. Therefore, for a conversational agent to engage effectively in real-time conversations, it is crucial to select a model size that balances both inference time and reasoning capability. The performances according to different time limits are reported in Appendix J.

Storing History Storing the entire session consistently exhibits superior performance compared to other history storing methods, because individual utterances lack adequate context, and crucial information may be lost during summarization. Contrary to our expectation, Mixtral's Base LLM (*i.e.* without history retrieval) outperforms some retrieval-based models in a setting with unlimited time. This is due to Mixtral's context length of 32k tokens, which is long enough to accommodate half a season of the script, allowing it to utilize a longer dialogue history than some of the other baselines. However, in a setting with a time limit, Mixtral's performance significantly drops due to its long inference time. Therefore, for a conversational agent to converse in real-time, it is necessary to select a reasonably appropriate length of dialogue history.

Oracle Setting To establish a performance upper bound, we conducted experiments in an oracle setting, where the agents were provided with the evidence sessions and their dates (see Figure 2). In this scenario, Claude-3 Opus achieved the best performance of 69.64% in a setting with unlimited time, highlighting the challenging nature of our task. This result surpasses the best RAG-based method, Session Entire-BM25 setting, by 23.21%. This notable gap underscores the necessity for

advanced techniques in storing and retrieving history for agents engaged in long-term dialogues. Detailed experimental results are provided in Appendix K.

Error Analysis by Question Type We conducted an error analysis by question type on Mixtral, based on Session Entire-BM25, which showed the highest performance setting without a time limit. First, comparing the performance of fan quiz-based questions and TKG-based questions, the results were 53.75% and 41.14% respectively, indicating the greater difficulty of TKG-based questions. Additionally, within TKG-based questions, one-hop questions had a performance of 54.46%, whereas two-hop questions had a performance of 17.92%, highlighting the challenge of two-hop questions. Furthermore, even in the oracle setting, while the performance of one-hop questions increased to 74.67%, two-hop questions remained at 36.56%. This suggests that two-hop questions are challenging not only in terms of history retrieval but also in reasoning across the given sessions.

Adversarial Test We conducted further experiments for the adversarial test by altering the names of the characters in two ways: by swapping their names with each other (*e.g.*, Joey \leftrightarrow Monica) or by assigning new names to them (*e.g.*, Joey \rightarrow John). The results showed a noticeable decrease in overall performance compared to the original setup. Specifically, when we experimented under unlimited time conditions, performance dropped by 5% to 10%. This decline is attributed to the agents relying not only on the dialogue history but also on their pre-trained knowledge when answering questions. Additionally, the performance decrease was more pronounced when names were swapped compared to when new names were assigned. This suggests that new names represent new information, while mixed names in the dialogue history conflicted with the pre-trained knowledge, leading to reduced reasoning ability. The detailed experimental results are provided in Appendix L.

5 Conclusion

In this paper, we introduce DialSim, a simulator for evaluating conversational agents' long-term dialogue understanding in real-time settings. DialSim utilizes scripts from well-known TV shows and incorporates questions derived from fan quizzes, along with a temporal knowledge graph, for a thorough assessment. Our experimental findings reveal significant limitations in current conversational agents' abilities to manage complex, multi-party, long-term dialogues effectively.

Despite its strengths, our simulator has two main limitations. First, it only supports multiple-choice questions, meaning it cannot evaluate the quality of agents' open-ended responses. Second, it does not consider the current session's context when asking questions, leading to potential incoherence with the ongoing dialogue. Future developments will focus on expanding the range of question types and ensuring contextual coherence to address these limitations.

Acknowledgments and Disclosure of Funding

This work was supported by Institute for Information & Communications Technology Promotion(IITP) grant (No.RS-2019-II190075) and National Research Foundation of Korea(NRF) grant (RS-2024-00333484), funded by the Korea government (MSIT).

References

- [1] Daniel Adiwardana, Minh-Thang Luong, David R So, Jamie Hall, Noah Fiedel, Romal Thoppilan, Zi Yang, Apoorv Kulshreshtha, Gaurav Nemade, Yifeng Lu, et al. Towards a human-like open-domain chatbot. *arXiv preprint arXiv:2001.09977*, 2020.
- [2] Tarek Ait Baha, Mohamed El Hajji, Youssef Es-Saady, and Hammou Fadili. The impact of educational chatbot on student learning experience. *Education and Information Technologies*, pages 1–24, 2023.
- [3] Anthropic. Introducing the next generation of claude, 2024.
- [4] Rajat Kumar Behera, Pradip Kumar Bala, and Arghya Ray. Cognitive chatbot for personalised contextual customer service: Behind the scene and beyond the hype. *Information Systems Frontiers*, 26(3):899–919, 2024.
- [5] Henry Y. Chen, Ethan Zhou, and Jinho D. Choi. Robust coreference resolution and entity linking on dialogues: Character identification on TV show transcripts. In Roger Levy and Lucia Specia, editors, *Proceedings of the 21st Conference on Computational Natural Language Learning (CoNLL 2017)*, pages 216–225, Vancouver, Canada, August 2017. Association for Computational Linguistics.
- [6] Mingda Chen, Zewei Chu, Sam Wiseman, and Kevin Gimpel. SummScreen: A dataset for abstractive screenplay summarization. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 8602–8615, Dublin, Ireland, May 2022. Association for Computational Linguistics.
- [7] Yu-Hsin Chen and Jinho D. Choi. Character identification on multiparty conversation: Identifying mentions of characters in TV shows. In Raquel Fernandez, Wolfgang Minker, Giuseppe Carenini, Ryuichiro Higashinaka, Ron Artstein, and Alesia Gainer, editors, *Proceedings of the 17th Annual Meeting of the Special Interest Group on Discourse and Dialogue*, pages 90–100, Los Angeles, September 2016. Association for Computational Linguistics.
- [8] Wei-Lin Chiang, Lianmin Zheng, Ying Sheng, Anastasios Nikolas Angelopoulos, Tianle Li, Dacheng Li, Hao Zhang, Banghua Zhu, Michael Jordan, Joseph E Gonzalez, et al. Chatbot arena: An open platform for evaluating llms by human preference. arXiv preprint arXiv:2403.04132, 2024.
- [9] Philip John Gorinski and Mirella Lapata. Movie script summarization as graph-based scene extraction. In Rada Mihalcea, Joyce Chai, and Anoop Sarkar, editors, *Proceedings of the 2015 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 1066–1076, Denver, Colorado, May–June 2015. Association for Computational Linguistics.
- [10] Hamish Ivison, Yizhong Wang, Valentina Pyatkin, Nathan Lambert, Matthew Peters, Pradeep Dasigi, Joel Jang, David Wadden, Noah A Smith, Iz Beltagy, et al. Camels in a changing climate: Enhancing lm adaptation with tulu 2. arXiv preprint arXiv:2311.10702, 2023.
- [11] Jihyoung Jang, Minseong Boo, and Hyounghun Kim. Conversation chronicles: Towards diverse temporal and relational dynamics in multi-session conversations. In Houda Bouamor, Juan Pino, and Kalika Bali, editors, *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 13584–13606, Singapore, December 2023. Association for Computational Linguistics.
- [12] Albert Q Jiang, Alexandre Sablayrolles, Arthur Mensch, Chris Bamford, Devendra Singh Chaplot, Diego de las Casas, Florian Bressand, Gianna Lengyel, Guillaume Lample, Lucile Saulnier, et al. Mistral 7b. arXiv preprint arXiv:2310.06825, 2023.
- [13] Albert Q Jiang, Alexandre Sablayrolles, Antoine Roux, Arthur Mensch, Blanche Savary, Chris Bamford, Devendra Singh Chaplot, Diego de las Casas, Emma Bou Hanna, Florian Bressand, et al. Mixtral of experts. arXiv preprint arXiv:2401.04088, 2024.
- [14] Seungone Kim, Juyoung Suk, Shayne Longpre, Bill Yuchen Lin, Jamin Shin, Sean Welleck, Graham Neubig, Moontae Lee, Kyungjae Lee, and Minjoon Seo. Prometheus 2: An open source language model specialized in evaluating other language models. arXiv preprint arXiv:2405.01535, 2024.
- [15] Gibbeum Lee, Volker Hartmann, Jongho Park, Dimitris Papailiopoulos, and Kangwook Lee. Prompted LLMs as chatbot modules for long open-domain conversation. In Anna Rogers, Jordan Boyd-Graber, and Naoaki Okazaki, editors, *Findings of the Association for Computational Linguistics: ACL 2023*, pages 4536–4554, Toronto, Canada, July 2023. Association for Computational Linguistics.
- [16] Patrick Lewis, Ethan Perez, Aleksandra Piktus, Fabio Petroni, Vladimir Karpukhin, Naman Goyal, Heinrich Küttler, Mike Lewis, Wen-tau Yih, Tim Rocktäschel, et al. Retrieval-augmented generation for knowledgeintensive nlp tasks. Advances in Neural Information Processing Systems, 33:9459–9474, 2020.

- [17] Yanran Li, Hui Su, Xiaoyu Shen, Wenjie Li, Ziqiang Cao, and Shuzi Niu. Dailydialog: A manually labelled multi-turn dialogue dataset. In *Proceedings of the Eighth International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 986–995, 2017.
- [18] Yuanxing Liu, Wei-Nan Zhang, Yifan Chen, Yuchi Zhang, Haopeng Bai, Fan Feng, Hengbin Cui, Yongbin Li, and Wanxiang Che. Conversational recommender system and large language model are made for each other in e-commerce pre-sales dialogue. ArXiv, abs/2310.14626, 2023.
- [19] Adyasha Maharana, Dong-Ho Lee, Sergey Tulyakov, Mohit Bansal, Francesco Barbieri, and Yuwei Fang. Evaluating very long-term conversational memory of llm agents. arXiv preprint arXiv:2402.17753, 2024.
- [20] OpenAI. Gpt-4 technical report, 2023.
- [21] OpenAI. Introducing chatgpt., 2023.
- [22] OpenAI. Hello gpt-40, 2024.
- [23] OpenAI. New embedding models and api updates., 2024.
- [24] Pinelopi Papalampidi, Frank Keller, Lea Frermann, and Mirella Lapata. Screenplay summarization using latent narrative structure. In Dan Jurafsky, Joyce Chai, Natalie Schluter, and Joel Tetreault, editors, *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 1920– 1933, Online, July 2020. Association for Computational Linguistics.
- [25] Farzana Rashid and Eduardo Blanco. Characterizing interactions and relationships between people. In Conference on Empirical Methods in Natural Language Processing, 2018.
- [26] Hannah Rashkin, Eric Michael Smith, Margaret Li, and Y-Lan Boureau. Towards empathetic open-domain conversation models: A new benchmark and dataset. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 5370–5381, 2019.
- [27] Machel Reid, Nikolay Savinov, Denis Teplyashin, Dmitry Lepikhin, Timothy Lillicrap, Jean-baptiste Alayrac, Radu Soricut, Angeliki Lazaridou, Orhan Firat, Julian Schrittwieser, et al. Gemini 1.5: Unlocking multimodal understanding across millions of tokens of context. arXiv preprint arXiv:2403.05530, 2024.
- [28] Stephen Robertson, Hugo Zaragoza, et al. The probabilistic relevance framework: Bm25 and beyond. *Foundations and Trends*® *in Information Retrieval*, 3(4):333–389, 2009.
- [29] Stephen Roller, Emily Dinan, Naman Goyal, Da Ju, Mary Williamson, Yinhan Liu, Jing Xu, Myle Ott, Eric Michael Smith, Y-Lan Boureau, et al. Recipes for building an open-domain chatbot. In Proceedings of the 16th Conference of the European Chapter of the Association for Computational Linguistics: Main Volume, pages 300–325, 2021.
- [30] Yisi Sang, Xiangyang Mou, Mo Yu, Shunyu Yao, Jing Li, and Jeffrey Stanton. TVShowGuess: Character comprehension in stories as speaker guessing. In Marine Carpuat, Marie-Catherine de Marneffe, and Ivan Vladimir Meza Ruiz, editors, *Proceedings of the 2022 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 4267–4287, Seattle, United States, July 2022. Association for Computational Linguistics.
- [31] Kurt Shuster, Jing Xu, Mojtaba Komeili, Da Ju, Eric Michael Smith, Stephen Roller, Megan Ung, Moya Chen, Kushal Arora, Joshua Lane, et al. Blenderbot 3: a deployed conversational agent that continually learns to responsibly engage. arXiv preprint arXiv:2208.03188, 2022.
- [32] Gemini Team, Rohan Anil, Sebastian Borgeaud, Yonghui Wu, Jean-Baptiste Alayrac, Jiahui Yu, Radu Soricut, Johan Schalkwyk, Andrew M Dai, Anja Hauth, et al. Gemini: a family of highly capable multimodal models. arXiv preprint arXiv:2312.11805, 2023.
- [33] Gemma Team, Thomas Mesnard, Cassidy Hardin, Robert Dadashi, Surya Bhupatiraju, Shreya Pathak, Laurent Sifre, Morgane Rivière, Mihir Sanjay Kale, Juliette Love, et al. Gemma: Open models based on gemini research and technology. *arXiv preprint arXiv:2403.08295*, 2024.
- [34] Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, et al. Llama 2: Open foundation and fine-tuned chat models. arXiv preprint arXiv:2307.09288, 2023.
- [35] Ethan Waisberg, Joshua Ong, Mouayad Masalkhi, and Andrew G Lee. Large language model (llm)-driven chatbots for neuro-ophthalmic medical education. *Eye*, 38(4):639–641, 2024.

- [36] Jing Xu, Arthur Szlam, and Jason Weston. Beyond goldfish memory: Long-term open-domain conversation. In Smaranda Muresan, Preslav Nakov, and Aline Villavicencio, editors, *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 5180–5197, Dublin, Ireland, May 2022. Association for Computational Linguistics.
- [37] Zhengzhe Yang and Jinho D. Choi. FriendsQA: Open-domain question answering on TV show transcripts. In Satoshi Nakamura, Milica Gasic, Ingrid Zukerman, Gabriel Skantze, Mikio Nakano, Alexandros Papangelis, Stefan Ultes, and Koichiro Yoshino, editors, *Proceedings of the 20th Annual SIGdial Meeting* on Discourse and Dialogue, pages 188–197, Stockholm, Sweden, September 2019. Association for Computational Linguistics.
- [38] Dian Yu, Kai Sun, Claire Cardie, and Dong Yu. Dialogue-based relation extraction. In Dan Jurafsky, Joyce Chai, Natalie Schluter, and Joel Tetreault, editors, *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 4927–4940, Online, July 2020. Association for Computational Linguistics.
- [39] Gangyi Zhang. User-centric conversational recommendation: Adapting the need of user with large language models. *Proceedings of the 17th ACM Conference on Recommender Systems*, 2023.
- [40] Saizheng Zhang, Emily Dinan, Jack Urbanek, Arthur Szlam, Douwe Kiela, and Jason Weston. Personalizing dialogue agents: I have a dog, do you have pets too? In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 2204–2213, 2018.
- [41] Yizhe Zhang, Siqi Sun, Michel Galley, Yen-Chun Chen, Chris Brockett, Xiang Gao, Jianfeng Gao, Jingjing Liu, and Bill Dolan. DIALOGPT : Large-scale generative pre-training for conversational response generation. In Asli Celikyilmaz and Tsung-Hsien Wen, editors, *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics: System Demonstrations*, pages 270–278, Online, July 2020. Association for Computational Linguistics.
- [42] Ethan Zhou and Jinho D. Choi. They exist! introducing plural mentions to coreference resolution and entity linking. In Emily M. Bender, Leon Derczynski, and Pierre Isabelle, editors, *Proceedings of the* 27th International Conference on Computational Linguistics, pages 24–34, Santa Fe, New Mexico, USA, August 2018. Association for Computational Linguistics.

Checklist

- 1. For all authors...
 - (a) Do the main claims made in the abstract and introduction accurately reflect the paper's contributions and scope? [Yes] See Section 1.
 - (b) Did you describe the limitations of your work? [Yes] See Section 5.
 - (c) Did you discuss any potential negative societal impacts of your work? [N/A]
 - (d) Have you read the ethics review guidelines and ensured that your paper conforms to them? [Yes]
- 2. If you are including theoretical results...
 - (a) Did you state the full set of assumptions of all theoretical results? [N/A]
 - (b) Did you include complete proofs of all theoretical results? [N/A]
- 3. If you ran experiments (e.g. for benchmarks)...
 - (a) Did you include the code, data, and instructions needed to reproduce the main experimental results (either in the supplemental material or as a URL)? [Yes] See Abstract.
 - (b) Did you specify all the training details (e.g., data splits, hyperparameters, how they were chosen)? [Yes] See Appendix H
 - (c) Did you report error bars (e.g., with respect to the random seed after running experiments multiple times)? [Yes] See Table 3.
 - (d) Did you include the total amount of compute and the type of resources used (e.g., type of GPUs, internal cluster, or cloud provider)? [Yes] See Section 4.1.
- 4. If you are using existing assets (e.g., code, data, models) or curating/releasing new assets...
 - (a) If your work uses existing assets, did you cite the creators? [Yes] See Section 3.2.
 - (b) Did you mention the license of the assets? [Yes]
 - (c) Did you include any new assets either in the supplemental material or as a URL? [Yes] We will share a Google Drive link that includes our dataset.
 - (d) Did you discuss whether and how consent was obtained from people whose data you're using/curating? [Yes] See Section 3.2.
 - (e) Did you discuss whether the data you are using/curating contains personally identifiable information or offensive content? [N/A]
- 5. If you used crowdsourcing or conducted research with human subjects...
 - (a) Did you include the full text of instructions given to participants and screenshots, if applicable? [Yes] See Appendix M.
 - (b) Did you describe any potential participant risks, with links to Institutional Review Board (IRB) approvals, if applicable? [N/A]
 - (c) Did you include the estimated hourly wage paid to participants and the total amount spent on participant compensation? [N/A]

Supplementary Contents

A	Datasheets for Datasets	15
	A.1 Motivation	15
	A.2 Composition	15
	A.3 Collection process	16
	A.4 Preprocessing/cleaning/labeling	17
	A.5 Uses	17
	A.6 Distribution	17
	A.7 Maintenance	17
B	LLM's Prior Knowledge of the TV shows	19
С	Prompt for Response Generation	20
D	Date Assignment	20
Е	Question Generation Based on Fan Quizzes	20
F	Question Generation Based on a Temporal Knowledge Graph	21
	F.1 Relations	21
	F.2 Question Templates and Generated Questions	21
G	Character Style Transfer	22
Н	Experimental Setting	23
	H.1 Average Time Interval Between Utterances	23
	H.2 Environment Control	23
	H.3 Choices Control	23
	H.4 Number of Retrieved Dialogue History	24
Ι	Experimental Results for The Big Bang Theory and The Office	24
J	Experimental Results for Different Time Limits	24
K	Experimental Results in the Oracle Setting	25
L	Experimental Results on Adversarial Test	25
M	Annotator Instructions	25

A Datasheets for Datasets

A.1 Motivation

• For what purpose was the dataset created?

We created this dataset to accurately assess a conversational agent's ability to respond within a reasonable time limit, understand the multi-party dialogue context thoroughly, and reason across previous sessions.

• Who created the dataset (e.g., which team, research group) and on behalf of which entity (e.g., company, institution, organization)?

The authors created the dataset.

• Who funded the creation of the dataset? If there is an associated grant, please provide the name of the grantor and the grant name and number.

This work was supported by Institute for Information & Communications Technology Promotion(IITP) grant (No.RS-2019-II190075) and National Research Foundation of Korea(NRF) grant (RS-2024-00333484), funded by the Korea government (MSIT).

A.2 Composition

• What do the instances that comprise the dataset represent (e.g., documents, photos, people, countries)?

DialSim includes three types of dialogues: Friends, The Big Bang Theory, and The Office. These dialogues consist of multiple sessions, with each session corresponding to a set of possible questions.

• How many instances are there in total (of each type, if appropriate)?

Friends consists of 785 sessions, with an average of 1196.8 possible questions per session. The Big Bang Theory consists of 805 sessions, with an average of 1196.9 questions per session. The Office consists of 2,338 sessions, with an average of 511.5 questions per session.

• Does the dataset contain all possible instances or is it a sample (not necessarily random) of instances from a larger set?

The dataset contains all possible instances.

• What data does each instance consist of?

Each dialogue contains multiple sessions, and each session includes a set of (question, correct answer, and choices) pairs.

• Is there a label or target associated with each instance?

Each question is paired with its corresponding choices and the correct answer.

- Is any information missing from individual instances? If so, please provide a description, explaining why this information is missing (e.g., because it was unavailable). This does not include intentionally removed information, but might include, e.g., redacted text. No.
- Are relationships between individual instances made explicit (e.g., users' movie ratings, social network links)?

No.

- Are there recommended data splits (e.g., training, development/validation, testing)? N/A.
- Are there any errors, sources of noise, or redundancies in the dataset? The scripts we used are all transcripts, and there may be typos in them.
- Is the dataset self-contained, or does it link to or otherwise rely on external resources (e.g., websites, tweets, other datasets)? The dataset is self-contained.
- Does the dataset contain data that might be considered confidential (e.g., data that is protected by legal privilege or by doctor-patient confidentiality, data that includes the content of individuals' non-public communications)? No.

• Does the dataset contain data that, if viewed directly, might be offensive, insulting, threatening, or might otherwise cause anxiety?

No. Our dataset is based on the scripts of popular TV shows.

• Does the dataset relate to people?

No.

- Does the dataset identify any subpopulations (e.g., by age, gender)? No.
- Does the dataset contain data that might be considered sensitive in any way (e.g., data that reveals race or ethnic origins, sexual orientations, religious beliefs, political opinions or union memberships, or locations; financial or health data; biometric or genetic data; forms of government identification, such as social security numbers; criminal history)? No.

A.3 Collection process

• How was the data associated with each instance acquired?

The questions in our dataset were created based on the website FunTrivia and the constructed TKG.

• What mechanisms or procedures were used to collect the data (e.g., hardware apparatuses or sensors, manual human curation, software programs, software APIs)?

TKG construction and fan quiz processing were performed using ChatGPT-4, and the authors manually verified the data.

- If the dataset is a sample from a larger set, what was the sampling strategy (e.g., deterministic, probabilistic with specific sampling probabilities)?
 N/A.
- Who was involved in the data collection process (e.g., students, crowd workers, contractors) and how were they compensated (e.g., how much were crowd workers paid)? The data collection and construction processes were performed by the authors.
- Over what timeframe was the data collected? From October 2023 to April 2024.
- From October 2023 to April 2024.
- Were any ethical review processes conducted (e.g., by an institutional review board)? N/A.
- Does the dataset relate to people? No.
- Did you collect the data from the individuals in question directly, or obtain it via third parties or other sources (e.g., websites)?

We downloaded the scripts for our dataset from Kaggle, and some of the questions were created using the fan quiz website FunTrivia.

- Were the individuals in question notified about the data collection? N/A.
- Did the individuals in question consent to the collection and use of their data? $N\!/\!A.$
- If consent was obtained, were the consenting individuals provided with a mechanism to revoke their consent in the future or for certain uses? N/A.
- Has an analysis of the potential impact of the dataset and its use on data subjects (e.g., a data protection impact analysis) been conducted?
 N/A.

- A.4 Preprocessing/cleaning/labeling
 - Was any preprocessing/cleaning/labeling of the data done (e.g., discretization or bucketing, tokenization, part-of-speech tagging, SIFT feature extraction, removal of instances, processing of missing values)? N/A.
 - Was the "raw" data saved in addition to the preprocess/cleaned/labeled data (e.g., to support unanticipated future uses)?
 N/A.
 - Is the software that was used to preprocess/clean/label the data available? We used Python code to annotate the data.

A.5 Uses

- Has the dataset been used for any tasks already? No.
- Is there a repository that links to any or all papers or systems that use the dataset? No.
- What (other) tasks could the dataset be used for?

The dataset can serve as a valuable test for a conversational agent before deployment. Moreover, if the evaluation of open-ended responses and the methods for generating coherent questions improve, the test will become increasingly realistic.

- Is there anything about the composition of the dataset or the way it was collected and preprocessed/cleaned/labeled that might impact future uses?

 N/A.
- Are there tasks for which the dataset should not be used? N/A.

A.6 Distribution

- Will the dataset be distributed to third parties outside of the entity (e.g., company, institution, organization) on behalf of which the dataset was created? No.
- How will the dataset be distributed? The dataset and the code will be released at https://github.com/jiho283/Simulator.⁹
- Will the dataset be distributed under a copyright or other intellectual property (IP) license, and/or under applicable terms of use (ToU)?

The dataset is released under MIT License.

• Have any third parties imposed IP-based or other restrictions on the data associated with the instances?

No.

• Do any export controls or other regulatory restrictions apply to the dataset or to individual instances?

No.

A.7 Maintenance

• Who will be supporting/hosting/maintaining the dataset? The authors will support and maintain the dataset.

⁹The URL for the croissant data for each dialogue is as follows. Friends is https://huggingface.co/api/datasets/jiho283/dialsim-friends/croissant, The Big Bang Theory is https://huggingface.co/api/datasets/jiho283/dialsim-bigbang/croissant, and The Office is https://huggingface.co/api/datasets/jiho283/dialsim-theoffice/croissant.

- How can the owner/curator/manager of the dataset be contacted(e.g., email address)? Contact the first author (jiho.kim@kaist.ac.kr).
- Is there an erratum? •

No.

• Will the dataset be updated (e.g., to correct labeling erros, add new instances, delete instances)?

If any modifications to the dataset are necessary, we will promptly update it and share it on the GitHub repository.

If the dataset relates to people, are there applicable limits on the retention of the data ٠ associated with the instances (e.g., were the individuals in question told that their data would be retained for a fixed period of time and then deleted)?

N/A.

Will older versions of the dataset continue to be supported/hosted/maintained? •

We plan to upload the latest version of the dataset and document the updates for each version separately.

If others want to extend/augment/build on/contribute to the dataset, is there a mechanism • for them to do so?

Contact the first author (jiho.kim@kaist.ac.kr).

B LLM's Prior Knowledge of the TV shows

We asked ChatGPT-40 to explain the plot of specific episodes of Friends. It accurately described the plots, as shown in Figure 4, 5. Notably, it provided these answers without any web browsing, suggesting that ChatGPT-40 might have learned about these TV shows during its pre-training process.

Tell me the plot of episode 7 from season 2 of the TV show Friends.

Sure! Episode 7 of Season 2 of "Friends" is titled "The One Where Ross Finds Out."

Here's the plot summary:

Rachel is on a date with Michael, a man she recently met, but she is unable to focus on him because she is still in love with Ross. Meanwhile, Ross is still dating Julie, which complicates Rachel's feelings even further. During the date, Rachel gets drunk and leaves a message on Ross's answering machine, confessing her love for him.

The next day, Ross hears the message and confronts Rachel at Central Perk. They have an intense conversation where Rachel tries to play it off, but Ross presses on, leading to a passionate kiss. Ross is torn between his feelings for Rachel and his current relationship with Julie.

In a subplot, Chandler is trying to quit smoking and resorts to a hypnosis tape to help him stop. However, the tape is designed for women, which leads to Chandler inadvertently picking up some feminine habits.

Monica is helping Chandler with his attempts to quit smoking, and Joey and Phoebe provide comedic relief with their antics. The episode ends on a cliffhanger, leaving viewers wondering what Ross will decide regarding his relationship with Rachel and Julie.

() ቆ ℃ ℃ ቆ~

Figure 4: The result of asking ChatGPT-40 to explain Season 2, Episode 7 of Friends.

	Tell me the plot of episode 14 from season 3 of the TV show Friends.
\$	Episode 14 of season 3 of the TV show "Friends" is titled "The One with Phoebe's
	Ex-Partner." Here is a summary of the plot: Phoebe's former singing partner, Leslie, shows up and wants to get back together.
	Initially, Phoebe is excited about the reunion, but their rekindled partnership quickly hits a snag when Leslie sells out by using "Smelly Cat" in a commercial.
	This betrayal causes Phoebe to sever ties with Leslie once again. Meanwhile, Chandler dates a woman named Ginger who has a wooden leg, a fact
	he only discovers after Ross inadvertently tells him. This revelation makes Chandler uncomfortable, leading to some awkward and humorous situations. Joey also
	remembers Ginger from a previous encounter where he accidentally threw her artificial leg into a fire.
	Ross is dealing with relationship issues with Rachel. They have a fight over a list Ross made, comparing her to Julie, his previous girlfriend. Despite this, Ross tries to make amends by taking her to a planetarium. However, their attempt at
	romance is interrupted by a loud child in the audience, and Rachel's feelings remain unresolved.
	The episode balances the comedic elements with more serious moments, showcasing the dynamics between the friends and their relationships.
	4" D C V *

Figure 5: The result of asking ChatGPT-40 to explain Season 3, Episode 14 of Friends.

C Prompt for Response Generation

The prompt given to the conversational agent to answer questions using dialogue history is shown in Table 5.

Table 5: In the <<<Chatbot>>> placeholder, the name of the main character (*i.e.*, Ross, Sheldon, Michael) for each TV show is inserted. In the <<<Date>>> placeholder, the date of the session in which the question is being asked is inserted. In the <<<Date>>> placeholder, the dialogue history that the agent will use is inserted. In the <<<Question>>> placeholder, the question that the agent should answer along with five choices is inserted.

Prompt for Response Generation					
You are << <chatbot>>>, a long-term conversational agent capable of interacting with multiple users.</chatbot>					
Based on the [Retrieved Dialogue History] provided, please answer the given [Question].					
Note the following points:					
1. Your answer must exclusively be one of the options: (A), (B), (C), (D), (E).					
2. Your responses should solely rely on the retrieved dialogue history. If the information in the dialogue					
history is insufficient to answer the question, you must choose (E).					
3. This question is being asked in the context of << <date>>>.</date>					
[Retrieved Dialogue History]					
<< <dialog_history>>></dialog_history>					
[Question] << <question>>></question>					
[Answer]					

D Date Assignment

We first extracted elements from the scripts that could indicate dates (*e.g.*, Valentine's Day, Christmas Eve). Then, we reviewed the scripts again to analyze the relative timing of the sessions. For example, if there is a line mentioning that Chandler broke up with his girlfriend two days ago, we annotated the session where he broke up with his girlfriend as occurring two days prior to the mentioned session. Next, while watching each episode, we pinpointed sessions where the dates might have changed by observing whether the characters' outfits changed between sessions. Finally, we assigned a specific date to each session based on the actual broadcast date of the episode, adjusting for the relative differences in dates and events such as Christmas.

E Question Generation Based on Fan Quizzes

For each scene $s_{i,k}$ from episode p_i in $Script_{pre}$, we define the set of answerable questions as $FanA_{i,k}$ and the set of unanswerable questions as $FanU_{i,k}$. The process of generating questions based on fan quizzes is as follows.

First, we collected quizzes for each season and episode of Friends, The Big Bang Theory, and The Office from the FunTrivia website. For each episode p_i in $Script_{pre}$, we used ChatGPT-4 to determine if the crawled questions $CrQ_i = \{q_{i,0}, q_{i,1}, ..., q_{i,l}\}$ could be answered using only p_i . If a question $q_{i,m}$ could be answered, ChatGPT-4 identified the scenes $ES_{i,m}$ that provide evidence for the answer, compiling them into $Q_i = \{(q_{i,m}, ES_{i,m})\}_{m=0}^l$. Subsequently, the authors reviewed each $ES_{i,m}$, made necessary corrections, and annotated whether a single scene from $ES_{i,m}$ was sufficient to answer $q_{i,m}$ or if multiple scenes were needed to be considered simultaneously. For each $s_{i,k}$ within p_i , we assessed the answerability of the questions in Q_i .

For each $s_{i,k}$, if a question $q_{i,m}$ could be answered using just one scene, and $s_{i,k}$ occurs after the initial appearance of the main character in $ES_{i,m}$, we included $q_{i,m}$ in $FanA_{i,k}$. This ensures that the main character had adequate exposure to the relevant evidence. Additionally, for questions requiring verification across multiple scenes, if the main character appears in all $ES_{i,m}$ scenes and $s_{i,k}$ occurs after the last scene of $ES_{i,m}$, we included $q_{i,m}$ in $FanA_{i,k}$. If the main character does not appear in any of the $ES_{i,m}$ scenes, $q_{i,m}$ was included in $FanU_{i,k}$ since the main character has not experienced

any evidence to answer the question. The rest are not included in the dataset as it is unclear whether they are answerable per scene. Additionally, to generate questions that require long-term memory, we added the most recent date of the evidence scenes for each question.

F Question Generation Based on a Temporal Knowledge Graph

F.1 Relations

We used the following 32 relations: 'age', 'alumni', 'boss', 'boyfriend', 'brother', 'client', 'date of birth', 'dating with', 'ex-boyfriend', 'ex-fiance', 'ex-fiancee', 'ex-girlfriend', 'ex-husband', 'ex-roommate', 'ex-wife', 'father', 'fiance', 'fiancee', 'girlfriend', 'hometown', 'husband', 'job', 'major', 'mother', 'neighbor', 'pet', 'place of birth', 'place of work', 'roommate', 'sister', 'subordinate', 'wife'.

F.2 Question Templates and Generated Questions

Templates for one-hop questions are provided in Table 6 and Table 7. The former contains templates without temporal information, while the latter includes templates with temporal details. Since relations like "brother" and "sister" remain constant over time, questions about these relations do not require temporal information. Hence, no temporal templates were created for them. In Table 7, "on {time}" is used, but {time} can be not only the full date (year, month, and day) but also just the year and month, or even just the year. In these cases, "in {time}" is used.

The templates for two-hop questions are available in Table 8. These templates incorporate temporal information. To frame questions in the present tense, adjust the verbs to the present tense and remove the temporal information, following the approaches demonstrated in Table 6 and Table 7.

Question Type	Relation	Template	Question Example		
	alumni	Who is {sub}'s alumni?	Who is Lincoln High School's alumni?		
	boss	Who is {sub}'s boss?	Who is Chandler's boss?		
	subordinate	Who is {sub}'s subordinate?	Who is Chandler's subordinate?		
	client	Who is {sub}'s client?	Who is Chandler's client?		
	neighbor	Who is {sub}'s neighbor?	Who is Chandler's neighbor?		
	roommate	Who is {sub}'s roommate?	Who is Chandler's roommate?		
	ex-roommate	Who is {sub}'s ex-roommate?	Who is Chandler's ex-roommate?		
	fiance	Who is {sub}'s fiance?	Who is Rachel's fiance?		
	fiancee	Who is {sub}'s fiancee?	Who is Ross's fiancee?		
	ex-fiance	Who is {sub}'s ex-fiance?	Who is Rachel's ex-fiance?		
	ex-fiancee	Who is {sub}'s ex-fiancee?	Who is Ross's ex-fiancee?		
	pet	Who is {sub}'s pet?	Who is Ross's pet?		
	dating with	Who is dating {sub}?	Who is dating Ross?		
	job	What is {sub}'s job?	What is Ross's job?		
	place of work	Where does {sub} work?	Where does Ross work?		
Vithout Time	age	How old is {sub}?	How old is Ross?		
without Thile	major	What is {sub}'s major?	What is Ross's major?		
	mother	Who is {sub}'s mother?	Who is Ross's mother?		
	father	Who is {sub}'s father?	Who is Ross's father?		
	place of birth	Where was {sub} born?	Where was Ben born?		
	hometown	Where is {sub}'s hometown?	Where is Monica's hometown?		
	date of birth	When was {sub} born?	When was Ben born?		
	husband	Who is {sub}'s husband?	Who is Emily's husband?		
	wife	Who is {sub}'s wife?	Who is Ross's wife?		
	girlfriend	Who is {sub}'s girlfriend?	Who is Joey's girlfriend?		
	boyfriend	Who is {sub}'s boyfriend?	Who is Monica's boyfriend?		
	ex-husband	Who is {sub}'s ex-husband?	Who is Carol's ex-husband?		
	ex-wife	Who is {sub}'s ex-wife?	Who is Ross's ex-wife?		
	ex-girlfriend	Who is {sub}'s ex-girlfriend?	Who is Ross's ex-girlfriend?		
	ex-boyfriend	Who is {sub}'s ex-boyfriend?	Who is Rachel's ex-boyfriend?		
	brother	Who is {sub}'s brother?	Who is Monica's brother?		
	sister	Who is {sub}'s sister?	Who is Ross's sister?		

Table 6: Templates for one-hop questions without temporal information.

Question Type	Relation	Template	Question Example
	boss	Who was {sub}'s boss on {time}?	Who was Chandler's boss on September 26th, 1994?
	client	Who was {sub}'s client on {time}?	Who was Chandler's client on September 26th, 1994?
	neighbor	Who was {sub}'s neighbor on {time}?	Who was Chandler's neighbor on September 26th, 1994?
	roommate	Who was {sub}'s roommate on {time}?	Who was Chandler's roommate on September 26th, 1994?
	fiance	Who was {sub}'s fiance on {time}?	Who was Rachel's fiance on September 26th, 1994?
	fiancee	Who was {sub}'s fiancee on {time}?	Who was Ross's fiancee on September 26th, 1994?
	pet	Who was {sub}'s pet on {time}?	Who was Ross's pet on September 26th, 1994?
With Time	dating with	Who dated {sub} on {time}?	Who dated Ross on September 26th, 1994?
with Thire	job	What was {sub}'s job on {time}?	What was Monica's job on September 26th, 1994?
	place of work	Where did {sub} work on {time}?	Where did Monica work on September 26th, 1994?
	age	How old was {sub} on {time}?	How old was Monica on September 26th, 1994?
	major	What was {sub}'s major on {time}?	What was Ross's major on September 26th, 1994?
	husband	Who was {sub}'s husband on {time}?	Who was Emily's husband on September 26th, 1994?
	wife	Who was {sub}'s wife on {time}?	Who was Ross's wife on September 26th, 1994?
	girlfriend	Who was {sub}'s girlfriend on {time}?	Who was Ross's girlfriend on September 26th, 1994?
	boyfriend	Who was {sub}'s boyfriend on {time}?	Who was Rachel's boyfriend on September 26th, 1994?

Table 7: Templates for one-hop questions with temporal information.

Table 8: Templates for two-hop questions.

First Relation	Second Relation	Template	Question Example	
	roommate, wife, husband, pet,	{sub1} had a {First Relation} on {time1}.	Monica had a roommate on September 26th, 1994.	
	girlfriend, boyfriend, client, neighbor,	Who was the {Second Relation} of the	Who was the boyfriend of the roommate	
	boss, subordinate, fiance, fiancee	{First Relation} on {time2}?	on October 5th, 1996?	
	dating with	{sub1} had a {First Relation} on {time1}. Who dated the {First Relation} on {time2}?	Monica had a roommate on September 26th, 1994. Who dated the roommate on October 5th, 1996?	
coommate, wife, husband, girlfriend, boyfriend, client, neighbor, boss, subordinate, fiance, fiancee	job, major, age	{sub1} had a {First Relation} on {time1}. What was the {Second Relation} of the {First Relation} on {time2}?	Monica had a roommate on September 26th, 1994. What was the job of the roommate on October 5th, 1996?	
	mother, father, son, daughter, sister, brother	{sub1} had a {First Relation} on {time1}. Who is the {Second Relation} of the {First Relation}?	Monica had a roommate on September 26th, 1994. Who is the mother of the roommate?	
nance, nancee	date of birth, place of birth,	{sub1} had a {First Relation} on {time1}. When (Where) was the {First Relation} born?	Monica had a roommate on September 26th 1994. When was the roommate born?	
	place of work	<pre>{sub1} had a {First Relation} on {time1}. Where did the {First Relation} work on {time2}?</pre>	Monica had a roommate on September 26th, 1994. Where did the roommate work on October 5th, 1996?	
	hometown	{sub1} had a {First Relation} on {time1}. Where is the hometown of the {First Relation}?	Monica had a roommate on September 26th, 1994. Where is the hometown of the roommate?	
	roommate, wife, husband,	{sub1} dated a person on {time1}.	Monica dated a person on September 26th, 1994.	
dating with	girlfriend, boyfriend, client, neighbor,	Who was the {Second Relation} of the	Who was the boss of the person	
	boss, subordinate, fiance, fiancee	person on {time2}?	on October 5th, 1996?	
	roommate, wife, husband, girlfriend, boyfriend, client, neighbor, boss, subordinate, fiance, fiancee	Who was the {Second Relation} of {sub1}'s {First Relation} on {time2}?	Who was the roommate of Ross's sister on September 26th, 1994?	
	dating with	Who dated {sub1}'s {First Relation} on {time2}?	Who dated Ben's father on September 26th, 1994?	
mother, father, son,	job, age, major	What was the {Second Relation} of {sub1}'s {First Relation} on {time2}?	What was the job of Ben's father on September 26th, 1994?	
daughter, sister, brother	mother, father, son, daughter, sister, brother	Who is the {Second Relation} of {sub1}'s {First Relation}?	Who is the mother of Ross's son?	
	date of birth, place of birth	When (Where) was {sub1}'s {First Relation} born?	When was Monica's brother born?	
	place of work	Where did {sub1}'s {First Relation} work on {time2}?	Where did Monica's brother work on October 5th, 1996?	
	hometown	Where is the hometown of {sub1}'s {First Relation}?	Where is the hometown of Ross's son?	

G Character Style Transfer

Table 9 shows the results of the character style transfer for three selected questions. To make the questions sound more natural and conversational, we prepended each one with "By the way,". This helps them blend seamlessly into the flow of the conversation. The table shows how each question appears when rephrased in the style of various characters. The 'Default' setting is applied when the question is asked by a character who is not a recurring character of the TV show.

Original Question	Character	Style Transferred Question
	Default	Hey, any idea what Rachel used to snag those stylish
	Delaun	new boots of hers?
y the way, how did Rachel buy her new boots? y the way, who dated Monica on September 22, 1994? y the way, Rachel had a roommate on October 28, 1994.	Monica	Hey, do you know what Rachel used to snag those super
	Womea	cute new boots she's been rocking?
By the way, how did Rachel buy her new boots?	Chandler	So, could we BE any more curious about how Rachel
by the way, now the relevel buy her new boots.	Chandler	snagged those new boots?
	Joey	Hey, how did Rachel manage to snag those killer
	JOCY	boots, huh?
	Phoebe	Oh my gosh! Do you have any idea how Rachel snagged
	Thoese	those super cute new boots?
	Default	So, who was Monica's date on the night of
	Delaun	September 22, 1994?
	Chandler	Oh, could you BE any more specific about who was
	Chandler	going out with Monica on September 22, 1994?
By the way, who dated Monica on September 22, 1994?	Joey	Hey, just outta curiosity, who was goin' out with
By the way, who dated Monica on September 22, 1994?	JOCY	Monica on September 22, 1994?
	Phoebe	Oh my gosh, so like, who was Monica's date on that
	Тпосос	super specific day, September 22, 1994?
	Rachel	Oh my god, so like, who was going out with Monica
	Racher	on September 22, 1994?'
		Oh. My. God. Remember when Rachel had a roommate
	Default	back on October 28, 1994? So, who was going out with
		that roommate by September 1994?
		Hey, just out of curiosity, do you know who was going
	Monica	out with Rachel's roommate from back in September 1994?
		I remember she got that roommate around October 28, 1994
		So, just for a little stroll down memory lane, Rachel
By the way, Rachel had a roommate on October 28, 1994.	Chandler	was bunking with someone on October 28, 1994.
Who dated the roommate in September 1994?	Chandler	Any wild guesses on who was dating this mystery
		co-habitant by September 1994?
		Hey, so you know how Rachel was living with someone
	Joey	back on October 28, 1994, right? So I'm just wonderin'
	30Cy	here, who was going out with this roommate of hers in
By the way, Rachel had a roommate on October 28, 19		September 1994?
By the way, Rachel had a roommate on October 28, 199	Phoebe	By the way, Rachel had a roommate on October 28, 1994.
	1 HOEDE	Who dated the roommate in September 1994?

Table 9: Examples of the results of character style transfer.

H Experimental Setting

H.1 Average Time Interval Between Utterances

Each episode includes around 240 utterances and lasts about 18 minutes without commercial breaks. This means each utterance should occur roughly every 4.5 seconds. However, because the experiments used the A6000, which is slower than the latest hardware like the A100 or H100, we extended the interval to 6 seconds.

H.2 Environment Control

Our simulator operates in real-time, requiring precise control of the experimental environment. Therefore, we conducted all experiments using the same hardware: NVIDIA RTX A6000 GPUs and an AMD EPYC 7702 64-Core Processor. To maintain consistent CPU performance, we allocated 10 cores for each experiment and ensured that no other processes were running simultaneously.

H.3 Choices Control

The number of questions based on fan quizzes was significantly smaller than the questions based on the TKG. Thus, 30% of the questions were intentionally extracted from the fan quiz-based during the simulation. Since each question has five choices, unanswerable questions were set to comprise 20% of the total to fairly stratify the correct answers.

H.4 Number of Retrieved Dialogue History

By default, agents retrieved up to 20 utterances, 10 entire sessions, and 15 session summaries, depending on the storing method, though some LLMs with shorter context lengths retrieved fewer histories accordingly.

I Experimental Results for The Big Bang Theory and The Office

The experimental results for The Big Bang Theory and The Office are provided in Table 10 and Table 11, respectively.

Table 10: The performances of the agents on The Big Bang Theory dialogue in DialSim (time limit = 6 seconds). We conducted experiments three times and reported the accuracies and the standard deviations.

			RAG-based						
Туре	Model	Base LLM		BM25		(OpenAI Embeddi	ng	
			Utterance	Session Entire	Session Sum	Utterance	Session Entire	Session Sum	
API	ChatGPT-3.5	32.49 (1.72)	25.32 (1.20)	35.59 (2.12)	33.86 (1.09)	27.81 (0.40)	32.97 (0.86)	37.02 (1.13)	
API	Gemini 1.0 pro	3.49 (0.69)	25.87 (1.23)	30.72 (0.18)	38.16 (1.25)	37.42 (0.68)	32.09 (0.44)	36.30 (0.32)	
	Tulu2-70B	0.62 (0.13)	21.08 (0.70)	18.95 (1.07)	22.36 (0.65)	34.64 (0.69)	9.08 (1.00)	20.22 (1.48)	
	Tulu2-7B	0.53 (0.18)	15.58 (1.34)	22.26 (0.53)	29.99 (0.57)	16.84 (2.13)	21.48 (0.77)	28.69 (1.15)	
	Llama2-70B	0.04 (0.06)	0.00 (0.00)	0.98 (0.34)	0.18 (0.17)	0.09 (0.06)	0.18 (0.06)	0.18 (0.07)	
	Llama2-7B	24.57 (0.90)	28.36 (1.08)	31.52 (1.21)	26.12 (1.42)	32.70 (0.54)	29.80 (1.37)	23.31 (2.32)	
Open	Mixtral-8x7B	1.95 (0.34)	15.91 (0.71)	34.52 (1.12)	16.83 (1.60)	17.45 (0.49)	34.98 (0.99)	13.83 (2.18)	
	Mistral-7B	3.11 (0.21)	24.69 (1.82)	34.26 (0.60)	32.17 (1.39)	30.23 (0.62)	33.36 (0.56)	29.19 (1.54)	
	Gemma-7B	16.40 (0.74)	21.40 (2.33)	19.74 (2.45)	16.67 (0.40)	24.50 (1.87)	20.22 (1.39)	16.12 (0.52)	
	Gemma-2B	1.56 (0.06)	28.94 (0.35)	26.12 (2.22)	33.47 (1.41)	27.92 (0.68)	29.40 (1.79)	34.86 (3.20)	

Table 11: The performances of the agents on The Office dialogue in DialSim (time limit = 6 seconds). We conducted experiments three times and reported the accuracies and the standard deviations.

	Model	Base LLM	RAG-based						
Туре			BM25			OpenAI Embedding			
			Utterance	Session Entire	Session Sum	Utterance	Session Entire	Session Sum	
API	ChatGPT-3.5 Gemini 1.0 pro	36.54 (0.32) 2.42 (0.18)	36.63 (0.57) 35.11 (0.50)	45.33 (1.00) 48.90 (1.57)	40.93 (0.13) 40.91 (0.75)	42.49 (1.24) 44.72 (0.19)	43.04 (0.82) 46.63 (0.89)	45.18 (0.56) 45.82 (0.97)	
Open	Tulu2-70B Tulu2-7B Llama2-70B Llama2-7B Mixtral-8x7B Mistral-7B Gemma-7B Gemma-2B	$\begin{array}{c} 0.46\ (0.09)\\ 0.32\ (0.04)\\ 0.00\ (0.00)\\ 24.11\ (1.29)\\ 1.53\ (0.41)\\ 2.55\ (0.09)\\ 17.81\ (0.86)\\ 0.83\ (0.16) \end{array}$	$\begin{array}{c} 22.33 \ (1.00) \\ 25.86 \ (0.54) \\ 0.02 \ (0.03) \\ 19.97 \ (1.22) \\ 19.63 \ (0.79) \\ 30.65 \ (0.45) \\ 21.58 \ (0.61) \\ 29.71 \ (0.69) \end{array}$	$\begin{array}{c} 35.52 \ (0.89) \\ 27.95 \ (1.03) \\ 1.02 \ (0.08) \\ 24.91 \ (0.56) \\ 34.35 \ (1.19) \\ 41.16 \ (1.26) \\ 25.62 \ (0.02) \\ 28.11 \ (1.14) \end{array}$	23.49 (1.16) 36.60 (2.11) 0.07 (0.06) 18.88 (0.49) 16.07 (0.56) 35.67 (1.68) 12.20 (0.57) 34.63 (0.94)	38.61 (1.02) 22.13 (0.33) 0.00 (0.00) 22.18 (1.91) 20.02 (0.44) 36.92 (2.13) 24.88 (0.93) 31.54 (0.65)	43.49 (1.27) 29.50 (0.56) 0.55 (0.16) 27.06 (1.26) 30.44 (1.69) 42.71 (1.24) 24.38 (0.52) 30.31 (0.16)	23.54 (0.52) 35.51 (1.40) 0.02 (0.03) 16.87 (0.24) 12.43 (1.04) 37.65 (2.42) 15.70 (0.43) 33.37 (0.27)	

J Experimental Results for Different Time Limits

The experimental results for different time limits are shown in Figure 6 and Figure 7. Figure 6 illustrates the performance over different time limits in the BM25-Session Entire setting, while Figure 7 displays the performance in the Oracle setting. Due to the high costs, time-based experiments with ChatGPT-40, Gemini-1.5 Pro, and Claude-3 Opus were conducted exclusively in the Oracle setting. One key observation from the results is the performance of ChatGPT-40 and ChatGPT-3.5. These models demonstrated consistent performance with quick inference times, handling up to a 3-second limit in the BM25-Session Entire setting and up to a 1-second limit in the Oracle setting.

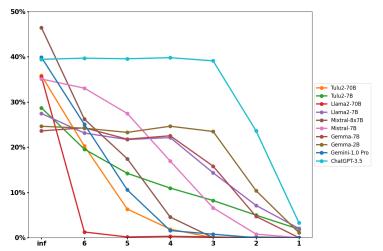


Figure 6: The experimental results for different time limits in the BM25-Session Entire setting.

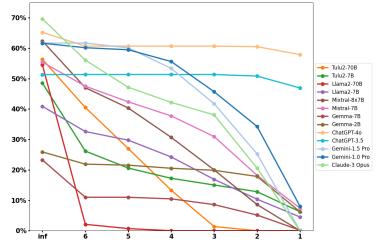


Figure 7: The experimental results for different time limits in the Oracle setting.

K Experimental Results in the Oracle Setting

Figure 8 shows the performance comparison between the BM25-Session Entire setting and the Oracle setting. These experiments were conducted without a time limit. Claude-3 Opus achieved the highest performance with a score of 69.64% in the Oracle setting.

L Experimental Results on Adversarial Test

In the adversarial test, we altered the characters' names and ran experiments under different conditions. Table 12 displays the results when characters' names were mixed with a 6-second time limit, while Table 13 shows the results without a time limit. Table 14 presents the results of changing characters' names to new ones with a 6-second time limit, while Table 15 shows the results without a time limit.

M Annotator Instructions

Figure 9 and Figure 10 show the screenshots of the dataset labeling process. Figure 9 illustrates the annotation process for the questions based on fan quizzes, and Figure 10 describes the review process for selecting triples for the TKG.

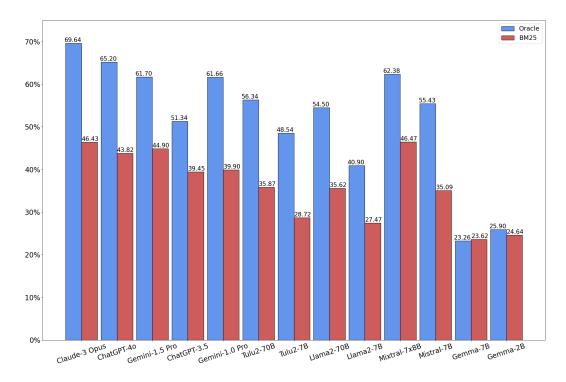


Figure 8: The performance comparison between the BM25-Session Entire setting and the Oracle setting.

Table 12: The performances of the agents on Friends dialogue in DialSim (time limit = 6 seconds,
with shuffled names). We conducted experiments three times and reported the accuracies and the
standard deviations.

	Model	Base LLM	RAG-based						
Туре			BM25			OpenAI Embedding			
			Utterance	Session Entire	Session Sum	Utterance	Session Entire	Session Sum	
API	Gemini 1.0 pro	2.40 (0.21)	27.00 (0.41)	25.01 (3.02)	30.95 (1.61)	31.97 (1.49)	28.28 (0.12)	31.34 (1.77)	
	Tulu2-70B	0.31 (0.13)	17.03 (0.94)	15.20 (0.87)	18.45 (1.04)	26.89 (0.54)	6.92 (0.47)	12.86 (1.23)	
	Tulu2-7B	0.73 (0.29)	12.50 (1.73)	17.58 (1.14)	24.21 (1.09)	10.20 (0.21)	14.26 (0.92)	21.03 (0.58)	
	Llama2-70B	0.00 (0.00)	0.00 (0.00)	0.89 (0.07)	0.05 (0.08)	0.00 (0.00)	0.42 (0.19)	0.31 (0.16)	
	Llama2-7B	22.18 (1.18)	20.78 (1.26)	22.76 (0.61)	19.63 (0.79)	23.13 (1.55)	22.7 (0.98)	20.70 (0.31)	
Open	Mixtral-8x7B	1.77 (0.19)	14.03 (0.12)	21.11 (1.07)	15.50 (0.68)	13.14 (0.83)	18.03 (0.44)	18.47 (0.55)	
	Mistral-7B	2.34 (0.17)	22.29 (1.43)	27.08 (0.99)	24.15 (1.76)	25.17 (1.74)	26.76 (2.64)	23.81 (2.53)	
	Gemma-7B	18.87 (1.43)	22.85 (0.81)	22.96 (1.34)	17.95 (0.62)	25.46 (2.08)	21.53 (1.00)	17.66 (1.31)	
	Gemma-2B	0.78 (0.22)	22.99 (0.66)	25.48 (1.54)	25.86 (2.48)	25.08 (1.34)	25.21 (0.22)	26.14 (1.71)	

Table 13: The performances of the agents on Friends dialogue in DialSim (without a time limit and with shuffled names). We conducted experiments three times and reported the accuracies and the standard deviations.

	Model	Base LLM	RAG-based						
Туре			BM25			OpenAI Embedding			
			Utterance	Session Entire	Session Sum	Utterance	Session Entire	Session Sum	
	Tulu2-70B	2.54 (0.21)	26.47 (1.91)	31.75 (1.71)	30.94 (2.41)	31.90 (1.25)	29.83 (1.03)	31.86 (2.13)	
	Tulu2-7B	1.15 (0.06)	28.20 (1.63)	27.64 (2.37)	27.78 (1.32)	28.98 (0.96)	25.03 (0.94)	29.08 (2.47)	
	Llama2-70B	28.16 (1.37)	28.99 (0.23)	31.27 (2.79)	30.33 (2.06)	33.00 (0.55)	31.78 (2.02)	34.39 (1.34)	
	Llama2-7B	23.67 (0.79)	24.37 (1.36)	24.19 (1.02)	23.95 (1.36)	24.11 (2.93)	25.03 (1.17)	23.25 (0.41)	
Open	Mixtral-8x7B	34.19 (0.68)	25.23 (1.19)	37.72 (0.96)	29.48 (0.87)	29.09 (1.46)	31.78 (1.71)	29.45 (0.04)	
	Mistral-7B	27.78 (1.62)	25.02 (1.26)	30.65 (1.39)	24.99 (1.51)	27.34 (0.49)	27.97 (1.31)	26.97 (1.45)	
	Gemma-7B	17.98 (2.15)	21.64 (0.39)	22.31 (2.15)	18.66 (1.55)	25.97 (1.92)	21.79 (0.40)	21.22 (0.59)	
	Gemma-2B	1.04 (0.19)	24.19 (0.82)	25.25 (1.02)	24.32 (1.55)	25.03 (0.66)	25.44 (1.96)	23.62 (0.36)	

	Model	Base LLM	RAG-based						
Туре				BM25		OpenAI Embedding			
			Utterance	Session Entire	Session Sum	Utterance	Session Entire	Session Sum	
API	Gemini 1.0 pro	2.75 (0.13)	27.15 (0.95)	25.03 (1.54)	31.45 (1.30)	33.44 (0.82)	29.88 (3.29)	31.73 (1.59)	
	Tulu2-70B	0.21 (0.07)	18.24 (0.84)	20.60 (1.00)	18.64 (1.81)	31.71 (2.22)	7.82 (1.57)	17.31 (0.61)	
	Tulu2-7B	0.74 (0.15)	13.19 (0.35)	19.54 (1.29)	26.07 (2.00)	13.87 (0.71)	18.35 (1.21)	27.48 (2.04)	
	Llama2-70B	0.00 (0.00)	0.00 (0.00)	0.73 (0.32)	0.16 (0.13)	0.00 (0.00)	0.47 (0.13)	0.21 (0.07)	
	Llama2-7B	19.50 (1.67)	18.32 (0.51)	21.22 (1.47)	19.76 (2.22)	20.19 (0.64)	21.88 (2.42)	18.37 (2.05)	
Open	Mixtral-8x7B	2.41 (0.40)	14.90 (0.82)	23.55 (0.40)	15.64 (0.47)	16.43 (1.68)	22.95 (0.68)	13.22 (1.61)	
	Mistral-7B	3.35 (0.58)	24.44 (1.13)	31.39 (0.70)	24.26 (1.60)	29.82 (0.95)	30.21 (0.90)	23.90 (0.51)	
	Gemma-7B	18.05 (0.97)	22.52 (0.81)	20.64 (0.26)	16.63 (1.59)	23.41 (1.26)	18.34 (0.82)	19.48 (2.45)	
	Gemma-2B	0.47 (0.13)	24.31 (0.96)	24.77 (0.74)	25.74 (1.46)	28.41 (1.20)	24.68 (1.45)	24.75 (1.50)	

Table 14: The performances of the agents on Friends dialogue in DialSim (time limit = 6 seconds, with new names replaced). We conducted experiments three times and reported the accuracies and the standard deviations.

Table 15: The performances of the agents on Friends dialogue in DialSim (without a time limit and with new names replaced). We conducted experiments three times and reported the accuracies and the standard deviations.

Туре	Model	Base LLM	RAG-based						
			BM25			OpenAI Embedding			
			Utterance	Session Entire	Session Sum	Utterance	Session Entire	Session Sum	
	Tulu2-70B	2.17 (0.46)	27.24 (1.17)	33.34 (1.17)	32.85 (1.85)	34.95 (0.47)	29.41 (1.22)	33.55 (2.79)	
	Tulu2-7B	0.63 (0.26)	30.26 (1.03)	27.68 (1.24)	30.98 (1.08)	30.99 (0.22)	27.93 (1.97)	31.80 (2.05)	
	Llama2-70B	30.25 (1.28)	29.97 (1.86)	34.15 (1.00)	34.81 (0.77)	36.15 (2.82)	33.54 (1.22)	35.86 (1.81)	
	Llama2-7B	22.40 (2.17)	23.52 (0.80)	22.82 (1.77)	23.87 (0.33)	28.8 (1.04)	22.32 (1.27)	23.70 (2.03)	
Open	Mixtral-8x7B	38.92 (1.61)	26.91 (1.46)	39.98 (2.98)	27.02 (0.42)	30.27 (1.37)	35.89 (0.37)	29.52 (1.28)	
	Mistral-7B	29.10 (1.34)	23.33 (0.83)	34.59 (0.80)	27.87 (2.66)	30.59 (2.09)	30.45 (0.89)	27.93 (0.99)	
	Gemma-7B	17.37 (0.77)	22.58 (1.62)	21.41 (1.53)	21.61 (1.53)	23.90 (0.90)	21.61 (1.09)	20.88 (0.91)	
	Gemma-2B	0.37 (0.07)	23.48 (1.85)	23.13 (1.14)	25.72 (2.67)	29.12 (1.90)	24.88 (1.40)	24.81 (1.31)	

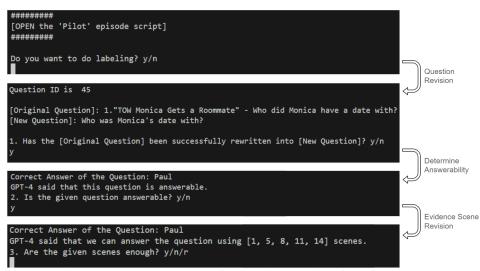


Figure 9: The actual process of annotating questions from fan quizzes.

Figure 10: The actual process of reviewing extracted triples.