Quantum Generative Learning for High-Resolution Medical Image Generation

Amena Khatun¹,* Kübra Yeter Aydeniz², Yaakov S. Weinstein², and Muhammad Usman^{3, 4}

¹Data61, CSIRO, Dutton Park, QLD 4102, Australia

²Emerging Engineering and Physical Sciences Department, The MITRE Corporation, USA

³Data61, CSIRO, Research Way, Clayton, 3168, Victoria, Australia

⁴School of Physics, The University of Melbourne, Parkville, 3010, Victoria, Australia

Integration of quantum computing in generative machine learning models has the potential to offer benefits such as training speed-up and superior feature extraction. However, the existing quantum generative adversarial networks (QGANs) fail to generate high-quality images due to their patch-based, pixel-wise learning approaches. These methods capture only local details, ignoring the global structure and semantic information of images. In this work, we address these challenges by proposing a quantum image generative learning (QIGL) approach for high-quality medical image generation. Our proposed quantum generator leverages variational quantum circuit approach addressing scalability issues by extracting principal components from the images instead of dividing them into patches. Additionally, we integrate the Wasserstein distance within the QIGL framework to generate a diverse set of medical samples. Through a systematic set of simulations on X-ray images from knee osteoarthritis and medical MNIST datasets, our model demonstrates superior performance, achieving the lowest Fréchet Inception Distance (FID) scores compared to its classical counterpart and advanced QGAN models reported in the literature.

I. INTRODUCTION

Medical images are commonly used in diagnostics, neuroscience and drug discovery, with the use of artificial intelligence (AI) in these applications becoming increasingly common [1–3]. Despite the promise of AI to improve efficiency and accuracy, the challenge is its training due to limited availability of medical images and patient datasets. A potential solution is, therefore, the generation of synthetic data using generative adversarial networks (GANs). To generate synthetic images which have similar properties to the original images from patient scans, GANs were first introduced in Ref. [4]. Recently, GANs have demonstrated state-of-the-art [5, 6] capabilities in generating realistic, high-resolution image datasets [7, 8], among other purposes including text generation [9], data augmentation [10], and anomaly detection [11]. Despite their widespread success, GANs impose huge computational demands, especially to generate high-resolution images [8, 12]. Contrarily, the integration of quantum computing in GAN architecture design could overcome these computational challenges. Indeed the design and implementation of resource efficient quantum generative adversarial networks (QGANs) is an emerging and promising research direction.

Existing work on QGANs [13, 14] have demonstrated that QGANs can achieve convergence similarly to classical GANs but within a quantum framework. These studies also highlight the advantages of QGANs in efficiently processing high-dimensional data, making them powerful for certain applications. However, these studies are often limited to theoretical proofs [13, 14], inefficient data loading [15], dealing with small-scale datasets [16], exhibiting

instability during training [16], and suffering from mode collapse [16], generally leading to poor-quality image generation. The advanced QGANs for image generation was proposed in Ref. [16]. This study considered handwritten digits dataset (8×8 pixels) for image generation of digits 0 and 1. Although it could generate recognisable images in some cases, the quality of images was generally poor. As this approach divided images into patches and performed pixel by pixel learning, it suffered from scalability challenges, particularly for high-resolution images.

To overcome the limitations of the existing QGAN methods, this work proposes a quantum image generative learning (QIGL). We implement and benchmark our QIGL technique on medical image datasets which typically require good quality image generation for diagnostic purpose. Figure 1(a) illustrates QIGL approach that consists of two sub-networks as in traditional GAN framework. The generator is quantum and the discriminator is classical. This is similar concept to other QGAN implementations [16, 17]. The architectures of the generator and the discriminator networks are illustrated in Figure 1(b) and 1(c). The variational quantum circuit-based generator is trained on quantum resources to exploit the unique properties of quantum mechanics during both the learning process and the generation of new samples. The discriminator is trained on classical resources that distinguishes the real and fake samples and is not required once the model is trained. The real input images undergo principal component analysis (PCA) transformation before processed by the discriminator. The quantum generator spearheads the learning process, aiming to reproduce the distribution of the original image dataset. After generating the images, both the original and the generated samples are fed to the discriminator. This adversarial setup ensures that the generator and discriminator continually learn from each other, improving their capabilities until the generator produces high-fidelity im-

^{*} amena.khatun@data61.csiro.au

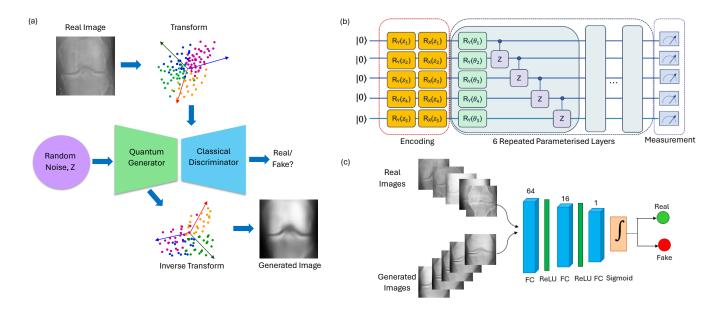


FIG. 1. (a) Overview of Quantum Image Generative Learning (QIGL) framework. QIGL consists of two sub-networks: a generator and a discriminator. Here, the generator is quantum and the discriminator is classical. The real input images are transformed before being fed into the discriminator. The quantum generator initiates the learning process to replicate the distribution throughout the training of QIGL. The PCA features are then re-scaled to revert to the original principal component range and produce a distinctive image that aligns with the distribution of the original images. (b) Architecture of quantum generator that is composed of eight sub-generators, each implemented as a variational quantum circuit (VQC). Each VQC consists of fixed gates for entangling the qubits and tunable gates optimized through training. The generator circuit's architecture begins with encoding input noise using $R_X(\theta_i)$ and $R_Y(\theta_i)$ rotational gates. Subsequently, parameterized weights are encoded on each quantum layer, accompanied by CZ gates to entangle qubits within each layer. Following these repeated layers, the expected value of Pauli X is computed for each qubit upon measurement. (c) Classical discriminator initiates with a dense layer (fully connected (FC)) for linear transformation of the input data that projects the input tensor into 64 dimensions. Subsequently, a Rectified Linear Unit (ReLU) activation function is applied element-wise to the output tensor. Following this, the output of the final dense layer passes through a Sigmoid activation function for final prediction whether the data is real or fake.

ages indistinguishable from real data. Our work shows that QIGL generates high-quality medical images while mitigating scalability and mode collapse issues that are present in the current methods.

The generation of realistic medical images also contributes to the development of algorithms used in medical image analysis and diagnosis. To this end, we consider knee osteoarthritis (OA) dataset [18] that consists of 5 classes, where the original image dimension is 224×224 . The class labels of the knee OA dataset were identified based on the Kellgren-Lawrence grading system (KLgrade) that is used to define knee OA progression, to assess OA in epidemiologic studies and to provide documentation for the requirement of total knee replacement [19]. In addition to this, we studied the medical MNIST dataset, containing 6 classes with image dimensions of 64×64. QIGL learns and extracts rich principal components from the images, resulting in the generation of high-quality and high-dimensional medical images. Additionally, we address the mode collapse issue by incorporating the Wasserstein distance [20] within the proposed framework as a loss function to enable better convergence and generating diverse and realistic samples.

II. RELATED WORK

In 2014, Goodfellow introduced generative models in an adversarial manner [4], where generator captures the data distribution, and a discriminator model estimates the probability that a sample came from the training data rather than generative model. While it is challenging, having a model to capture the distribution of images to generate realistic synthetic copies, GANs achieved great success synthetic for image generation. Inspired by the success of GANs, various extensions have been proposed for image-to-image translation [21, 22], pixel-level transfer from source to target domains [23], and style transfer between domains [6].

Witnessing the success of classical GANs, quantum information science community has been motivated to develop corresponding quantum GANs that can run on quantum computer. Ref. [13] first introduced QGANs, demonstrating their theoretical potential for exponential superiority compared to its classical counterparts. Building on this, Ref. [14] designed a way to train variational quantum circuit (VQC) as the generator in QGAN mod-

els. Although these methods are only proof-of-concept, the findings of these studies highlight the potential of QGANs to address problems that classical GANs struggle with includes huge demand of computational resources and the number of parameters, which increase the complexity of the model, making optimisation and convergence more challenging [24].

Ref. [25] introduces a patch-based conditional QGAN for generating abnormal ECG signals. The first image generation QGAN method was proposed in Ref. that generate images of hand-written digits from MNIST dataset. This approach down-scaled the size of the images from 28×28 into 8×8 and divided the images into patches before using as input to the generator as lower dimensional images requires less number of qubits. Despite significant performance gain in synthetic image generation with fewer parameters compared to classical GANs, this method suffers from scalability issues, especially for high-resolution images as it fails to capture the global patterns and semantic details of the images due to pixel-wise learning. 1) By concentrating on individual patches and pixels, the model may lose sight of the broader context and relationships between different parts of the image. This leads to difficulties in capturing global patterns and semantic details 2) Processing images pixel by pixel can be computationally expensive and memoryintensive, particularly for high-resolution images. 3) In many real-world applications, it is essential to consider the entire image and understand the relationship between objects and features across the image. Pixel-wise learning may not effectively capture these broader relationships. 4) Pixel-wise learning is not effective at generating a diverse set of images as it only consider the similarity between individual pixels, while ignoring high-level features and semantics of the images. This leads to a loss of diversity in the generated samples, which is known as mode collapse problem. Another study [17] uses a similar concept as in Ref. [16] and generates images with 28×28 pixel rather than reducing the dimensionality as in [16]. However, this method also breaks the images into patches and performs pixel-wise learning, which leads to the scalability issues and poor quality image generation. Ref. [26] introduced QGAN via learning discrete distribution for image generation. A remapping method is also used to enhance the quality of the generated images of MNIST and Fashion-MNIST datasets, however, this approach also generate low resolution images (28 \times 28 pixel). Despite recent progress in developing QGANs for image generation, their scope is still limited due to low resolution and proof-of-concept dataset. Our work addresses this critical gap and demonstrates that quantum generative learning could generate high resolution images and could have a direct application in the field of medical diagnostic, which is an important application with real-world implications.

III. QUANTUM GENERATOR AND CLASSICAL DISCRIMINATOR FRAMEWORK

In this work, we propose QIGL composed of a quantum generator and a classical discriminator as illustrated in Figure 1(a), where the quantum generator consists of multiple sub-generators. Each of these sub-generators is a variational quantum circuit (VQC), which undergoes iterative optimisation to train the model. VQC consists of fixed gates for entangling the qubits and the tunable gates that are optimised through the training process. Thus, the complete quantum circuit is an optimisation function constructed from a series of unitary transformations. The architecture of a generator circuit is illustrated in Figure 1(b). The generator takes random noise vectors as input, where each element is a random value. Each element of the noise vector corresponds to a qubit in the quantum circuit. Each qubit is initialised with R_x and R_y rotational gates, parameterised by the noise input. Subsequently, after the noise has been embedded, parameterised weights are encoded on each quantum layer alongside controlled-Z (CZ) gates to entangle the qubits within each layer. After these six repeated layers, the Pauli X expected value is computed for each qubit upon measurement. For PCA feature selection, we choose 40 components as these 40 components capture 98% of the total variability present in the dataset (see Section S9 and Figure S6 in the supplementary document). These 40 principal components are distributed across eight sub-generators. All the eight sub-generators have the similar structures as described above, each comprising a five-qubit circuit. Figure 1(b) shows the structure of only one sub-generator.

The classical discriminator architecture is illustrated in Figure 1(c), where the first layer is a dense layer that performs linear transformation of the input data. It takes the input tensor with PCA dimensions and projects it into a space with 64 dimensions. Each neuron in this layer is connected to every neuron in the input, applying weights to the input features to transform them into a new representation. After that, a Rectified Linear Unit (ReLU) activation function is applied element-wise to the output tensor. ReLU introduces non-linearity by replacing negative values with zero which helps the network learn complex patterns and relationships in the data. The output of the final dense layer is passed through a Sigmoid activation function to transform the output of the network into a probability value ranges between 0 and 1. Values closer to 1 indicate higher probability of the input being classified as real, whereas values closer to 0 indicate the probability of the input being classified as generated.

IV. RESULTS AND DISCUSSION

QIGL is implemented and tested on two popular medical image datasets: knee OA, consists of 5 grade/classes

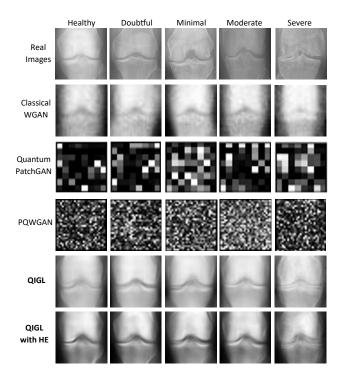


FIG. 2. Generated Images from Knee Osteoarthritis dataset. The first row shows the real images from all the classes. The second, third, fourth and fifth rows represent the images generated by classical WGAN [20], Quantum PatchGAN [16], PQWGAN [17], the proposed QIGL, and QIGL with Histogram Equalisation.

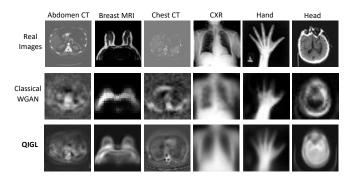


FIG. 3. Generated Images from medical MNIST dataset. The first row shows the real images from all the classes. For this dataset, we compare the generated images of the proposed QIGL with classical WGAN only.

(healthy, doubtful, minimal, moderate, and severe), and medical MNIST dataset, comprising 6 classes (abdomen CT, breast MRI, chest CT, chest X-ray, hand, and head) which are shown in Fig. S5 in the supplementary document and briefly discussed in Section VI.

A. Qualitative Comparison with State-of-the-art Approaches

A qualitative comparison of QGAN approaches is shown in Figure 2 for knee OA dataset. In the figure, the first row shows the real images for all classes. We implement classical WGAN [20], Quantum PatchGAN [16], and PQWGAN [17] for image generation and make a comparison with QIGL. For knee OA dataset, QIGL generates 10000 images, 2000 per class. The second, third, fourth and fifth row represent the generated images for classical WGAN, Quantum PatchGAN, PQW-GAN, and our QIGL, respectively. The results indicate that, Quantum PatchGAN suffers from several challenges as it decomposes the image into patches and perform pixel-by-pixel learning, leading to difficulties in capturing global patterns and semantic details, particularly for high-resolution images. From the generated images, we find the quality of the images generated using Quantum PatchGAN is low for knee OA data. While Quantum PatchGAN down-sized the MNIST hand-written digits data into 8×8 pixels, PQWGAN method [17] generates images for the MNIST dataset with higher-resolution images (28×28 pixels) compared to PatchGAN. Despite this promising performance of PQWGAN for MNIST dataset, it also incorporates the same patch strategy while integrating the concept of WGAN-GP (Wasserstein GAN-Gradient Penalty) [27] to enhance convergence within the Quantum PatchGAN framework. Therefore, PQW-GAN encounters challenges and fails to generate images for high-resolution datasets such as knee OA dataset $(224 \times 224 \text{ pixels})$. In contrast to these approaches and classical WGAN, QIGL generates high quality images as shown in Figure 2. To further enhance the contrast of the images, we perform histogram equalisation (HE) as in Ref. [28], which is described in the METHOD VI section. After HE, QIGL generates sharper images as illustrated in the last row.

We also compare QIGL generated images with the images generated using classical WGAN for medical MNIST dataset as depicted in Figure 3. We consider the same parameters for classical WGAN experiments as in QIGL for fair comparison which are described in Section VI. From the figure, it is observed that our method generates images which are sharper and contain finer details than the images generated by the implemented classical WGAN. The performance of the proposed QIGL brings attention to the promising potential of quantum machine learning approaches for image generation tasks. While the comparison of QIGL and classical WGAN is insightful, it is important to note that WGAN is not considered state-of-the-art in GANs. Currently, StyleGAN [12] and its variants [7, 29] are recognised for their superior performance in generating high-quality images with fine details and realistic textures. However, quantum hardware are still in their infancy. The limited number of qubits available on current quantum computers, along with high error rates and decoherence, makes building complex models like StyleGAN infeasible at this stage. Nevertheless our study has demonstrated that quantum generative models such as QIGL could enable high resolution image generation for medical applications and in future could be deployed on larger scale fault-tolerant quantum computers when they become available within the next decade.

B. Quantitative Comparison of QIGL with Classical WGAN

To quantitatively compare the quality of images generated by QIGL with other methods, we calculate the Fréchet Inception Distance (FID) scores as an evaluation metric (see details in Section VI) for both QIGL and classical WGAN on knee OA and medical MNIST datasets as reported in Table I. The classical GANs [12, 24, 30] utilise FID scores to evaluate the performance of generative models which is considered a standard method. FID score provides a quantitative measure of the similarity between the feature distributions of real and generated images, with lower values representing better performance. For FID score calculation, the feature representations are extracted for both real images and generated images using pre-trained deep convolutional neural network. Let us denote that the feature representations of real images as μ_r (mean) and Σ_r (covariance) and the feature representations of generated images as μ_q (mean) and Σ_q (covariance). The Fréchet distance between two multivariate Gaussian distributions $N(\mu_r, \Sigma_r)$ and $N(\mu_q, \Sigma_q)$ can be represented as,

$$FID = \|\mu_r - \mu_g\|^2 + \text{Tr}(\Sigma_r + \Sigma_g - 2(\Sigma_r \Sigma_g)^{1/2}), \quad (1)$$

where $Tr(\cdot)$ denotes the trace operation which computes the sum of the diagonal elements of the resulting matrix and thus quantifies the dissimilarity between the covariance matrices. For each class of knee condition, the FID score obtained by both QIGL and classical WGAN method are listed in Table I. For all the classes, FID score is lower for our method compared to the FID score obtained using images generated by classical WGAN, demonstrating that OIGL outperforms its classical counterpart across different levels of knee OA severity. We also calculated the FID score for the medical MNIST dataset. Similar to the case of Knee OA data, QIGL outperforms classical WGAN for all 6 classes. These results indicate superior performance of QIGL in generating realistic images across a diverse range of datasets when compared to the classical WGAN.

To study the training efficiency, we also calculated the number of parameters for both classical WGAN method (Table S3 in the supplementary document) and QIGL (Table S4 in the supplementary document). Total number of training parameters in classical WGAN is 6,819,841 (4,718,592 for the generator and 2,101,249 for the discriminator) whereas the number of training parameters in QIGL is 3,489 (240 for the quantum genera-

tor and 3,249 for the discriminator). This suggests that the implemented quantum network offers better performance while using $\approx 2000 \times$ less number of training parameters. This exhibits the advantages of our QIGL approach in training efficiency by reducing the parameters significantly, highlighting its potency for practical implementation. The number of parameters in QIGL method can be increased by increasing the number of layers or by increasing the number of qubits in the quantum generator circuit. However, these improvements might cause well known barren plateau issue in which the optimisation landscape becomes flat. Layer wise learning [31] can be utilised to mitigate this issue and we leave increased size problems as a future work. Similarly, more advanced classical GAN models, such as StyleGAN [12], have been utilised in the literature for better quality medical image generation [32, 33]. However, these advanced classical models require training of millions (26 million for StyleGAN) of parameters and intensive computational resources. As we mitigate issues towards increasing problem size for our QIGL method, we will also study these advanced classical GAN methods for performance comparison of the classical and quantum generative methods with the goal of better quality generation of medical images.

C. Ablation Studies

We perform a set of simulations to evaluate the effectiveness of the proposed PCA feature re-distribution technique which is compared with traditional PCA feature distribution technique. We also conduct simulations to generate images with and without Wasserstein Distance, and with and without histogram equalisation to demonstrate the effect of these components.

1. Effect of PCA Balanced Feature Distribution

In QIGL, PCA is considered to extract the principal features of images that facilitates efficient learning. Traditionally. PCA computes a set of principal components. which are linear combinations of the original features. These components are sequenced such that the first principal component captures the maximum amount of variance present in the data, the second principal component captures the second highest amount of variance, and so on. As there are eight sub-generators in the proposed framework as mentioned in Section III, the PCA features are typically distributed among the sub-generators succeedingly. Hence, the initial sub-generators will get the first few features, which are heavily concentrated of the explained variance compared to the subsequent features. This sequential distribution leads to an imbalance in feature distribution among the sub-generators, potentially impacting the overall performance and diversity of the generated outputs. To overcome this problem, we in-

Knee Osteoarthritis			Medical MNIST		
Classes	FID (QIGL)	FID (WGAN)	Classes	FID (QIGL)	FID (WGAN)
Healthy	63.59	200.93	AbdomenCT	45.89	234.35
Doubtful	56.28	188.29	BreastMRI	117.58	356.42
Minimal	61.85	339.01	ChestCT	42.95	212.83
Moderate	62.76	312.58	CXR	157.73	454.47
Severe	75.54	310.07	Hand	175.82	473.61
			Head	151.94	421.27

TABLE I. Simulation results of the proposed QIGL approach compared to the classical WGAN method on Knee Osteoarthritis and Medical MNIST datasets. FID, representing the Fréchet Inception Distance, is the lower the better.

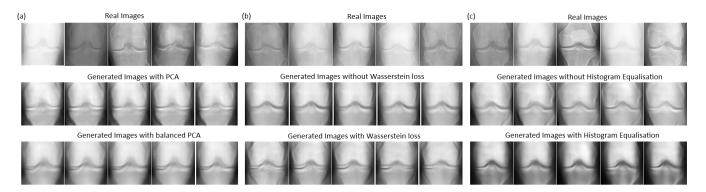


FIG. 4. Generated images on Knee Osteoarthritis dataset for class 0 (Healthy): (a) represents the generated images with conventional PCA feature distribution technique and balanced PCA feature distribution technique. (b) shows the generated images without Wasserstein loss and with Wasserstein loss, and (c) represents the generated images without Histogram Equalisation and with Histogram Equalisation.

Method	FID
QIGL with PCA (no Wasserstein Loss)	81.4
QIGL with PCA + Wasserstein Loss	78.1
QIGL + Balanced PCA	76.8
QIGL + Balanced PCA + Wasserstein Loss	71.6
QIGL + Balanced PCA + Wasserstein Loss + HE	63.6

TABLE II. Ablation studies on Knee Osteoarthritis dataset for class 0 (Healthy). "QIGL with PCA" is the proposed QIGL with normal PCA feature distribution, "QIGL with PCA + Wasserstein Loss" represents with normal PCA feature distribution but considering Wasserstein loss, "QIGL + Balanced PCA" is the method with balanced PCA feature distribution technique but there is no Wasserstein loss, "QIGL + Balanced PCA + Wasserstein Loss" denotes the approach with both balanced PCA feature distribution technique and Wasserstein loss, and "QIGL + Balanced PCA + Wasserstein Loss + HE" represents the QIGL method with balanced PCA feature distribution technique, Wasserstein loss and histogram equalisation.

corporate a feature distribution technique to ensure that the features are distributed among the sub-generators in a more balanced way. This technique is explained in the supplementary document S9 in more detail.

To investigate the effectiveness of the balanced distribution technique of PCA features, we train the QIGL model with normal feature distribution technique for comparison. Figure 4(a) shows the generated images on one of the classes (healthy i.e., class 0) from the knee

OA dataset. While the top row shows the real images, the second and third rows depict the images generated with PCA conventional distribution and PCA balanced feature distribution, respectively. It is very hard to see the visual difference of the generated images for human perception. Therefore, we performed experiments to calculate the FID score of the generated images with both distributions of PCA features as in Table II. The FID score of QIGL with balanced PCA is 76.8 while the score is 81.4 with conventional PCA feature distribution.

2. Effect of Wasserstein Distance in QIGL

A limitation of our model is related to a tendency of generating repetitive and uniform images, thus lacking in variety and detail, which is a common issue even in classical GANs [34, 35]. While it is essential to generate high-quality images, it is equally important to generate a diverse range of samples to enhance the model's fidelity to real-world data. We propose the integration of the Wasserstein distance (WD) into QIGL framework. WD encourages the generator to produce samples that captures the diversity present in the real data distribution. The impact of mode collapse and WD is thoroughly explained in the supplementary document S10. Figure 4(b) illustrates the generated images both with and without the Wasserstein loss for class 1 of Knee OA dataset. From

the Figure, it can be observed that the model exhibits enhanced diversity in samples when WD is used. We further evaluate the effectiveness of WD by calculating the FID score as shown in Table II. From the Table, the QIGL achieves an FID score of 81.4 when there is no WD, which is 78.1 when WD is incorporating within QIGL, demonstrating the effectiveness of this approach in mitigating mode collapse and enhancing image generation diversity.

3. Effect of Histogram Equalisation

In this subsection, we investigate the impact of histogram equalisation (HE) on the quality of generated knee X-ray images. Given that real medical X-ray images used for generating synthetic images often lack sharpness, we apply HE to enhance the contrast of these real input images. Subsequently, we assess the effect of this preprocessing step on the fidelity of the generated samples and corresponding FID scores. Figure 4(c) shows higher contrast in the generated images with HE compared to the images when HE is not considered. As a result of this, the FID score of the QIGL generated images including HE is lower for all classes of the knee images. We present the mean FID score for each class with and without HE implemented in Table S5 in the supplementary document. We observe that the HE procedure significantly improves FID score values.

V. DISCUSSION

The proposed QIGL addresses the challenges of the current QGAN method [16]. While Ref. [16] divides full images into patches due to the limited number of qubits available in the current quantum devices and perform pixel-by-pixel learning, QIGL extracts principal components of images instead of pixel-wise learning that results in poor quality image generation. The proposed method successfully generates high-quality medical images $(64 \times 64 \text{ pixel})$ as shown in Figure 2 and 3. Through qualitative comparison with classical WGAN and existing OGAN approaches such as Quantum PatchGAN and PQWGAN, it is observed that existing methods struggle with capturing global patterns and semantic details, particularly in high-resolution datasets like the knee OA. In contrast, our QIGL framework consistently generates higher quality images with sharper details. Integration of balanced PCA feature distribution technique effectively distributes PCA features across the sub-generators compare to the traditional PCA methods as shown in Figure S7(b) and Table II. Additionally, the incorporation of WD as a loss function within the proposed framework addresses mode collapse, leading to more diverse and realistic medical image generation. The quantitative comparisons through FID scores confirm the superiority of our approach over classical WGAN across various classes and datasets, highlighting the potential of quantum machine learning approaches in medical imaging tasks for improving healthcare outcomes through accurate diagnosis and analysis of medical images. However, quantum hardware is not yet scaled up to process complex quantum circuits which are necessary for the wide spread implementation of QGANs for real-world applications, and it will take a few more years to deploy such techniques on real devices.

VI. METHODS

In this section, we introduce QIGL, detailing its design and architecture. First, we briefly describe classical GAN for better context of understanding. Subsequently, we delve into the details of QIGL.

GANs work through a dynamic interplay between two neural networks: the generator and the discriminator. The generator, creates synthetic data, while the discriminator tries to distinguish between real and fake samples. As they compete, both networks improve iteratively. The generator aims to produce samples that are indistinguishable from real data, while the discriminator aims to become increasingly accurate at differentiating between real and fake samples. Through this adversarial process, GANs can generate highly realistic data. This is explained in the supplementary document in detail (see S8).

A. Quantum Image Generative Learning (QIGL)

The proposed QIGL consists of a generator and a discriminator, following a similar structure to classical GANs, however, utilising quantum principles for training and inference. The generator is trained on quantum resources while the discriminator operates on classical resources, allowing QIGL to leverage quantum resources for generative tasks. To address the limitations of current NISQ (Noisy Intermediate-Scale Quantum) devices, which have fewer qubits than required for highresolution image generation, we employ a PCA-based approach. PCA extracts essential features of images, which are scaled between 0 and 1, enabling quantum sub-generators to operate efficiently. The scaled features guide the generator during training. Once training is completed, the output is re-scaled to its original range and inverse-transformed to reconstruct high-quality images. To ensure balanced feature distribution among subgenerators, the top principal components are assigned evenly, avoiding the imbalance and enhancing the overall utility of the generator. This methodology overcomes scalability issues and generates high-quality medical images with minimal qubits.

B. Datasets

Knee Osteoarthritis [18] dataset includes knee Xray image data aimed at both knee joint detection and grading according to the Kellgren-Lawrence (KL) scale, facilitating research and analysis in the diagnosis of knee osteoarthritis. For image generation, we consider the grading as different class. There are 5 grading system within this dataset such as: Grade 0 represents healthy knee images, Grade 1 indicates doubtful joint narrowing with possible osteophytic lipping, Grade 2 reflects definite presence of osteophytes with potential joint space narrowing, Grade 3 signifies multiple osteophytes, definite joint space narrowing, and mild sclerosis, and Grade 4 denotes large osteophytes, significant joint narrowing, and severe sclerosis. Total 5,778 images in 224×224 dimension are considered from all 5 classes to train QIGL model for image generation.

Medical MNIST [36] dataset is a MNIST-style medical images in $64{\times}64$ dimension. The images were originally taken from other datasets and processed into such style. There are 58954 medical images belonging to 6 classes, i.e., AbdomenCT, BreastMRI, ChestCT, ChestXR, Hand, and HeadCT. To train QIGL, all these images are considered as real input images.

C. Image Pre-processing

In order to improve the quality of the generated images we implemented image preprocessing. One of the methods used in image generation through GANs is to use histogram equalisation which improves the contrast of the generated images. This technique spreads out the most frequent intensity values in an image, making it easier for the model to learn and generate more detailed and visually appealing images. It also helps in reducing the model's bias towards certain intensity values, thereby enhancing the overall quality of the generated images. In order to implement this technique, we utilized equalize function in Python Imaging Library's (PIL) ImageOps module. This function applies a non-linear mapping to the input image in order to create a uniform distribution of grayscale values in the output image. Another image preprocessing method that we implemented is to manually detect and remove the images with surgical prosthetics or scratches and punch holes. In addition to this, we inverted negative channel images and flipped all rightoriented images to the left, as it was implemented in [28]. In Table S6 in the supplementary document, we provide the number of these items in each KL grade of osteoarthritis of the knee X-ray images dataset.

D. Network Setup and Training Details

We use PvTorch [37] as a wrapper to interface with PennyLane [38]. Adam [39] optimiser is used for all the experiments with a batch size of 8 and a learning rate of 0.3 for the quantum generator and 0.05 for the discriminator. We initialise the quantum circuit with 5 qubits and 6 variational layers (depth of the quantum circuit). During training, images are decomposed into 40 principal components which are then distributed across eight 5-qubit quantum circuit, each of which is a sub-generator. We also perform simulation studies for Quantum Patch-GAN [16] and PQWGAN [17] on Knee OA dataset for comparison. For these implementations, we use Pennylane framework with the same hyper-parameters used in the original paper, i.e., Ref. [16, 17]. To further evaluate the proposed method, we additionally set up simulations for classical WGAN with the same hyper-parameters as used in QIGL implementation for fair evaluation.

VII. CONCLUSION AND FUTURE WORK

In this paper, we presented QIGL framework for highquality medical image generation that significantly advances the application of quantum generative learning in healthcare. Through a comprehensive set of simulations and analysis on a diverse set of classes of medical image datasets, we have demonstrated superior performance of our approach compared to its classical counterparts and the existing QGAN methods, particularly in terms of image quality, scalability, mode collapse mitigation, and resource efficiency. Our simulation results and extensive comparison of QIGL with its classical counterparts open up avenues for future research in healthcare technology. While our results demonstrate remarkable gains in medical image generation, there remain opportunities for further exploration, such as extending QIGL approach for RGB medical image generation, implementation on real quantum devices, and perform image classification tasks, thus expanding the scope and applicability of quantumenhanced techniques in medical imaging.

ACKNOWLEDGMENTS

A.K. acknowledge the use of CSIRO HPC (High-Performance Computing) for conducting the experiments. A.K. also acknowledges CSIRO's Quantum Technologies Future Science Platform for providing the opportunity to work on quantum machine learning. KYA and YSW were supported through Quantum Horizon Program at MITRE and MITRE National Security (MNS) Sector. ©2024 The MITRE Corporation. ALL RIGHTS RESERVED. Approved for public release. Distribution unlimited PR_24—00320—4.

- Andre Esteva, Brett Kuprel, Roberto A Novoa, Justin Ko, Susan M Swetter, Helen M Blau, and Sebastian Thrun. Dermatologist-level classification of skin cancer with deep neural networks. nature, 542(7639):115–118, 2017.
- [2] Geert Litjens, Thijs Kooi, Babak Ehteshami Bejnordi, Arnaud Arindra Adiyoso Setio, Francesco Ciompi, Mohsen Ghafoorian, Jeroen Awm Van Der Laak, Bram Van Ginneken, and Clara I Sánchez. A survey on deep learning in medical image analysis. Medical image analysis, 42:60–88, 2017.
- [3] Jonathan M Stokes, Kevin Yang, Kyle Swanson, Wengong Jin, Andres Cubillos-Ruiz, Nina M Donghia, Craig R MacNair, Shawn French, Lindsey A Carfrae, Zohar Bloom-Ackermann, et al. A deep learning approach to antibiotic discovery. Cell, 180(4):688-702, 2020.
- [4] Ian Goodfellow, Jean Pouget-Abadie, Mehdi Mirza, Bing Xu, David Warde-Farley, Sherjil Ozair, Aaron Courville, and Yoshua Bengio. Generative adversarial nets. Advances in neural information processing systems, 27, 2014.
- [5] Amena Khatun, Simon Denman, Sridha Sridharan, and Clinton Fookes. End-to-end domain adaptive attention network for cross-domain person re-identification. *IEEE Transactions on Information Forensics and Secu*rity, 16:3803–3813, 2021.
- [6] Amena Khatun, Simon Denman, Sridha Sridharan, and Clinton Fookes. Pose-driven attention-guided image generation for person re-identification. *Pattern Recognition*, 137:109246, 2023.
- [7] Tero Karras, Samuli Laine, Miika Aittala, Janne Hellsten, Jaakko Lehtinen, and Timo Aila. Analyzing and improving the image quality of StyleGAN. In Proceedings of the IEEE/CVF conference on computer vision and pattern recognition, pages 8110–8119, 2020.
- [8] Andrew Brock, Jeff Donahue, and Karen Simonyan. Large scale GAN training for high fidelity natural image synthesis. arXiv preprint arXiv:1809.11096, 2018.
- [9] Touseef Iqbal and Shaima Qureshi. The survey: Text generation models in deep learning. Journal of King Saud University-Computer and Information Sciences, 34(6):2515-2528, 2022.
- [10] Alec Radford, Luke Metz, and Soumith Chintala. Unsupervised representation learning with deep convolutional generative adversarial networks. CoRR, abs/1511.06434, 2015.
- [11] Guansong Pang, Chunhua Shen, Longbing Cao, and Anton Van Den Hengel. Deep learning for anomaly detection: A review. ACM computing surveys (CSUR), 54(2):1–38, 2021.
- [12] Tero Karras, Samuli Laine, and Timo Aila. A style-based generator architecture for generative adversarial networks. In Proceedings of the IEEE/CVF conference on computer vision and pattern recognition, pages 4401–4410, 2019.
- [13] Seth Lloyd and Christian Weedbrook. Quantum generative adversarial learning. *Physical review letters*, 121(4):040502, 2018.
- [14] Pierre-Luc Dallaire-Demers and Nathan Killoran. Quantum generative adversarial networks. *Physical Review A*, 98(1):012324, 2018.

- [15] Kouhei Nakaji and Naoki Yamamoto. Quantum semisupervised generative adversarial network for enhanced data classification. Scientific reports, 11(1):19649, 2021.
- [16] He-Liang Huang, Yuxuan Du, Ming Gong, Youwei Zhao, Yulin Wu, Chaoyue Wang, Shaowei Li, Futian Liang, Jin Lin, Yu Xu, et al. Experimental quantum generative adversarial networks for image generation. *Physical Review Applied*, 16(2):024051, 2021.
- [17] Shu Lok Tsang, Maxwell T West, Sarah M Erfani, and Muhammad Usman. Hybrid quantum-classical generative adversarial network for high resolution image generation. *IEEE Transactions on Quantum Engineering*, 2023.
- [18] Pingjun Chen. Knee osteoarthritis severity grading dataset. Mendeley Data, 1:21–23, 2018.
- [19] Bofei Zhang, Jimin Tan, Kyunghyun Cho, Gregory Chang, and Cem M. Deniz. Attention-based CNN for KL grade classification: Data from the osteoarthritis initiative. In 2020 IEEE 17th International Symposium on Biomedical Imaging (ISBI), pages 731–735, 2020.
- [20] Martin Arjovsky, Soumith Chintala, and Léon Bottou. Wasserstein generative adversarial networks. In *International conference on machine learning*, pages 214–223. PMLR, 2017.
- [21] Amena Khatun, Simon Denman, Sridha Sridharan, and Clinton Fookes. Semantic consistency and identity mapping multi-component generative adversarial network for person re-identification. In Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision, pages 2267–2276, 2020.
- [22] Leon A. Gatys, Alexander S. Ecker, and Matthias Bethge. Image style transfer using convolutional neural networks. In Proceedings of the IEEE conference on computer vision and pattern recognition, pages 2414–2423, 2016.
- [23] Donggeun Yoo, Namil Kim, Sunggyun Park, Anthony S. Paek, and In So Kweon. Pixel-level domain transfer. In Computer Vision–ECCV 2016: 14th European Conference, Amsterdam, The Netherlands, October 11-14, 2016, Proceedings, Part VIII 14, pages 517–532. Springer, 2016.
- [24] Martin Heusel, Hubert Ramsauer, Thomas Unterthiner, Bernhard Nessler, and Sepp Hochreiter. Gans trained by a two time-scale update rule converge to a local nash equilibrium. Advances in neural information processing systems, 30, 2017.
- [25] Zhiguo Qu, Wenke Shi, and Prayag Tiwari. Quantum conditional generative adversarial network based on patch method for abnormal electrocardiogram generation. Computers in Biology and Medicine, 166:107549, 2023.
- [26] Nan-Run Zhou, Tian-Feng Zhang, Xin-Wen Xie, and Jun-Yun Wu. Hybrid quantum-classical generative adversarial networks for image generation via learning discrete distribution. Signal Processing: Image Communication, 110:116891, 2023.
- [27] Ishaan Gulrajani, Faruk Ahmed, Martin Arjovsky, Vincent Dumoulin, and Aaron C Courville. Improved training of Wasserstein GANs. Advances in neural information processing systems, 30, 2017.

- [28] Fabi Prezja, Juha Paloneva, Ilkka Pölönen, Esko Niinimäki, and Sami Äyrämö. DeepFake knee osteoarthritis X-rays from generative adversarial neural networks deceive medical experts and offer augmentation potential to automatic classification. Scientific Reports, 12(1):18573, 2022.
- [29] Tero Karras, Miika Aittala, Samuli Laine, Erik Härkönen, Janne Hellsten, Jaakko Lehtinen, and Timo Aila. Alias-free generative adversarial networks. Advances in neural information processing systems, 34:852– 863, 2021.
- [30] Shengyu Zhao, Zhijian Liu, Ji Lin, Jun-Yan Zhu, and Song Han. Differentiable augmentation for data-efficient gan training. Advances in neural information processing systems, 33:7559-7570, 2020.
- [31] Andrea Skolik, Jarrod R McClean, Masoud Mohseni, Patrick Van Der Smagt, and Martin Leib. Layerwise learning for quantum neural networks. Quantum Machine Intelligence, 3:1–11, 2021.
- [32] McKell Woodland, John Wood, Brian M Anderson, Suprateek Kundu, Ethan Lin, Eugene Koay, Bruno Odisio, Caroline Chung, Hyunseon Christine Kang, Aradhana M Venkatesan, et al. Evaluating the performance of stylegan2-ada on medical images. In *International Work*shop on Simulation and Synthesis in Medical Imaging, pages 142–153. Springer, 2022.
- [33] Gun Ahn, Byung Sun Choi, Sunho Ko, Changwung Jo, Hyuk-Soo Han, Myung Chul Lee, and Du Hyun Ro. High-resolution knee plain radiography image synthesis using style generative adversarial network adaptive discriminator augmentation. *Journal of Orthopaedic Re*search®, 41(1):84–93, 2023.
- [34] Duhyeon Bang and Hyunjung Shim. Mggan: Solving mode collapse using manifold-guided training. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 2347–2356, 2021.
- [35] Akash Srivastava, Lazar Valkov, Chris Russell, Michael U. Gutmann, and Charles Sutton. Veegan: Reducing mode collapse in gans using implicit variational learning. In I. Guyon, U. Von Luxburg, S. Bengio, H. Wallach, R. Fergus, S. Vishwanathan, and R. Garnett, editors, Advances in Neural Information Processing Systems, volume 30. Curran Associates, Inc., 2017.
- [36] Medical mnist dataset (available at: https://www.kaggle.com/datasets/andrewmvd/medical-mnist).
- [37] Adam Paszke, Sam Gross, Francisco Massa, Adam Lerer, James Bradbury, Gregory Chanan, Trevor Killeen, Zeming Lin, Natalia Gimelshein, Luca Antiga, et al. Pytorch: An imperative style, high-performance deep learning library. Advances in neural information processing systems, 32, 2019.
- [38] Ville Bergholm, Josh Izaac, Maria Schuld, Christian Gogolin, Shahnawaz Ahmed, Vishnu Ajith, M Sohaib Alam, Guillermo Alonso-Linaje, B AkashNarayanan, Ali Asadi, et al. Pennylane: Automatic differentiation of hybrid quantum-classical computations. arXiv preprint arXiv:1811.04968, 2018.
- [39] Diederik P. Kingma and Jimmy Ba. Adam: A method for stochastic optimization. arXiv preprint arXiv:1412.6980, 2014.

[40] Cédric Villani et al. Optimal transport: old and new, volume 338. Springer, 2009.

Supplementary Document

S8. CLASSICAL GENERATIVE ADVERSARIAL NETWORKS (CGANS)

GANs are neural networks that learn to draw samples from a distribution they have learned by setting up a competition. The discriminator tries to distinguish whether the samples are real or generated, and the generator generates fake samples and tries to fool the discriminator. Thus, the two sub-networks have a significant influence on each other as they update themselves in an iterative manner. To learn a generator distribution over data x, the generator $G(z, \theta_1)$ maps the input noise variables z to the expected data space x, while the discriminator $D(x, \theta_2)$ tries to learn the probability, ranging from 0 to 1, that the generated data are from the real domain. The weights of the discriminator are optimised to minimise the probability of fake samples being classified as belonging to the real dataset, and maximising the probability that real input images are classified that they are from the real dataset. As such, the discriminator is minimising the function D(G(z)) while maximising D(x). In contrast, the generator tries to defeat the discriminator by generating fake samples, which look similar to the real samples. Thus, the weights of the generator are optimised to increase the probability that the fake samples are classified as belonging to the real dataset.

As both generator and the discriminator train simultaneously, parameters are adjusted for generator to minimize log(1-D(G(x))) and for discriminator to minimize logD(x), as if they are following the two-player min-max game with value function V(G,D).

The objective of a GAN can be formulated as [4],

$$\min_{G} \max_{D} V(D, G) = \mathbb{E}_{x \sim P_{\text{data}}(x)}[\log D(x)] + \mathbb{E}_{z \sim P_{z}(z)}[\log(1 - D(G(x)))]. \tag{2}$$

When the network converges, the generator can create more realistic samples. At this point, the discriminator becomes unable to differentiate between real and fake samples. This is because neither the discriminator nor the generator can further improve themselves.

S9. PCA FOR SCALABILITY AND FEATURE LEARNING

In the proposed methodology, we address the scalability issue by transforming the input image data rather than breaking it into patches. We adopt PCA approach to extract and learn essential features of images that facilitates efficient learning. Initially, PCA normalises the input data, ensuring uniformity in feature scales. Subsequently, it decomposes images into principal components, which represent the most significant variations within the dataset. To understand how much of the information in

the dataset can be captured by each principal component, we measure the explained variance ratio. Figure S6 shows the plot, where explained variance is 98% with 40 principal components in PCA, indicating that these 40 components capture 98% of the total variability present in the original dataset. Therefore, we choose to extract 40 PCA features. These features are then scaled between 0 and 1, enabling quantum sub-generators to operate across the entire input space. During the training, these scaled features are fed to the discriminator as ground truth to guide the generator to learn the distribution of the dataset. After training, the output are re-scaled to their original principal component range, and inverse transformation is performed to reconstruct images with the original distribution. Although this approach overcomes the scalability issue and generate high-quality medical images, we investigate that, the distribution of PCA features can be unbalanced among multiple sub-generators, consisting of a variational quantum circuit (VQC) within the proposed approach. Conventionally, PCA features are distributed sequentially among the sub-generators, that is, the first few features are aligned to the first sub-generator, the next features are assigned to the next sub-generator and so on. This is illustrated in Figure S7(a). We develop our QIGL approach in such a way that only 5 qubits are required for image generation of a full-resolution of 4096-pixel (64×64 pixel) image dataset. To distribute 40PCA features, QIGL comprises of 8 sub-generators, each with a 5-qubit quantum circuit. Each sub-generator is assigned with 5 PCA features. As shown in Figure S7(a), the first 5 features are assigned to the first sub-generator (G1), the next 5 features are assigned to the second subgenerator (G2), while the last sub-generator (G8) is getting the last 5 PCA features. This leads to an imbalance in the distribution of features among the sub-generators because PCA features inherently exhibit a heavy concentration of explained variance in the initial features, with a notable drop-off in subsequent ones. As PCA features become entangled within the sub-generators to facilitate rich connections for image generation, if certain sub-generators lack useful information across all features, the overall utility of the generator diminishes.

We address the imbalance distribution of PCA features by counteracting the uneven assignment of principal components to sub-generators as shown in Figure S7(b). Initially, we allocate the top principal component to the first sub-generator, followed by subsequent components assigned sequentially to each sub-generator until each holds one top principal component. Next, the remaining principal components are distributed in reverse order, assigning the last n-1 components to the first sub-generator, the second to last n-1 to the second subgenerator, and so forth until all features are allocated among the sub-generators as illustrated in Figure S7(c). This approach ensures a more balanced distribution, allowing all the sub-generators to contribute meaningfully during training without skewing the learning process.

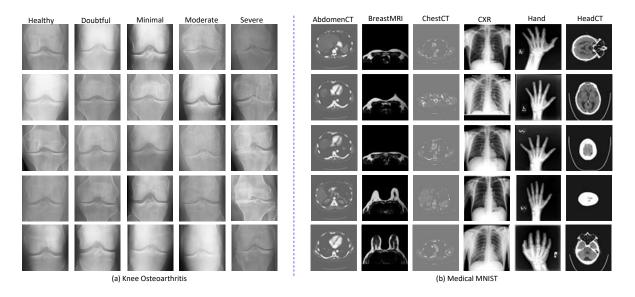


FIG. S5. Overview of datasets used to generate synthetic images by the proposed QIGL. In the Figure, (a) represents Knee Osteoarthritis dataset, containing 5 classes, and (b) represents Medical MNIST dataset consisting of 6 classes.

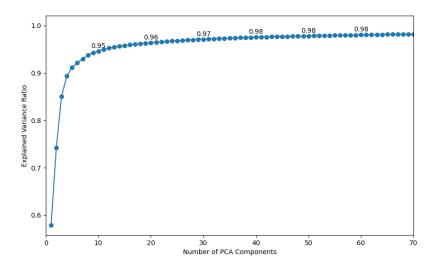


FIG. S6. Plot of the explained variance ratio against the number of components. Here, 98% of the information are captured by 40 principal components.

S10. MODE COLLAPSE IN QIGL

Mode collapse in generative learning occurs when the generator fixates on producing a narrow range of outputs, often repeating similar patterns or generating limited types of samples. Figure S7(d) illustrates mode collapse, where many latent space z can be mapped to only one real space x. However, it is crucial to maintain variety in image generation rather than only generating limited type of images from a particular class. QIGL addresses this issue by incorporating wasserstein distance within the proposed framework. Wasserstein distance approx-

imates Earth Mover's Distance to make the generated image distribution equal to the real image distribution. This distance measures the minimum cost required to transform one distribution into another. The loss function is constructed using the Kantorovich-Rubinstein duality [40] as,

$$W(P_r, P_\theta) = \sup_{\|f\|_L \le 1} \mathbb{E}_{x \sim P_r}[f(x)] - \mathbb{E}_{x \sim P_\theta}[f(x)], \quad (3)$$

where P_r represents the real data distribution and P_{θ} represents the generated data distribution parameterised by the generator network's parameters θ . $||f||_L$ is the Lips-

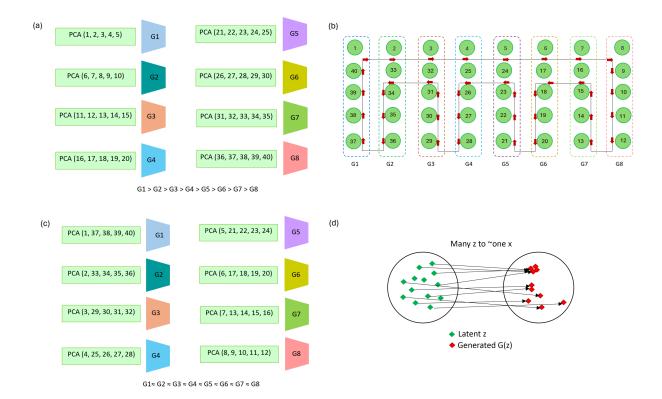


FIG. S7. Illustration of (a) conventional PCA feature distribution technique. QIGL consists of 8 sub-generators that requires the extraction of 40 PCA features for a 5-qubit quantum circuit. Each sub-generator is allocated with 5 PCA features. The allocation of PCA features follows a systematic pattern: the first 5 features are directed to the first sub-generator (G1), the subsequent 5 features are allocated to the second sub-generator (G2), and the final 5 PCA features are directed to the eighth sub-generator (G8). (b) Balanced PCA feature re-distribution technique where the top principal component are assigned to the first sub-generator. Succeeding components are then sequentially allocated to each sub-generator until each holds one top principal component. Following this, we adopt a reverse distribution approach for the remaining principal components. This entails assigning the last n-1 components to the first sub-generator, the second-to-last n-1 components to the second sub-generator, and so forth, until all features are allocated principal component. (c) Balanced PCA feature distribution across the sub-generators, and (d) Mode Collapse problem where multiple latent distributions G(z) is mapped to only one real space output x, resulting limited set of output samples from generator.

chitz constant of the function f, The supremum (sup) is taken over all functions f with $||f||_L \leq 1$. $\mathbb{E}_{x \sim P_r}[f(x)]$ represents the expected value of f(x)) when x is sampled from the real data distribution P_r , and $\mathbb{E}_{x \sim P_{\theta}}[f(x)]$ represents the expected value of f(x) when x is sampled from

the generated data distribution, P_{θ} , which is controlled by the generator network. This formulation allows for a more stable optimisation process compared to traditional GANs, as it encourages the generator to produce samples that are closer to the real data distribution.

Layer	Generator	Discriminator
Layer 1 (weights)	100×128	$(1 \times 64 \times 64) \times 512$
Layer 1 (biases)	128	512
Layer 2 (weights)	128×256	512×256
Layer 2 (biases)	256	256
Layer 3 (weights)	256×512	256×1
Layer 3 (biases)	512	1
Layer 4 (weights)	512×1024	-
Layer 4 (biases)	1024	-
Layer 5 (weights)	$1024 \times (1 \times 64 \times 64)$	-
Layer 5 (biases)	$(1 \times 64 \times 64)$	-
Batch normalization	256+512+1024	-
Total	4,718,592	2,101,249

TABLE S3. Number of training parameters at each layer of generator and discriminator for classical WGAN.

Layer	Discriminator
Layer 1 (weights)	40×64
Layer 1 (biases)	64
Layer 2 (weights)	64×16
Layer 2 (biases)	16
Layer 3 (weights)	16×1
Layer 3 (biases)	1
Total	3249
Quantum Generator	$8 \times 6 \times 5 = 240$

TABLE S4. Number of training parameters at each layer of quantum generator and classical discriminator for QIGL.

Class	QIGL	QIGL + HE
0	67.50	63.59
1	63.18	56.28
2	73.76	61.85
3	67.89	62.76
4	88.76	75.54

TABLE S5. The mean FID score values of the QIGL generated images without histogram equalization and with histogram equalization after 20 epochs for knee X-ray images dataset.

Class	Number of damaged items	Number of negative channel images
0	11	26
1	5	8
2	11	22
3	12	10
4	5	0

TABLE S6. The number of images with surgical prosthetics or scratches and punch holes (middle column) and number of negative channel images (last column) in the knee X-ray images dataset listed for each class, i.e., KL grade as described in VIB.