

ZeroDL: Zero-shot Distribution Learning for Text Clustering via Large Language Models

Hwiyeol Jo^{1,2}, Hyunwoo Lee^{1,2}, Taiwoo Park²

¹NAVER, ²NAVER Search US

{hwiyeol.jo, hanu.lee, taiwoo.park}@navercorp.com

Abstract

The recent advancements in large language models (LLMs) have brought significant progress in solving NLP tasks. Notably, in-context learning (ICL) is the key enabling mechanism for LLMs to understand specific tasks and grasping nuances. In this paper, we propose a simple yet effective method to contextualize a task toward a specific LLM, by (1) observing how a given LLM describes (all or a part of) target datasets, i.e., open-ended zero-shot inference, and (2) aggregating the open-ended inference results by the LLM, and (3) finally incorporate the aggregated meta-information for the actual task. We show the effectiveness of this approach in text clustering tasks, and also highlight the importance of the contextualization through examples of the above procedure.

1 Introduction

Large language models (LLMs) have demonstrated impressive performances on various downstream tasks (Devlin et al., 2019; Radford et al., 2019). These also exhibit the ability to understand the context of input text, known as in-context learning (ICL) (Brown et al., 2020; OpenAI, 2023). ICL allows to leverage LLMs for specific tasks without further extensive training. However, effective use of ICL hinges on well-designed prompts.

While prompts with few-shot examples can demonstrably improve performance, they can easily overfit a model to the examples (Perez et al. (2021); Mizrahi et al. (2023); *inter alia*). This led to a growing interest in zero-shot learning, which reduces the need for intricate few-shot selection. Recent advancements in zero-shot learning involve incorporating more sophisticated use of prompt structures, such as Chain-of-Thought (Wei et al., 2022), zero-shot reasoning (Kojima et al., 2022), and models trained to follow instructions (Ouyang et al., 2022; Chung et al., 2024).

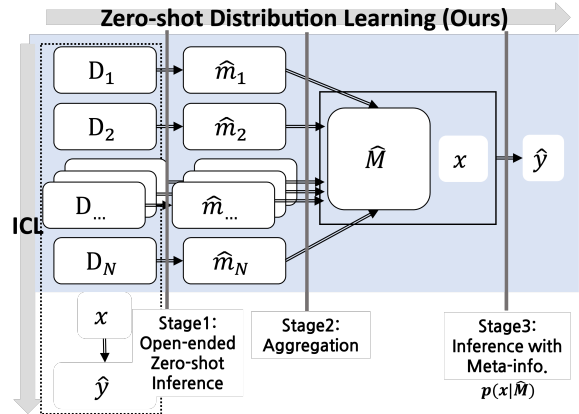


Figure 1: Illustration of proposed method ZeroDL. While in-context learning (ICL) relies on examples tailored to specific tasks, ZeroDL aggregates all the outputs from these zero-shot inferences, resulting in meta-level information. This meta-level information is then used by the LLM to generate its final predictions.

Motivated by the core principle of ICL—providing task and data contexts *within* prompts—we propose an approach to construct more effective zero-shot prompts by understanding how LLMs describe datasets *across* prompting outputs. As illustrated in Figure 1, the method, called **Zero-shot Distribution Learning (ZeroDL)**, first aims to learn data distributions through zero-shot inferences. The method comprises two key components: (1) open-ended zero-shot inference, and (2) output aggregation. A zero-shot prompt is then constructed with the generated meta information, and used for actual task. This method takes advantage of the self-generated frame of LLMs to successfully carry out a given task.

We exemplify the effectiveness of ZeroDL with text clustering tasks, where we assume an absence of ground-truth class labels. Unlike traditional clustering algorithms such as K-Means representing groups based on distance metrics in embedding space, our method works in a text-to-text format. Hence, our approach allows clustering with perspectives and/or specific context. For instance, the

sentences "I love this movie" and "I hate this movie" express opposite sentiment but belong to the same topic cluster of movie reviews. Refer to Table 8 in the Appendix for potential risk of absence of the perspectives.

Our contributions in this paper are as follows:

- We propose a novel approach called **Zero-shot Distribution Learning** that leverages zero-shot inferences to generate meta-level information about the data distribution by aggregating open-ended inference outputs from datasets.
- ZeroDL enables models to perform text-based clustering, empowering them to handle data with specific context, which offers advantages over embedding-based clustering methods.
- Our experiments show that ZeroDL is competitive against embedding-based clustering methods on several datasets. ZeroDL even achieves better performances than models with ground-truth class labels in some cases.

2 Related Works

While there have been a few attempts to leverage LLMs for clustering tasks, majority of existing approaches rely on traditional methods like K-Means clustering based on LLM-generated embeddings (Petukhova et al., 2024; BehnamGhader et al., 2024). In contrast, our approach leverages text-level prompting, which injects specific viewpoints into LLMs, enabling it to perform more targeted and contextualized clustering.

The importance of appropriate ground-truth labels extends beyond clustering and permeates ICL. While Min et al. (2022) observed cases where the input-label correspondence does not play significant roles, Yoo et al. (2022) argued that the impact heavily depends on target tasks and experiment settings. Compared with the few-shot settings these works assumed, our method is with zero-shot for clustering. We believe that this work would serve as a reference that supports the appropriate class information is crucial for the performances, as we develop ZeroDL to leverage the power of generative LLMs to propose effective class labels, i.e., adjusting a task from LLMs' perspective.

3 Proposed Method: ZeroDL

The framework is illustrated in Figure 1.

Stage 1: Open-Ended Inference. We begin by designing a prompt for zero-shot classification. This prompt intentionally avoids any

detailed information about the task, minimizing the risk of overfitting. Based on the idea, we opt for the simplest prompt format:

```
Text: [text]\n\nClassify the text to the
best [type_of_task].
```

where [text] is the input data and [type_of_task] provides view of the task. In the experiment, it can be either sentiment or topic. Leveraging this prompt, we perform model inferences on the input data (D). This process generates open-ended class predictions, denoted as $\hat{m}_1 \cdots \hat{m}_N$.

Stage 2: Aggregation. The open-ended predictions lack constraints, leading to potentially inconsistent output formats. For instance, the model might predict "positive" and "non-positive" classes, while the ground-truth is "positive" and "negative". The predictions could even be entire sentences. To address the inconsistencies in the open-ended predictions, we employ aggregation strategy.

Before the aggregation, we count the frequency of each predictions and sort it. After that, the predictions which frequency is only 1 are dropped in order to filter out extraordinary predictions and save computation. Next, we iteratively construct subsets of the predictions by removing the least frequent predictions one by one. This process results in a list of subsets, denoted as $[\{ \hat{m}_1, \hat{m}_2, \cdots, \hat{m}_U \}, \{ \hat{m}_1, \hat{m}_2, \cdots, \hat{m}_{U-1} \}, \cdots, \{ \hat{m}_1 \}]$ where U denotes the number of remained predictions. We input all the subset to provide more weights to the frequently occurred predictions. The prompt for aggregation is as follows:

```
[type_of_task] List:
- \hat{m}_1\n- \hat{m}_2\n- ... \n\hat{m}_U # prompt (sub)set
\n\nAggregate the [type_of_task] List into
[NUM_CLUSTER_CLASS] classes.
```

where [NUM_CLUSTER_CLASS] is pre-defined number of classes to cluster.

While the prompt instructs the LLM to predict a specific number of classes ([NUM_CLUSTER_CLASS]), the model outputs often still lack coherence, especially in generating exact number of classes. To address this, we select the LLM outputs where the number of aggregated classes matches the pre-defined number of cluster classes. We then use the most frequent class pairs aggregated from prompt (sub)sets as meta-information \hat{M} . This information represents the model's understanding of potential views over the entire data.

Stage 3: Leveraging Meta-Information for Prediction. We incorporate the aggregated meta-

Model	Method	IMDB	SST-2	SST-5	YRev	AGNew	DBp(F)	DBp(B)	Yah(F)	Yah(B)	Macro	Micro
TF-IDF	KMeans	52.1	53.0	26.2	35.2	43.8	55.9	62.8	44.7	46.5	46.7	48.8
mistral -7b-inst	Gold(C-T)	87.5	77.0	41.8	50.8	60.7	74.2	85.2	40.8	62.5	64.5	68.1
	Gold(T-C)	91.7	82.5	43.3	51.8	82.7	84.1	82.7	50.9	73.8	71.5	72.7
	ZeroDL(C-T)	85.3	82.4	43.4	51.6	75.4	64.0	73.3	47.2	69.4	65.8	65.1
	ZeroDL(T-C)	<u>92.2</u>	79.4	36.0	48.2	81.0	62.2	78.4	51.8	73.4	67.0	66.4
	llm2vec+KMeans	62.1	55.2	30.3	56.0	84.4	96.1	70.8	48.0	46.2	61.0	67.5
Llama-3 -8b-inst	Gold(C-T)	66.5	73.7	42.1	48.9	55.9	71.3	75.5	35.2	54.7	58.2	61.1
	Gold(T-C)	93.2	84.2	46.0	53.5	70.2	74.6	79.2	49.3	75.4	69.5	70.3
	ZeroDL(C-T)	89.8	74.2	42.6	37.6	69.0	65.9	52.5	46.8	48.2	58.5	56.4
	ZeroDL(T-C)	66.7	79.1	41.1	49.2	<u>80.4</u>	73.2	63.7	49.1	48.6	61.2	60.8
	llm2vec+KMeans	53.2	53.2	29.6	54.8	85.1	94.5	72.7	47.4	50.4	60.1	66.2
Llama-3 -70b-inst	Gold(C-T)	94.4	88.9	53.0	56.6	83.2	94.8	95.8	65.3	82.4	79.4	80.7
	Gold(T-C)	95.2	89.4	52.3	58.2	81.1	95.8	91.0	63.8	82.6	78.8	80.3
	ZeroDL(C-T)	94.3	90.0	42.7	47.7	83.3	55.3	35.4	51.2	82.0	64.7	57.5
	ZeroDL(T-C)	95.0	89.4	41.5	49.3	<u>72.6</u>	47.0	<u>36.1</u>	<u>53.2</u>	81.4	62.8	56.2

Table 1: The performance of LLMs for text clustering. C-T denotes the prompt order with class information then input text. T-C is the reversed. Bold means the best accuracy and underline the outperforming cases than ground-truth (i.e., Gold) class label setting. Note that llm2vec for Llama3-70b is not publicly available at the moment.

information (\hat{M}) into the classification prompt¹ to enhance the model’s prediction capabilities:

```
Text: [text]\n\nClass description:
- Class 0:  $\hat{M}_0$ 
- Class 1:  $\hat{M}_1$ 
- Class ...:  $\hat{M}_c$ 
- Class C:  $\hat{M}_c$ 
\n\nBased on the class description, classify
the text to the best [type_of_task] class.
```

Within the prompt, we include placeholders denoted as - Class n:. These placeholders serve as templates for the LLM to parse.

By incorporating the meta-information (\hat{M}) into the prompt, we enable the LLM to perform conditioned classification within the clustering context. The generated meta-information might not directly correspond to the ground-truth classes, potentially leading to variations in performance.

4 Experiments

Models. Our experiments are conducted on mistral-7b-instruct-v0.2 (Jiang et al., 2023) due to its impressive performance even with a relatively small parameter size compared with other LLMs. We additionally report results obtained with the Llama-3 family models (Meta, 2024) from HuggingFace (Wolf et al., 2020) ran with vLLM library (Kwon et al., 2023). Greedy decoding is employed for generation² and the final prediction is done with guided_choice hyperparameters. We follow the official instruction formatting guidelines.

¹The order of Text: and Class description: can be reversed.

²Note that the current version of vLLM might exhibit non-deterministic behavior.

The results are averaged from 5 runs. We also tested llm2vec (BehnamGhader et al., 2024) with KMeans approach where applicable.

Datasets and Evaluation. We use 6 datasets: IMDB (Maas et al., 2011), SST-2, SST-5 (Socher et al., 2013), YelpReivews (Zhang et al., 2015) for sentiment classification and AGNews, DBpedia (Lehmann et al., 2015), YahooAnswers (Chang et al., 2008) for topic classification. Further information is presented in Table 4 of the Appendix.

We evaluate the model performance using accuracy. To determine the predicted class, we leverage the class n: anchor tokens within the LLM outputs. LLMs might not directly predict the same classes as the ground-truth labels, for example, Class 0 means Positive in the prediction while Negative is labeled as Class 0 in the ground-truth. We thus test all possible mapping combinations and report the best performed mapping. However, this results in a total of factorial of C potential mappings, so we split datasets with more than 7 classes (i.e., DBpedia and YahooAnswers³) into 2 subsets Front (F) and Back (B) to avoid out-of-memory.

5 Results

Table 1 reports the performance of our method. Interestingly, ZeroDL achieves even better performance than models provided with ground-truth (i.e., Gold) class labels on several datasets. This suggests that ZeroDL might uncover richer or more nuanced class structures within the data compared

³After removing the 3 smallest size of classes: CarsAndTransportation, SocialScience, Sports

Data	Method	ClassLabels
SST-5	ZeroDL	<p>Negative Sentiment: This class includes all the sentiment labels that express a negative or sad emotion towards the movie or documentary. Examples include (...)</p> <p>Ambiguous Sentiment: This class includes all the sentiment labels that do not clearly express a positive or negative emotion towards the movie or documentary. Examples include (...)</p> <p>Mixed Sentiment: This class includes all the sentiment labels that express a mixed sentiment towards the movie or documentary. Examples include (...)</p> <p>Positive Sentiment: This class includes all the sentiment labels that express a positive emotion towards the movie or documentary. Examples include (...)</p>
	Gold	Very Negative, Negative, Neutral, Positive, Very Positive
AGNews	ZeroDL	<p>International Relations and Politics: This class includes topics related to international relations, diplomacy, Middle East politics, terrorism, nuclear politics, and elections.</p> <p>Sports and Entertainment: This class includes topics related to sports, tennis, golf, basketball, baseball, cricket, and entertainment.</p> <p>Business and Economy: This class includes topics related to the economy, finance, stocks, mergers and acquisitions, retail, real estate, and labor markets.</p> <p>Technology and Science: This class includes topics related to technology, computing, internet, cybersecurity, space exploration, and science.</p>
	Gold	World, Sports, Business, Sci/Tech

Table 2: The example of generated class labels in 5-class sentiment classification (SST-5), and topic classification (AGNews). ZeroDL can generate alternative class labels and its description. Additional examples are in Table 7.

	S2(C-T)	S2(T-C)	S5(C-T)	S5(T-C)
RandToken	51.6	59.5	28.6	28.6
AutoL(Best)	86.8	84.9	41.8	38.5
AutoL(Worst)	82.5	80.7	41.7	38.6
Gold	77.0	82.5	41.8	43.3
ZeroDL(Mistral)	82.4	79.4	43.4	36.0
ZeroDL(GPT3.5)	73.3	79.1	42.8	42.1

Table 3: The performance with various class labels. The best AutoL in SST-2 are [Wonderful, Bad] and the worst labels are [Irresistible, Pathetic]. In SST-5, [Terrible, Better, Good, Extraordinary, Unforgettable] are the best while [Awful, Better, Hilarious, Perfect, Wonderful] are the worst. GPT3.5 with ZeroDL generates only 4 classes in SST-5.

with the pre-defined labels. Our method demonstrates comparable performance to K-Means clustering that utilizes LLM embeddings⁴, outperforming on tasks with relatively smaller datasets. ZeroDL achieves this by flexible zero-shot prompting. Table 8 in the Appendix shows the importance of the constraints utilized by ZeroDL with detailed examples.

Table 3 investigates the significance of class labels in text clustering tasks. We explore the performance of mistral-7b-instruct-v0.2 using class labels suggested by AutoL (Gao et al., 2021) designed for prompt-based model fine-tuning. These labels represent a curated selection. We also investigate the class labels generated by gpt-3.5-turbo. The results demonstrate that clustering performance is generally higher when using manually selected labels compared with the original dataset labels. This suggests that carefully chosen labels can significantly improve clustering outcomes. In the context, ZeroDL performs particularly well on SST-5, im-

⁴However, llm2vec involves additional training steps.

plying that the critical role of class labels in text clustering and the potential of ZeroDL to capitalize on informative class labels automatically.

Table 2 shows the examples of class labels generated by ZeroDL. Notably, these labels provide richer explanations for the classifications compared with the original ground-truth labels⁵. Table 6 in the Appendix delves deeper into the data points classified into newly emerged classes, such as "Ambiguous Sentiment" and "Mixed Sentiment," which ZeroDL might uncover based on the data.

ZeroDL involves a trade-off in computational cost. To investigate this aspect, we measure the performance changes based on the amount of input data used (see Table 5 in the Appendix). The results indicate that using only 10% of the data yields plausible performance but it leads to inconsistency in the model performances, considering increased standard deviation.

6 Conclusion

We introduce ZeroDL, a novel approach to contextualize LLM tasks for a given LLM. ZeroDL employs open-ended zero-shot inference and output aggregation to learn data distributions. We demonstrate its effectiveness, showing competitive performances against embedding-based clustering methods and superior performance than ground-truth labels in some cases. Beyond its clustering capabilities, ZeroDL offers the generation of informative class labels that provide deeper insights into LLMs.

⁵The generation of class description might depend on datasets and LLMs; Llama-3 usually does not make it.

7 Limitations

Prompt Dependency and Heuristics. ZeroDL relies on carefully designed prompts to guide LLMs towards effective clustering. While our focus was on using simple and intuitive prompts, prompt selection can potentially influence the model’s behavior and introduce biases. Future work could explore more sophisticated prompt engineering techniques to further enhance ZeroDL’s performance.

Experiments with Diverse LLMs and Prompts. While we acknowledge the computational limitations (and price) of ZeroDL, investigating its behavior with a wider range of LLMs (including commercial models like GPT-4, Claude, and Gemini) and prompt templates could provide valuable insights into the generalizability and robustness of the approach.

Lower than State-of-the-Art Performance. Achieving state-of-the-art performance is not the sole focus of ZeroDL but it offers a valuable framework in understanding data distributions with zero-shot inference via LLMs. By addressing the limitations mentioned above, ZeroDL has the potential to become a powerful and versatile tool not only for text clustering but data exploration.

Expensive Computational Cost in Inferences. Although ZeroDL have an alternative approach to reduce computational burden through data sampling, effectively sampling data to generate appropriate class labels remains a challenge. The technique within the framework presents a valuable future direction.

References

- Parishad BehnamGhader, Vaibhav Adlakha, Marius Mosbach, Dzmitry Bahdanau, Nicolas Chapados, and Siva Reddy. 2024. Llm2vec: Large language models are secretly powerful text encoders. *arXiv preprint arXiv:2404.05961*.
- Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. 2020. Language models are few-shot learners. *Advances in neural information processing systems*, 33:1877–1901.
- Ming-Wei Chang, Lev-Arie Ratinov, Dan Roth, and Vivek Srikumar. 2008. Importance of semantic representation: Dataless classification. In *AAAI*, volume 2, pages 830–835.
- Hyung Won Chung, Le Hou, Shayne Longpre, Barret Zoph, Yi Tay, William Fedus, Yunxuan Li, Xuezhi Wang, Mostafa Dehghani, Siddhartha Brahma, et al. 2024. Scaling instruction-finetuned language models. *Journal of Machine Learning Research*, 25(70):1–53.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. **BERT: Pre-training of deep bidirectional transformers for language understanding.** In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 4171–4186, Minneapolis, Minnesota. Association for Computational Linguistics.
- Yanjun Gao, Ting-Hao Huang, and Rebecca J. Passonneau. 2021. **Learning clause representation from dependency-anchor graph for connective prediction.** In *Proceedings of the Fifteenth Workshop on Graph-Based Methods for Natural Language Processing (TextGraphs-15)*, pages 54–66, Mexico City, Mexico. Association for Computational Linguistics.
- AQ Jiang, A Sablayrolles, A Mensch, C Bamford, DS Chaplot, D de las Casas, F Bressand, G Lengyel, G Lample, L Saulnier, et al. 2023. Mistral 7b (2023). *arXiv preprint arXiv:2310.06825*.
- Takeshi Kojima, Shixiang Shane Gu, Machel Reid, Yutaka Matsuo, and Yusuke Iwasawa. 2022. Large language models are zero-shot reasoners. *Advances in neural information processing systems*, 35:22199–22213.
- Woosuk Kwon, Zhuohan Li, Siyuan Zhuang, Ying Sheng, Lianmin Zheng, Cody Hao Yu, Joseph E. Gonzalez, Hao Zhang, and Ion Stoica. 2023. Efficient memory management for large language model serving with pagedattention. In *Proceedings of the ACM SIGOPS 29th Symposium on Operating Systems Principles*.
- Jens Lehmann, Robert Isele, Max Jakob, Anja Jentzsch, Dimitris Kontokostas, Pablo N Mendes, Sebastian Hellmann, Mohamed Morsey, Patrick Van Kleef, Sören Auer, et al. 2015. Dbpedia—a large-scale, multilingual knowledge base extracted from wikipedia. *Semantic Web*, 6(2):167–195.
- Andrew L. Maas, Raymond E. Daly, Peter T. Pham, Dan Huang, Andrew Y. Ng, and Christopher Potts. 2011. **Learning word vectors for sentiment analysis.** In *Proceedings of the 49th Annual Meeting of the Association for Computational Linguistics: Human Language Technologies*, pages 142–150, Portland, Oregon, USA. Association for Computational Linguistics.
- Meta. 2024. Introducing meta llama 3: The most capable openly available llm to date. <https://ai.meta.com/blog/meta-llama-3/>.
- Sewon Min, Xinxi Lyu, Ari Holtzman, Mikel Artetxe, Mike Lewis, Hannaneh Hajishirzi, and Luke Zettlemoyer. 2022. **Rethinking the role of demonstrations:**

- What makes in-context learning work? In *Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing*, pages 11048–11064, Abu Dhabi, United Arab Emirates. Association for Computational Linguistics.
- Moran Mizrahi, Guy Kaplan, Dan Malkin, Rotem Dror, Dafna Shahaf, and Gabriel Stanovsky. 2023. State of what art? a call for multi-prompt llm evaluation. *arXiv preprint arXiv:2401.00595*.
- OpenAI. 2023. [Gpt-4 technical report](#).
- Long Ouyang, Jeffrey Wu, Xu Jiang, Diogo Almeida, Carroll Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, et al. 2022. Training language models to follow instructions with human feedback. *Advances in neural information processing systems*, 35:27730–27744.
- Ethan Perez, Douwe Kiela, and Kyunghyun Cho. 2021. True few-shot learning with language models. *Advances in neural information processing systems*, 34:11054–11070.
- Alina Petukhova, Joao P Matos-Carvalho, and Nuno Fachada. 2024. Text clustering with llm embeddings. *arXiv preprint arXiv:2403.15112*.
- Alec Radford, Jeffrey Wu, Rewon Child, David Luan, Dario Amodei, Ilya Sutskever, et al. 2019. Language models are unsupervised multitask learners. *OpenAI blog*, 1(8):9.
- Richard Socher, Alex Perelygin, Jean Wu, Jason Chuang, Christopher D Manning, Andrew Y Ng, and Christopher Potts. 2013. Recursive deep models for semantic compositionality over a sentiment treebank. In *Proceedings of the 2013 conference on empirical methods in natural language processing*, pages 1631–1642.
- Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Fei Xia, Ed Chi, Quoc V Le, Denny Zhou, et al. 2022. Chain-of-thought prompting elicits reasoning in large language models. *Advances in neural information processing systems*, 35:24824–24837.
- Thomas Wolf, Lysandre Debut, Victor Sanh, Julien Chaumond, Clement Delangue, Anthony Moi, Pierric Cistac, Tim Rault, Remi Louf, Morgan Funtowicz, Joe Davison, Sam Shleifer, Patrick von Platen, Clara Ma, Yacine Jernite, Julien Plu, Canwen Xu, Teven Le Scao, Sylvain Gugger, Mariama Drame, Quentin Lhoest, and Alexander Rush. 2020. [Transformers: State-of-the-art natural language processing](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*, pages 38–45, Online. Association for Computational Linguistics.
- Kang Min Yoo, Junyeob Kim, Hyuhng Joon Kim, Hyunsoo Cho, Hwiyeol Jo, Sang-Woo Lee, Sang-goo Lee, and Taeuk Kim. 2022. [Ground-truth labels matter: A deeper look into input-label demonstrations](#). In *Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing*, pages 2422–2437, Abu Dhabi, United Arab Emirates. Association for Computational Linguistics.
- Xiang Zhang, Junbo Zhao, and Yann LeCun. 2015. Character-level convolutional networks for text classification. In *Advances in neural information processing systems*, pages 649–657.

A Appendix

	#Train	#Valid	#Test	#Class	Pre-defined ClassTitle
IMDB	25,000	3,750	25,000	2	Negative, Positive
SST-2	9,645	1,101	2,210	2	Negative, Positive
SST-5	9,645	1,101	2,210	5	Very Negative, Negative, Neutral, Positive, Very Positive
YelpReviews	650,000	97,500	49,999	5	Very Negative, Negative, Neutral, Positive, Very Positive
AGNews	120,000	18,000	7,600	4	World, Sports, Business, Sci/Tech
DBpedia(F)	280,000	41,939	35,000	7	Company, EducationalInstitution, Artist, Athlete, OfficeHolder, MeanOfTransportation, Building
DBpedia(B)	280,000	42,213	35,000	7	NaturalPlace, Village, Animal, Plant, Album, Film, WrittenWork
Yahoo(F)	59,518	8,879	10,489	7	ArtsAndHumanities, BeautyAndStyle, BusinessAndFinance, ComputersAndInternet, ConsumerElectronics, EducationAndReference, EntertainmentAndMusic
Yahoo(B)	59,493	8,973	10,514	7	FoodAndDrink, GamesAndRecreation, Health, HomeAndGarden, Pets, PregnancyAndParenting, SocietyAndCulture

Table 4: Data information used in the experiments.

[C-T]	IMDB	SST-2	SST-5	YRev	AGNew	DBp(F)	DBp(L)	Yah(F)	Yah(L)	Macro	Micro
All	85.3	82.4	43.4	51.6	75.4	64.0	73.3	47.2	69.4	65.8	65.1
(std)	3.40	3.67	2.93	1.35	2.23	3.17	3.82	1.02	2.65		
1%	75.2	70.7	38.3	51.1	-	48.9	37.9	23.7	17.2	45.4	47.8
(std)	23.01	13.47	6.17	1.30	-	10.51	22.91	1.82	2.50		
5%	92.9	82.4	45.8	52.1	-	59.2	58.5	35.2	51.7	59.7	60.1
(std)	0.30	2.34	2.78	1.64	-	6.77	7.37	9.03	14.15		
10%	91.9	82.0	35.0	50.3	-	67.2	68.6	37.3	57.1	61.2	63.5
(std)	0.82	3.17	4.45	3.47	-	6.35	3.27	2.47	6.24		
[T-C]	IMDB	SST-2	SST-5	YRev	AGNew	DBp(F)	DBp(L)	Yah(F)	Yah(L)	Macro	Micro
All	92.2	79.4	36.0	48.2	81.0	62.2	78.4	51.8	73.4	67.0	66.4
(std)	2.34	5.12	3.84	3.22	1.81	4.65	7.14	1.07	1.91		
1%	76.1	78.3	39.4	50.0	-	49.3	34.3	21.0	17.2	45.7	46.9
(std)	23.88	6.01	5.17	2.48	-	13.03	19.56	3.67	2.50		
5%	93.3	81.0	41.7	48.4	-	55.3	67.9	56.3	55.7	62.5	61.7
(std)	0.93	2.59	4.09	4.98	-	1.84	4.28	6.09	12.68		
10%	92.7	74.2	36.9	49.3	-	63.2	75.8	41.8	64.6	62.3	64.6
(std)	1.77	13.36	6.03	5.98	-	6.53	6.57	4.96	3.44		

Table 5: ZeroDL performances according to the number of training data. ZeroDL fails to find exact number of clusters in AGNews dataset.

Predicted	Gold	Example
Mixed Sentiment: (...)	VeryNeg	It 's hard not to feel you 've just watched a feature-length video game with some really heavy back story .
	Neg	But it pays a price for its intricate intellectual gamesmanship .
	Neutral	The appearance of Treebeard and Gollum 's expanded role will either have you loving what you 're seeing, or rolling your eyes .
	Pos	An utterly compelling ' who wrote it ' in which the reputation of the most famous author who ever lived comes into question .
	VeryPos	... a roller-coaster ride of a movie
Ambiguous Sentiment: (...)	VeryNeg	It 's difficult to say whether The Tuxedo is more boring or embarrassing - I 'm prepared to call it a draw .
	Neg	Like most Bond outings in recent years , some of the stunts are so outlandish that they border on being cartoonlike .
	Neutral	Effective but too-tepid biopic
	Pos	But he somehow pulls it off .
	VeryPos	Emerges as something rare , an issue movie that 's so honest and keenly observed that it does n't feel like one .

Table 6: Example of data predicted to newly generated classes in SST-5. Randomly selected.

Data	Method	ClassLabels
IMDB	ZeroDL	Negative Sentiment: The list also includes various expressions of negative sentiment towards movies, films, shows, and documentaries. Some examples include (...) Positive Sentiment: The list includes various expressions of positive sentiment towards movies, films, shows, and documentaries. Some examples include (...)
	Gold	Negative, Positive
SST-2	ZeroDL	Positive Sentiment: All the sentiment labels that express a positive sentiment towards the movie, film, documentary, or subject. For example, (...) Negative or Neutral Sentiment: All the sentiment labels that do not express a positive sentiment towards the movie, film, documentary, or subject. For example, (...)
	Gold	Negative, Positive
Yelp Rev	ZeroDL	Negative Sentiment: This class includes sentences expressing negative sentiments towards a place, food, or experience. Examples include (...) Very Positive Sentiment: This class includes sentences expressing highly positive sentiments towards a place, food, or experience. Examples include (...) Mixed Sentiment: This class includes sentences expressing mixed sentiments towards a place, food, or experience. Examples include (...) Neutral Sentiment: This class includes sentences expressing neutral sentiments towards a place, food, or experience. Examples include (...) Positive Sentiment: This class includes sentences expressing positive sentiments towards a place, food, or experience. Examples include (...)
	Gold	Very Negative, Negative, Neutral, Positive, Very Positive
DBp (F)	ZeroDL	Aviation and Transportation: This class includes topics related to aviation, aerospace technology, military history, maritime history, and transportation. Business and Economy: This class includes topics related to business, finance, industries, companies, and economics. Sports and Biographies: This class includes topics related to sports, athletes, and their biographies. Politics and Government: This class includes topics related to politics, government, elections, and specific political parties. Education: This class includes topics related to education, universities, schools, and specific educational institutions. History and Architecture: This class includes topics related to history, architecture, historic sites, castles, and landmarks. Art and Entertainment: This class includes topics related to art, music, entertainment, and specific artists or record labels.
	Gold	Company, EducationalInstitution, Artist, Athlete, OfficeHolder, MeanOfTransportation, Building
DBp (B)	ZeroDL	Science and Technology: This class includes topics related to paleontology, geology, volcanology, space exploration, and academic journals. Music and Entertainment: This class includes topics related to music, album releases, jazz music, heavy metal music, hip hop music, and entertainment. Geography and Hydrology: This class includes topics related to geography, hydrology, rivers, water bodies, and water resources. Botany and Plant Sciences: This class includes topics related to botany, horticulture, plant taxonomy, plant conservation, and endangered species. Literature and Books: This class includes topics related to literature, novels, fiction, mystery and crime fiction, and academic publications. Zoology and Entomology: This class includes topics related to zoology, entomology, moths, butterflies, fish species, and arachnids. Film and Television: This class includes topics related to film, cinema, movies, movie reviews, Bollywood, and television.
	Gold	NaturalPlace, Village, Animal, Plant, Album, Film, WrittenWork
Yah (F)	ZeroDL	Personal Finance and Economics: Topics related to personal finance, credit scores, debt management, taxes, and economics. Health and Wellness: Topics related to health, medicine, fitness, nutrition, and wellness. Pop Culture and Entertainment: Topics related to music, movies, TV shows, books, art, and entertainment. Technology and Computing: Topics related to computers, technology, software, internet, telecommunications, and mobile phones. Miscellaneous: Topics that do not fit neatly into any of the above categories, such as philosophy, religion, science, and humor. Fashion and Beauty: Topics related to fashion, clothing, makeup, cosmetics, hair care, and beauty. Education and Careers: Topics related to education, academic programs, scholarships, student loans, careers, and employment.
	Gold	ArtsAndHumanities, BeautyAndStyle, BusinessAndFinance, ComputersAndInternet, ConsumerElectronics, EducationAndReference, EntertainmentAndMusic
Yah (B)	ZeroDL	Food and Cooking: This class includes topics related to various cuisines, recipes, food items, and cooking techniques. Home Improvement and DIY: This class includes topics related to home repair, renovation, decorating, gardening, and DIY projects. Miscellaneous: This class includes topics that do not fit neatly into any of the above categories, such as politics, education, art, and entertainment. Technology and Gaming: This class includes topics related to video games, computer hardware, software, technology, and internet culture. Health and Wellness: This class includes topics related to physical and mental health, nutrition, dieting, weight loss, fitness, exercise, and medical conditions. Animals and Pets: This class includes topics related to various animals, pet care, animal rights, and wildlife. Religion and Philosophy: This class includes topics related to various religions, theology, philosophy, and spirituality.
	Gold	FoodAndDrink, GamesAndRecreation, Health, HomeAndGarden, Pets, PregnancyAndParenting, SocietyAndCulture

Table 7: Additional examples of generated class labels. Class title is marked as bold and its description is colored as gray.

Data	TaskType	Generated Class Labels (Descriptions are omitted)
IMDB	sentiment	Negative, Very Positive, Highly Negative, Mixed, Neutral-Positive, Positive, Highly Positive, Neutral-Negative, Extremely Negative, Neutral; [Total 10]
	topic	Film and Television Influence on Business, Film and Television Influence on Politics, Film and Television Production Companies, Film and Television Influence on Art, Film and Television Productions, Film Analysis or Review, Film and Television Influence on Society and Culture, Film and Television Influence on Technology, Film and Television Recommendations, Film and Television Awards, Film and Television, Film and Television Genres, Film and Television Influence on Society, Film and Television Marketing, Movie Reviews or Film Criticism, Film and Television Critics, Film and Television Technologies, Film and Television Festivals, Film or Media Criticism, Film and Television History, Film and Television Technology Trends, Film and Television Education, Film and Television Influence on Entertainment, Film and Television Influence on Education, Personal Opinion or Review, Film and Television Industry, Film and Television Distribution; [Total 27]
SST	sentiment	The text expresses a negative sentiment towards the subject being described, The text expresses a negative or sad sentiment towards the film, The text expresses a negative or sad sentiment, The text has a negative tone, The text expresses a negative or cautionary sentiment, The text expresses a negative or slightly negative sentiment, Negative Sentiment, The text expresses a negative or slightly negative sentiment towards the film, The text expresses a negative sentiment, The text expresses a negative sentiment towards the movie being described, The text has a negative sentiment; [Total 11]
	topic	Literature and Writing, Media and Entertainment, Mental Health and Psychology, Travel and Adventure, Film and Television, Family and Relationships, Science and Technology, Food and Cooking, Performing Arts, Sports, Education and Learning, Business and Finance, Greetings and Open-Ended Texts, Entertainment; [Total 14]
Yelp Rev	sentiment	Positive Sentiment, Highly Negative Sentiment, Neutral to Positive Sentiment, Negative Sentiment, Mixed Sentiment, Neutral Sentiment, Very Positive Sentiment, Neutral to Negative Sentiment; [Total: 8]
	topic	Automotive, Environment or Nature, Legal or Law, Customer Service or Business, Nightlife or Entertainment, Education or Training, Sports or Fitness, Discrimination or Racism, Religion or Spirituality, Technology or Gadgets, Health or Medical, Travel or Tourism, Education or Learning, Beauty or Personal Care, Customer Reviews or Testimonials, Politics or Government, Food or Cooking, Food or Beverage, Shopping or Retail, Home Improvement or Construction, Science or Technology, Real Estate or Housing, Food Safety or Food Poisoning, Entertainment or Leisure, Arts or Culture, Personal Care or Beauty, Business or Economy, Personal Experiences, Dining Experience or Food Review; [Total 29]
AG News	sentiment	Negative: 12 expressions that contain negative sentiment, Positive: 25 expressions that contain positive sentiment, Negative: 12, Sentiment not clear: 3, Mixed: 11 expressions that contain a mix of positive and negative sentiment, Positive: 25, Neutral: 33, Neutral: 33 expressions that do not contain any clear positive or negative sentiment, Sentiment not clear: 3 expressions that do not provide enough context to determine a clear sentiment, Mixed: 11; [Total 10]
	topic	Same Result with Table 2
DBp (F)	sentiment	Neutral, Positive, Negative; [Total 3]
	topic	Baseball, Aviation, Sports and Biographies, History, Aircraft, Soccer or Football, People and Biographies, Ice Hockey, Education, American Football, General, Aircraft Design, Music or Entertainment, Higher Education or Universities, Healthcare or Hospitals, Football or Soccer; [Total 15]
DBp (B)	sentiment	Ambiguous, Neutral, Positive, Romantic, Negative, Mixed, Objective; [Total 6]
	topic	Botany or Biology (specifically, Plant Science or Taxonomy), Botany or Endangered Species or Conservation Biology, Botany or Horticulture, Botany or Algae, Botany or Brazilian Flora, Botany or Cacti, Botany or Mexican Flora, Botany or Tillandsia species, Botany or Orchids, Botany or Aquatic Plants, Botany or Plant Science, Botany or Tropical Plants, Botany or Hawaiian Flora, Botany or Plant Taxonomy, Botany or Palm Trees [Total 15]
Yah (F)	sentiment	Positive, Neutral, Mixed, Informational, Negative [Total 5]
	topic	Miscellaneous (for topics that do not fit neatly into any specific category), Education and Careers, Makeup and Beauty, Gaming and Technology, Fashion and Clothing, Telecommunications, Housing and Real Estate, Music and Entertainment, Pop Culture and Entertainment, Personal Finance and Credit Scores; [Total 10]
Yah (B)	sentiment	Neutral; [Total 1]
	topic	Health and Medical Concerns, Pop Culture and Entertainment, Mental Health and Psychology, Literature and Writing, Business and Finance, Food and Cooking, Video Games and Technology, Art and Creativity, Philosophy and Ethics, Education and Learning, Humor and Satire, Sports and Fitness, Religion and Theology, Home Improvement and DIY, Science and Technology, Travel and Adventure, Pets and Animals, Politics and Society, Pregnancy and Reproductive Health; [Total 19]

Table 8: The examples of generated class labels when no constraints are given; we experiment with wrong task type and unlimited the number of clusters.