

SQLFixAgent: Towards Semantic-Accurate SQL Generation via Multi-Agent Collaboration

Jipeng Cen¹, Jiaxin Liu², Zhixu Li³, Jingjing Wang^{1*}

¹Natural Language Processing Lab, School of Computer Science & Technology, Soochow University

²iFLYTEK Research (Suzhou), China

³Shanghai Key Laboratory of Data Science, School of Computer Science, Fudan University
jpcen@stu.suda.edu.cn, jxliu6@iflytek.com, zhixuli@fudan.edu.cn, djingwang@suda.edu.cn

Abstract

While fine-tuned large language models (LLMs) excel in generating grammatically valid SQL in Text-to-SQL parsing, they often struggle to ensure semantic accuracy in queries, leading to user confusion and diminished system usability. To tackle this challenge, we introduce SQLFixAgent, an innovative multi-agent collaborative framework designed for detecting and repairing erroneous SQL. Our framework comprises a core agent, SQLRefiner, alongside two auxiliary agents: SQLReviewer and QueryCrafter. The SQLReviewer agent employs the rubber duck debugging method to identify potential semantic mismatches between SQL statement and user query. If the error is detected, the QueryCrafter agent generates multiple SQL statements as candidate repairs using a fine-tuned SQLTool. Subsequently, leveraging similar repair retrieval and failure memory reflexion, the SQLRefiner agent selects the most fitting SQL statement from the candidates as the final repair. We evaluated our proposed framework on five Text-to-SQL benchmarks. The experimental results show that our method consistently enhances the performance of the baseline model, specifically achieving an execution accuracy improvement of over 3% on the Bird benchmark. Our framework also has a higher token efficiency compared to other advanced methods, making it more competitive.

Introduction

Traditional data querying methods require users to have expertise in Structured Query Language (SQL), posing a significant barrier for non-technical users. Text-to-SQL parsing aims to overcome this obstacle by automatically converting natural language questions into SQL queries (Qin et al. 2022; Deng, Chen, and Zhang 2022).

Previous Text-to-SQL methods mainly rely on pretrained models to encode the input sequence (Wang et al. 2020; Hui et al. 2022), then decode the SQL query using abstract syntax trees (AST) (Guo et al. 2019; Wang et al. 2020; Cao et al. 2023). However, recent advancements in decoder-based LLMs have transformed the field of NLP. The researchers are actively exploring the potential of LLMs in Text-to-SQL parsing. These methods can be divided into two categories: Fine-tuning LLMs and Prompting LLMs.

*Jingjing Wang is the corresponding author.







	User Question
What is the phone number of the school that has the highest number of test takers with an SAT score of over 1500?	
	Database schema
frpm : CDSCode, County Code, School Code, Charter School(Y/N) satscores : cds, sname, AvgScrMath, NumTstTakt, NumGE1500, ... schools : CDSCode, Phone , County, City, Zip, ...	
	SQL with syntax error
SELECT T2.Phone FROM satscores AS T1 INNER JOIN schools AS T2 ON T1.cds = T2.CDSCode ORDER BY T1.NumGE1500 DESC LIMIT 1;	
	SQL with semantic error
SELECT schools.Phone FROM satscores INNER JOIN schools ON satscores.cds = schools.cdscode WHERE satscores.numtstakt > 1500 ORDER BY satscores.numtstakt DESC LIMIT 1;	
	Gold SQL
SELECT T2.Phone FROM satscores AS T1 INNER JOIN schools AS T2 ON T1.cds = T2.CDSCode ORDER BY T1.NumGE1500 DESC LIMIT 1; 	

Figure 1: A complex example of Text-to-SQL from Bird. We demonstrate two common types of errors happened in LLM-based parsing: **SQL with syntax errors**, where missing table names are easily detected, while **SQL with semantic errors** is often executed, leading to user confusion.

The former fine-tunes the LLMs on Text-to-SQL downstream tasks, aiming to enhance their capabilities by high-quality data (Li et al. 2024a; Sun et al. 2024). The latter prompts the proprietary LLMs with hundreds of billions parameters, such as GPT-4 (OpenAI et al. 2024), to push the boundaries of Text-to-SQL by leveraging their superior In-Context-Learning capabilities (Gao et al. 2024; Wang et al. 2024a; Xie et al. 2024). However, it is worth noting that due to the concerns of inference overheads and data privacy, Fine-tuning LLMs remains the preferred choice for most practical applications. With the improvement of open source LLMs (Touvron et al. 2023; Li et al. 2023c), these methods achieved commendable performance on some simpler Text-to-SQL benchmarks (Yu et al. 2018, 2019), comparable to those state-of-the-art prompting methods.

Although the fine-tuned LLMs excel in generating syntactically valid SQL statements, they often struggle to produce

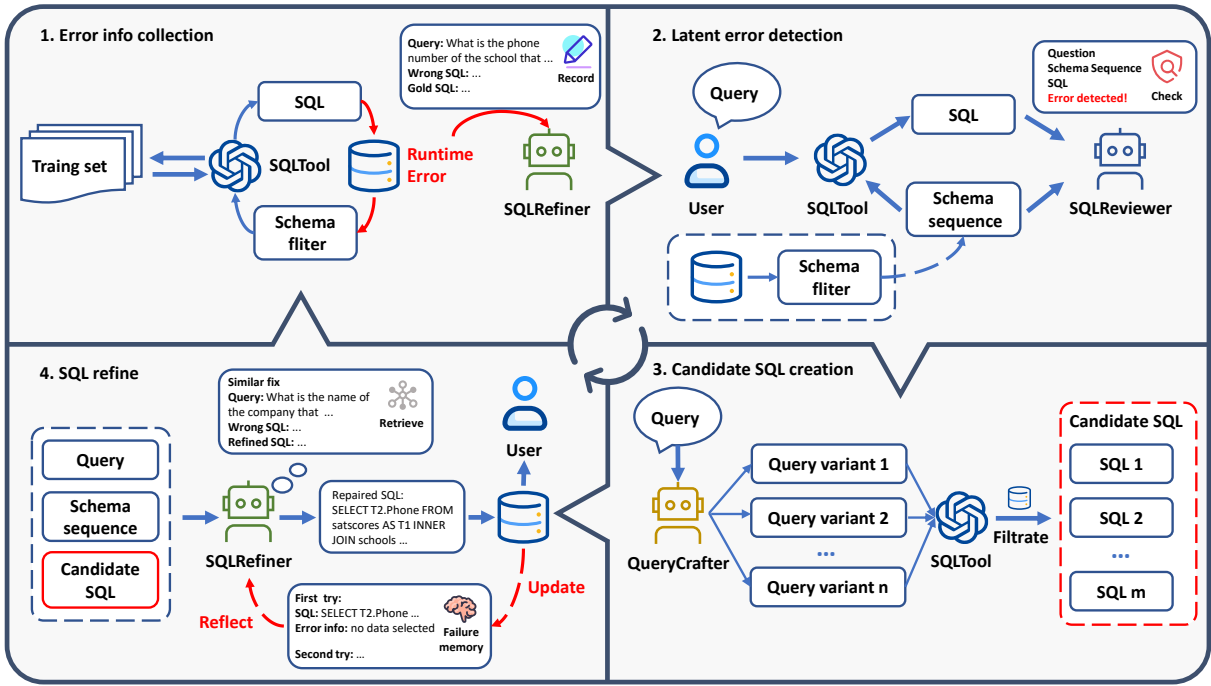


Figure 2: The overview of SQLFixAgent framework, which comprises three agents: (i) the *SQLReviewer*, which detects syntax and semantic errors in SQL generated by *SQLTool* based on user query and schema sequence, (ii) the *QueryCrafter*, which generates multiple variants of user query, then utilizes *SQLTool* to generate multiple SQL as candidate repairs, and (iii) the *SQLRefiner*, which records runtime errors from *SQLTool*, and selects the optimal SQL as final repair from candidates.

semantically accurate ones in real-world scenarios (Sun et al. 2023). Given user query and the database schema, Figure 1 illustrates two types of errors in LLM-generated SQL: syntax errors and semantic errors. Compared with syntax errors, semantic errors are more difficult to detect since they can be executed smoothly in the database. These semantic errors lead to confusing execution results, significantly reducing the reliability of the Text-to-SQL system. We note that some new Text-to-SQL benchmarks have already taken this issue into account. For example, the latest benchmark, Bird (Li et al. 2024b) introduces external knowledge required for semantic parsing, making it more challenging for LLMs to generate SQL that adhere to query semantics.

To enhance the capability of Text-to-SQL system in generating semantically correct results, we introduce SQLFixAgent, a novel multi-agent collaborative framework designed to detect and correct syntactic and semantic errors in SQL generated by LLMs. Our framework comprises a core *SQLRefiner* agent for generating repaired SQL, accompanied by two auxiliary agents, the *SQLReviewer* and the *QueryCrafter*, for latent error detection and candidate SQL creation. Specifically, the *SQLReviewer* employs the Rubber Duck Debugging method to identify potential semantic discrepancies between the SQL and the user query, then passes the messages to the other agents. The *QueryCrafter* utilizes *SQLTool* to generate multiple candidate SQLs, and the *SQLRefiner* selects the most appropriate SQL statement as the final repair from the candidates by retrieving similar repair examples and reflecting from failure memory.

In our experiments, we use the fine-tuned Codes (Li et al. 2024a) as the *SQLTool* used by agents for Text-to-SQL parsing and employ ChatGPT-3.5 as the backbone LLM for all agents. We evaluate our framework on five Text-to-SQL benchmarks: Bird (Li et al. 2024b), Spider (Yu et al. 2018) and its three robustness variants (Gan, Chen, and Purver 2021; Gan et al. 2021; Deng et al. 2021). The experimental results demonstrate that our SQLFixAgent can effectively reduce the syntactic and semantic errors generated by *SQLTool*. On this basis, we conduct comprehensive ablation experiments on the framework. We compare the fine-grained capabilities of the backbone LLMs and evaluate the agents’ performance on sub-tasks, further revealing how the foundation LLMs serve as agents to assist the fine-tuned LLM in generating more accurate SQL queries. Moreover, to achieve a practical Text-to-SQL solution, we compared the token efficiency of our approach with other advanced methods, demonstrating its competitive performance.

Contributions (1) We highlight the semantic inconsistency error in Text-to-SQL parsing and propose SQLFixAgent, a novel multi-agent collaborative framework designed to detect and repair the error in LLM-generated SQL, including syntax and semantic error. (2) We conduct extensive experiments, demonstrating that our framework consistently enhances the performance of the baseline model, specifically achieving an execution accuracy improvement of over 3% on the Bird benchmark. Besides, our approach achieves higher token efficiency compared to other advanced methods.

Related Work

Text-to-SQL with LLMs

Prompting LLMs Recent advancements in large language models (LLMs) have resulted in groundbreaking capabilities (OpenAI et al. 2024; Team et al. 2024). To explore the potential of foundation LLMs in Text-to-SQL parsing, advanced prompting approaches tailored to the task have been proposed. DAIL-SQL (Gao et al. 2024) systematically examined prompt engineering for LLM-based Text-to-SQL methods, it employed dynamic few-shot examples by considering the similarity of both the user questions and the SQL queries. Subsequent studies introduced frameworks like C3-SQL (Dong et al. 2023), DIN-SQL (Pourreza and Rafei 2023), and StructGPT (Jiang et al. 2023), which aim to simplify databases, verify queries, generate SQL and integrate answers by utilizing techniques such as Chains of Thought (Wei et al. 2022b), self-consistency (Wei et al. 2022a), and least-to-most prompting (Zhou et al. 2023). However, these methods overly rely on the capabilities of proprietary LLMs with hundreds of billions parameters, raising concerns of data privacy and inference overheads.

Fine-tuning LLMs Compared to prompting LLMs, fine-tuning LLMs is more widely adopted in enterprises. DAIL-SQL (Gao et al. 2024) has investigated fine-tuning open-source LLMs. However, due to the smaller sizes, their performance remains lower than prompting larger LLMs such as GPT-4. Some research is dedicated to improving the capabilities of fine-tuned LLMs. CodeS (Li et al. 2024a) applied an incremental pre-training technique to train the Text-to-SQL LLMs on a meticulously constructed pre-training corpus, and achieves impressive results. SQL-PaLM (Sun et al. 2024) focuses on larger-scale LLMs, investigating the potential for significant gains with increased model size due to the emergent capabilities of LLMs. However, although the fine-tuned LLMs excel in generating syntactically valid SQL statements, they often struggle to produce semantically accurate queries, which is the challenge we need to address.

LLM-based Agents

Following the rise of large language models, LLM-based agents have become one of the most prevalent AI systems (Wang et al. 2024b; Xi et al. 2023; Durante et al. 2024). These agents learn to interact with the external world through action-observation pairs articulated in natural language. AutoGPT (AutoGPT-Team 2023) is an early open-source implementation of the AI agent, following a single-agent paradigm. It enhances the AI model with many useful tools but lacks support for multi-agent collaboration. In the programming domain, MetaGPT (Hong et al. 2023) innovatively simulates the operational structure of a traditional software company. This framework drives the GPT agents to collaborate on user-defined programming tasks by assigning them to different roles: product manager, project manager, or engineer. Similar work includes FixAgent (Lee et al. 2024), an automated and integrated debugging framework that achieves its goals through the collaboration of multiple agents. In the Text-to-SQL field, MAC-SQL (Wang et al.

2024a) firstly proposed a multi-agent collaborative framework, which integrates multiple LLM-based agents to collectively interpret SQL queries and address the complexity and diversity of SQL queries encountered in real-world scenarios. However, the application of LLM-based agents to detect and fix errors generated by Text-to-SQL LLMs remains under-explored, and the SQLFixAgent fills this gap.

Problem Formulation

Text-to-SQL Task Formally, given a natural language question Q based on a database schema \mathcal{S} and a knowledge evidence \mathcal{K} , Text-to-SQL parsing aims to translate Q into a SQL query y that can be executed on relational database \mathcal{D} to answer the question Q . The database schema \mathcal{S} of database \mathcal{D} includes (1) a set of tables $\mathcal{T} = \{\mathcal{T}_1, \mathcal{T}_2, \dots, \mathcal{T}_m\}$, (2) a set of columns $\mathcal{C} = \{\mathcal{C}_{\mathcal{T}_1}^1, \dots, \mathcal{C}_{\mathcal{T}_1}^n, \mathcal{C}_{\mathcal{T}_2}^1, \dots, \mathcal{C}_{\mathcal{T}_2}^n, \mathcal{C}_{\mathcal{T}_m}^1, \dots, \mathcal{C}_{\mathcal{T}_m}^n\}$ associated with the tables, (3) and a set of foreign key relations $\mathcal{R} = \left\{ \left(\mathcal{C}_k^i, \mathcal{C}_h^j \right) \mid \mathcal{C}_k^i, \mathcal{C}_h^j \in \mathcal{C} \right\}$. Here, m and n denote the number of table names and column names, respectively. Finally, with the language model policy θ , the Text-to-SQL task could be formulated as:

$$y = f(Q, \mathcal{S}, \mathcal{K} | \theta), \quad (1)$$

SQL Repair Task We consider the Text-to-SQL LLM as SQLTool in SQL Repair task, and use SQLFixAgent to detect and repair the erroneous results generated by SQLTool.

Algorithm 1: The algorithm of SQLFixAgent

Input: question q , database db , knowledge kg , training set t
Output: label, sql

```
1: // Collect runtime error from SQLTool
2: SQLRefinerinit(SQLTool, t)
3: db = SchemaFilter(q, db, kg)
4: psql = SQLTool(q, db, kg)
5: // Detect syntax error and semantic error in psql
6: label = SQLReviewer(psql, db, kg)
7: if label then
8:   sql = psql
9: else
10:   count = 0
11:   while count < maxTryTimes do
12:     // Generate candidate SQL
13:     sqls = QueryCrafter(q, db, kg, SQLTool)
14:     // Retrieve similar repair
15:     eg = SQLRefinerretrieve(SQLTool, t)
16:     sql = SQLRefiner(q, db, kg, sqls, eg)
17:     pass, err = executeAndAnalyze(sql, db)
18:     if pass then
19:       break
20:     else
21:       // Refresh failure memory
22:       SQLRefinerrefresh(sql, err)
23:     end if
24:   end while
25: end if
26: return label, sql
```

Method

Overview

We introduce SQLFixAgent, a novel multi-agent collaborative framework designed to detect and repair the syntax and semantic errors in SQL statements generated by SQLTool. As illustrated in Figure 2, our framework comprises a core *SQLRefiner* agent for generating repaired SQL, accompanied by two auxiliary agents, the *SQLReviewer* and the *QueryCrafter*, for latent error detection and candidate repair creation. Specifically, the *SQLReviewer* employs the Rubber Duck Debugging method to check whether the SQL statement align with the user’s query intent. If the error is detected, the *SQLRefiner* and *QueryCrafter* is tasked with making the necessary corrections. Next, The *QueryCrafter* utilizes *SQLTool* to generates multiple candidate SQLs and the *SQLRefiner* selects the most appropriate one as the final repair from the candidates by retrieving similar repair and reflecting from failure memory.

SQLReviewer

LLM-based Text-to-SQL parsing typically encounters two types of errors: syntax errors and semantic errors. The former can usually be detected and intercepted through the pre-execution checks in database. In contrast, the latter can be executed smoothly, producing confusing results for the user and reducing the reliability of system. *SQLReviewer* is designed to detect the potential errors in SQL statements generated by LLMs. We provide *SQLReviewer* with a real environment connected to the database to capture syntax errors in SQL. Then, for those pass the syntax inspection, we further check whether their semantics align with the user’s query based on the relevant database and evidence.

Based on the opinion: *LLMs closely mimic developers when performing coding-related tasks, so they can benefit from general software engineering principles* (Lee et al. 2024). We adopt the principle of rubber duck debugging in the design of *SQLReviewer*, a method where a programmer explains his code line-by-line to an inanimate object (like a rubber duck) to help identify and understand errors, as shown in the Figure 3. We assign *SQLReviewer* the role of a database administrator and require it to step-by-step verify whether each part of the SQL statement aligns with the user’s query intent, thereby detecting potential semantic mismatch errors. If no error is detected, the original SQL will be returned as the final result. Otherwise, the message will be passed to other agents for further processing.

QueryCrafter

Although the fine-tuned LLMs excels at generating syntactically correct SQL statements, it remains challenging to produce ones that completely align with the user’s query intent (Sun et al. 2023). To mitigate this challenge, we designed *QueryCrafter*, which leverages *SQLTool* to generate multiple candidate SQL for *SQLRefiner* to select the most accurate one as the final repair. Given a user query Q , *QueryCrafter* generates a list of variants $Q' = \{Q'_1, Q'_2, \dots, Q'_n\}$ with similar length and equivalent se-

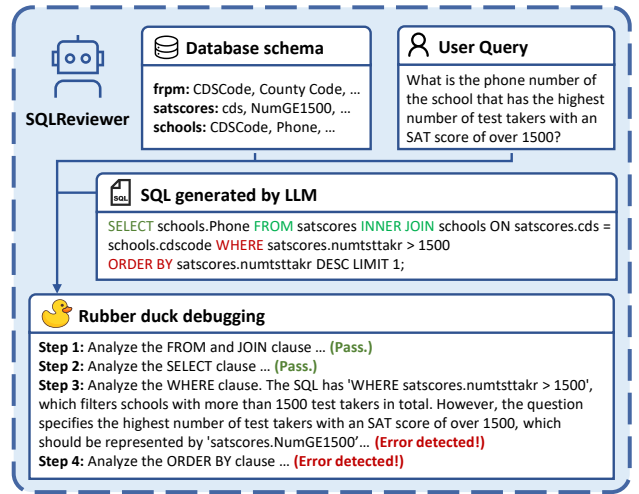


Figure 3: The *SQLReviewer* Agent Illustration.

matic. Then, by using *SQLTool*, *QueryCrafter* generates multiple SQL statements $y = \{y_1, y_2, \dots, y_m\}$ based on query variants Q' , the database schema \mathcal{S} and the evidence \mathcal{K} . The candidate SQL statements $y_{candidate} = \{y_1, y_2, \dots, y_m\}$, which will be passed to *SQLRefiner*, are obtained by further pre-execution filtering of the SQL statements y' in the database \mathcal{D} .

Some researches showed that employing beam search decoding for LLMs to generate multiple candidate SQL can effectively improve the Text-to-SQL accuracy (Li et al. 2023a, 2024a). However, the fine-tuned LLMs often overfits to the training data, limiting the diversity of effective candidates. In contrast, *QueryCrafter* generates multiple equivalent user queries, introducing perturbations at the input of *SQLTool* to broaden the spectrum of generated candidates. Besides, *SQLTool* may struggle to produce effective SQL for certain user queries due to the biases from training data, whereas the multiple query variants can address this issue.

SQLRefiner

As the core of the *SQLFixAgent* framework, the primary function of *SQLRefiner* is to automatically repair SQL errors. Since it is powered by a foundation LLM that is not specifically trained for Text-to-SQL tasks, it lacks proficiency in directly generating accurate SQL statements but excels in semantic analysis and comprehension. Therefore, we regard *SQLRefiner* as essential for ensuring the framework produces semantically correct SQL. Given the user query Q , the evidence \mathcal{K} , and the database schema \mathcal{S} , *SQLRefiner* first retrieves similar repairs from the *SQLTool* error record as examples. Then, it selects the SQL y that best matches the user query from the candidate SQL $y_{candidate}$ provided by *QueryCrafter* as the final repair, along with explanation. In some cases where *QueryCrafter* can not provide effective SQL candidates, *SQLRefiner* will attempt to generate the corrected SQL statement on its own.

Despite some prompting tricks are used to ensure the LLM’s outputs align with our expectations, it’s still hard to

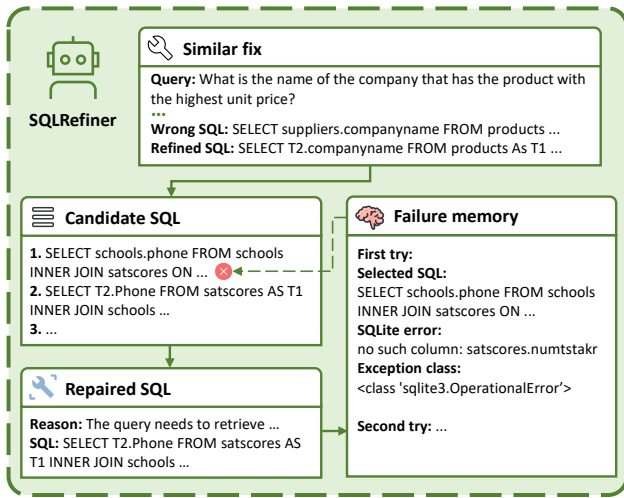


Figure 4: The SQLRefiner Agent Illustration.

obtain the correct repair in an interaction due to the hallucination of the LLM (Huang et al. 2023). To mitigate this challenge, we introduced Reflexion (Shinn et al. 2023) mechanism in SQL repair. As shown in Figure 4. Upon completing selection or generation of a SQL statement, following MAC-SQL (Wang et al. 2024a), the SQLRefiner first assess its syntactic correctness, execution feasibility, and the retrieval of non-empty results from the database. If the check passes, the SQL statement will be taken as the final result; otherwise, it will be written into the failure memory along with the corresponding error feedback. In the next attempt, SQLRefiner reflects on the failure memory and repeats the repair process until the generated result passes inspection or the maximum number of modifications is reached.

The essence of the SQLFixAgent framework lies in the collaboration between a foundational LLM and a specialized LLM trained on Text-to-SQL tasks. We believe their capabilities are complementary: while the foundational LLM possesses strong ICL abilities, it is not adept at generating effective SQL statements directly. On the other hand, the Text-to-SQL LLM excels at generating syntactically valid SQL statements, but often struggles to produce SQL queries with semantic accuracy. In the SQLFixAgent framework, the correctness of SQL syntax is primarily ensured by SQL-Tool, while the correctness of SQL semantics is guaranteed through the collaboration of QueryCrafter and SQLRefiner.

Experiments

Datasets

We evaluated our framework on two primary Text-to-SQL benchmarks: Spider (Yu et al. 2018) and Bird (Li et al. 2024b). Moreover, we assessed the robustness on three variants of Spider: Spider-DK (Gan, Chen, and Purver 2021), Spider-Syn (Gan et al. 2021), and Spider-Realistic (Deng et al. 2021). For the training sets of Spider and Bird, we used them to simulate runtime error records.

Spider is widely used to evaluate Text-to-SQL parsers across various databases, requiring models to demonstrate

their adaptability to unfamiliar database structures. It offers a training set comprising 8,659 samples, a development set with 1,034 samples, and a test set with 2,147 samples, encompassing 200 distinct databases and 138 domains.

BIRD released by Alibaba DAMO Academy, is a new benchmark for large-scale database grounded Text-to-SQL evaluation. It contains 95 large-scale databases and high-quality Text-SQL pairs, with a data storage volume of up to 33.4GB spanning 37 professional domains. Compared to Spider, it focuses on integrating external knowledge reasoning to bridge natural language questions and database content, and addresses new challenges related to SQL efficiency when handling large databases.

Spider-DK, Spider-Syn, Spider-Realistic are variants derived from the original Spider dataset, introducing robustness challenges through domain knowledge introduction, synonym substitution, and explicit mention removal, respectively. They are specifically crafted to resemble queries that might be posed by users in real-world scenarios.

Evaluation Metrics

We adopt execution accuracy, exact match accuracy, and valid efficiency score to evaluate the performance of our framework. *Execution accuracy (EX)* is defined as the proportion of questions in the evaluation set where the execution result of both the predicted and ground-truth queries are identical, which is the fundamental metric for measuring Text-to-SQL parser performance. *Exact match accuracy (EM)*, introduced by Test-Suites (Zhong, Yu, and Klein 2020), evaluates each clause as a set and compares the predicted clauses with their corresponding ones in the reference query. A predicted SQL query is considered correct only if all of its components match the ground truth. *Valid efficiency score (VES)*, introduced by Bird (Li et al. 2024b), is designed to measure the efficiency of valid SQLs generated by models. It is worth noting that the term "valid SQLs" refers to predicted SQL queries whose result sets align with those of the ground-truth SQLs. Therefore, VES considers both the accuracy and efficiency for the model-generated query.

Setting

In evaluation, we utilized fine-tuned version of CodeS (Li et al. 2024a) with 3b and 7b parameters as the SQLTool within the framework, and all agents were powered by GPT-3.5-turbo. For SQLTool inference, a beam search produces 4 SQL candidates, we select the first executable one for further checking by SQLFixAgent. If the error is detected, SQLFixAgent attempts to repair it up to 3 times. All experiments were conducted on a server equipped with 1 × AMD EPYC 7352 CPU and 8 × NVIDIA RTX 3090 GPU.

Main Results

Results on BIRD Table 1 presents the performance of the SQLFixAgent framework compared to other competitive methods on the current most challenging text-to-SQL benchmark, BIRD. We observe that CodeS-7B + SQLFixAgent achieves better performance than the standalone CodeS-7B, indicating that SQLFixAgent effectively reduces semantic

and syntactic errors in the SQL generated by the LLMs. Surprisingly, it outperforms the best baseline by 0.78% EX with backbone models (CodeS-7B + GPT-3.5 Turbo) that their parameters significantly fewer than GPT-4, highlighting the value of SQL repair study. Specifically, CodeS-7B equipped with SQLFixAgent demonstrated a 3.00% increase in EX and a 4.35% increase in VES, while CodeS-3B equipped with SQLFixAgent improved EX by 3.65% and VES by 5.65%, showing even greater improvement. This result is attributed to the weaker capability of CodeS-3b, which leads to more correctable errors in the generated SQL.

Results on Spider and its variants As shown in Table 2, SQLFixAgent effectively enhances the EX performance of the CodeS-3B and CodeS-7B baseline by 1.4% and 0.8% on Spider’s dev set. However, since SQLFixAgent is powered by gpt-3.5-turbo without fine-tuning, it does not contribute to improving exact match accuracy. Besides, CodeS-7b did not achieve improvement on the test set after applying SQLFixAgent. We believe that this represents the limit of performance for the backbone model on Spider. Across three robustness variants of Spider, as shown in Table 3, our framework achieved CodeS-7B EX improvements of 0.8%, 0.4%, and 2.2% on Spider-Syn, Spider-Realistic, and Spider-DK, respectively, reaching the current state-of-the-art performance. Particularly, the results from Spider-DK demonstrate that SQLFixAgent significantly enhances the fine-tuned LLMs’ domain knowledge reasoning capability.

Ablation Study

Analysis of Backbone Model Capabilities Figure 5 compares the performance of the backbone model of SQLFixAgent across various dimensions of sub-capabilities on Bird-dev. The results indicate that fine-tuned CodeS-3b outperforms ChatGPT in all areas, particularly in ranking, numerical computing (math), and value illustration, with accuracy of ChatGPT in math and ranking being below 30%. It suggests that the foundation LLMs struggle with deep data science tasks, which often require mathematical computations and rankings within the context of vague user queries. However, all models perform well in domain KG, synonym, and match-based areas, benefiting from the language and reasoning abilities acquired during pre-training. Despite ChatGPT’s inferior performance compared to fine-tuned CodeS-3b across all fine-grained category of Text-to-SQL, we employ it as agents for error detection and correction tasks on LLM-generated SQL, further improving the query accuracy.

Analysis of Performance on Sub-tasks The SQLFixAgent framework includes two main subtasks in the Text-to-SQL process: SQL error detection and correction, which are respectively handled by the SQLReviewer agent and the SQLRefiner agent. We employ the F1 score to evaluate the performance of SQL error detection, and then calculate the success rate of corrections after errors are detected. As shown in Table 4, our framework can effectively detecting erroneous SQL statements, including both semantic and syntactic errors. Due to the performance limitations of the backbone model, SQLFixAgent achieves repair success rates of 17.49% and 15.64% for errors generated by CodeS-3B and

Methods	Dev set	
	EX%	VES%
<i>ICL-based</i>		
Codex (Li et al. 2024b)	34.35	43.41
ChatGPT (Li et al. 2024b)	37.22	43.81
GPT-4 (Li et al. 2024b)	46.35	49.77
DIN-SQL + GPT-4 (Pourreza and Rafiei 2023)	50.72	58.79
DAIL-SQL + GPT-4 (Gao et al. 2024)	54.76	56.08
<i>FT-based</i>		
T5-3B (Li et al. 2024b)	23.34	25.57
CodeS-3B (Li et al. 2024a)	55.02	56.54
CodeS-7B (Li et al. 2024a)	57.17	58.80
<i>Agent-based</i>		
MAC-SQL + GPT-4 (Li et al. 2024b)	59.39	66.39
CodeS-3B + SQLFixAgent (GPT-3.5 Turbo)	58.67 (↑3.65)	62.19 (↑5.65)
CodeS-7B + SQLFixAgent (GPT-3.5 Turbo)	60.17 (↑3.00)	63.15 (↑4.35)

Table 1: Evaluation of SQLFixAgent on BIRD’s dev set.

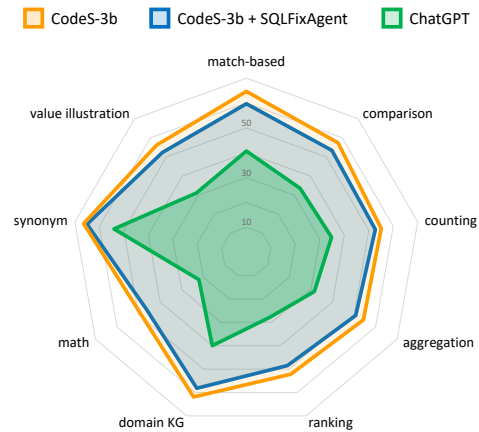


Figure 5: The fine-grained categorical evaluation of backbone models on BIRD’s dev set.

CodeS-7B, respectively. This presents a challenging task, and we plan to delve deeper into it in future work.

Analysis of ICL methods Table 5 presents the ablation study of the ICL-based methods in SQLFixAgent. Starting from the complete framework of CodeS-3B + SQLFixAgent, we successively removed rubber duck debugging (COT) from SQLReviewer, Failure memory reflection (Reflection), and multiple choice selection (MCS) from SQLRefiner and QueryCrafter. The experimental results show that each component of the SQLFixAgent framework plays a crucial role in achieving high accuracy, as their removal resulted in decreased performance across all difficulty levels.

Token Efficiency

Considering that the LLM APIs charge based on token numbers, and inference time is proportional to token lengths, we emphasize the token efficiency of Text-to-SQL methods. In Figure 6, we demonstrate the average token consumption and execution accuracy of our method compare to three advanced methods, STRIKE (Nan et al. 2023), MAC-SQL and DAIL-SQL, they are all powered by GPT-3.5-turbo for a fair comparison. Since our SQLFixAgent initiates repairs only

Methods	Dev		Test	
	EM%	EX%	EM%	EX%
<i>ICL-based</i>				
DAIL-SQL + GPT-4 + SC (Gao et al. 2024)	68.7	83.6	66.0	86.6
DEA-SQL + GPT-4 (Xie et al. 2024)	-	85.4	-	87.1
C3 + ChatGPT + Zero-Shot (Dong et al. 2023)	71.4	81.8	-	82.3
ChatGPT (Liu et al. 2023)	34.6	74.4	-	-
GPT-4 (OpenAI et al. 2024)	22.1	72.3	-	-
<i>FT-based</i>				
T5-3B + PICARD (Scholak, Schucher, and Bahdanau 2021)	75.5	79.3	71.9	75.1
Graphix-T5-3B + PICARD (Li et al. 2023b)	77.1	81.0	74.0	77.6
RESDSL-3B + NatSQL (Li et al. 2023a)	80.5	84.1	72.0	79.9
SQL-PaLM (Sun et al. 2024)	78.2	82.8	-	-
SFT CodeS-3B (Li et al. 2024a)	78.1	83.4	72.0	81.9
SFT CodeS-7B (Li et al. 2024a)	80.3	85.4	72.7	83.3
<i>Agent-based</i>				
MAC-SQL + GPT-4 (Li et al. 2024b)	63.2	86.7	-	82.8
CodeS-3B + SQLFixAgent (GPT-3.5 Turbo)	77.9	84.8 (↑1.4)	70.9	82.2 (↑0.3)
CodeS-7B + SQLFixAgent (GPT-3.5 Turbo)	79.1	86.2 (↑0.8)	72.5	83.2

Table 2: Evaluation of SQLFixAgent on Spider’s dev/test sets.

Methods	Spider-Syn		Spider-Realistic		Spider-DK
	EM%	EX%	EM%	EX%	EX%
T5-3B + PICARD (Scholak, Schucher, and Bahdanau 2021)	61.8	69.8	61.7	71.4	62.5
RESDSL-3B + NatSQL (Li et al. 2023a)	66.8	76.9	70.1	81.9	66.0
ChatGPT (Liu et al. 2023)	48.5	58.6	49.2	63.4	62.6
SQL-Palm (Few-shot) (Sun et al. 2024)	67.4	74.6	72.4	77.6	66.5
SQL-Palm (Fine-tuned) (Sun et al. 2024)	66.4	70.9	73.2	77.4	67.5
CodeS-7B (Li et al. 2024a)	70.0	76.9	77.2	82.9	72.0
CodeS-7B + SQLFixAgent (GPT-3.5 Turbo)	68.4	77.7 (↑0.8)	75.8	83.3 (↑0.4)	74.2 (↑2.2)

Table 3: Evaluation of SQLFixAgent on Spider variants.

Methods	Detection (F1)	Repair (%)
CodeS-3B + SQLFixAgent	73.73	17.49
CodeS-7B + SQLFixAgent	73.68	15.64

Table 4: Error detection accuracy and successful repair rate of SQLFixAgent on the Bird’s dev set.

Methods	Simple	Mod.	Chall.	All
CodeS-3B + SQLFixAgent	66.16	49.89	38.89	58.67
w/o COT	65.73	48.82	39.58	58.15 (↓)
w/o Reflexion	65.19	47.74	40.28	57.56 (↓)
w/o MCS	64.86	47.53	38.89	57.17 (↓)

Table 5: Execution accuracy of ICL method ablation study on BIRD’s dev set.

when the erroneous SQL is detected, it achieves state-of-art execution accuracy with fewer API token consumption, exhibiting higher token efficiency compared to other methods.

Conclusion

In this paper, We first highlight the potential semantic error in LLM-based Text-to-SQL parsing and propose SQL-FixAgent, an novel multi-agent collaborative framework designed for detecting and repairing the erroneous SQL. The

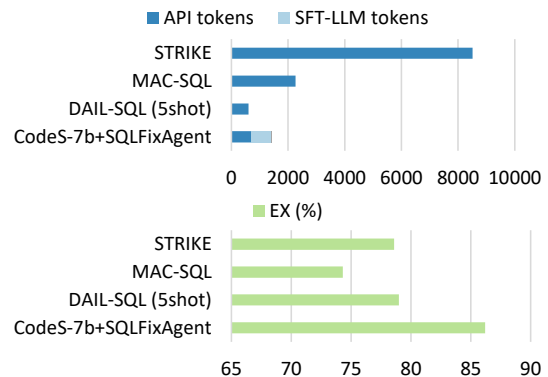


Figure 6: Token consumption and execution accuracy of advanced Text-to-SQL methods on Spider’s dev set.

extensive experiments on Bird, Spider and its three robustness variants showcase the effectiveness and universality of our method. We validated our opinion through ablation experiments, where the inexperienced foundation LLMs can serve as agents to assist the SFT-LLM in generating more accurate SQL queries. Furthermore, we underline the high token efficiency of SQLFixAgent compared to other advanced methods, providing direction for developing more practical Text-to-SQL solutions in real-world scenarios.

References

- AutoGPT-Team. 2023. AutoGPT: build and use AI agents.
- Cao, R.; Zhang, H.; Xu, H.; Li, J.; Ma, D.; Chen, L.; and Yu, K. 2023. ASTormer: An AST Structure-aware Transformer Decoder for Text-to-SQL. *arXiv preprint arXiv:2310.18662*.
- Deng, N.; Chen, Y.; and Zhang, Y. 2022. Recent Advances in Text-to-SQL: A Survey of What We Have and What We Expect. In *Proceedings of the 29th International Conference on Computational Linguistics*, 2166–2187. Gyeongju, Republic of Korea: International Committee on Computational Linguistics.
- Deng, X.; Awadallah, A. H.; Meek, C.; Polozov, O.; Sun, H.; and Richardson, M. 2021. Structure-Grounded Pretraining for Text-to-SQL. In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, 1337–1350. Online: Association for Computational Linguistics.
- Dong, X.; Zhang, C.; Ge, Y.; Mao, Y.; Gao, Y.; lu Chen; Lin, J.; and Lou, D. 2023. C3: Zero-shot Text-to-SQL with ChatGPT. *arXiv:2307.07306*.
- Durante, Z.; Huang, Q.; Wake, N.; Gong, R.; Park, J. S.; Sarkar, B.; Taori, R.; Noda, Y.; Terzopoulos, D.; and Choi, Y. 2024. Agent AI: Surveying the Horizons of Multimodal Interaction. *arXiv:2401.03568*.
- Gan, Y.; Chen, X.; Huang, Q.; Purver, M.; Woodward, J. R.; Xie, J.; and Huang, P. 2021. Towards Robustness of Text-to-SQL Models against Synonym Substitution. In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, 2505–2515. Online: Association for Computational Linguistics.
- Gan, Y.; Chen, X.; and Purver, M. 2021. Exploring Underexplored Limitations of Cross-Domain Text-to-SQL Generalization. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, 8926–8931. Online and Punta Cana, Dominican Republic: Association for Computational Linguistics.
- Gao, D.; Wang, H.; Li, Y.; Sun, X.; Qian, Y.; Ding, B.; and Zhou, J. 2024. Text-to-SQL Empowered by Large Language Models: A Benchmark Evaluation. *Proc. VLDB Endow.*, 17(5): 1132–1145.
- Guo, J.; Zhan, Z.; Gao, Y.; Xiao, Y.; Lou, J.-G.; Liu, T.; and Zhang, D. 2019. Towards Complex Text-to-SQL in Cross-Domain Database with Intermediate Representation. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, 4524–4535. Florence, Italy: Association for Computational Linguistics.
- Hong, S.; Zhuge, M.; Chen, J.; Zheng, X.; Cheng, Y.; Zhang, C.; Wang, J.; Wang, Z.; Yau, S. K. S.; Lin, Z.; and Zhou, L. 2023. MetaGPT: Meta Programming for A Multi-Agent Collaborative Framework. *arXiv:2308.00352*.
- Huang, L.; Yu, W.; Ma, W.; Zhong, W.; Feng, Z.; Wang, H.; Chen, Q.; Peng, W.; Feng, X.; Qin, B.; and Liu, T. 2023. A Survey on Hallucination in Large Language Models: Principles, Taxonomy, Challenges, and Open Questions. *arXiv:2311.05232*.
- Hui, B.; Geng, R.; Wang, L.; Qin, B.; Li, Y.; Li, B.; Sun, J.; and Li, Y. 2022. S²SQL: Injecting Syntax to Question-Schema Interaction Graph Encoder for Text-to-SQL Parsers. In *Findings of the Association for Computational Linguistics: ACL 2022*, 1254–1262. Dublin, Ireland: Association for Computational Linguistics.
- Jiang, J.; Zhou, K.; Dong, Z.; Ye, K.; Zhao, X.; and Wen, J.-R. 2023. StructGPT: A General Framework for Large Language Model to Reason over Structured Data. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, 9237–9251. Singapore: Association for Computational Linguistics.
- Lee, C.; Xia, C. S.; tse Huang, J.; Zhu, Z.; Zhang, L.; and Lyu, M. R. 2024. A Unified Debugging Approach via LLM-Based Multi-Agent Synergy. *arXiv:2404.17153*.
- Li, H.; Zhang, J.; Li, C.; and Chen, H. 2023a. Resdsq: Decoupling schema linking and skeleton parsing for text-to-sql. In *Proceedings of the AAAI Conference on Artificial Intelligence*, 13067–13075.
- Li, H.; Zhang, J.; Liu, H.; Fan, J.; Zhang, X.; Zhu, J.; Wei, R.; Pan, H.; Li, C.; and Chen, H. 2024a. CodeS: Towards Building Open-source Language Models for Text-to-SQL. *Proc. ACM Manag. Data*, 2(3).
- Li, J.; Hui, B.; Cheng, R.; Qin, B.; Ma, C.; Huo, N.; Huang, F.; Du, W.; Si, L.; and Li, Y. 2023b. Graphix-t5: Mixing pre-trained transformers with graph-aware layers for text-to-sql parsing. In *Proceedings of the AAAI Conference on Artificial Intelligence*, 13076–13084.
- Li, J.; Hui, B.; Qu, G.; Yang, J.; Li, B.; Li, B.; Wang, B.; Qin, B.; Geng, R.; Huo, N.; Zhou, X.; Ma, C.; and Li, G. 2024b. Can LLM already serve as a database interface? a big bench for large-scale database grounded text-to-SQLs. In *Proceedings of the 37th International Conference on Neural Information Processing Systems*. Red Hook, NY, USA: Curran Associates Inc.
- Li, R.; Allal, L. B.; Zi, Y.; Muennighoff, N.; Kocetkov, D.; Mou, C.; Marone, M.; Akiki, C.; Li, J.; and Chim, J. 2023c. StarCoder: may the source be with you! *arXiv:2305.06161*.
- Liu, A.; Hu, X.; Wen, L.; and Yu, P. S. 2023. A comprehensive evaluation of ChatGPT’s zero-shot Text-to-SQL capability. *arXiv:2303.13547*.
- Nan, L.; Zhao, Y.; Zou, W.; Ri, N.; Tae, J.; Zhang, E.; Cohan, A.; and Radev, D. 2023. Enhancing Text-to-SQL Capabilities of Large Language Models: A Study on Prompt Design Strategies. In *Findings of the Association for Computational Linguistics: EMNLP 2023*, 14935–14956. Singapore: Association for Computational Linguistics.
- OpenAI; Achiam, J.; Adler, S.; Agarwal, S.; Ahmad, L.; Akkaya, I.; Aleman, F. L.; Almeida, D.; and Altenschmidt, J. 2024. GPT-4 Technical Report. *arXiv:2303.08774*.
- Pourreza, M.; and Rafiei, D. 2023. DIN-SQL: Decomposed In-Context Learning of Text-to-SQL with Self-Correction. *arXiv:2304.11015*.
- Qin, B.; Hui, B.; Wang, L.; Yang, M.; Li, J.; Li, B.; Geng, R.; Cao, R.; Sun, J.; Si, L.; Huang, F.; and Li, Y. 2022. A Survey on Text-to-SQL Parsing: Concepts, Methods, and Future Directions. *arXiv:2208.13629*.

- Scholak, T.; Schucher, N.; and Bahdanau, D. 2021. PICARD: Parsing Incrementally for Constrained Auto-Regressive Decoding from Language Models. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, 9895–9901. Online and Punta Cana, Dominican Republic: Association for Computational Linguistics.
- Shinn, N.; Cassano, F.; Gopinath, A.; Narasimhan, K.; and Yao, S. 2023. Reflexion: language agents with verbal reinforcement learning. In *Advances in Neural Information Processing Systems*, 8634–8652. Curran Associates, Inc.
- Sun, R.; Arik, S. Ö.; Muzio, A.; Miculicich, L.; Gundabathula, S.; Yin, P.; Dai, H.; Nakhost, H.; and Sinha, R. 2024. SQL-PaLM: Improved Large Language Model Adaptation for Text-to-SQL (extended). arXiv:2306.00739.
- Sun, S.; Zhang, Y.; Yan, J.; Gao, Y.; and Ong, D. 2023. Battle of the Large Language Models: Dolly vs LLaMA vs Vicuna vs Guanaco vs Bard vs ChatGPT - A Text-to-SQL Parsing Comparison. In *Findings of the Association for Computational Linguistics: EMNLP 2023*, 11225–11238. Singapore: Association for Computational Linguistics.
- Team, G.; Anil, R.; Borgeaud, S.; Alayrac, J.-B.; Yu, J.; Soricut, R.; Schalkwyk, J.; Dai, A. M.; Hauth, A.; and Millican, K. 2024. Gemini: A Family of Highly Capable Multimodal Models. arXiv:2312.11805.
- Touvron, H.; Lavril, T.; Izacard, G.; Martinet, X.; Lachaux, M.-A.; Lacroix, T.; Rozière, B.; Goyal, N.; and Hambro, E. 2023. LLaMA: Open and Efficient Foundation Language Models. arXiv:2302.13971.
- Wang, B.; Ren, C.; Yang, J.; Liang, X.; Bai, J.; Chai, L.; Yan, Z.; Zhang, Q.-W.; Yin, D.; Sun, X.; and Li, Z. 2024a. MAC-SQL: A Multi-Agent Collaborative Framework for Text-to-SQL. arXiv:2312.11242.
- Wang, B.; Shin, R.; Liu, X.; Polozov, O.; and Richardson, M. 2020. RAT-SQL: Relation-Aware Schema Encoding and Linking for Text-to-SQL Parsers. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, 7567–7578. Online: Association for Computational Linguistics.
- Wang, L.; Ma, C.; Feng, X.; Zhang, Z.; Yang, H.; Zhang, J.; Chen, Z.; Tang, J.; Chen, X.; Lin, Y.; Zhao, W. X.; Wei, Z.; and Wen, J. 2024b. A survey on large language model based autonomous agents. *Frontiers of Computer Science*, 18(6).
- Wei, J.; Wang, X.; Schuurmans, D.; Bosma, M.; brian ichter; Xia, F.; Chi, E. H.; Le, Q. V.; and Zhou, D. 2022a. Chain of Thought Prompting Elicits Reasoning in Large Language Models. In Oh, A. H.; Agarwal, A.; Belgrave, D.; and Cho, K., eds., *Advances in Neural Information Processing Systems*.
- Wei, J.; Wang, X.; Schuurmans, D.; Bosma, M.; ichter, b.; Xia, F.; Chi, E.; Le, Q. V.; and Zhou, D. 2022b. Chain-of-Thought Prompting Elicits Reasoning in Large Language Models. In *Advances in Neural Information Processing Systems*, 24824–24837. Curran Associates, Inc.
- Xi, Z.; Chen, W.; Guo, X.; He, W.; Ding, Y.; Hong, B.; Zhang, M.; Wang, J.; Jin, S.; Zhou, E.; Zheng, R.; and Fan, X. 2023. The Rise and Potential of Large Language Model Based Agents: A Survey. arXiv:2309.07864.
- Xie, Y.; Jin, X.; Xie, T.; Lin, M.; Chen, L.; Yu, C.; Cheng, L.; Zhuo, C.; Hu, B.; and Li, Z. 2024. Decomposition for Enhancing Attention: Improving LLM-based Text-to-SQL through Workflow Paradigm. *arXiv preprint arXiv:2402.10671*.
- Yu, T.; Zhang, R.; Yang, K.; Yasunaga, M.; Wang, D.; Li, Z.; Ma, J.; Li, I.; Yao, Q.; Roman, S.; and Zhang, Z. 2018. Spider: A Large-Scale Human-Labeled Dataset for Complex and Cross-Domain Semantic Parsing and Text-to-SQL Task. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, 3911–3921. Brussels, Belgium: Association for Computational Linguistics.
- Yu, T.; Zhang, R.; Yasunaga, M.; Tan, Y. C.; Lin, X. V.; Li, S.; Er, H.; Li, I.; Pang, B.; Chen, T.; Ji, E.; and Dixit, S. 2019. SPaRc: Cross-Domain Semantic Parsing in Context. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, 4511–4523. Florence, Italy: Association for Computational Linguistics.
- Zhong, R.; Yu, T.; and Klein, D. 2020. Semantic Evaluation for Text-to-SQL with Distilled Test Suite. In *The 2020 Conference on Empirical Methods in Natural Language Processing*. Association for Computational Linguistics.
- Zhou, D.; Schärli, N.; Hou, L.; Wei, J.; Scales, N.; Wang, X.; Schuurmans, D.; Cui, C.; Bousquet, O.; Le, Q. V.; and Chi, E. H. 2023. Least-to-Most Prompting Enables Complex Reasoning in Large Language Models. In *The Eleventh International Conference on Learning Representations*.