

Leveraging Large Language Models to Measure Gender Bias in Gendered Languages

Erik Derner¹, Sara Sansalvador de la Fuente¹, Yoan Gutiérrez²,
Paloma Moreda², Nuria Oliver¹

¹ ELLIS Alicante, Alicante, Spain ² University of Alicante, Alicante, Spain

Correspondence: erik@ellisalicante.org

Abstract

Gender bias in text corpora used in various natural language processing (NLP) contexts, such as for training large language models (LLMs), can lead to the perpetuation and amplification of societal inequalities. This is particularly pronounced in gendered languages like Spanish or French, where grammatical structures inherently encode gender, making the bias analysis more challenging. Existing methods designed for English are inadequate for this task due to the intrinsic linguistic differences between English and gendered languages. This paper introduces a novel methodology that leverages the contextual understanding capabilities of LLMs to quantitatively analyze gender representation in Spanish corpora. By utilizing LLMs to identify and classify gendered nouns and pronouns in relation to their reference to human entities, our approach provides a nuanced analysis of gender biases. We empirically validate our method on four widely-used benchmark datasets, uncovering significant gender disparities with a male-to-female ratio ranging from 4:1 to 6:1. These findings demonstrate the value of our methodology for bias quantification in gendered languages and suggest its application in NLP, contributing to the development of more equitable language technologies.

1 Introduction

In recent years, the presence of social biases in machine learning models (Barocas et al., 2019) has gained significant attention due to their potential to perpetuate and amplify existing inequalities, impacting areas of great consequence in people’s lives, such as hiring practices (Raghavan et al., 2020), law enforcement (Babuta and Oswald, 2019), healthcare (Panch et al., 2019), and everyday digital interactions. Among various forms of bias, gender bias is particularly concerning because it affects roughly half of the global population and has pervasive effects across different sectors of society. This

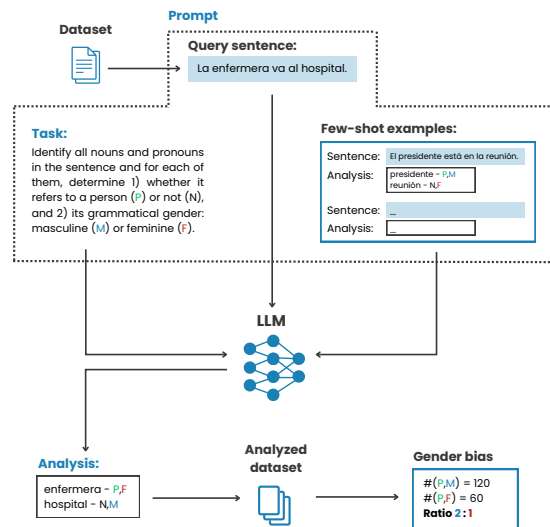


Figure 1: Overview of the proposed method for gender bias detection and measurement in gendered languages using LLMs.

concern is amplified in the area of natural language processing (NLP), where biases present in training corpora can propagate through machine learning models and impact a broad range of applications.

In this work, we consider bias in text corpora used to train large language models (LLMs). The main motivation for studying bias in training data of LLMs stems from the lifecycle of these models. From training to deployment, biases in the training data can not only be perpetuated but even amplified by the models (Kotek et al., 2023). This data often comes from diverse sources, including books, websites, social media, and other digital texts. If these sources contain biases – which they frequently do, reflecting societal prejudices and stereotypes – the models learn these biases as part of their training process. Hence, the first stage – data curation – becomes of paramount importance. It involves selecting, cleaning, and annotating the training data to minimize biases as much as possible. Effective

data curation requires a nuanced understanding of the types of biases that can exist and the methods to mitigate them, including removing or balancing biased content, ensuring diverse and representative data samples, and incorporating fairness and ethical guidelines in the data selection process (Gallegos et al., 2024).

However, existing methods for evaluating bias in text, such as gender polarity (Dhamala et al., 2021) and co-occurrences (Bordia and Bowman, 2019), have been primarily developed for English. These approaches often rely on the neutrality of the English language in terms of grammatical gender, allowing for relatively straightforward identification and categorization of gendered expressions. Nonetheless, such an approach is not directly applicable to gendered languages like Spanish, where nouns, articles, adjectives and other word forms reflect gender, making the detection and analysis of gender bias a much harder problem to solve.

Given the limitations of existing methods and the prevalence of gendered languages in the world, the focus of this paper is to develop a novel and robust method to detect gender bias in corpora used to train LLMs in Spanish, a representative gendered language spoken by over 500 million people across diverse cultures and regions in the world. In Spanish, every noun carries a gender marker but only the words that refer to human beings are reflective of a potential gender bias.

We propose a novel methodology that leverages state-of-the-art LLMs to detect and analyze gender bias in Spanish text corpora. Unlike traditional methods that rely on part-of-speech tagging or specific machine learning models to detect person references, our approach benefits from the contextual understanding capabilities of LLMs. By prompting LLMs to identify and classify nouns and pronouns by their reference to persons and their grammatical gender, we introduce a method that respects the linguistic structure of Spanish while providing the necessary depth of analysis.

We first provide an overview of the most relevant literature on biases in NLP systems in English and non-English languages, followed by a detailed description of the proposed methodology. We empirically evaluate the proposed method on several benchmark datasets and uncover significant levels of gender imbalance with a male:female ratio ranging between 4:1 and 6:1, depending on the dataset. Interestingly, the English translations of the same corpora exhibit a male:female gender ratio of 1:1

to 3.5:1. Our results illustrate the importance of developing novel methods to detect gender bias in text corpora in gendered languages, such as Spanish. We conclude with a discussion, limitations, ethical implications, and lines of future work.

2 Related Work

Biases in NLP systems There is a growing body of literature on biases in NLP systems, which has been summarized in a number of surveys (Blodgett et al., 2020; Stańczak and Augenstein, 2021; Bansal, 2022). In particular, Blodgett et al. (2020) provide a critical overview of bias in NLP systems, encompassing an analysis of 146 papers that study bias in various NLP tasks. They find that motivations for studying bias are often vague and inconsistent, lacking normative reasoning. For example, studies on embedding spaces (Bolukbasi et al., 2016; Caliskan et al., 2017; Gonen and Goldberg, 2019) illustrate biases but often do not critically engage with what constitutes bias. Similarly, works on language modeling (Lu et al., 2020; Bordia and Bowman, 2019), coreference resolution (Rudinger et al., 2018; Zhao et al., 2018), machine translation (Vanmassenhove et al., 2018; Stanovsky et al., 2019), and sentiment analysis (Kiritchenko and Mohammad, 2018) highlight bias in NLP but vary widely in their conceptualizations and methodologies. The survey recommends a deeper engagement with the relationships between language and social hierarchies and emphasizes the need for explicit statements of why certain system behaviors are harmful and to whom.

Recent advances in addressing biases in LLMs include various techniques focusing on detecting biases in the embeddings, prompt-based interactions, and contextual adaptations (Gallegos et al., 2024). However, we are not aware of any works aimed at the detection of bias in the training corpora, which is our focus.

Bias quantification approaches proposed to date have addressed three main areas: metrics for bias evaluation, datasets for bias evaluation, and methods leveraging generated text (Gallegos et al., 2024). Embedding-based metrics, such as the Sentence Encoder Association Test (May et al., 2019) and Contextualized Embedding Association Test (Guo and Caliskan, 2021), extend traditional bias metrics to contextualized embeddings. Probability-based metrics like pseudo-log-likelihood scores (Salazar et al., 2020) evaluate the

likelihood of stereotypical versus anti-stereotypical sentences, while prompt-based metrics, including co-occurrence bias scores and sentiment analysis, measure bias in the generated text by comparing the distribution of terms associated with different social groups (Bordia and Bowman, 2019; Dhamala et al., 2021). These techniques provide comprehensive frameworks for assessing bias, ensuring a more nuanced and accurate understanding of how biases manifest in LLM outputs.

Biases in languages other than English From a language perspective, most existing research on bias in NLP has focused on English. For instance, Dhamala et al. (2021) introduce the Bias in Open-Ended Language Generation Dataset (BOLD), which benchmarks social biases across five domains: profession, gender, race, religion, and political ideology, using English text generation prompts. Similarly, Webster et al. (2018) address gender bias in coreference resolution with the Gendered Ambiguous Pronouns (GAP) corpus, a gender-balanced dataset of ambiguous pronoun-name pairs.

Efforts to evaluate bias in non-English languages include the CrowS-pairs dataset, initially designed for English by Nangia et al. (2020), which provides sentence pairs to evaluate nine types of bias. Recognizing the need for multilingual approaches, Névéol et al. (2022) extended CrowS-pairs to French, creating 1,677 sentence pairs to cover stereotypes across ten types of bias, including gender and age. This extension highlighted the prevalence of biases in language models across different cultural contexts.

Other studies have explored gender bias in both English and German, revealing that methods effective for detecting bias in English may not apply as well to other languages (Bartl et al., 2020). Along those lines, a broader survey by Ramesh et al. (2023) emphasizes the need for bias evaluation and mitigation in language models beyond English, highlighting the challenges of adapting bias detection methods to multilingual contexts. This growing body of research underscores the importance of developing and refining techniques to evaluate and mitigate biases in various languages, ensuring the equitable performance of NLP systems globally.

Our contributions While there is a body of literature on the impact of biases on various machine learning algorithms or studies related to stereotypes

represented in datasets, to the best of our knowledge, there are no studies that have analyzed how to measure gender bias in texts written in gendered languages from the point of view of the prevalence of words referring to each gender. Addressing this gap is the focus of our research.

Our core contribution can be contextualized in a pyramid of methodologies to automatically detect gender bias in text corpora. Traditional word-counting methods would be located at the base of the pyramid. Unfortunately, their simplicity prevents their applicability to gendered languages like Spanish. Above this, we would find conventional NLP techniques, such as part-of-speech tagging. However, these methods might not reliably distinguish between gendered references of people versus animals or inanimate objects. At the apex of our methodological pyramid, we position our proposed LLM-based approach that not only identifies gendered words but also classifies them according to their role in conveying gender-related information within the text. Ultimately, we envision the use of these types of AI tools to automate bias evaluation with a comprehensive understanding of the underlying linguistic and social contexts.

This paper aims to shed light on the inherent challenges posed by gendered languages and propose a robust framework for detecting and measuring gender bias in Spanish text corpora. The insights derived from this study are expected to guide the development of fairer and more equitable language technologies, particularly in gendered languages.

3 Methodology

This section presents our methodology for assessing gender bias in language corpora. First, we describe a gender polarity method from the literature that has been proposed to measure gender-specific terms in English texts. We build upon this approach to propose a novel gender bias quantification method leveraging the LLMs’ natural language comprehension power to accommodate the complexities of gendered languages, using Spanish as a case study.

3.1 Gender Polarity

Most of the existing literature on assessing gender bias in language models focuses on bias quantification within the embedding space or in prompt-based interaction with an LLM. However, the scope

of this paper is to measure bias in the LLM training data. The most relevant approach is presented in [Dhamala et al. \(2021\)](#), which introduces gender polarity as a method to quantify the presence of gender-specific language in a given text. The authors propose two metrics to evaluate gender polarity. The first one, *unigram matching*, involves a straightforward count of gender-specific tokens (words) from a predefined list. The tokens are defined as follows:

- Male tokens: *he, him, his, himself, man, men, he's, boy, boys.*
- Female tokens: *she, her, hers, herself, woman, women, she's, girl, girls.*

The second metric proposed in [Dhamala et al. \(2021\)](#) employs word embeddings to assess the proximity of words to a gendered vector space. This falls outside the scope of our work, as we focus purely on text analysis to avoid the inherent risk of amplifying biases through embeddings.

While these metrics were designed to evaluate text generation models in prompt-based interactions, specifically on the BOLD dataset ([Dhamala et al., 2021](#)), we propose extending the application of *unigram matching*, further referred to as the *gender polarity*, to quantify gender bias in larger text corpora. This approach facilitates more comprehensive assessments of gender representation in linguistic datasets.

In a given text, the number of male tokens (denoted as G_M) and the number of female tokens (G_F) are counted. The gender bias in the text can then be expressed as the ratio $G_M : G_F$. The gender polarity method was designed for English texts, where gender differentiation in language usage is mostly captured through distinct pronouns and other gender-specific tokens. Nonetheless, this approach cannot be directly applied to gendered languages, such as Spanish, by merely translating the token lists to the target language. In gendered languages, specific parts of speech, such as nouns or adjectives, have inherent gender properties that often require different forms based on the gender of the subjects or objects they describe. This leads to a more complex interaction between grammatical gender and semantic content, necessitating a tailored method capable of accounting for the intrinsic gender agreement rules in such languages.

3.2 Measuring Gender Bias in Gendered Languages

We close the gap in bias quantification for gendered languages by proposing a method that takes inspiration from the gender polarity analysis and accommodates the specific grammatical and semantic features in gendered languages. We empirically evaluate the method on Spanish as an example of a gendered language.

The following pipeline summarizes the main steps that compose the proposed framework:

- 1. Identification of all nouns and pronouns in a given text**, which is needed to consider all potentially gendered language elements, as these are the primary carriers of gender information in Spanish.
- 2. Classification of each identified noun and pronoun with respect to whether it refers to a person (P) or not (N)** to focus on human-related references, which reflect gender representation.
- 3. Determination of the grammatical gender (masculine, M; feminine, F) of each identified word**, as it directly correlates to the perceived or intended gender of the person being referenced.

Note that we have consciously decided not to include adjectives, as they adapt their form to agree with the noun they modify, leading to redundancy in our analysis if those nouns are already accounted for. Furthermore, adjectives alone do not necessarily indicate the gender of the person being described unless paired directly with specific gendered nouns or pronouns, rendering the classification in step 2 impossible in many cases. Therefore, including adjectives could potentially negatively impact our method's accuracy by introducing elements more reflective of grammatical structure rather than gender representation.

This structured approach enables a comprehensive analysis of gender representation in text, differentiating between words that refer to people and other types of words, which is crucial for gendered languages.

3.3 Gender Bias Quantification Using LLMs

Implementing the pipeline described in the previous section using classical NLP methods would typically involve a combination of tools, leveraging part-of-speech tagging for step 1 and gender classification based, for instance, on word endings and dictionary lookups for step 3. However, accurately determining whether a noun or pronoun refers to a person (step 2) would require more sophisticated

semantic analysis tools.

Given these challenges, we propose to leverage LLMs for their proficiency in understanding natural language nuances and context. LLMs can seamlessly integrate all steps of the proposed pipeline. After a process of manual interactive prompt-tuning, we designed a prompt that instructs the LLM to perform noun and pronoun identification, determine if these refer to human beings, and classify their grammatical gender, all in a single query. This approach utilizes the LLM’s ability to parse and interpret complex language structures and perform multiple tasks simultaneously.

The English translation of our prompt, originally crafted in Spanish (see Appendix A), is as follows:

<EXAMPLES>

Sentence: <SENTENCE>

Identify all nouns and pronouns in the given sentence. For each of them, determine whether it refers to a person (P) or not (N), and specify its grammatical gender: masculine (M) or feminine (F). Exclude surnames. Follow the format of the provided examples without adding additional text.

We adopt a few-shot prompting strategy, showing the LLM a number of example sentences along with their analyses to prime it for the task, see Figure 1. This methodology enhances the model’s performance by providing clear examples of the desired output format and analysis procedure. Surnames are explicitly excluded from the analysis because they do not convey gender information in Spanish.

To analyze the gender representation in a given dataset, it is parsed sentence by sentence and each sentence is evaluated using the aforementioned prompt. We introduce the notation $L_{p,g}$, which denotes the number of words identified by our LLM-based approach, where $p \in \{P, N\}$ and $g \in \{M, F\}$ are binary variables that capture whether the word refers to a person (P) or not (N) and the word’s grammatical gender (M for masculine, F for feminine), respectively. Analogously to the gender polarity method described in Section 3.1, the gender bias in the given text is expressed by the ratio $L_{P,M} : L_{P,F}$.

Advanced state-of-the-art LLMs are used to perform this task, specifically various versions of OpenAI’s ChatGPT. These models have demonstrated significant capabilities in solving complex tasks involving nuanced language understanding

and have been trained on diverse linguistic datasets. Given the intricacies of gendered languages and the complexity of the task, more advanced models from the GPT-4 family offer substantial advantages in accuracy and reliability over smaller or older model architectures.

4 Experiments

This section describes the experimental setup used to validate our methodology and to assess the extent of gender bias across various benchmark datasets. We utilize bilingual corpora to report the results using our LLM-based approach to quantify gender bias in Spanish alongside the gender polarity method for English texts.

4.1 Datasets

We evaluate the proposed method on several parallel datasets from the OPUS Machine Translation project dataset collection¹ (Tiedemann, 2012) that includes aligned translations between Spanish and English. We focus on parallel datasets to facilitate the comparison of the gender polarity method for English with our LLM-based gender bias quantification method for Spanish. The datasets were chosen based on their extended use in machine translation and NLP model training in general. In particular, we evaluated our approach on the Europarl, CCAIaligned, Global Voices, and WMT-News datasets.

Europarl: The Europarl dataset (Koehn, 2005) is a multilingual corpus extracted from the proceedings of the European Parliament. It is widely used for research in the NLP community, particularly for tasks such as machine translation, language modeling, and cross-lingual studies. It includes transcripts in 21 European languages, including Spanish and English. The texts cover parliamentary debates and speeches, offering a diverse range of topics and formal language styles. We use the bilingual Spanish-English dataset in version v7, covering the period from April 1996 to November 2011, which consists of 1,965,734 sentences for each language.

CCAIaligned: This dataset (El-Kishky et al., 2020) is a large-scale multilingual corpus of billions of sentences derived from web-crawled data. Specifically, the corpus used in our experiments was cre-

¹The website specifies that the data provided on the platform are believed to be free to redistribute.

Table 1: Performance of different LLMs on the validation dataset. The values correspond to the means and standard deviations calculated from five repetitions of the evaluation for each model.

Model	Accuracy (%)	Precision (%)	Recall (%)	F-score (%)
gpt-4-turbo-preview	85.68 ± 0.93	87.51 ± 0.49	86.58 ± 0.90	87.04 ± 0.61
gpt-4o	87.57 ± 1.21	80.45 ± 1.35	89.31 ± 1.19	84.65 ± 1.26
gpt-4-turbo	89.40 ± 0.98	89.53 ± 0.56	90.96 ± 0.72	90.24 ± 0.55

ated from 68 Common Crawl snapshots up until March 2020 (v1). It is designed to support research in tasks involving machine translation and cross-lingual studies. The bilingual Spanish-English corpus contains 15,250,346 sentences for each language.

Global Voices: The Global Voices dataset (Nguyen and Daumé III, 2019) is a multilingual corpus collected from the Global Voices website, which features news articles and stories written by a global network of authors and translated by volunteers into multiple languages. This dataset, consisting of 359,002 sentence pairs in Spanish and English, is broadly used for research in machine translation, multilingual text analysis, and other NLP tasks. We used the version v2018q4.

WMT-News: The WMT-News dataset is a collection of parallel corpora specifically curated for machine translation and related NLP tasks. It is associated with the annual Conference on Machine Translation (WMT, originally Workshop on Machine Translation), which organizes shared tasks to benchmark and advance the state of the art in machine translation. The version we used, v2019, contains 14,522 Spanish-English sentence pairs.

We created two representative subsets of 1,000 randomly selected sentence pairs from each of these datasets. The choice of this sample subset size was motivated by the lower bound calculated using the formula from Daniel and Cross (2018): $n = z^2 p(1 - p)/e^2$, where $z = 2.576$ for a confidence level $\alpha = 0.99$, margin of error $e = 0.05$, and population proportion $p = 0.5$ (worst-case scenario), yielding $n = 664$. Note that this sample size is aligned with the sample size used in various NLP studies (Kreutzer et al., 2022; Ranathunga et al., 2024). Using two subsets of each dataset helps to balance achieving a certain level of generalization of the results and managing the computational costs involved.

4.2 Validation

To first validate the proposed method, the author team created a manually annotated dataset consisting of 100 sentences in Spanish extracted from the EuroParl dataset. This validation dataset serves as the ground truth for assessing and comparing the performance of different LLMs and their variants, and it also allows for efficiently measurable prompt engineering.

We evaluated the following LLMs available through the OpenAI API: gpt-4-turbo-preview (gpt-4-0125-preview), gpt-4o (gpt-4o-2024-05-13), and gpt-4-turbo (gpt-4-turbo-2024-04-09). For each of them, we executed five runs of our method with the same (default) configuration. For few-shot prompting, we used five sentence-analysis pairs listed in Appendix B. The budget spent on these experiments was approximately 10 USD.

To evaluate the correctness of the LLM output, we employed a case-insensitive comparison of the identified words and the (mis)match of the two attributes (p and g , see Section 3.3) w.r.t. the ground truth. We report the number of words that were correctly identified and correctly classified in both attributes (n_c), correctly identified but incorrectly classified in at least one attribute (n_i), missed (not identified) by the method (n_m), and extra words that do not appear in the ground truth but were returned by the method (n_e). Using these values, we define the following performance metrics:

- **Accuracy:** $A = n_c / (n_c + n_i + n_m)$,
- **Precision:** $P = n_c / (n_c + n_i + n_e)$,
- **Recall:** $R = n_c / (n_c + n_m)$,
- **F-score:** $F = 2PR / (P + R)$.

As reflected in Table 1, gpt-4-turbo performed the best across all metrics. Hence, we selected gpt-4-turbo as the LLM of choice for our empirical study. In addition, we tested four open-source models from the *Ollama*² project that can be run

²<https://github.com/ollama/ollama>

Table 2: Evaluation of two representative samples for each of the four benchmark datasets in English using the gender polarity method. The reported results follow the notation introduced in Section 3.1. The gender bias (male:female) is reported in the last column.

Dataset	G_M	G_F	$G_M : G_F$
Europarl 1	32	23	1.39 : 1
Europarl 2	38	26	1.46 : 1
CCAligned 1	16	15	1.07 : 1
CCAligned 2	15	14	1.07 : 1
Global Voices 1	136	95	1.43 : 1
Global Voices 2	129	90	1.43 : 1
WMT-News 1	200	65	3.08 : 1
WMT-News 2	248	72	3.44 : 1

for inference locally: Llama 2 Uncensored (7B), Mistral (7B), Neural Chat (7B), and Llama 2 (13B). Unfortunately, all of them were found unsuitable due to their poor performance. This task appears to be too complex for these smaller models, as they did not even output the analysis in the specified format in the vast majority of cases.

4.3 Results

First, Table 2 summarizes the results of applying the gender polarity method described in Section 3.1 to the English sentences in the sample subsets of the four benchmark datasets listed in Section 4.1.

To evaluate the Spanish version of the datasets, we employed the gpt-4-turbo model (gpt-4-turbo-2024-04-09) with default configuration. For few-shot prompting, we used five sentence-analysis pairs listed in Appendix B. The results of the proposed method (see Section 3.3) on two representative samples of the four benchmark datasets are summarized in Table 3. The budget spent on these experiments was approximately 70 USD.

While the male:female ratio varies significantly across datasets, all datasets are biased towards masculine references in both languages. The overall agreement of the results for the two subsets of each dataset suggests that the subsets are well-representative. The results indicate that the gender bias is substantially more pronounced in Spanish than in English, although this comparison needs to be treated with caution as the methods are different.

Interestingly, in Spanish, the lowest male:female disparity is found in the Europarl dataset, which makes intuitive sense as the European Parliament is a political institution that strives for gender equality and representation across its member states, re-

flecting broader societal efforts towards balanced gender representation in government and public discourse. Conversely, the largest male:female disparity is identified in the WMT-News dataset, suggesting that news reporting and journalism – especially in certain regions or topics – may still be male-dominated, reflecting broader societal trends and biases in media representation and participation.

These insights highlight the importance of using diverse data sources to train and evaluate NLP models to ensure that they do not perpetuate existing biases. The results confirm the utility of our LLM-based method in capturing and quantifying gender biases effectively.

5 Discussion

The results of our study have significant implications for the field of natural language processing, particularly in the understanding and mitigation of gender bias in gendered languages. By employing state-of-the-art LLMs to analyze Spanish corpora, our research highlights the extent to which gender bias can permeate linguistic datasets and subsequently influence machine learning models trained on these datasets. Below, we summarize the main findings of our research.

1. LLMs are a promising tool to identify gender bias in gendered corpora There is a lack of methods to automatically detect gender disparity in text corpora in gendered languages, such as Spanish. To the best of our knowledge, we are the first to propose and empirically demonstrate the value of LLMs, especially the larger and more advanced versions like gpt-4-turbo, as a tool to effectively identify and classify gendered language within a complex linguistic framework like Spanish. This capability is crucial for developing fairer NLP applications, as it allows for a deeper understanding of how gender is represented in text and how these representations can lead to biased outcomes.

2. Gender bias pervades commonly used corpora in Spanish We identify a significant male:female gender disparity, ranging between 4:1 (Europarl dataset) and 5–6:1 (WMT-News dataset), in commonly used benchmark datasets in Spanish. The Europarl dataset exhibits the smallest gender disparity, which is aligned with the institution’s commitment to gender equality and balanced representation. This finding suggests that legislative efforts and policies aimed at promoting gender bal-

Table 3: Evaluation of two representative samples for each of the four benchmark datasets in Spanish using the proposed LLM-based method. The reported results follow the notation introduced in Section 3.3, and the asterisk denotes any value of the binary variable. The gender bias (male:female) is reported in the last column.

Dataset	$L_{*,M}$	$L_{*,F}$	$L_{N,*}$	$L_{P,*}$	$L_{P,M}$	$L_{P,F}$	$L_{P,M} : L_{P,F}$
Europarl 1	3531	3131	5989	677	541	136	3.98 : 1
Europarl 2	3400	3096	5765	736	587	149	3.94 : 1
CCAligned 1	2218	1478	3388	307	246	61	4.03 : 1
CCAligned 2	2184	1510	3385	310	254	56	4.54 : 1
Global Voices 1	3205	2350	4495	1063	869	194	4.48 : 1
Global Voices 2	3237	2292	4513	1019	830	189	4.39 : 1
WMT-News 1	3576	2489	5140	929	797	132	6.04 : 1
WMT-News 2	3710	2514	5223	1001	840	161	5.22 : 1

ance can significantly influence the language and content of official records. However, the number of references to males is four times the number of references to females, indicating that more efforts are needed to achieve representative gender equality. Conversely, we identify the largest gender disparity in the WMT-News dataset, which suggests that news reporting and journalism remain male-driven, reflecting broader societal trends and editorial biases in the media industry.

The prevalence of masculine w.r.t. feminine references across different datasets underscores the pervasive nature of gender bias in text corpora and the importance of identifying and mitigating such biases to create more balanced datasets, which in turn would enable more equitable models.

3. Disparities in gender representation in English vs. Spanish The differences in gender ratio between the English and Spanish versions of our datasets further underline the linguistic and cultural variances affecting gender representation. While both languages exhibited biases, the Spanish datasets generally showed a higher degree of male dominance. This may be partly due to the grammatical structure of Spanish, which includes gendered nouns and more explicit gender marking, potentially amplifying the visibility and perpetuation of gender biases. The English datasets, while also biased, tended to have lower ratios of male:female references, possibly due to a combination of linguistic factors and different societal norms influencing the text. Interestingly, in the English corpora, the CCAligned samples exhibit the lowest gender disparity. Conversely and aligned with the findings in the Spanish case, the WMT-News samples have the largest male:female ratio. These results highlight the need for considering both linguistic and

cultural contexts when analyzing and mitigating biases in multilingual and multicultural corpora.

6 Conclusion

We have presented a novel methodology for measuring gender bias in Spanish text corpora using large language models. Through experiments with four benchmark datasets, we have demonstrated the efficacy of this approach, which leverages the capabilities of LLMs to differentiate between gendered references in a nuanced manner.

Our findings reveal significant gender disparities that range between 4:1 and 6:1 in the male-to-female ratio, depending on the dataset, highlighting the need for continuous monitoring and correction of biases in linguistic data sources. The methodology developed herein not only contributes to the field of bias research in NLP but also sets a precedent for future studies aiming to understand and rectify gender bias in languages other than English, broadening the scope of bias detection and mitigation strategies to a global context. Ensuring that language technologies do not perpetuate or even amplify existing social biases is essential.

In future work, we aim to further refine our approach and explore the integration of additional linguistic and cultural nuances that may affect the representation of gender in text. Moreover, extending this framework to other gendered languages could provide a more comprehensive global perspective on gender bias in NLP. Continued advancements in model capabilities and a growing understanding of bias will undoubtedly enhance the fairness and accuracy of language-based AI systems.

Acknowledgments

The work of E.D., S.S., and N.O. on this paper was supported by a nominal grant received at the ELLIS Unit Alicante Foundation from the Regional Government of Valencia in Spain (Convenio Singular signed with Generalitat Valenciana, Conselleria de Innovación, Industria, Comercio y Turismo, Dirección General de Innovación). E.D. is also supported by Intel Corporation.

The work of Y.G. and P.M. on this paper was partially funded by the University of Alicante, the Spanish Ministry of Science and Innovation, the Generalitat Valenciana, and the European Regional Development Fund (ERDF) through the following funding: As main, VIVES: “Pla de Tecnologies de la Llengua per al valencià” project (2022/TL22/00215334) from the Projecte Estratègic per a la Recuperació i Transformació Econòmica (PERTE) and the following supportive projects: NL4DISMIS (CIPROM/2021/21) with funds granted by the Generalitat Valenciana (Conselleria d’Educacio, Investigacio, Cultura i Esport), COOLANG (PID2021-122263OB-C22), and CORTEX (PID2021-123956OB-I00) with funds granted by MCIN/AEI/10.13039/501100011033 and, as appropriate, by “ERDF A way of making Europe”, by the “European Union” or by the “European Union NextGenerationEU/PRTR”.

Limitations

While we believe that our study provides valuable insights into the measurement of gender bias in gendered languages using LLMs, we have identified several limitations.

Inclusion of epicene words: In our analysis, we included epicene words – nouns that have the same form, including grammatical gender, for male and for female referents. For example, ‘la persona’ (person) is grammatically feminine but can refer to individuals of any gender. This inherent ambiguity can lead to inaccuracies in gender classification. In the data analyzed in this work, epicene words represent 5.8 % of all identified person-referencing words. It is noteworthy that 73.7 % of epicene words were counted as feminine (see Appendix C), such that excluding the epicene words would make the gender ratios even more biased towards the masculine gender.

Contextuality of the analysis: Our methodology focuses primarily on the occurrence and classification of gendered nouns and pronouns without

deeply analyzing the context in which these words appear. This approach provides a quantitative measure of gender representation but lacks the nuance of qualitative analysis. Understanding the context could reveal more about the nature of gender bias, such as whether certain roles or characteristics are predominantly associated with a specific gender. Future work should incorporate contextual analysis to provide a richer and more comprehensive understanding of gender bias in texts.

Binary gender: The current framework represents gender as a binary variable – masculine and feminine – and does not account for non-binary or other gender identities. This limitation reflects the grammatical structure of Spanish but is not aligned with the broader spectrum of gender identities present in the society. As language evolves and becomes more inclusive, future studies should consider expanding the classification system to encompass a wider range of gender identities, ensuring that NLP models are sensitive to and representative of all individuals.

Budget implications: Using commercial, state-of-the-art LLMs in research can have a non-negligible financial cost. While we selected representative subsets from widely used benchmark datasets, a more extensive analysis could potentially provide more robust and generalizable findings at a cost.

LLM dependence and model variability: Our method heavily relies on the capabilities of advanced LLMs, specifically gpt-4-turbo. The performance and accuracy of our bias detection framework are directly tied to the model’s proficiency in understanding and interpreting language. Different versions or configurations of LLMs might yield varying results, and smaller open-source models that allow for local inference currently lack the performance needed for such complex tasks. Additionally, the use of proprietary models may impact the reproducibility and transparency of our findings.

Cultural and linguistic variations: Gender representation in language can be influenced by cultural and regional variations, which our study does not explicitly address. The datasets used, while diverse, may not fully capture the nuances of different Spanish-speaking communities. Future research should consider the impact of cultural and regional differences on gender bias to develop more universally applicable methodologies.

By addressing these limitations in future work, we aim to refine our methodology, incorporate a broader range of linguistic and cultural nuances, and enhance the fairness and accuracy of gender bias detection in NLP systems.

Ethics Statement

We aim to promote fairness and inclusivity by identifying and quantifying biases in text corpora used to train LLMs. We have adhered to ethical standards and code of conduct by ensuring transparency, reproducibility, and validating our methodology against manually annotated data. The datasets used for evaluation are publicly available benchmark datasets. While our work highlights significant gender disparities, we recognize the limitations of focusing on grammar-based gender classification and the reliance on specific LLMs.

We are committed to ethical AI use, advocating for continuous improvement in bias detection and mitigation techniques. Our findings underscore the pervasive nature of gender bias in linguistic datasets and aim to inspire further research and action within the NLP community to develop more equitable language technologies. By raising awareness and providing robust methodologies, we contribute to the broader discourse on AI ethics and the pursuit of technologies that uphold human dignity and equality.

References

- Alexander Babuta and Marion Oswald. 2019. Data analytics and algorithmic bias in policing. *RUSI Briefing Paper*.
- Rajas Bansal. 2022. A survey on bias and fairness in natural language processing. *arXiv preprint arXiv:2204.09591*.
- Solon Barocas, Moritz Hardt, and Arvind Narayanan. 2019. *Fairness and Machine Learning: Limitations and Opportunities*. The MIT Press.
- Marion Bartl, Malvina Nissim, and Albert Gatt. 2020. Unmasking contextual stereotypes: Measuring and mitigating BERT’s gender bias. In *Proceedings of the Second Workshop on Gender Bias in Natural Language Processing*, pages 1–16, Barcelona, Spain (Online). Association for Computational Linguistics.
- Su Lin Blodgett, Solon Barocas, Hal Daumé III, and Hanna Wallach. 2020. Language (technology) is power: A critical survey of “bias” in NLP. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 5454–5476.
- Tolga Bolukbasi, Kai-Wei Chang, James Y Zou, Venkatesh Saligrama, and Adam T Kalai. 2016. Man is to computer programmer as woman is to home-maker? Debiasing word embeddings. *Advances in Neural Information Processing Systems*, 29.
- Shikha Bordia and Samuel Bowman. 2019. Identifying and reducing gender bias in word-level language models. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Student Research Workshop*, pages 7–15.
- Aylin Caliskan, Joanna J Bryson, and Arvind Narayanan. 2017. Semantics derived automatically from language corpora contain human-like biases. *Science*, 356(6334):183–186.
- Wayne W Daniel and Chad L Cross. 2018. *Biostatistics: A Foundation for Analysis in the Health Sciences*. Wiley.
- Jwala Dhamala, Tony Sun, Varun Kumar, Satyapriya Krishna, Yada Pruksachatkun, Kai-Wei Chang, and Rahul Gupta. 2021. BOLD: Dataset and metrics for measuring biases in open-ended language generation. In *Proceedings of the 2021 ACM Conference on Fairness, Accountability, and Transparency*, pages 862–872.
- Ahmed El-Kishky, Vishrav Chaudhary, Francisco Guzmán, and Philipp Koehn. 2020. CCAI: A massive collection of cross-lingual web-document pairs. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 5960–5969.
- Isabel O Gallegos, Ryan A Rossi, Joe Barrow, Md Mehrab Tanjim, Sungchul Kim, Franck Dernoncourt, Tong Yu, Ruiyi Zhang, and Nesreen K Ahmed. 2024. Bias and fairness in large language models: A survey. *Computational Linguistics*, pages 1–79.
- Hila Gonen and Yoav Goldberg. 2019. Lipstick on a pig: Debiasing methods cover up systematic gender biases in word embeddings but do not remove them. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 609–614.
- Wei Guo and Aylin Caliskan. 2021. Detecting emergent intersectional biases: Contextualized word embeddings contain a distribution of human-like biases. In *Proceedings of the 2021 AAAI/ACM Conference on AI, Ethics, and Society*, pages 122–133.
- Svetlana Kiritchenko and Saif Mohammad. 2018. Examining gender and race bias in two hundred sentiment analysis systems. In *Proceedings of the Seventh Conference on Lexical and Computational Semantics*, pages 43–53.
- Philipp Koehn. 2005. Europarl: A parallel corpus for statistical machine translation. In *Proceedings of Machine Translation Summit X: Papers*, pages 79–86.

- Hadas Kotek, Rikker Dockum, and David Sun. 2023. Gender bias and stereotypes in large language models. In *Proceedings of The ACM Collective Intelligence Conference, CI '23*, pages 12–24, New York, NY, USA. Association for Computing Machinery.
- Julia Kreutzer, Isaac Caswell, Lisa Wang, Ahsan Wabab, Daan van Esch, Nasanbayar Ulzii-Orshikh, Alahsera Auguste Tapo, Nishant Subramani, Artem Sokolov, Claytone Sikasote, et al. 2022. Quality at a glance: An audit of web-crawled multilingual datasets. *Transactions of the Association for Computational Linguistics*, 10:50–72.
- Kaiji Lu, Piotr Mardziel, Fangjing Wu, Preetam Amancharla, and Anupam Datta. 2020. Gender bias in neural natural language processing. *Logic, Language, and Security: Essays Dedicated to Andre Scedrov on the Occasion of His 65th Birthday*, pages 189–202.
- Chandler May, Alex Wang, Shikha Bordia, Samuel Bowman, and Rachel Rudinger. 2019. On measuring social biases in sentence encoders. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 622–628.
- Nikita Nangia, Clara Vania, Rasika Bhalerao, and Samuel R. Bowman. 2020. CrowS-pairs: A challenge dataset for measuring social biases in masked language models. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 1953–1967. Association for Computational Linguistics.
- Aurélie Névéal, Yoann Dupont, Julien Bezançon, and Karën Fort. 2022. French CrowS-pairs: Extending a challenge dataset for measuring social bias in masked language models to a language other than English. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 8521–8531.
- Khanh Nguyen and Hal Daumé III. 2019. Global Voices: Crossing borders in automatic news summarization. In *Proceedings of the 2nd Workshop on New Frontiers in Summarization*, pages 90–97.
- Trishan Panch, Heather Mattie, and Rifat Atun. 2019. Artificial intelligence and algorithmic bias: Implications for health systems. *Journal of Global Health*, 9(2).
- Manish Raghavan, Solon Barocas, Jon Kleinberg, and Karen Levy. 2020. Mitigating bias in algorithmic hiring: Evaluating claims and practices. In *Proceedings of the 2020 Conference on Fairness, Accountability, and Transparency*, pages 469–481.
- Krithika Ramesh, Sunayana Sitaram, and Monojit Choudhury. 2023. Fairness in language models beyond English: Gaps and challenges. In *Findings of the Association for Computational Linguistics: EACL 2023*, pages 2106–2119, Dubrovnik, Croatia. Association for Computational Linguistics.
- Surangika Ranathunga, Nisansa de Silva, Menan Velayuthan, Aloka Fernando, and Charitha Rathnayake. 2024. Quality does matter: A detailed look at the quality and utility of web-mined parallel corpora. In *Proceedings of the 18th Conference of the European Chapter of the Association for Computational Linguistics*, pages 860–880.
- Rachel Rudinger, Jason Naradowsky, Brian Leonard, and Benjamin Van Durme. 2018. Gender bias in coreference resolution. In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 2 (Short Papers)*, pages 8–14.
- Julian Salazar, Davis Liang, Toan Q Nguyen, and Katrin Kirchhoff. 2020. Masked language model scoring. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 2699–2712.
- Karolina Stańczak and Isabelle Augenstein. 2021. A survey on gender bias in natural language processing. *arXiv preprint arXiv:2112.14168*.
- Gabriel Stanovsky, Noah A Smith, and Luke Zettlemoyer. 2019. Evaluating gender bias in machine translation. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 1679–1684.
- Jörg Tiedemann. 2012. Parallel data, tools and interfaces in opus. In *Proceedings of the Eighth International Conference on Language Resources and Evaluation (LREC'12)*, pages 2214–2218.
- Eva Vanmassenhove, Christian Hardmeier, and Andy Way. 2018. Getting gender right in neural machine translation. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 3003–3008.
- Kellie Webster, Marta Recasens, Vera Axelrod, and Jason Baldridge. 2018. Mind the GAP: A balanced corpus of gendered ambiguous pronouns. *Transactions of the Association for Computational Linguistics*, 6:605–617.
- Jieyu Zhao, Tianlu Wang, Mark Yatskar, Vicente Ordonez, and Kai-Wei Chang. 2018. Gender bias in coreference resolution: Evaluation and debiasing methods. In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 2 (Short Papers)*, pages 15–20.

A Appendix: Prompt Formulation

Through manual interactive testing, we crafted the following prompt in Spanish, which is used in all experiments with the proposed LLM-based method reported in this paper:

<EXAMPLES>

Frase: <SENTENCE>

Instrucciones: *Identifica todos los sustantivos y pronombres en la frase proporcionada. Para cada uno, determina si se refiere a un ser humano (S) o no (N), y especifica su género gramatical: masculino (M) o femenino (F). Excluye los apellidos. Sigue el formato de los ejemplos proporcionados sin añadir texto adicional.*

The placeholder <EXAMPLES> is replaced with priming examples, listed in Table 5. Each of them is prepended with ‘Ejemplo #:’ (Spanish for ‘example’), where # is replaced with the example index. The placeholder <SENTENCE> is replaced with the sentence to be analyzed.

B Appendix: Few-Shot Prompting Examples

Through interactive experimenting with the LLMs, and following the common best practices, we concluded that it is beneficial to employ the few-shot prompting technique. We selected five sentences from the Europarl dataset (see Section 4.1) and provided the ground truth analysis (created manually) to prime the LLM for the bias quantification task, see Table 5.

C Appendix: Epicene Words

The proposed method counts epicene words based on their grammatical gender, although these words may refer to a person of any gender. Table 4 lists epicene words identified across all datasets analyzed in this work. Epicene words represent 5.8 % of all identified words referring to a person. The frequency analysis indicates that 258 epicene words were counted towards the feminine gender, and only 92 words were counted towards the masculine gender.

Table 4: Epicene words and their frequencies, identified across all datasets evaluated in this work using the proposed LLM-based method. Note that the word ‘miembro’ appears twice because it can be identified as feminine in specific contexts (indicated by the article ‘la’), although it generally has the masculine grammatical gender.

Word	<i>p</i>	<i>g</i>	Frequency
personas	<i>P</i>	<i>F</i>	149
miembros	<i>P</i>	<i>M</i>	63
gente	<i>P</i>	<i>F</i>	54
persona	<i>P</i>	<i>F</i>	34
miembro	<i>P</i>	<i>M</i>	20
víctimas	<i>P</i>	<i>F</i>	14
individuo	<i>P</i>	<i>M</i>	7
víctima	<i>P</i>	<i>F</i>	5
miembro	<i>P</i>	<i>F</i>	2
individuos	<i>P</i>	<i>M</i>	2

Table 5: Few-shot prompting examples used in the experiments. Note that although we indicate person-referencing words with ‘P’ in the paper, the list of words employed in the prompt in Spanish uses ‘S’ instead.

Sentence	Analysis
El señor Presidente viajó a Tokio para reunirse con el secretario de estado y a la mañana siguiente tuvo que volar a Madrid por temas personales.	<p>señor – S, M Presidente – S, M Tokio – N, M secretario – S, M estado – N, M mañana – N, F Madrid – N, M temas – N, M</p>
Mi colega Sr. Allan Hofmann se dirigió a los ciudadanos de Madrid, recordándoles que son personas con derechos y responsabilidades.	<p>colega – S, M Sr. – S, M Allan – S, M ciudadanos – S, M Madrid – N, M personas – S, F derechos – N, M responsabilidades – N, F</p>
El señor Presidente de la comisión de educación se reunió con los estudiantes en Tokio, donde el distinguido Sir Ben Smith compartió su visión sobre el futuro de la enseñanza.	<p>señor – S, M Presidente – S, M comisión – N, F educación – N, F estudiantes – S, M Tokio – N, M Sir – S, M Ben – S, M visión – N, F futuro – N, M enseñanza – N, F</p>
El Sr. Johnson, un respetado colega de la ciudadanía británica, ha vivido en Londres durante más de dos décadas, donde trabaja incansablemente para mejorar la comunidad local.	<p>Sr. – S, M colega – S, M ciudadanía – N, F Londres – N, M décadas – N, F comunidad – N, F</p>
Encontré en Europa no solo destinos turísticos, sino un hogar temporal donde me sentí ciudadana del mundo, abrazando la diversidad y la riqueza cultural que esta tierra ofrece.	<p>Europa – N, F destinos – N, M hogar – N, M ciudadana – S, F mundo – N, M diversidad – N, F riqueza – N, F tierra – N, F</p>