

# Converging Dimensions: Information Extraction and Summarization through Multisource, Multimodal, and Multilingual Fusion

Pranav Janjani

Mayank Palan

Sarvesh Shirude

Ninad Shegokar

Sunny Kumar

Faruk Kazi

Centre of Excellence in Complex and Nonlinear Dynamical Systems, VJTI  
Mumbai, India

prjanjani\_b21@ce.vjti.ac.in, mbpalan\_b22@it.vjti.ac.in, seshirude\_b20@el.vjti.ac.in,  
nsshegokar\_b23@ee.vjti.ac.in, skumar\_p21@ee.vjti.ac.in, fskazi@el.vjti.ac.in

## Abstract

Recent advances in large language models (LLMs) have led to new summarization strategies, offering an extensive toolkit for extracting important information. However, these approaches are frequently limited by their reliance on isolated sources of data. The amount of information that can be gathered is limited and covers a smaller range of themes, which introduces the possibility of falsified content and limited support for multilingual and multimodal data. The paper proposes a novel approach to summarization that tackles such challenges by utilizing the strength of multiple sources to deliver a more exhaustive and informative understanding of intricate topics. The research progresses beyond conventional, unimodal sources such as text documents and integrates a more diverse range of data, including YouTube playlists, pre-prints, and Wikipedia pages. The aforementioned varied sources are then converted into a unified textual representation, enabling a more holistic analysis. This multifaceted approach to summary generation empowers us to extract pertinent information from a wider array of sources. The primary tenet of this approach is to maximize information gain while minimizing information overlap and maintaining a high level of informativeness, which encourages the generation of highly coherent summaries.

## 1 Introduction

Within the contemporary paradigm of omnipresent information access, where knowledge dissemination transcends traditional boundaries of format and language, the ability to efficiently extract and synthesize significant volumes of data becomes paramount. Methods have been implemented for textual summarization on PDFs from sources like educational documents and scientific research papers (Allahyari et al., 2017; Liu and Lapata, 2019). For research, there are significant amounts of unused information in the form of a large number

of scholarly articles on websites like arXiv (Jiang et al., 2024; Ibrahim Altmami and El Bachir Menai, 2022). An intelligent paper search module is integrated that works just like a seasoned navigator, which searches for appropriate research papers according to the query entered by the user. This focused approach mitigates the need to go through a plethora of irrelevant information. Once research paper harvesting is complete, latest summary methodology is employed to collate the retrieved papers into short, clear, and informative summaries (An et al., 2021). This way, researchers and students can quickly investigate the latest developments in their area of interest without expending too much time and effort.

YouTube is another source of information as it is one of the most popular websites characterized by abundant educative and entertaining information. The process employed is more advanced than just textual analysis, as the method also generate transcripts from multilingual videos (Lin et al., 2024; Sun et al., 2022). Advance methods in extracting frames to capture the visual narrative embedded in the film are employed (Ciocca and Schettini, 2006). By dissecting what is being said, one can better understand the topic. Therefore, the keyframes and generated transcripts are used to produce the summary.

To further improve the context of the information retrieved, summaries from reliable knowledge base such as Google, DuckDuckGo, and Wikipedia are concatenated (Hingu et al., 2015; Nemoto and Klyuev, 2021). These resources are vast libraries of filtered, verified human knowledge and provide essential background information. By integrating information from the sources to which it is connected, the system thus manages a more profound understanding of the underlying relationships between concepts and entities. A summary of a scientific result is extracted from these vast information banks that not only describes the result but

also embeds it in the appropriate historical context and the framework of scientific ideas. This well-defined structure allows a deep understanding of the content, enabling the easy integration of information from several modalities and languages into the document (Yuan et al., 2019). The ultimate summary, therefore, provides a comprehensive guide that contains all the relevant information related to YouTube videos, scholarly papers, and background sources.

This paper presents a methodology for multi-source summarization, capable of gleaning nuanced details and insights from a confluence of heterogeneous data streams – multilingual, multimodal, and encompassing the full spectrum of textual, visual, and conceptual information. This holistic approach fosters a cohesive understanding by leveraging the complementary strengths of diverse information sources, ensuring a comprehensive and multifaceted representation of the underlying knowledge. This will enhance user comprehension and make navigating the ever-increasing knowledge landscape smoother by combining the power of several sources into one joint knowledge base.

## 2 Related Work

The wealth of multimodal and multilingual information demands valuable ways of summarizing and synthesizing information with minimal overlap. Recent works have released a multilingual abstractive summarization test set using a large dataset with multiple languages, human summaries, and pairs of the source document and its summary in different languages (Cao et al., 2020; Hasan et al., 2021). This milestone work provides evidence of an opportunity for automatic systems to synthesize culturally appropriate and coherent summaries. Based on such principles, video summarization frameworks have appeared with the addition of transcription and thematic analysis of video content. For instance, a documentary synopsis is supposed to include important visuals and summarize the major events and characters covered (Otani et al., 2016). All these go a step further than merely summarizing text, considering audiovisual aspects in making a holistic narrative (Zhou et al., 2018; Lin et al., 2024). Providing summaries of videos that focus on the key visual and thematic elements have also been outlined (Gianluigi and Raimondo, 2006).

Studies have pointed out that scientific discov-

eries need to be placed into relevant cultural and historical contexts, which enhances understanding and intercultural communication. Therefore it, underscores the value of using background information from comprehensive knowledge bases such as Google, Wikipedia and DuckDuckGo.

There is a need for reinforcing summarization techniques by utilizing advanced algorithms. Some techniques emphasized retrieval-based mechanisms to improve the relevance and informativeness characteristics of summaries (Liu et al., 2024; Syed et al., 2023). Summarizing research papers calls for specialized models and domain adaptation techniques to deal with a broad scope of domain-specific challenges, including scientific terms and complex syntactic structures. An attractive approach for summarizing scientific documents through joint fact detection in citations is proposed which identifies noun phrases from citation sentences that frequently co-occur. It represent common facts discussed from different perspectives. These facts could then be compiled using this multi-document summarization system into a comprehensive summary (Chen and Zhuge, 2014). Another literature investigates multi-document summarization techniques that evaluate various models, including graph-based, neural network-based, and hybrid approaches, proposing methods to effectively synthesize information from multiple papers (Agarwal et al., 2011).

The prevailing information extraction and summarization methodologies are predominantly characterized by their singular source dependence and a dearth of multi-modality. This constraint restricts the potential for optimal knowledge acquisition. This singular source dependence often leads to redundancy within extracted information and hinders the capture of diverse perspectives. To achieve a more comprehensive understanding of a subject, it is imperative to leverage information from a multiplicity of sources. To address these limitations, research efforts should be directed towards the development of robust multi-source information extraction and summarization techniques.

The proposed multifaceted approach should serve a dual purpose: it not only mitigates redundancy within the extracted data but also promotes the inclusion of diverse and potentially conflicting perspectives. This comprehensive methodology should enhance the overall quality of the data by optimizing its relevance and breadth. Minimizing repetitive information, ensures the capture of

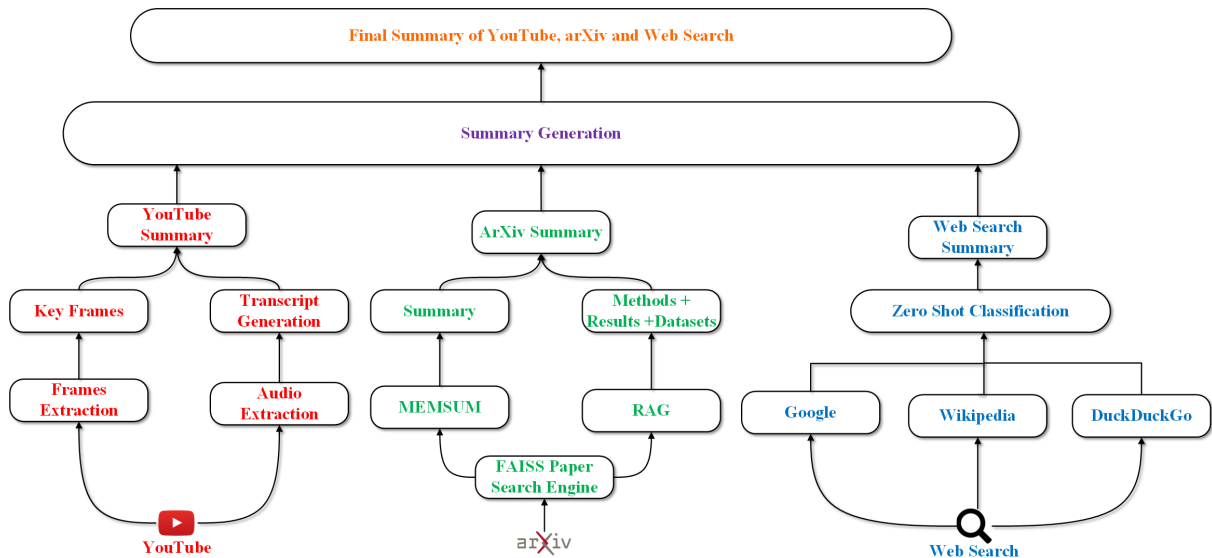


Figure 1: Methodology

a broader spectrum of perspectives and insights, thereby enriching the dataset with a nuanced and multifarious understanding of the subject matter.

### 3 Methodology

This paper proposes a multisource, multimodal, and multilingual information extraction system, the first of its kind to capture the most important and diverse information to reduce hallucinations and increase the quality of summary generation. Figure 1, provides a comprehensive overview of the process. The functions and methods are categorized into these parts:

1. Information Conversion
2. Information Search & Retrieval
3. Information Convergence

Three multimodal sources- YouTube Playlists, arXiv Papers and Web Search are considered. Each is passed through the mentioned processes to generate a superior system capable of providing robust information related to any subject matter.

#### 3.1 YouTube Playlists: Multilingual and Multimodal Approach

Within the dynamic domain of information extraction, where the primary objective revolves around the harvesting of valuable knowledge from disparate sources, YouTube playlists emerge as an intriguing and relatively unexplored research frontier. By incorporating information gleaned from

playlists in conjunction with established textual sources, a system can cultivate a more comprehensive and richly multifaceted comprehension of the target domain (Lyu et al., 2005).

##### 3.1.1 Information Conversion

YouTube encompasses multimodal information- audio and video each processed separately and merged to generate an optimal information representation of the query presented by the user.

(i) Audio Extraction: The audio stream gets extracted using the YouTube API and the audio is subsequently converted to text along with its timestamp using Open AI’s robust speech recognition model Whisper (Radford et al., 2023). It can identify the language of the video and transcribe the audio to a desired language. Whisper is a Transformer sequence-to-sequence model trained on various speech processing tasks, including multilingual speech recognition, speech translation, spoken language identification, and voice activity detection. An alternate method of using YouTube’s Closed Caption generation was explored and provided poor results due to the lesser accuracy of the captions generated and limited multilingualism. The mentioned support is provided only for a smaller percentage of the videos so it’s not optimal, adaptable or scalable.

(ii) Video Frames Extraction: The process begins with extracting frames from the video, followed by calculating frame differences, identifying local maxima, and selecting high-quality frames through clustering (Sadiq et al., 2020; Calic and

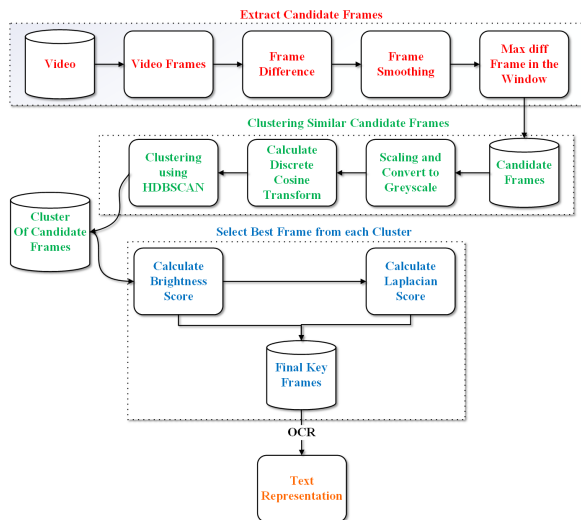


Figure 2: Key frames and Information Extraction

Izquierdo, 2002). The resulting keyframes are processed using OCR to extract the text for a comprehensive inclusion of information. Figure 2 illustrates frame extraction.

To identify frames that exhibit significant changes, we calculate the sum of absolute differences (SAD) between consecutive frames. This process involves several steps:

- **Conversion to HSV:** Each frame is converted to the HSV color space, which provides better differentiation of visual information compared to the RGB space.
- **Difference Calculation:** The absolute difference between the current frame and the previous frame is computed.
- **Sum of Differences:** The differences are summed to obtain a single value representing the change between frames.

A custom Frame class stores each frame along with its computed SAD value. These values help identify frames with substantial content changes. To extract frames that are significantly different from their neighbors, we use local maxima detection. This involves:

- **Smoothing:** The frame difference values are smoothed using a window function (e.g., Hanning window).
- **Local Maxima Identification:** Local maxima within the smoothed difference values are identified using `scipy.signal.argrelextrema`.

Frames corresponding to these local maxima are considered candidate keyframes, representing moments of significant visual change in the video. Once candidate keyframes are extracted, they undergo further evaluation based on brightness, entropy, and sharpness to ensure high visual quality:

- **Brightness Score:** This is computed as the average brightness of the frame in the HSV color space.
- **Entropy Score:** This measures the amount of information or randomness in the frame, calculated using a disk-shaped structuring element.
- **Sharpness (Laplacian Variance):** This assesses the sharpness of the frame by computing the variance of the Laplacian, with higher values indicating sharper images.

Frames with optimal brightness and contrast (entropy) are filtered for further analysis. To ensure diversity among the selected keyframes, clustering techniques are employed:

- **Discrete Cosine Transform (DCT):** Each candidate keyframe is converted to grayscale and resized to a standard dimension. The DCT is then applied to capture frequency components, which are used as feature vectors.
- **HDBSCAN Clustering:** The feature vectors are clustered using HDBSCAN, which groups frames into clusters based on similarity.
- **Best Frame Selection:** Within each cluster, the frame with the highest Laplacian variance is selected as the best representative frame. This step ensures that the final set of key frames is sharp and visually distinct.

Following the initial feature extraction stage, where key frames are isolated and synchronized with corresponding timestamps, the visual data undergoes text recognition and extraction. Google's Generative Pre-trained Transformer, also known as Gemini, is utilized for this purpose of Optical Character Recognition. The resulting time-stamped textual elements, gleaned from the processed video frames, are subsequently subjected to a data fusion process. This entails the seamless integration of the extracted time-stamped text with the existing, synchronized transcript. This enriched dataset, encompassing both visual and textual information with



precise temporal alignment, serves as the foundation for subsequent information convergence process.

### 3.1.2 Information Search and Retrieval

Open-sourced Playlist search libraries are utilized to facilitate real-time information retrieval. The limitations of static datasets are eschewed in favor of a dynamic approach that incorporates the ever-evolving corpus of information on YouTube (Abu-El-Haija et al., 2016). This approach facilitates the retrieval of a vast volume of playlists, which are then be subjected to an optimal information conversion process. By simple entry of keywords as queries, the libraries retrieve the relevant playlists.

### 3.1.3 Information Convergence

To efficiently extract key information from video playlists, a synopsis generation paradigm is employed. This approach entails processing each video within the playlist to produce a concise summary that retains crucial details while eliminating redundant content. To tailor summaries to the specific content domain of the playlist, the LLaMA3 70b model's power is coupled with meticulously crafted prompt engineering techniques. Through this synergistic approach, it is ensured that the generated summaries accurately capture the diverse content of each video and the overarching narrative of the playlist.

## 3.2 arXiv Paper Search and Summarization:

The inclusion of arXiv and research papers is quite beneficial and indispensable. They offer a unique window into the frontiers of scientific knowledge, providing access to cutting-edge discoveries, detailed exploration of all related topics, and a structured format that facilitates accurate information extraction. By incorporating these valuable resources, the system can gain a deeper understanding of the information landscape and extract more comprehensive, nuanced, and insightful knowledge.

### 3.2.1 Information Conversion

The arXiv dataset is a repository of 1.7 million articles (arXiv.org submitters, 2024), with relevant features such as article id, article authors, titles, abstract, categories, full text PDFs, and more. The title and abstract for each paper were combined and converted to vector embedding using sentence transformers 'all-MiniLM-L6-v2' model. It maps sentences & paragraphs to a 384-dimensional dense vector space and can be used for various natural

language tasks like semantic search (Wang et al., 2020).

### 3.2.2 Information Search and Retrieval

Retrieval Augmented Generation (RAG) system using Facebook AI Similarity Search (FAISS) was built to search for research papers in the arXiv dataset based on the user query and retrieves the top 'n' papers (Lewis et al., 2020). These embedded vectors are stored in the RAG System using a FAISS index, which is an open-source library designed to quickly search for embeddings in large datasets and provides scalable similarity search functions (Douze et al., 2024).

Upon submission of a user search query, the query text will be vectorized. These query vectors will then be compared to the vectors stored in the FAISS index. Further re-ranking is using the 'cross-encoder/ms-marco-MiniLM-L-6-v2' encoder model to improve vector search results as it compares text instead of vectors. Overall, it re-orders the text search result based on the search query by assigning a score to the text result. The re-ranked search results are returned which consists of paper title, abstract, its categories, and a link to the PDF. Text extraction techniques are employed to convert the document, located at a specific URL, into a machine-readable format.

### 3.2.3 Information Convergence

Subsequently, the summarization engine consists of two distinct levels to ensure the capture of all critical information. The first level focuses on the faithful extraction of statistical and mathematical expressions within the paper while the second level delves into the background knowledge presented and the novel findings introduced by the research, guaranteeing an inclusive and informative summary. This ensures the inclusion of crucial statistical and mathematical equations, while simultaneously retaining the significance of background knowledge and novel findings presented within the research paper.

(i) MeMSum Pipeline: The extracted text is summarized using Multi-step Episodic Markov decision process extractive Summarizer (MeMSum). It is a reinforcement learning-based extractive summarizer enriched at each step with information on the current extraction history. MemSum's 'mesum-arXiv-summarization' pre-trained model is used to summarize the research papers (Gu et al., 2022).

(ii) RAG Chain Pipeline: The research paper's

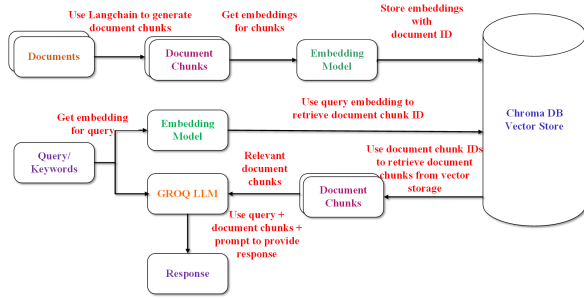


Figure 3: RAG Chain Pipeline

information is segmented into manageable chunks using Langchain. Each chunk is then transformed into a numerical representation, or embedding, via an embedding model, which is ‘BAAI/bge-small-en-v1.5’ capturing semantic nuances necessary for efficient retrieval (Chen et al., 2024). These embeddings, alongside document IDs, are stored in a Chroma DB Vector Store, enabling quick, similarity-based retrieval. This storage mechanism ensures that the document chunks can be easily accessed and utilized in subsequent stages of the pipeline. Figure 3 illustrated the mechanisms of the RAG chain pipeline.

Upon receiving a query, an embedding model generates a corresponding query embedding, which is utilized to fetch relevant document chunks from the Chroma DB Vector Store. These chunks, containing pertinent information, are fed into a GROQ LLM, which processes the query and contextually integrates the document chunks. The LLM is prompted to retrieve and synthesize information specifically about the methodology, datasets, and results of the research papers. This approach maximizes the utility of large language models by augmenting them with specific, contextual data retrieved efficiently through embeddings and vector stores, ensuring the responses are accurate, relevant, and comprehensive.

Following the independent processing by the MeMSum and RAG Chain pipelines, their outputs are synergistically merged to create a holistic textual representation. The resulting comprehensive nature of this information source facilitates the efficacious dissemination of knowledge. This ensures that users, particularly those engaged in academic pursuits (i.e., students and researchers), possess a contemporaneous understanding of the latest developments within their respective fields. Furthermore, this comprehensive approach bolsters the source’s epistemic authority by establishing a foundation

for information retrieval that is demonstrably robust. Consequently, the likelihood of encountering unsubstantiated assertions or misleading data or hallucinations is significantly reduced.

### 3.3 Web Search Engine

To mitigate the risk of data obsolescence and guarantee exhaustive information retrieval from a diverse range of sources, a multifaceted web search strategy is employed. This strategy leverages the capabilities of prominent search engines, namely Wikipedia, DuckDuckGo, and Google.

#### 3.3.1 Information Search and Retrieval

The aforementioned search engines function as established web crawlers, systematically traversing the web to index content provided as "llama-index" agents. Extracted webpages undergo a rigorous topic classification process using a large language model (LLM) based Zero-Shot classification technique (Yin et al., 2019; Puri and Catanzaro, 2019). This classification ensures that only those webpages demonstrably aligned with the research query’s thematic domain are retained for subsequent analysis.

#### 3.3.2 Information Convergence

Our approach involves synthesizing a vast array of pertinent data retrieved from numerous web search engines. Key insights are distilled from this extensive collection, significantly reducing redundant information and ensuring the content remains current and relevant. This is accomplished by harnessing the formidable capabilities of the LLaMA3 70b model, expertly combined with meticulously crafted prompt engineering techniques (AI@Meta, 2024). This methodology guarantees that the generated summaries not only encapsulate the essence of each source but also cohesively convey the overarching narrative of the entire topic and its related concepts.

### 3.4 Final Summary Generation

Following the derivation of succinct representations from each source, MeMSum in a multi-source fashion is used to strategically mitigate the redundancy and overlap of information across the summaries. This approach ensures the inclusion of all salient and distinct viewpoints, fostering the generation of a comprehensive information extraction summary that encompasses multi-source, multi-modal, and multilingual content.

## 4 Results

Keyword	Coherence Score
Deep Learning	0.470
Statistics	0.462
Quantum Physics	0.470

Table 1: Comparison of Coherence Score

Metric	Final Summary	arXiv	Web Search	YouTube
KL Divergence (vs arXiv)	0.465	-	4.791	4.431
KL Divergence (vs Web Search)	2.360	5.424	-	5.057
KL Divergence (vs YouTube)	1.404	4.861	4.808	-
Entropy	8.113	7.540	7.993	7.739
TTR	0.186	0.218	0.254	0.134
Redundancy Score	0.084	0.453	0.578	0.235

Table 2: Metrics Evaluation for ‘Deep Learning’ sample

Metric	Final Summary	arXiv	Web Search	YouTube
KL Divergence (vs arXiv)	1.824	-	4.453	3.599
KL Divergence (vs Web Search)	0.442	4.867	-	2.636
KL Divergence (vs YouTube)	0.925	5.141	4.118	-
Entropy	8.491	7.998	7.816	8.576
TTR	0.133	0.289	0.207	0.109
Redundancy Score	0.055	0.810	0.521	0.088

Table 3: Metrics Evaluation for ‘Statistics’ sample

Metric	Final Summary	arXiv	Web Search	YouTube
KL Divergence (vs arXiv)	2.250	-	5.252	4.350
KL Divergence (vs Web Search)	0.449	4.900	-	2.524
KL Divergence (vs YouTube)	0.704	4.531	3.442	-
Entropy	8.348	8.072	7.925	8.203
TTR	0.158	0.317	0.255	0.148
Redundancy Score	0.038	0.693	0.387	0.114

Table 4: Metrics Evaluation for ‘Quantum Physics’ sample

This research presents a novel methodology for gleaning information from a confluence of disparate sources. The following robust metrics are utilized to rigorously evaluate the efficacy of our information extraction and summarization system:

### 4.1 Entropy

Entropy in textual summaries measures the average unpredictability or information richness of content. This dimension shows the coverage of vocabulary and topics gained from the text summary, i.e., overall diversity and coverage.

$$H(X) = - \sum_{i=1}^{|X|} p(x_i) \log_2(p(x_i)) \quad (1)$$

where,  $H(X)$  represents the entropy of the document  $X$ ,  $|X|$  represents the total number of words in the document, and  $p(x_i)$  represents the probability of the  $i$ -th word appearing in the document.

Higher values for entropy suggests an extensive spread of different words and concepts and leading towards an extremely informative and diverse summary. In contrast, lower entropy implies a predictable structure with less variety of unique terms, suggesting a narrower focus or repetitive content (Zhang et al., 2023a).

### 4.2 KL Divergence

Kullback-Leibler (KL) Divergence measures the difference between two probability distributions of summary content.

$$D_{KL}(P||Q) = \sum_{i=1}^{|X|} p(x_i) \log_2\left(\frac{p(x_i)}{q(x_i)}\right) \quad (2)$$

where,  $D_{KL}(P||Q)$  represents the KL divergence between two probability distributions  $P$  and  $Q$  which represent the word distributions of two different documents or a document and its language model,  $p(x_i)$  represents the probability of the  $i$ -th word under distribution  $P$  and  $q(x_i)$  represents the probability of the  $i$ -th word under distribution  $Q$ .

In the context of textual summaries, it quantifies how much more information or content one summary adds compared with another. Small KL Divergence indicates similar content distributions for summaries, while larger values suggest more divergence and unique information—diverse content (Zhang et al., 2023b).

### 4.3 Redundancy Score

Based on KL Divergence, this is a statistical measure used to establish how much novelty information a summary brings compared to the shared summary distribution derived from several sources. If the summary has a low redundancy score, it brings novel perspectives and information not found in other summaries; hence, it becomes invaluable for different views or information. Higher redundancy scores reflect more overlap or repetition in content with other summaries, whereas lower scores show less unique contribution in information.

### 4.4 Average Coherence

It measures semantic consistency and flow of the summary by checking inter-sentential similarity between sentences or paragraphs; that is, how good ideas are connected and presented within the summary. Higher average coherence scores mean a summary is more well-structured and coherent, with smoother transitions among points. Lower

Category	Rouge-1			Rouge-2			Rouge-L		
	Recall	Precision	F1	Recall	Precision	F1	Recall	Precision	F1
Final Summary vs arXiv	0.955	0.446	0.608	0.941	0.373	0.534	0.954	0.446	0.608
Final Summary vs Web Search	0.747	0.381	0.505	0.702	0.273	0.394	0.745	0.380	0.504
Final Summary vs YouTube	0.553	0.505	0.528	0.411	0.442	0.426	0.545	0.498	0.520
arXiv vs Web Search	0.233	0.255	0.243	0.062	0.061	0.062	0.208	0.227	0.217
arXiv vs YouTube	0.177	0.345	0.234	0.046	0.125	0.068	0.166	0.324	0.219
Web Search vs YouTube	0.161	0.288	0.206	0.031	0.086	0.046	0.145	0.259	0.186

Table 5: ROUGE Score metric for ‘Deep Learning’ sample

Category	Rouge-1			Rouge-2			Rouge-L		
	Recall	Precision	F1	Recall	Precision	F1	Recall	Precision	F1
Final Summary vs arXiv	0.714	0.204	0.317	0.553	0.107	0.179	0.693	0.198	0.308
Final Summary vs Web Search	1.000	0.380	0.551	1.000	0.293	0.453	1.000	0.380	0.551
Final Summary vs YouTube	0.622	0.719	0.667	0.537	0.682	0.601	0.617	0.713	0.661
arXiv vs Web Search	0.216	0.288	0.247	0.051	0.078	0.062	0.195	0.259	0.222
arXiv vs YouTube	0.108	0.438	0.174	0.026	0.168	0.044	0.101	0.408	0.161
Web Search vs YouTube	0.150	0.456	0.226	0.040	0.175	0.066	0.143	0.434	0.215

Table 6: ROUGE Score metric for ‘Statistics’ sample

average scores may indicate disjointed or less coherent content, where ideas may not flow as logically or seamlessly (Shen et al., 2021).

#### 4.5 Evaluating Document Coherence Modeling

This paper examines how well different language models can evaluate document coherence. It delves into the methods used to measure semantic consistency and flow within summaries, specifically focusing on inter-sentential similarity and the logical progression of ideas (Shen et al., 2021).

#### 4.6 Type-Token Ratio (TTR)

The Type-Token Ratio (TTR) is a measure of lexical diversity in a given text. It is defined as the ratio of the number of unique words (types) to the total number of words (tokens) in the text.

$$TTR = \frac{V}{N} \quad (3)$$

where,  $V$  represents the number of unique words (types) in the text and  $N$  is the total number of words (tokens) in the text (Reviriego et al., 2023).

#### 4.7 ROUGE Scores

Recall-Oriented Understudy for Gisting Evaluation (ROUGE) scores compare summaries by measuring their efficiency at capturing information critical in reference texts. The same n-grams (words, phrases) overlapping between a generated summary and reference text show the statistics of precision, recall, and F1 measures for these.

High ROUGE scores reflect high agreement and overlap between a generated summary and its reference, being more exact or complete in that sense. Low scores indicates gaps or incongruities in the information or misunderstanding of the original content of the summary (Lin, 2004).

The methodology presented in the paper has been extensively evaluated over a plethora of examples. Three samples - ‘Deep Learning’, ‘Statistics’ and ‘Quantum Physics’ are presented below. The information obtained from these sources is effectively utilized by the proposed methodology.

Table 1 depicts that the final summaries are coherent, they follow a logical flow and allow the reader to navigate the information extracted sensibly and it ensures the abruptness caused due to multiple sources information integration is minimal.

Tables 2, 3, and 4 contain metrics used to evaluate the quality of the final summary compared to summaries from individual sources. These metrics include KL Divergence, Entropy, Type Token Ratio, and Redundancy Score. The KL Divergence metric suggests that the divergence between individual sources as evident is quite high, which supports our claim that the information brought in by different sources is unique in nature. Relatively, the KL divergence between Final Summary and different sources is less which shows that our final summary integrates information from different sources properly. This integration results in a summary that is diversified and rich in information content, as



Category	Rouge-1			Rouge-2			Rouge-L		
	Recall	Precision	F1	Recall	Precision	F1	Recall	Precision	F1
<b>Final Summary vs arXiv</b>	0.696	0.276	0.395	0.577	0.152	0.240	0.683	0.271	0.388
<b>Final Summary vs Web Search</b>	0.968	0.397	0.563	0.956	0.306	0.464	0.968	0.397	0.563
<b>Final Summary vs YouTube</b>	0.774	0.693	0.731	0.711	0.651	0.679	0.766	0.686	0.724
<b>arXiv vs Web Search</b>	0.232	0.241	0.236	0.058	0.070	0.064	0.206	0.213	0.210
<b>arXiv vs YouTube</b>	0.171	0.386	0.237	0.040	0.138	0.062	0.156	0.353	0.217
<b>Web Search vs YouTube</b>	0.229	0.499	0.313	0.078	0.224	0.116	0.209	0.456	0.286

Table 7: ROUGE Score metric for ‘Quantum Physics’ sample

indicated by high entropy. It utilizes an enriched vocabulary, reflected by the type token ratio, and effective in expressing information, as shown by the low redundancy score. Consequently, information from different sources makes the description of the topic more detailed and balanced compared to what would have been achieved in any one source.

From Table 5, 6 and 7 it is evident that high recall scores in comparisons with individual sources indicate that the final summary contains most relevant content from the individual sources. The moderate values of the precision scores prove that the final summary has more context or information than the individual sources. The F1 scores of the final summary are consistent, indicating a balance between recall and precision. Such a balance in the F1 scores means a final summary informed of the synthesis of information but not performed at the expense of relevance and coherency. The shallow ROUGE scores of the three different sources, arXiv, Wikipedia, and YouTube, document their particular contribution to the presented work. The high distinctiveness value in the ROUGE scores points to the worth of combining these multiple sources, particularly in making a final summary of worth both rich and detailed. In general, the hypothesis that the given topic is fully covered in this multi-channel, multimodal and multilingual setting, taking advantage of idiosyncrasy offered by each source, gets backed up by the ROUGE scores.

## 5 Conclusion

In conclusion, this paper culminated in the establishment of a robust knowledge repository through multifaceted information extraction. The polyvalent approach, defined by the meticulous elimination of redundant data and the strategic inclusion of divergent viewpoints, demonstrably enhanced the thematic relevance and extensiveness of the constructed dataset. The potency of this methodology was further underscored by a comparative evaluation of metrics across information sources,

encompassing entropy, KL divergence, type token ratio, and redundancy scores. Notably, the generated summaries exhibited a minimal degree of redundancy coupled with optimal type token ratio. Additionally, the deployment of the ROUGE metric battery elucidated the intricate interplay between textual similarity and coverage within the final product and the source materials. This reinforces the significance of incorporating diverse perspectives in achieving a comprehensive understanding. Furthermore, the proposed framework exhibited exceptional coherence, bolstering its capacity to safeguard thematic pertinence and internal consistency. In simpler terms, the holistic data extraction approach employed in this research yielded a high-quality dataset. This optimized thematic relevance and the overall breadth of the information corpus by meticulously attenuating redundancy and strategically incorporating diverse perspectives. The metrics and comparative analyses presented throughout this work provide unequivocal support for the effectiveness of this strategy, further solidifying its potential to significantly impact the knowledge foundation and analytical resilience of technical research endeavors.

## 6 Acknowledgments

Authors acknowledge the support of the Centre of Excellence (CoE) in Complex & Nonlinear Dynamical Systems (CNDS) under TEQIP-III funding.

## References

- Sami Abu-El-Haija, Nisarg Kothari, Joonseok Lee, Paul Natsev, George Toderici, Balakrishnan Varadarajan, and Sudheendra Vijayanarasimhan. 2016. [Youtube-8m: A large-scale video classification benchmark](#).
- Nitin Agarwal, Ravi Reddy, Kiran R, and Carolyn Rosé. 2011. Scisumm: A multi-document summarization system for scientific articles. pages 115–120.
- AI@Meta. 2024. [Llama 3 model card](#).

- Mehdi Allahyari, Seyedamin Pouriyeh, Mehdi Assefi, Saeid Safaei, Elizabeth D Trippe, Juan B Gutierrez, and Krys Kochut. 2017. Text summarization techniques: a brief survey. *arXiv preprint arXiv:1707.02268*.
- Chenxin An, Ming Zhong, Zhichao Geng, Jianqiang Yang, and Xipeng Qiu. 2021. Retrievalsum: A retrieval enhanced framework for abstractive summarization.
- arXiv.org submitters. 2024. [arxiv dataset](#).
- J. Calic and E. Izquierdo. 2002. Efficient key-frame extraction and video analysis. In *Proceedings. International Conference on Information Technology: Coding and Computing*, pages 28–33.
- Yue Cao, Xiaojun Wan, Jinge Yao, and Dian Yu. 2020. Multisumm: towards a unified model for multilingual abstractive summarization. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 34, pages 11–18.
- Jianlv Chen, Shitao Xiao, Peitian Zhang, Kun Luo, Defu Lian, and Zheng Liu. 2024. [Bge m3-embedding: Multi-lingual, multi-functionality, multi-granularity text embeddings through self-knowledge distillation](#).
- Jingqiang Chen and Hai Zhuge. 2014. Summarization of scientific documents by detecting common facts in citations. *Future Generation Computer Systems*, 32:246–252. Special Section: The Management of Cloud Systems, Special Section: Cyber-Physical Society and Special Section: Special Issue on Exploiting Semantic Technologies with Particularization on Linked Data over Grid and Cloud Architectures.
- Gianluigi Ciocca and Raimondo Schettini. 2006. Erratum to: An innovative algorithm for key frame extraction in video summarization. *J. Real-Time Image Processing*, 1:69–88.
- Matthijs Douze, Alexandr Guzhva, Chengqi Deng, Jeff Johnson, Gergely Szilvassy, Pierre-Emmanuel Mazaré, Maria Lomeli, Lucas Hosseini, and Hervé Jégou. 2024. [The faiss library](#).
- Ciocca Gianluigi and Schettini Raimondo. 2006. An innovative algorithm for key frame extraction in video summarization. *Journal of Real-Time Image Processing*, 1:69–88.
- Nianlong Gu, Elliott Ash, and Richard Hahnloser. 2022. MemSum: Extractive summarization of long documents using multi-step episodic Markov decision processes. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 6507–6522, Dublin, Ireland. Association for Computational Linguistics.
- Tahmid Hasan, Abhik Bhattacharjee, Md Saiful Islam, Kazi Samin, Yuan-Fang Li, Yong-Bin Kang, M. Sohel Rahman, and Rifat Shahriyar. 2021. [Xl-sum: Large-scale multilingual abstractive summarization for 44 languages](#).
- Dharmendra Hingu, Deep Shah, and Sandeep Udmale. 2015. [Automatic text summarization of wikipedia articles view document](#).
- Nouf Ibrahim Altmami and Mohamed El Bachir Menai. 2022. Automatic summarization of scientific articles: A survey. *Journal of King Saud University - Computer and Information Sciences*, 34(4):1011–1028.
- Feng Jiang, Kuang Wang, and Haizhou Li. 2024. [Bridging research and readers: A multi-modal automated academic papers interpretation system](#).
- Patrick Lewis, Ethan Perez, Aleksandra Piktus, Fabio Petroni, Vladimir Karpukhin, Naman Goyal, Heinrich Küttler, Mike Lewis, Wen-tau Yih, Tim Rocktäschel, Sebastian Riedel, and Douwe Kiela. 2020. Retrieval-augmented generation for knowledge-intensive nlp tasks. In *Proceedings of the 34th International Conference on Neural Information Processing Systems, NIPS '20*, Red Hook, NY, USA. Curran Associates Inc.
- Chin-Yew Lin. 2004. [ROUGE: A package for automatic evaluation of summaries](#). In *Text Summarization Branches Out*, pages 74–81, Barcelona, Spain. Association for Computational Linguistics.
- Jingyang Lin, Hang Hua, Ming Chen, Yikang Li, Jenhao Hsiao, Chiuman Ho, and Jiebo Luo. 2024. [Videxum: Cross-modal visual and textural summarization of videos](#).
- Shengjie Liu, Jing Wu, Jingyuan Bao, Wenyi Wang, Naira Hovakimyan, and Christopher G Healey. 2024. [Towards a robust retrieval-based summarization system](#).
- Yang Liu and Mirella Lapata. 2019. Text summarization with pretrained encoders.
- M.R. Lyu, Jiqiang Song, and Min Cai. 2005. A comprehensive method for multilingual video text detection, localization, and extraction. *IEEE Transactions on Circuits and Systems for Video Technology*, 15(2):243–255.
- Yuta Nemoto and Vitaly Klyuev. 2021. Tool to retrieve less-filtered information from the internet. *Information*, 12(2):65.
- Mayu Otani, Yuta Nakashima, Esa Rahtu, Janne Heikkilä, and Naokazu Yokoya. 2016. [Video summarization using deep semantic features](#).
- Raul Puri and Bryan Catanzaro. 2019. [Zero-shot text classification with generative language models](#).
- Alec Radford, Jong Wook Kim, Tao Xu, Greg Brockman, Christine McLeavey, and Ilya Sutskever. 2023. Robust speech recognition via large-scale weak supervision. In *Proceedings of the 40th International Conference on Machine Learning, ICML'23*. JMLR.org.
- Pedro Reviriego, Javier Conde, Elena Merino Gómez, Gonzalo Martínez, and José Hernández. 2023. [Playing with words: Comparing the vocabulary and lexical richness of chatgpt and humans](#).

- Bashir Sadiq, Bilyamin Muhammad, Muhammad Abdullahi, Gabriel Onuh, Abdulhakeem Ali, and Adeogun Babatunde. 2020. Keyframe extraction techniques: A review. *ELEKTRIKA- Journal of Electrical Engineering*, 19:54–60.
- Aili Shen, Meladel Mistica, Bahar Salehi, Hang Li, Timothy Baldwin, and Jianzhong Qi. 2021. [Evaluating Document Coherence Modeling](#). *Transactions of the Association for Computational Linguistics*, 9:621–640.
- Haoran Sun, Xiaolong Zhu, and Conghua Zhou. 2022. [Deep reinforcement learning for video summarization with semantic reward](#). In *2022 IEEE 22nd International Conference on Software Quality, Reliability, and Security Companion (QRS-C)*, pages 754–755.
- Shahbaz Syed, Ahmad Dawar Hakimi, Khalid Al-Khatib, and Martin Potthast. 2023. [Citance-contextualized summarization of scientific papers](#).
- Wenhui Wang, Furu Wei, Li Dong, Hangbo Bao, Nan Yang, and Ming Zhou. 2020. Minilm: deep self-attention distillation for task-agnostic compression of pre-trained transformers. In *Proceedings of the 34th International Conference on Neural Information Processing Systems, NIPS '20*, Red Hook, NY, USA. Curran Associates Inc.
- Wenpeng Yin, Jamaal Hay, and Dan Roth. 2019. [Benchmarking zero-shot text classification: Datasets, evaluation and entailment approach](#).
- Jun Yuan, Neng Gao, Ji Xiang, Chenyang Tu, and Jingquan Ge. 2019. Knowledge graph embedding with order information of triplets. In *Advances in Knowledge Discovery and Data Mining: 23rd Pacific-Asia Conference, PAKDD 2019, Macau, China, April 14-17, 2019, Proceedings, Part III* 23, pages 476–488. Springer.
- Xingyue Zhang, Dingxin Hu, Baofeng Li, Yu Qin, and Lei Li. 2023a. [Content richness evaluation method for abstractive summarization](#). In *2023 IEEE 9th International Conference on Cloud Computing and Intelligent Systems (CCIS)*, pages 245–249.
- Yufeng Zhang, Wanwei Liu, Zhenbang Chen, Ji Wang, and Kenli Li. 2023b. [On the properties of kullback-leibler divergence between multivariate gaussian distributions](#).
- Kaiyang Zhou, Yu Qiao, and Tao Xiang. 2018. [Deep reinforcement learning for unsupervised video summarization with diversity-representativeness reward](#).