# Communication-Efficient Adaptive Batch Size Strategies for Distributed Local Gradient Methods

Tim Tsz-Kit Lau\* Weijian Li<sup>†</sup> Chenwei Xu<sup>†</sup> Han Liu<sup>†‡</sup> Mladen Kolar<sup>§\*</sup>
June 21, 2024

#### **Abstract**

Modern deep neural networks often require distributed training with many workers due to their large size. As worker numbers increase, communication overheads become the main bottleneck in data-parallel minibatch stochastic gradient methods with per-iteration gradient synchronization. Local gradient methods like Local SGD reduce communication by only syncing after several local steps. Despite understanding their convergence in i.i.d. and heterogeneous settings and knowing the importance of batch sizes for efficiency and generalization, optimal local batch sizes are difficult to determine. We introduce adaptive batch size strategies for local gradient methods that increase batch sizes adaptively to reduce minibatch gradient variance. We provide convergence guarantees under homogeneous data conditions and support our claims with image classification experiments, demonstrating the effectiveness of our strategies in training and generalization.

#### 1 Introduction

Recent advances in deep learning, particularly large language models (LLMs) with billions of parameters, necessitate efficient distributed training on many GPUs or TPUs. Data-parallel optimization [83] simplifies this by having each worker compute and average batch gradients from different i.i.d. data batches, followed by a global model update. Despite its efficiency with numerous workers, this method faces challenges such as costly gradient synchronization and reduced generalization from large batches. Frequent synchronization of models or gradients among workers leads to significant communication overheads, exacerbated as worker counts and model sizes increase [48, 71, 79]. This challenge intensifies with workers distributed across nodes with limited inter-node communication speeds. To mitigate this, communication-efficient distributed optimization methods [43], such as local gradient methods [26, 67, 73, 81, 82] and their variants, have been developed. In local stochastic gradient methods (Local SGD), workers train locally and synchronize less frequently by averaging models after several local steps, effectively reducing communication overheads. In data-parallel optimization, the total batch size is the sum of all workers' local batch sizes, increasing with more workers. Large batch sizes are preferred to fully utilize worker memory, making large-batch training the standard in large-scale model training. However, this approach often results in reduced model generalization, a problem noted by LeCun et al. [47]. Large-batch training typically creates a loss landscape with sharp minima, worsening generalization [35]. Although increasing the learning rate proportionally to batch size can mitigate the generalization gap [29, 65, 66], it cannot fully close it. Keskar et al. [35] recommended adaptive sampling to gradually increase batch sizes during training [7, 19], explored in [11, 12, 44, 59]. However, this method is still confined to single- or few-worker scenarios and does not scale well with larger models and more workers.

Motivated by the above two challenges, we answer the following question affirmatively:

<sup>\*</sup>The University of Chicago Booth School of Business, Chicago, IL 60637, USA; Email: timtsz-kit.lau@chicagobooth.edu.

†Department of Computer Science, Northwestern University, Evanston, IL 60208, USA; Email {weijianli2021,chenweixu2023}@u.northwestern.edu, hanliu@northwestern.edu.

<sup>&</sup>lt;sup>‡</sup>Department of Statistics and Data Science, Northwestern University, Evanston, IL 60208, USA.

<sup>§</sup>Department of Data Sciences and Operations, University of Southern California Marshall School of Business, Los Angeles, CA 90089, USA; Email: mkolar@marshall.usc.edu.

Can we develop training strategies which are communication-efficient and memory-efficient with desirable generalization performance for large-scale distributed training?

Contributions. We make the following contributions: (i) We develop adaptive batch size strategies for local gradient methods by extending the adaptive sampling methods in [3, 7]. Such strategies are for local batch sizes, i.e., batch sizes of individual workers. This is particularly relevant when the workers are heterogeneous devices with different computational speeds and memories, as well as different local objectives and datasets. The proposed strategies are communication-efficient by leveraging local gradient methods, and memory-efficient by leveraging large batch sizes at later stages of training. (ii) Under various standard assumptions, we provide convergence guarantees of the proposed approaches for smooth (strongly) convex and nonconvex objectives under a homogeneous data setting. (iii) We empirically demonstrate the efficacy of the proposed strategies with a three-layer convolutional neural network and RESNET for image classification on the MNIST and CIFAR-10 datasets, respectively, in terms of communication efficiency, memory efficiency, and model generalization performance. To grasp a thorough understanding of the strategies, we also study the effect of different hyperparameters such as the number of local steps and the one which controls the probability of increasing batch sizes.

## 2 Related Work

Minibatch gradient methods. Minibatch SGD [4, 13, 15, 63] is the simplest and most widely used optimizer for large-scale machine learning [5], and is easily extendable with data parallelism [49]. The convergence of minibatch SGD and its variants like Adagrad [18] and Adam [39] is well-understood across various settings, including convex [21], nonconvex [36], and nonsmooth [10] objectives, under different gradient variance assumptions. However, frequent gradient synchronization among workers leads to communication overheads, posing a significant challenge in distributed training.

**Local gradient methods.** Local SGD [54, 67, 83], a communication-efficient variant of minibatch SGD, reduces overheads from frequent synchronization in distributed training. Recent studies [17, 51] highlight its efficacy in pre-training large language models with extensive computational resources. Optimization of Local SGD for varied data settings has shown promising convergence rates [37, 40, 67, 69, 74, 76, 77]. It includes extensions like asynchronous SGD [30, 41, 45, 55, 57] and hierarchical SGD [8, 50, 75]. Federated learning [9, 33, 34, 54, 62], another model focusing on efficiency, addresses heterogeneity and partial participation. While applicable, we defer exploring federated learning's theoretical and empirical aspects to future work.

Generalization gap in large-batch training. Large-batch training not only faces communication overheads in minibatch SGD under distributed data parallelism but also shows poorer generalization despite better hardware efficiency. It has been successful in tasks like ImageNet classification and BERT training [22, 64, 80]. Addressing these, Lin et al. [50] introduced Post-local SGD, a hybrid of minibatch and Local SGD, where early training involves frequent synchronization of local models, followed by Local SGD. In large-scale environments, Ortiz et al. [58] noted that Post-local SGD does not consistently outperform Local SGD in generalization, and the transition from minibatch to Local SGD presents a trade-off between communication efficiency and generalization. Following these findings, Gu et al. [24, 25] analyzed Local SGD's generalization via an SDE approximation and proposed the Quadratic Synchronization Rule (QSR) for adjusting local gradient steps during training.

Adaptive batch size strategies. In stochastic optimization, adaptive sampling methods [3, 7, 19] adjust batch sizes based on gradient noise, enhancing training processes for smooth finite-sum problems. These methods, further explored in deep learning [11, 12, 44, 59], have not been applied to data parallelism with distributed batches. The strategies discussed here draw from batch size scheduling, a key technique in pretraining LLMs, evidenced by its use in GPT-3 [6], Nemotron-4 [60], OLMo 65B [23], and DeepSeek-V2 [14], which involve increasing batch sizes in set stages. Despite their benefits for efficiency and parallelization, these strategies are heuristic and have unclear impacts on training. This work aims to develop theoretically

grounded, communication-efficient adaptive batch size strategies akin to adaptive sampling, viewed as stochastic variance-reduction methods [20, 31, 78], focusing on scalable batch size increments.

Several studies have explored adaptive batch size strategies in deep learning, including Big Batch SGD [11, 12], CABS [1], AdaBatch [16], and SimiGrad [61]. Conversely, AdaScale SGD [32] modifies learning rates for large batches instead of batch sizes. These methods, however, are often not theoretically robust, lacking solid convergence proofs or are restricted to SGD analyses under strict conditions like convexity or the Polyak-Lojasiewicz condition. Their batch size adjustment strategies usually depend on heuristic rules, such as geometric growth or decay [61], which can lead to unreliable outcomes. Crucially, these methods overlook the distributed data-parallel context, prevalent in practice, thus not addressing the needs of adaptive batch size strategies in large-scale distributed training.

**Hyperparameter tuning for Local SGD.** Besides batch sizes, recent research has also focused on optimizing learning rate schedules for Local SGD, particularly in identical data settings as discussed in [2]. This optimization is crucial in federated learning with heterogeneous data, where local objectives differ significantly in geometry and smoothness, necessitating locally adaptive learning rate schedules [38, 56]. Our adaptive local batch size strategies complement these efforts.

#### 3 **Preliminaries**

**Notation.** We define  $[n] := \{1, \ldots, n\}$  for  $n \in \mathbb{N}^* := \mathbb{N} \setminus \{0\}$ , the set of positive integers. We also write  $[\![m,n]\!] := \{m,m+1,\ldots,n\}$  for the set of integers ranging from m to n (inclusive) for m < n. We denote the Euclidean inner product in  $\mathbb{R}^d$  by  $\langle \cdot, \cdot \rangle$  and its induced  $L_2$ -norm by  $\| \cdot \|$ . The ceiling function is denoted by  $\lceil \cdot \rceil$ . We also write  $\delta_x$  a Dirac measure at the point  $x \in \mathbb{R}^d$ .

#### 3.1 **Problem Formulation**

We consider a distributed training setting with M workers, each with a possibly heterogeneous (i.e. non-i.i.d.) underlying true data distribution  $\mathbb{P}_m$  ( $m \in [\![M]\!]$ ). The true data distribution  $\mathbb{P}_m$  is usually unknown, but can be approximated by its empirical distribution  $\widehat{\mathbb{P}}_m = \frac{1}{n_m} \sum_{i=1}^{n_m} \delta_{\xi_i^m}$ , where  $\mathcal{D}_m \coloneqq \{\xi_i^m\}_{i \in \llbracket n_m \rrbracket}$  is the set of  $n_m$  data samples of worker m and  $\xi_i^m \in \mathcal{Z}_m \subseteq \mathbb{R}^p$  for  $i \in \llbracket n_m \rrbracket$ . The goal is to find an approximate minimizer of the global objective F which is the average of the local objectives  $F_m$ :

$$\underset{x \in \mathbb{R}^d}{\text{minimize}} \ F(x) \coloneqq \frac{1}{M} \sum_{m=1}^M F_m(x),$$

where  $F_m(x) := \mathbb{E}_{\xi \sim \widehat{\mathbb{P}}_m}[f_m(x;\xi)] = \frac{1}{n_m} \sum_{i=1}^{n_m} f_m(x;\xi_i^m)$  is the local objective for worker m. At each iteration  $k \in \mathbb{N}$ , since the number of samples of each worker  $n_m$  could be large, the per-worker gradient  $\nabla F_m$  cannot be computed. It can however be approximated by its minibatch counterpart

$$(\forall x \in \mathbb{R}^d) \quad \nabla F_{\mathcal{B}_k^m}(x) := \frac{1}{b_k^m} \sum_{i \in \mathcal{B}_k^m} \nabla f_m(x; \xi_i^m), \tag{1}$$

where  $\mathcal{B}_k^m$  is the local batch of worker m at iteration k and  $b_k^m \coloneqq |\mathcal{B}_k^m|$  is the corresponding local batch size, assuming that  $f_m(\cdot;\xi^m)$  is continuously differentiable for any  $\xi^m \in \mathcal{Z}_m$ .

#### 3.2 Minibatch and Local Stochastic Gradient Methods

We present both the formulations of minibatch SGD under data parallelism and Local SGD.

Minibatch SGD. Minibatch SGD under data parallelism is a fully synchronized stochastic gradient method. In particular, at each iteration k, after each worker m has computed its local batch gradient  $\nabla F_{\mathcal{B}_{i}^{m}}(x_{k})$ , the global batch gradient  $\nabla F_{\mathcal{B}_k}(x_k)$  is computed by averaging all local batch gradients by  $\nabla F_{\mathcal{B}_k}(x_k) = \frac{1}{M} \sum_{m=1}^{M} \nabla F_{\mathcal{B}_k^m}(x_k)$  with a global batch size  $b_k := |\mathcal{B}_k| = \sum_{m=1}^{M} b_k^m = M b_k^1$ , assuming that all local batch

sizes are equal. This is followed by the global model update, performed via  $x_{k+1} = x_k - \alpha_k \nabla F_{\mathcal{B}_k}(x_k)$ , where  $\alpha_k$  is the learning rate of iteration k. The same mechanism also applies to other optimizers such as ADAM [39] and ADAGRAD [18].

**Local SGD.** As opposed to minibatch SGD, Local SGD [67] reduces the communication frequency. Communication for *model averaging* (through *all-reduce* operations) is performed every H local gradient steps, Local SGD takes the following updates:

$$(\forall m \in \llbracket M \rrbracket)(\forall k \in \mathbb{N}) \quad x_{k+1}^m = \begin{cases} \frac{1}{M} \sum_{m=1}^M \left( x_k^m - \alpha_k \nabla F_{\mathcal{B}_k^m}(x_k^m) \right) & \text{if } H \text{ divides } k+1, \\ x_k^m - \alpha_k \nabla F_{\mathcal{B}_k^m}(x_k^m) & \text{otherwise.} \end{cases}$$
 (2)

We also consider the following alternative representation that explicitly separates the numbers of local gradient steps H and communication rounds K. In particular, for M parallel workers, K rounds of communication, H local gradient steps per round, Local SGD updates can also be expressed as

$$(\forall m \in [\![M]\!])(\forall k \in [\![0, K-1]\!]) \begin{cases} x_{k,h+1}^m = x_{k,h}^m - \alpha_{k,h} \nabla F_{\mathcal{B}_{k,h}^m}(x_{k,h}^m) & \text{for } h \in [\![0, H-1]\!], \\ x_{k+1,0}^m = \frac{1}{M} \sum_{m=1}^M x_{k,H}^m. \end{cases}$$
(3)

## 4 Adaptive Local Batch Size Strategies for Local Gradient Methods

The proposed adaptive local batch size strategies are based on the adaptive sampling method [7] originally developed for unconstrained stochastic optimization problems using minibatch SGD. We outline its mechanism and its extension to Local SGD below.

#### 4.1 Adaptive Sampling Methods

Introduced in [7], the adaptive sampling method for minibatch SGD was designed for a single worker (M=1) with the objective  $F(x) = \frac{1}{n} \sum_{i=1}^{n} f(x; \xi_i)$  over samples  $\mathcal{D} = \{\xi_i\}_{i=1}^{n}$ . This method relies on a key stochastic optimization principle: when the sample size n is large, the batch gradient  $\nabla F_{\mathcal{B}_k}$  approximates the full gradient  $\nabla F$ . If  $f(\cdot; \xi)$  is continuously differentiable and convex for any  $\xi \in \mathcal{Z} \subseteq \mathbb{R}^p$ , then  $-\nabla F_{\mathcal{B}_k}(x_k)$  serves as a descent direction for F at  $x_k \in \mathbb{R}^d$ , provided there exists  $\eta \in (0, 1)$  such that

$$\delta_{\mathcal{B}_k}(x_k) := \|\nabla F_{\mathcal{B}_k}(x_k) - \nabla F(x_k)\| \leqslant \eta \|\nabla F(x_k)\|. \tag{4}$$

Note that  $\nabla F(x_k)$  is not available in minibatch SGD, but  $\delta_{\mathcal{B}_k}(x_k)$  can be approximated by  $\widehat{\delta}_{\mathcal{B}_k}(x_k)^2 := \frac{1}{b_k} \operatorname{Var}_{i \in \mathcal{B}_k}(\nabla f(x_k; \xi_i)) \cdot \frac{n - b_k}{n - 1}$ , where, for any vector-valued function  $h : \mathbb{R}^d \times \mathcal{Z} \to \mathbb{R}^d$ , the batch variance is defined by

$$\operatorname{Var}_{i \in \mathcal{B}_k}(h(x_k; \xi_i)) \coloneqq \frac{1}{b_k - 1} \sum_{i \in \mathcal{B}_k} \|h(x_k; \xi_i) - \mathbb{E}_{i \in \mathcal{B}_k}[h(x_k; \xi_i)]\|^2, \tag{5}$$

with  $\mathbb{E}_{i \in \mathcal{B}_k}[h(x_k; \xi_i)] := \frac{1}{b_k} \sum_{i \in \mathcal{B}_k} h(x_k; \xi_i)$ . Hence, as  $n \to \infty$ , condition (4) can be approximated as

$$\frac{1}{h_k} \operatorname{Var}_{i \in \mathcal{B}_k}(\nabla f(x_k; \xi_i)) \leqslant \eta^2 \|\nabla F_{\mathcal{B}_k}(x_k)\|^2.$$
(6)

In practice, for each iteration  $k \in \mathbb{N}$ , the dynamic sample gradient algorithm [7] performs the following minibatch SGD update:  $x_{k+1} = x_k - \alpha_k \nabla F_{\mathcal{B}_k}(x_k)$  with learning rate  $\alpha_k > 0$ , and then checks the following (approximate) norm test condition (6), which can also be viewed as an approximation of the exact variance norm test in the stochastic setting:

$$\mathbb{E}_k \left[ \|\nabla F_{\mathcal{B}_k}(x_k) - \nabla F(x_k)\|^2 \right] \leqslant \eta^2 \|\nabla F(x_k)\|^2, \tag{7}$$

i.e., condition (4) holds in expectation. Here we abbreviate the conditional expectation on  $\mathcal{F}_k$  (i.e., the filtration  $\mathcal{F}_k := \sigma(\{x_0, \mathcal{B}_0, \mathcal{B}_1, \dots, \mathcal{B}_{k-1}\}))$  by  $\mathbb{E}_k[\cdot] := \mathbb{E}[\cdot \mid \mathcal{F}_k]$ . If condition (6) is violated, the batch size of the next iteration  $b_{k+1}$  is increased, determined by the formula:

$$b_{k+1} = \left\lceil \frac{\operatorname{Var}_{i \in \mathcal{B}_k}(\nabla f(x_k; \xi_i))}{\eta^2 \|\nabla F_{\mathcal{B}_k}(x_k)\|^2} \right\rceil,$$

and the next batch  $\mathcal{B}_{k+1}$  is sampled with this larger batch size accordingly. Otherwise, the next batch size remains the same as the current one. The value of the pre-specified constant  $\eta$  controls the probability of obtaining a descent direction, thereby affecting the probability of increasing the batch size as well as the magnitude of the next batch size.

Condition (7) is more relaxed than the typical assumption of uniformly bounded gradient variance for minibatch stochastic gradient methods: for any i.i.d. batch  $\mathcal{B} \subset [\![n]\!]$  and some positive constant  $\sigma > 0$ ,  $\mathbb{E}_{\mathcal{B}}[\|\nabla F_{\mathcal{B}}(x) - \nabla F(x)\|^2] \leq \sigma^2$  for all  $x \in \mathbb{R}^d$ , which is usually unverifiable in practice. The adaptive batch size schedule using the approximate norm test may cause rapid batch size increases, undermining its purpose. To moderate these schedules, Bollapragada et al. [3] introduced the (augmented) inner product test, which manages the variance between the batch and full gradient's inner product. Given the preference for large batch sizes for memory efficiency, controlled via

eta, we focus on the norm test and defer exploring local variants of the (augmented) inner product test to future work.

#### 4.2 Extensions to Local Gradient Methods

We extend the above adaptive sampling methods beyond the single worker setting with data parallelism using multiple workers, more specifically for Local SGD. We have to invoke a local variant of the norm test (7) called the *(exact variance) local norm test*, at every iteration  $k \in \mathbb{N}$ , using formulation (2): for some sequence of positive constants  $(\eta_m)_{m \in \mathbb{N}} \subset (0, 1)$ ,

$$(\forall m \in \llbracket M \rrbracket) \quad \mathbb{E}_{\mathcal{F}_{k}^{m}} \left[ \|\nabla F_{\mathcal{B}_{k}^{m}}(x_{k}^{m}) - \nabla F_{m}(x_{k}^{m})\|^{2} \right] \leqslant \eta_{m}^{2} \|\nabla F_{m}(x_{k}^{m})\|^{2}, \tag{8}$$

where  $\mathbb{E}_{\mathcal{F}_k^m}[\cdot] := \mathbb{E}[\cdot \mid \mathcal{F}_k^m]$  denotes the conditional expectation on  $\mathcal{F}_k^m := \sigma(\{x_0, \mathcal{B}_0^m, \dots, \mathcal{B}_{k-1}^m\})$ . Again,  $\nabla F_m$  is in general unavailable since the sample size  $n_m$  could be large. The above local norm test is approximately enforced by the following (approximate) local norm test:

$$(\forall m \in \llbracket M \rrbracket) \quad \frac{1}{b_k^m} \operatorname{Var}_{i \in \mathcal{B}_k^m} (\nabla f_m(x_k^m; \xi_i^m)) \leqslant \eta_m^2 \| \nabla F_{\mathcal{B}_k^m}(x_k^m) \|^2. \tag{9}$$

Should the condition (9) not be met, the subsequent local batch sizes are determined by the formula:

$$(\forall m \in \llbracket M \rrbracket) \quad b_{k+1}^m = \left\lceil \frac{\operatorname{Var}_{i \in \mathcal{B}_k^m} (\nabla f_m(x_k^m; \xi_i^m))}{\eta_m^2 \|\nabla F_{\mathcal{B}_k^m}(x_k^m)\|^2} \right\rceil, \tag{10}$$

and the local batches  $\mathcal{B}_{k+1}^m$  are augmented accordingly. In a practical implementation, for simplicity, we can set  $\eta_m \equiv \eta$  for all  $m \in [\![M]\!]$  and choose the next local batch sizes to be

$$(\forall m \in \llbracket M \rrbracket) \quad b_{k+1}^m \equiv b_{k+1} \coloneqq \max_{m \in \llbracket M \rrbracket} \left\lceil \frac{\operatorname{Var}_{i \in \mathcal{B}_k^m}(\nabla f_m(x_k^m; \xi_i^m))}{\eta^2 \|\nabla F_{\mathcal{B}_k^m}(x_k^m)\|^2} \right\rceil, \tag{11}$$

which is particularly useful when homogeneous workers and identical data on the workers are used, so that there would not be discrepancy of training time for the local steps due to different local batch sizes and undesirable stragglers before model averaging.

The proposed adaptive batch size strategies extend to local variants of minibatch stochastic gradient optimizers beyond SGD [63], including momentum SGD [70], ADAGRAD [18], ADAM [39], and ADAMW [52] The algorithm is detailed in Algorithm 1.

In a data parallel setting, adaptive global batch size strategies can be developed using minibatch SGD, leading to increased communication overheads from aggregating local batch gradient variances among workers to compute the quantities in (6).

## 5 Convergence Analysis

Our analysis focuses on the i.i.d. setting as shown in (1). We set  $\eta_m \equiv \eta \in (0,1)$  for all  $m \in [\![M]\!]$ , typical in datacenter environments for distributed training [13], where workers access the entire data set. The analysis

#### Algorithm 1 Adaptive Local Batch Size Schedules for Local Gradient Methods

Input: no. of workers  $M \in \mathbb{N}^*$ , no. of communication steps  $K \in \mathbb{N}^*$ , no. of local steps  $H \in \mathbb{N}^*$ , no. of training samples  $N \in \mathbb{N}^*$ , global step counter k = 0, processed samples counter B = 0, training sets  $(\mathcal{D}_m)_{m \in \llbracket M \rrbracket} = (\{\xi_i^m\}_{i=1}^{n_m})_{m \in \llbracket M \rrbracket}$ , initial model parameters  $x_{0,0}^m = x_0 \in \mathbb{R}^d$  for all  $m \in \llbracket M \rrbracket$ , initial local batch sizes  $(b_0^m)_{m \in \llbracket M \rrbracket}$ , learning rate schedules  $(\alpha_{k,h})_{k \in \llbracket 0,K-1 \rrbracket,h \in \llbracket 0,H-1 \rrbracket}, (\eta_m)_{m \in \llbracket M \rrbracket} \subset (0,1)$  while B < N do

```
for all worker m=1,\ldots,M in parallel do

for local step h=0,\ldots,H-1 do

Sample the local batch \mathcal{B}^m_{k,h} of size b^m_{k,h}:=|\mathcal{B}^m_{k,h}| uniformly from \mathcal{D}_m

Compute per-sample gradients \nabla f_m(x^m_{k,h};\xi^m_i) for each i\in\mathcal{B}^m_{k,h}

Compute the local batch gradient \nabla F_{\mathcal{B}^m_{k,h}}(x^m_{k,h})=\frac{1}{b^m_{k,h}}\sum_{i\in\mathcal{B}^m_{k,h}}\nabla f_m(x^m_{k,h};\xi^m_i)

Compute \mathrm{Var}_{i\in\mathcal{B}^m_{k,h}}(\nabla f_m(x^m_{k,h};\xi^m_i)) by applying (5)

Compute the local norm test statistic \mathsf{T}^m_{k,h} defined by (10)

Determine the next local batch sizes: b^m_{k,h+1}=\max\{\mathsf{T}^m_{k,h},b^m_{k,h}\}

Local SGD step: x^m_{k,h+1}=x^m_{k,h}-\alpha_{k,h}\nabla F_{\mathcal{B}^m_{k,h}}(x^m_{k,h})

end for

Update the global model: x^m_{k+1,0}=\frac{1}{M}\sum_{m=1}^M x^m_{k,H} for each m\in[M]

b all-reduce b\in B+\sum_{m=1}^M\sum_{h=0}^{H-1}b^m_{k,h}

b\in B+\sum_{m=1}^M\sum_{h=0}^{H-1}b^m_{k,h}

end while
```

**Output:**  $\widehat{x} = x_{K,0}^1$ , where K is the smallest integer such that  $\sum_{k=0}^{K-1} \sum_{m=1}^{M} \sum_{h=0}^{H-1} b_{k,h}^m \geqslant N$ 

of heterogeneous data settings is deferred to future work. Our convergence analysis, following [69], does not assume bounded gradient variance across  $\mathbb{R}^d$ . Instead, our adaptive local batch size strategies ensure the expected strong growth condition [5, 36] at each local iterate  $x_k^m$  for all workers  $m \in [\![M]\!]$ . This approach relaxes the standard assumptions of uniform boundedness and expected strong growth conditions [72], which are challenging to verify except in the interpolation regime [53].

We might need to invoke the following assumptions on the objective function F.

**Assumption 1** (*L*-Lipschitz smoothness). The function  $F: \mathbb{R}^d \to \mathbb{R}$  is continuously differentiable, bounded below by  $F^* := \inf_{x \in \mathbb{R}^d} F(x) = F(x^*) \in \mathbb{R}$  with  $x^* = \operatorname{argmin}_{x \in \mathbb{R}^d} F(x)$ , and is *L*-Lipschitz smooth for some L > 0, i.e., for any  $(x, y) \in \mathbb{R}^d \times \mathbb{R}^d$ ,  $\|\nabla F(x) - \nabla F(y)\| \le L\|x - y\|$ .

**Assumption 2** ( $\mu$ -strong convexity). The function F is  $\mu$ -strongly convex for some  $\mu \geq 0$ , i.e., for any  $(x,y) \in \mathbb{R}^d \times \mathbb{R}^d$ ,  $F(x) - F(y) + \frac{\mu}{2} ||x-y||^2 \leq \langle \nabla F(x), x-y \rangle$ . If  $\mu = 0$ , we say that F is convex.

We derive the following convergence results for the proposed adaptive batch size strategies as follows. Their proofs are deferred to Appendix A.

**Theorem 1** (Strongly convex;  $\mu > 0$ ). Suppose that Assumptions 1 and 2 hold with  $\mu > 0$ . Let  $(x_k^m)_{k \in \mathbb{N}, m \in \llbracket M \rrbracket}$  be the sequence of the iterates of Local SGD (2) with the (exact variance) local norm test (8) with  $\eta_m \equiv \eta \in (0,1)$  and a constant learning rate  $\alpha_k \equiv \alpha$ . Then, for some  $\alpha \leq 1/(10L(HM + \eta^2))$ , we have

$$\mathbb{E}[F(x_{\mathsf{out}})] - F^* = \widetilde{\mathbb{G}}\left(L(HM + \eta^2) \exp\left\{-\frac{\mu K}{10L(HM + \eta^2)}\right\} \|x_0 - x^*\|^2\right),\tag{12}$$

where  $x_{\text{out}} \in \{x_k^m\}_{k \in [\![0,K-1]\!],m \in [\![M]\!]}$  is chosen as  $x_k^m$  with probability proportional to  $(1 - \mu \alpha/2)^{-k}$  uniformly on  $m \in [\![M]\!]$  and  $\widetilde{\mathfrak{G}}$  hides logarithmic factors.

**Theorem 2** (Convex;  $\mu = 0$ ). Suppose that Assumptions 1 and 2 hold with  $\mu = 0$ . Let  $(x_k^m)_{k \in \mathbb{N}, m \in \llbracket M \rrbracket}$  be the sequence of the iterates of Local SGD (2) with the (exact variance) local norm test (8) with  $\eta_m \equiv \eta \in (0,1)$  and a constant learning rate  $\alpha_k \equiv \alpha$ . Then, for some  $\alpha \leq 1/(10L(HM + \eta^2))$ , we have

$$\mathbb{E}[F(x_{\text{out}})] - F^* = \mathbb{O}\left(\frac{L(HM + \eta^2)}{K} \|x_0 - x^*\|^2\right),\tag{13}$$

where  $x_{\text{out}}$  is chosen uniformly at random from  $\{x_k^m\}_{k\in \llbracket 0,K-1\rrbracket,m\in \llbracket M\rrbracket}$ .

**Theorem 3** (Nonconvex). Suppose that Assumption 1 holds. Let  $(x_k^m)_{k \in \mathbb{N}, m \in \llbracket M \rrbracket}$  be the sequence of the iterates of Local SGD (2) with the (exact variance) local norm test (8) with  $\eta_m \equiv \eta \in (0,1)$  and a constant learning rate  $\alpha_k \equiv \alpha$ . Then, for some  $\alpha \leq 1/(10L(HM + \eta^2))$ , we have

$$\mathbb{E}\|\nabla F(x_{\text{out}})\|^2 = 6\left(\frac{L(HM + \eta^2)}{K}(F(x_0) - F^*)\right),\tag{14}$$

where  $x_{\text{out}}$  is chosen uniformly at random from  $\{x_k^m\}_{k\in [0,K-1],m\in [M]}$ .

The theorems confirm that Local SGD, using the local norm test with exact variance, achieves linear convergence rates for both convex and nonconvex objectives. This scaling is proportional to the number of local gradient steps H and workers M, akin to Local SGD under constant batch sizes and bounded gradient variance [69].

Remark 1 (Choice of  $\eta$ ). Convergence rates depend quadratically on  $\eta$ , which controls the likelihood and size of increased local batch sizes. Choosing smaller  $\eta$  values accelerates convergence but causes quick batch size escalation, undermining adaptive batch sizing and widening the generalization gap.

## 6 Numerical Experiments

We evaluate the efficiency of the training (total steps or wall-clock time) and the generalization performance of our strategies through image classification tasks. We use a three-layer convolutional neural network on the MNIST dataset [46] and a Resnet-50 [28] on the CIFAR-10 dataset [42], with four workers (M=4 GPUs). The models are trained using Local Adam and Local SGD with momentum (SHB), synchronizing only the models every H steps. Further details and results are in Appendix B.

## 6.1 Three-layer CNN on MNIST

We demonstrate our strategies using a three-layer CNN for MNIST classification. The training involves 12 million samples (200 epochs) with global and local batch sizes set to 60,000 and 15,000, respectively. This task uses a fixed learning rate of 0.0008 without any rate schedules. Results are in Table 1.

Table 1: Adaptive local batch size strategies for three-layer CNN on MNIST; no. of total steps (steps), wall-clock time (in minutes), average local batch sizes (bsz.), and top validation accuracy (acc.; in %)

Schedule	H = 16				H=4				H=1			
Schedule	steps	$_{ m time}$	bsz.	acc.	steps	$_{ m time}$	bsz.	acc.	steps	$_{ m time}$	bsz.	acc.
Constant	1456	5.01	2048	99.10	1464	9.44	2048	99.06	1464	25.58	2048	99.08
Constant	352	6.84	8192	98.80	364	8.19	8192	98.85	366	12.37	8192	98.94
Constant	192	10.59	15000	98.40	196	11.41	15000	98.43	199	13.88	15000	98.54
$\eta = 0.25$	213	11.35	13414	98.51	221	11.94	13427	98.55	223	14.50	13467	98.66
$\eta = 0.375$	224	11.85	13077	98.61	228	12.16	13031	98.58	228	14.86	13078	98.71
$\eta = 0.50$	229	11.85	12615	98.58	235	11.73	12648	98.60	235	14.42	12748	98.72

Values of  $\eta$ . Table 1 shows that adaptive local batch size strategies can match or exceed the validation accuracy of constant batch size strategies. Specifically, with 16 local gradient steps and  $\eta = 0.25$ , the adaptive strategy achieves an average batch size similar to a constant batch size of 15,000 (see Figure 1), but with superior accuracy and 21 additional steps. This confirms that adaptive strategies can mitigate the generalization gap in large-batch training. Furthermore, Figure 2 indicates that these strategies reach a maximum local batch size of 15,000 later in the training, enhancing hardware utilization and efficiency. Similar trends are noted for H = 4 and H = 1.

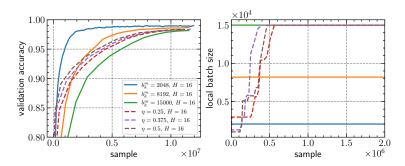


Figure 1: Validation accuracy and local batch sizes of Local ADAM with adaptive batch size strategies (H = 16).

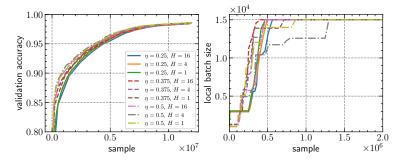


Figure 2: Validation accuracy and local batch sizes of Local ADAM with adaptive batch size strategies with  $\eta \in \{0.25, 0.375, 0.5\}$  and  $H \in \{16, 4, 1\}$ .

**Local gradient steps** H. Smaller H increases training time due to more frequent communication, and contrary to expectations, does not always enhance generalization. As Table 1 demonstrates, with a local batch size of 2048, H=1 and H=4 have lower accuracy compared to H=16. This pattern is consistent with adaptive batch sizes, where H=4 underperforms H=16 at  $\eta=0.375$ . Moreover, while H=1 leads to longer training times, it achieves higher accuracy.

#### 6.2 ResNet-50 on CIFAR-10

We scale our experiment to RESNET-50 for CIFAR-10, using a training budget of 12 million samples (200 epochs) and setting maximum global and local batch sizes of 60,000 and 15,000, respectively. Our learning rate schedules include a 10% linear warmup and cosine decay, with peak and minimum rates of 0.5 and 0.05, respectively.

Table 2: Adaptive local batch size strategies for RESNET-50 on CIFAR-10; no. of total steps (steps), wall-clock time (in minutes), average local batch sizes (bsz.), and top validation accuracy (acc.; in %)

Calcalala	H = 16				H=4				H=1			
Schedule	steps	$_{ m time}$	bsz.	acc.	steps	$_{ m time}$	bsz.	acc.	steps	$_{ m time}$	bsz.	acc.
Constant	2432	27.16	1024	92.31	2440	34.00	1024	92.65	2441	60.51	1024	91.11
Constant	608	34.99	4096	63.50	608	37.10	4096	57.04	610	46.39	4096	40.40
Constant	304	34.31	8192	12.51	304	35.34	8192	16.61	305	40.01	8192	14.78
$\eta = 0.8$	576	90.73	4306	81.95	416	138.39	6001	75.09	241	50.67	10380	25.32
$\eta = 0.85$	512	92.41	4900	81.95	912	141.51	2742	86.89	433	144.75	5767	72.66
$\dot{\eta} = 0.9$	2816	96.98	885	93.59	1982	126.38	1261	92.53	3940	111.92	634	93.75

**Values of**  $\eta$ . Table 3 shows that adaptive local batch size strategies can achieve comparable or superior validation accuracy to constant batch sizes with similar averages. For instance, with H = 16 and  $\eta = 0.80$ , the adaptive strategy reaches an average batch size akin to a constant batch size of 4096 but with nearly

50% higher accuracy and 32 fewer steps, illustrating the effectiveness of adaptive strategies in bridging the generalization gap in large-batch training.

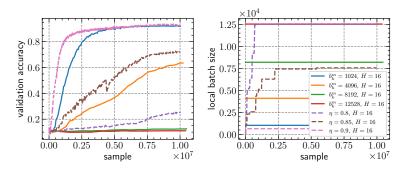


Figure 3: Validation accuracy and local batch sizes of Local SHB with adaptive batch size strategies (H = 16).

**Local gradient steps** H. We first examine constant batch sizes (Table 3 and Figure 4). Local gradient methods, as noted in [24, 25, 50, 58], may improve generalization compared to synchronized methods (H = 1), although we employ SHB in synchronized models instead of standard SGD. For adaptive local batch sizes, smaller H values increase batch sizes more rapidly (Table 3), supporting our theory that a smaller  $\eta$  should be used with a larger H to maintain convergence rates of  $\mathfrak{G}(HM + \eta^2)$ . Refer to Figure 3 and appendix B.2 for further illustrations.

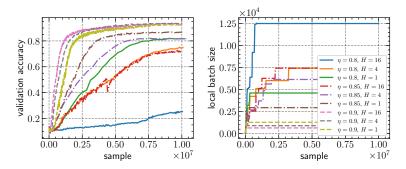


Figure 4: Validation accuracy and local batch sizes of Local SHB with adaptive batch size strategies with  $\eta \in \{0.25, 0.375, 0.5\}$  and  $H \in \{16, 4, 1\}$ .

Number of workers M. We conducted additional experiments with M=8. Compared to the 4-worker scenario, increasing the number of workers reduces training time but lowers average accuracy, indicating poorer generalization. Nonetheless, the observations regarding local gradient steps H and values of  $\eta$  remain consistent with the 4-worker case.

Table 3: Adaptive local batch size strategies for RESNET-50 on CIFAR-10 with 8 workers

C -1 - 11 -	H = 16				H=4				H=1			
Schedule	steps	$_{ m time}$	bsz.	acc.	steps	$_{ m time}$	bsz.	acc.	steps	$_{ m time}$	bsz.	acc.
Constant	2432	12.06	512	92.06	2440	15.45	512	92.87	2441	29.09	512	92.41
Constant	1216	11.19	1024	88.88	1220	12.93	1024	87.87	1220	19.72	1024	86.80
Constant	608	10.72	2048	66.94	608	11.59	2048	71.32	610	15.03	2048	59.57
$\eta = 0.8$	213	11.55	5666	17.88	216	11.82	5655	15.98	218	12.29	5650	16.84
$\eta = 0.85$	220	12.22	5610	19.47	222	12.30	5570	22.06	222	12.66	5569	21.99
$\eta = 0.9$	261	15.25	5236	28.78	277	16.92	$\bf 5052$	33.07	278	18.26	4959	36.83

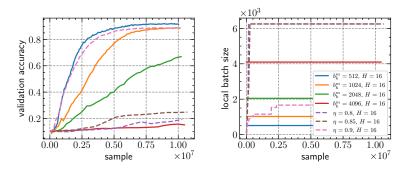


Figure 5: Validation accuracy and local batch sizes of Local SHB with adaptive batch size strategies (H = 16) with 8 workers.

# 7 Concluding Remarks

This work introduces adaptive local batch size strategies for local gradient methods in data parallelism, focusing on reducing communication overheads by increasing local batch sizes independently. Although our analysis and experiments are limited to identical data settings, the algorithm is applicable to heterogeneous scenarios. Future work will explore convergence in diverse settings and federated learning [33, 54], including personalized approaches [27]. Extensions to asynchronous SGD [30, 41, 45, 55, 57] and hierarchical SGD [8, 50, 75] are also promising for improving communication efficiency and addressing worker heterogeneity.

## Acknowledgments

The research of Han Liu is supported by NIH R01LM01372201, NSF RI 1840857, NSF TRIPOD 1740735, NSF DMS1454377-CAREER, NSF IIS 1546482, along with an Alfred P. Sloan Fellowship. The research of Mladen Kolar is supported in part by NSF ECCS-2216912. This research is supported in part through the computational resources and staff contributions from the Data Science Institute at the University of Chicago, through its AI + Science Research Funding Initiatives.

### References

- [1] Lukas Balles, Javier Romero, and Philipp Hennig. Coupling adaptive batch sizes with learning rates. In *Proceedings of the Conference on Uncertainty in Artificial Intelligence (UAI)*, 2017.
- [2] Lukas Balles, Prabhu Teja S, and Cedric Archambeau. On the choice of learning rate for local SGD. Transactions on Machine Learning Research, 2024.
- [3] Raghu Bollapragada, Richard Byrd, and Jorge Nocedal. Adaptive sampling strategies for stochastic optimization. SIAM Journal on Optimization, 28(4):3312–3343, 2018.
- [4] Léon Bottou. Large-scale machine learning with stochastic gradient descent. In *Proceedings of COMP-STAT'2010: 19th International Conference on Computational Statistics*, pages 177–186. Springer, 2010.
- [5] Léon Bottou, Frank E. Curtis, and Jorge Nocedal. Optimization methods for large-scale machine learning. SIAM Review, 60(2):223–311, 2018.
- [6] Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel M. Ziegler, Jeffrey Wu, Clemens Winter, Chris Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. Language models are few-shot learners. In Advances in Neural Information Processing Systems (NeurIPS), 2020.
- [7] Richard H. Byrd, Gillian M. Chin, Jorge Nocedal, and Yuchen Wu. Sample size selection in optimization methods for machine learning. *Mathematical Programming*, 134(1):127–155, 2012.
- [8] Timothy Castiglia, Anirban Das, and Stacy Patterson. Multi-level local SGD: Distributed SGD for heterogeneous hierarchical networks. In *International Conference on Learning Representations (ICLR)*, 2021.
- [9] Mingzhe Chen, Nir Shlezinger, H. Vincent Poor, Yonina C. Eldar, and Shuguang Cui. Communicationefficient federated learning. *Proceedings of the National Academy of Sciences*, 118(17):e2024789118, 2021.
- [10] Damek Davis, Dmitriy Drusvyatskiy, Sham Kakade, and Jason D. Lee. Stochastic subgradient method converges on tame functions. Foundations of Computational Mathematics, 20:119–154, 2020.
- [11] Soham De, Abhay Yadav, David Jacobs, and Tom Goldstein. Big batch SGD: Automated inference using adaptive batch sizes. arXiv preprint arXiv:1610.05792, 2016.
- [12] Soham De, Abhay Yadav, David Jacobs, and Tom Goldstein. Automated inference with adaptive batches. In Proceedings of the International Conference on Artificial Intelligence and Statistics (AISTATS), 2017.
- [13] Jeffrey Dean, Greg Corrado, Rajat Monga, Kai Chen, Matthieu Devin, Mark Mao, Marc' aurelio Ranzato, Andrew Senior, Paul Tucker, Ke Yang, Quoc V. Le, and Andrew Y. Ng. Large scale distributed deep networks. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2012.
- [14] DeepSeek-AI. DeepSeek-V2: A strong, economical, and efficient Mixture-of-Experts language model. arXiv preprint arXiv:2405.04434, 2024.
- [15] Ofer Dekel, Ran Gilad-Bachrach, Ohad Shamir, and Lin Xiao. Optimal distributed online prediction using mini-batches. *Journal of Machine Learning Research*, 13(1), 2012.
- [16] Aditya Devarakonda, Maxim Naumov, and Michael Garland. Adabatch: Adaptive batch sizes for training deep neural networks. arXiv preprint arXiv:1712.02029, 2017.
- [17] Arthur Douillard, Qixuan Feng, Andrei A. Rusu, Rachita Chhaparia, Yani Donchev, Adhiguna Kuncoro, Marc'Aurelio Ranzato, Arthur Szlam, and Jiajun Shen. DiLoCo: Distributed low-communication training of language models. arXiv preprint arXiv:2311.08105, 2023.

- [18] John Duchi, Elad Hazan, and Yoram Singer. Adaptive subgradient methods for online learning and stochastic optimization. *Journal of Machine Learning Research*, 12:2121–2159, 2011.
- [19] Michael P. Friedlander and Mark Schmidt. Hybrid deterministic-stochastic methods for data fitting. SIAM Journal on Scientific Computing, 34(3):A1380–A1405, 2012.
- [20] Robert M. Gower, Mark Schmidt, Francis Bach, and Peter Richtárik. Variance-reduced methods for machine learning. *Proceedings of the IEEE*, 108(11):1968–1983, 2020.
- [21] Robert Mansel Gower, Nicolas Loizou, Xun Qian, Alibek Sailanbayev, Egor Shulgin, and Peter Richtárik. SGD: General analysis and improved rates. In *Proceedings of the International Conference on Machine Learning (ICML)*, 2019.
- [22] Priya Goyal, Piotr Dollár, Ross Girshick, Pieter Noordhuis, Lukasz Wesolowski, Aapo Kyrola, Andrew Tulloch, Yangqing Jia, and Kaiming He. Accurate, large minibatch SGD: Training ImageNet in 1 hour. arXiv preprint arXiv:1706.02677, 2017.
- [23] Dirk Groeneveld, Iz Beltagy, Pete Walsh, Akshita Bhagia, Rodney Kinney, Oyvind Tafjord, Ananya Harsh Jha, Hamish Ivison, Ian Magnusson, Yizhong Wang, Shane Arora, David Atkinson, Russell Authur, Khyathi Raghavi Chandu, Arman Cohan, Jennifer Dumas, Yanai Elazar, Yuling Gu, Jack Hessel, Tushar Khot, William Merrill, Jacob Morrison, Niklas Muennighoff, Aakanksha Naik, Crystal Nam, Matthew E. Peters, Valentina Pyatkin, Abhilasha Ravichander, Dustin Schwenk, Saurabh Shah, Will Smith, Emma Strubell, Nishant Subramani, Mitchell Wortsman, Pradeep Dasigi, Nathan Lambert, Kyle Richardson, Luke Zettlemoyer, Jesse Dodge, Kyle Lo, Luca Soldaini, Noah A. Smith, and Hannaneh Hajishirzi. OLMo: Accelerating the science of language models. arXiv preprint arXiv:2402.00838, 2024.
- [24] Xinran Gu, Kaifeng Lyu, Longbo Huang, and Sanjeev Arora. Why (and when) does local SGD generalize better than SGD? In *International Conference on Learning Representations (ICLR)*, 2023.
- [25] Xinran Gu, Kaifeng Lyu, Sanjeev Arora, Jingzhao Zhang, and Longbo Huang. A quadratic synchronization rule for distributed deep learning. In *International Conference on Learning Representations (ICLR)*, 2024.
- [26] Farzin Haddadpour, Mohammad Mahdi Kamani, Mehrdad Mahdavi, and Viveck Cadambe. Local SGD with periodic averaging: Tighter analysis and adaptive synchronization. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2019.
- [27] Filip Hanzely, Boxin Zhao, and Mladen Kolar. Personalized federated learning: A unified framework and universal optimization techniques. *Transactions on Machine Learning Research*, 2023.
- [28] Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep residual learning for image recognition. In Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR), 2016.
- [29] Elad Hoffer, Itay Hubara, and Daniel Soudry. Train longer, generalize better: closing the generalization gap in large batch training of neural networks. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2017.
- [30] Rustem Islamov, Mher Safaryan, and Dan Alistarh. AsGrad: A sharp unified analysis of asynchronous-SGD algorithms. In *Proceedings of the International Conference on Artificial Intelligence and Statistics* (AISTATS), 2024.
- [31] Rie Johnson and Tong Zhang. Accelerating stochastic gradient descent using predictive variance reduction. In Advances in Neural Information Processing Systems (NeurIPS), 2013.
- [32] Tyler Johnson, Pulkit Agrawal, Haijie Gu, and Carlos Guestrin. AdaScale SGD: A user-friendly algorithm for distributed training. In *Proceedings of the International Conference on Machine Learning (ICML)*, 2020.

- [33] Peter Kairouz, H. Brendan McMahan, Brendan Avent, Aurélien Bellet, Mehdi Bennis, Arjun Nitin Bhagoji, Kallista Bonawitz, Zachary Charles, Graham Cormode, Rachel Cummings, Rafael G. L. D'Oliveira, Hubert Eichner, Salim El Rouayheb, David Evans, Josh Gardner, Zachary Garrett, Adrià Gascón, Badih Ghazi, Phillip B. Gibbons, Marco Gruteser, Zaid Harchaoui, Chaoyang He, Lie He, Zhouyuan Huo, Ben Hutchinson, Justin Hsu, Martin Jaggi, Tara Javidi, Gauri Joshi, Mikhail Khodak, Jakub Konečný, Aleksandra Korolova, Farinaz Koushanfar, Sanmi Koyejo, Tancrède Lepoint, Yang Liu, Prateek Mittal, Mehryar Mohri, Richard Nock, Ayfer Özgür, Rasmus Pagh, Mariana Raykova, Hang Qi, Daniel Ramage, Ramesh Raskar, Dawn Song, Weikang Song, Sebastian U. Stich, Ziteng Sun, Ananda Theertha Suresh, Florian Tramèr, Praneeth Vepakomma, Jianyu Wang, Li Xiong, Zheng Xu, Qiang Yang, Felix X. Yu, Han Yu, and Sen Zhao. Advances and open problems in federated learning. Foundations and Trends® in Machine Learning, 14(1–2):1–210, 2021.
- [34] Sai Praneeth Karimireddy, Satyen Kale, Mehryar Mohri, Sashank Reddi, Sebastian Stich, and Ananda Theertha Suresh. SCAFFOLD: Stochastic controlled averaging for federated learning. In *Proceedings of the International Conference on Machine Learning (ICML)*, 2020.
- [35] Nitish Shirish Keskar, Dheevatsa Mudigere, Jorge Nocedal, Mikhail Smelyanskiy, and Ping Tak Peter Tang. On large-batch training for deep learning: Generalization gap and sharp minima. In *International Conference on Learning Representations (ICLR)*, 2017.
- [36] Ahmed Khaled and Peter Richtárik. Better theory for SGD in the nonconvex world. Transactions on Machine Learning Research, 2023.
- [37] Ahmed Khaled, Konstantin Mishchenko, and Peter Richtarik. Tighter theory for local SGD on identical and heterogeneous data. In *Proceedings of the International Conference on Artificial Intelligence and Statistics (AISTATS)*, 2020.
- [38] Junhyung Lyle Kim, Taha Toghani, Cesar A. Uribe, and Anastasios Kyrillidis. Adaptive federated learning with auto-tuned clients. In *International Conference on Learning Representations (ICLR)*, 2024.
- [39] Diederik P. Kingma and Jimmy Lei Ba. Adam: a method for stochastic optimization. In *International Conference on Learning Representations (ICLR)*, 2015.
- [40] Anastasia Koloskova, Nicolas Loizou, Sadra Boreiri, Martin Jaggi, and Sebastian Stich. A unified theory of decentralized SGD with changing topology and local updates. In *Proceedings of the International Conference on Machine Learning (ICML)*, 2020.
- [41] Anastasia Koloskova, Sebastian U. Stich, and Martin Jaggi. Sharper convergence guarantees for asynchronous SGD for distributed and federated learning. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2022.
- [42] Alex Krizhevsky. Learning multiple layers of features from tiny images. Technical report, University of Toronto, 2009.
- [43] Guanghui Lan, Soomin Lee, and Yi Zhou. Communication-efficient algorithms for decentralized and stochastic optimization. *Mathematical Programming*, 180(1-2):237–284, 2020.
- [44] Tim Tsz-Kit Lau, Han Liu, and Mladen Kolar. ADADAGRAD: Adaptive batch size schemes for adaptive gradient methods. arXiv preprint arXiv:2402.11215, 2024.
- [45] Louis Leconte, Matthieu Jonckheere, Sergey Samsonov, and Eric Moulines. Queuing dynamics of asynchronous federated learning. In Proceedings of the International Conference on Artificial Intelligence and Statistics (AISTATS), 2024.
- [46] Yann LeCun, Corinna Cortes, and Chris Burges. MNIST handwritten digit database, 1998. URL http://yann.lecun.com/exdb/mnist.
- [47] Yann LeCun, Leon Bottou, Genevieve B. Orr, and Klaus Robert Müller. Efficient BackProp. In Genevieve B. Orr and Klaus-Robert Müller, editors, *Neural Networks: Tricks of the Trade*, pages 9–50. Springer Berlin Heidelberg, 2002.

- [48] Conglong Li, Ammar Ahmad Awan, Hanlin Tang, Samyam Rajbhandari, and Yuxiong He. 1-bit LAMB: Communication efficient large-scale large-batch training with LAMB's convergence speed. In *Proceedings* of IEEE 29th International Conference on High Performance Computing, Data, and Analytics (HiPC), 2022.
- [49] Shen Li, Yanli Zhao, Rohan Varma, Omkar Salpekar, Pieter Noordhuis, Teng Li, Adam Paszke, Jeff Smith, Brian Vaughan, Pritam Damania, and Soumith Chintala. PyTorch distributed: Experiences on accelerating data parallel training. In *Proceedings of the VLDB Endowment*, 2020.
- [50] Tao Lin, Sebastian U. Stich, Kumar Kshitij Patel, and Martin Jaggi. Don't use large mini-batches, use local SGD. In *International Conference on Learning Representations (ICLR)*, 2020.
- [51] Bo Liu, Rachita Chhaparia, Arthur Douillard, Satyen Kale, Andrei A. Rusu, Jiajun Shen, Arthur Szlam, and Marc'Aurelio Ranzato. Asynchronous local-SGD training for language modeling. arXiv preprint arXiv:2401.09135, 2024.
- [52] Ilya Loshchilov and Frank Hutter. Decoupled weight decay regularization. In *International Conference* on Learning Representations (ICLR), 2019.
- [53] Siyuan Ma, Raef Bassily, and Mikhail Belkin. The power of interpolation: Understanding the effectiveness of SGD in modern over-parametrized learning. In *Proceedings of the International Conference on Machine Learning (ICML)*, 2018.
- [54] H. Brendan McMahan, Eider Moore, Daniel Ramage, Seth Hampson, and Blaise Agüera y Arcas. Communication-efficient learning of deep networks from decentralized data. In *Proceedings of the International Conference on Artificial Intelligence and Statistics (AISTATS)*, 2017.
- [55] Konstantin Mishchenko, Francis Bach, Mathieu Even, and Blake Woodworth. Asynchronous SGD beats minibatch SGD under arbitrary delays. In *Advances in Neural Information Processing Systems* (NeurIPS), 2022.
- [56] Sohom Mukherjee, Nicolas Loizou, and Sebastian U. Stich. Locally adaptive federated learning. arXiv preprint arXiv:2307.06306, 2024.
- [57] John Nguyen, Kshitiz Malik, Hongyuan Zhan, Ashkan Yousefpour, Mike Rabbat, Mani Malek, and Dzmitry Huba. Federated learning with buffered asynchronous aggregation. In *Proceedings of the International Conference on Artificial Intelligence and Statistics (AISTATS)*, 2022.
- [58] Jose Javier Gonzalez Ortiz, Jonathan Frankle, Mike Rabbat, Ari Morcos, and Nicolas Ballas. Trade-offs of local SGD at scale: An empirical study. arXiv preprint arXiv:2110.08133, 2021.
- [59] Petr Ostroukhov, Aigerim Zhumabayeva, Chulu Xiang, Alexander Gasnikov, Martin Takáč, and Dmitry Kamzolov. AdaBatchGrad: Combining adaptive batch size and adaptive step size. arXiv preprint arXiv:2402.05264, 2024.
- [60] Jupinder Parmar, Shrimai Prabhumoye, Joseph Jennings, Mostofa Patwary, Sandeep Subramanian, Dan Su, Chen Zhu, Deepak Narayanan, Aastha Jhunjhunwala, Ayush Dattagupta, Vibhu Jawa, Jiwei Liu, Ameya Mahabaleshwarkar, Osvald Nitski, Annika Brundyn, James Maki, Miguel Martinez, Jiaxuan You, John Kamalu, Patrick LeGresley, Denys Fridman, Jared Casper, Ashwath Aithal, Oleksii Kuchaiev, Mohammad Shoeybi, Jonathan Cohen, and Bryan Catanzaro. Nemotron-4 15B technical report. arXiv preprint arXiv:2402.16819, 2024.
- [61] Heyang Qin, Samyam Rajbhandari, Olatunji Ruwase, Feng Yan, Lei Yang, and Yuxiong He. SimiGrad: Fine-grained adaptive batching for large scale training using gradient similarity measurement. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2021.
- [62] Sashank J. Reddi, Zachary Charles, Manzil Zaheer, Zachary Garrett, Keith Rush, Jakub Konečný, Sanjiv Kumar, and Hugh Brendan McMahan. Adaptive federated optimization. In *International Conference on Learning Representations (ICLR)*, 2021.

- [63] Herbert Robbins and Sutton Monro. A stochastic approximation method. The Annals of Mathematical Statistics, 22(3):400–407, 1951.
- [64] Christopher J. Shallue, Jaehoon Lee, Joseph Antognini, Jascha Sohl-Dickstein, Roy Frostig, and George E. Dahl. Measuring the effects of data parallelism on neural network training. *Journal of Machine Learning Research*, 20(112):1–49, 2019.
- [65] Samuel L. Smith and Quoc V. Le. A Bayesian perspective on generalization and stochastic gradient descent. In *International Conference on Learning Representations (ICLR)*, 2018.
- [66] Samuel L. Smith, Pieter-Jan Kindermans, and Quoc V. Le. Don't decay the learning rate, increase the batch size. In *International Conference on Learning Representations (ICLR)*, 2018.
- [67] Sebastian U. Stich. Local SGD converges fast and communicates little. In *International Conference on Learning Representations (ICLR)*, 2019.
- [68] Sebastian U. Stich. Unified optimal analysis of the (stochastic) gradient method. arXiv preprint arXiv:1907.04232, 2019.
- [69] Sebastian U. Stich and Sai Praneeth Karimireddy. The error-feedback framework: SGD with delayed gradients. *Journal of Machine Learning Research*, 21(237):1–36, 2020.
- [70] Ilya Sutskever, James Martens, George Dahl, and Geoffrey Hinton. On the importance of initialization and momentum in deep learning. In *Proceedings of the International Conference on Machine Learning (ICML)*, 2013.
- [71] Hanlin Tang, Shaoduo Gan, Ammar Ahmad Awan, Samyam Rajbhandari, Conglong Li, Xiangru Lian, Ji Liu, Ce Zhang, and Yuxiong He. 1-bit Adam: Communication efficient large-scale training with Adam's convergence speed. In Proceedings of the International Conference on Machine Learning (ICML), 2021.
- [72] Sharan Vaswani, Francis Bach, and Mark Schmidt. Fast and faster convergence of SGD for overparameterized models and an accelerated perceptron. In *Proceedings of the International Conference on Artificial Intelligence and Statistics (AISTATS)*, 2019.
- [73] Jianyu Wang and Gauri Joshi. Adaptive communication strategies to achieve the best error-runtime trade-off in local-update SGD. In *Proceedings of Machine Learning and Systems (MLSys)*, 2019.
- [74] Jianyu Wang and Gauri Joshi. Cooperative SGD: A unified framework for the design and analysis of local-update SGD algorithms. *Journal of Machine Learning Research*, 22(213):1–50, 2021.
- [75] Jiayi Wang, Shiqiang Wang, Rong-Rong Chen, and Mingyue Ji. Demystifying why local aggregation helps: Convergence analysis of hierarchical SGD. In *Proceedings of the AAAI Conference on Artificial Intelligence*, 2022.
- [76] Blake Woodworth, Kumar Kshitij Patel, and Nati Srebro. Minibatch vs local SGD for heterogeneous distributed learning. In Advances in Neural Information Processing Systems (NeurIPS), 2020.
- [77] Blake Woodworth, Kumar Kshitij Patel, Sebastian Stich, Zhen Dai, Brian Bullins, Brendan Mcmahan, Ohad Shamir, and Nathan Srebro. Is local SGD better than minibatch SGD? In Proceedings of the International Conference on Machine Learning (ICML), 2020.
- [78] Lin Xiao and Tong Zhang. A proximal stochastic gradient method with progressive variance reduction. SIAM Journal on Optimization, 24(4):2057–2075, 2014.
- [79] Hang Xu, Wenxuan Zhang, Jiawei Fei, Yuzhe Wu, TingWen Xie, Jun Huang, Yuchen Xie, Mohamed Elhoseiny, and Panos Kalnis. SLAMB: Accelerated large batch training with sparse communication. In Proceedings of the International Conference on Machine Learning (ICML), 2023.

- [80] Yang You, Jing Li, Sashank Reddi, Jonathan Hseu, Sanjiv Kumar, Srinadh Bhojanapalli, Xiaodan Song, James Demmel, Kurt Keutzer, and Cho-Jui Hsieh. Large batch optimization for deep learning: Training BERT in 76 minutes. In *International Conference on Learning Representations (ICLR)*, 2020.
- [81] Hao Yu, Sen Yang, and Shenghuo Zhu. Parallel restarted SGD with faster convergence and less communication: Demystifying why model averaging works for deep learning. In *Proceedings of the AAAI Conference on Artificial Intelligence*, 2019.
- [82] Fan Zhou and Guojing Cong. On the convergence properties of a k-step averaging stochastic gradient descent algorithm for nonconvex optimization. In *Proceedings of the International Joint Conference on Artificial Intelligence (IJCAI)*, 2018.
- [83] Martin Zinkevich, Markus Weimer, Lihong Li, and Alex Smola. Parallelized stochastic gradient descent. In Advances in Neural Information Processing Systems (NeurIPS), 2010.

# Appendix

# Contents

1	Introduction	1
2	Related Work	2
3	Preliminaries         3.1 Problem Formulation          3.2 Minibatch and Local Stochastic Gradient Methods	3 3
4	Adaptive Local Batch Size Strategies for Local Gradient Methods4.1 Adaptive Sampling Methods4.2 Extensions to Local Gradient Methods	4 4 5
5	Convergence Analysis	5
6	Numerical Experiments 6.1 Three-layer CNN on MNIST	7 7 8
7	Concluding Remarks	10
R	eferences	11
A	ppendix	17
A	A.1 Technical Lemmas	18 18 19
В	Details of Numerical Experiments  B.1 Three-layer Convolutional Neural Network on MNIST	24 24 29

#### A Proofs of Main Text

We present the omitted proofs of the main text, mainly by simplifying the technique in [69].

**Notation.** Let us define

$$(\forall k \in \mathbb{N}) \quad \overline{x}_{k+1} := \overline{x}_k - \frac{\alpha_k}{M} \sum_{m=1}^M g_k^m, \tag{A.1}$$

where  $g_k^m := \nabla F_{\mathcal{B}_k^m}(x_k^m)$  and  $\overline{x}_0 := x_0$ .

Let use recall that  $\mathbb{E}_k := \mathbb{E}[\cdot \mid \mathcal{F}_k], \mathbb{E}_{\mathcal{F}_k^m} := \mathbb{E}[\cdot \mid \mathcal{F}_k^m], \text{ and } \mathbb{E} \text{ denotes the unconditional expectation.}$ 

We also define the notion of slowly decreasing learning rates, called  $\tau$ -slow sequences.

**Definition A.1** ( $\tau$ -slow sequence; Definition 10 in in [69]). A sequence  $(a_k)_{k\in\mathbb{N}}\subset(0,\infty)$  with positive values is  $\tau$ -slow decreasing for  $\tau\geqslant 1$  if

$$(\forall k \in \mathbb{N})$$
  $a_{k+1} \leqslant a_k$  and  $a_{k+1} \left( 1 + \frac{1}{2\tau} \right) \geqslant a_k$ .

The sequence  $(a_k)_{k\in\mathbb{N}}$  is  $\tau$ -slow increasing if  $(1/a_k)_{k\in\mathbb{N}}$  is  $\tau$ -slow decreasing.

#### A.1 Technical Lemmas

We first state without proofs some preparatory lemmas, which are either standard results or whose proofs are be found in the cited work.

**Lemma A.1.** For any M vectors  $v_1, \ldots, v_M \in \mathbb{R}^d$ , we have

$$\left\| \sum_{m=1}^{M} v_m \right\| \leqslant \sum_{m=1}^{M} \|v_m\|. \tag{A.2}$$

**Lemma A.2.** For any M vectors  $v_1, \ldots, v_M \in \mathbb{R}^d$ , we have

$$\left\| \sum_{m=1}^{M} v_m \right\|^2 \leqslant M \sum_{m=1}^{M} \|w_m\|^2. \tag{A.3}$$

**Lemma A.3.** For any two vectors  $x, y \in \mathbb{R}^d$  and any positive number  $\rho > 0$ , we have

$$||x+y||^2 \le (1+\rho)||a||^2 + (1+1/\rho)||b||^2. \tag{A.4}$$

**Lemma A.4** (Cauchy–Schwarz inequality). For any two vectors  $x, y \in \mathbb{R}^d$  and any positive number  $\rho > 0$ , we have

$$2\langle x, y \rangle \leqslant \rho \|a\|^2 + \rho^{-1} \|b\|^2. \tag{A.5}$$

**Lemma A.5.** If  $F: \mathbb{R}^d \to \mathbb{R}$  is L-Lipschitz smooth for some L > 0 (Assumption 1), then we have

$$(\forall x \in \mathbb{R}^d) \quad \|\nabla F(x)\|^2 \leqslant 2L(F(x) - F^*). \tag{A.6}$$

**Lemma A.6** (Lemma 2 in [68]; Lemma 13 in [69]). For any nonnegative sequence  $(u_k)_{k\in\mathbb{N}}$  and parameters  $\kappa \geqslant \chi > 0$ ,  $\sigma \geqslant 0$  and  $K \in \mathbb{N}$ , there exists a constant  $\alpha \leqslant 1/\kappa$  such that for constant learning rates  $(\alpha_k \equiv \alpha)_{k\in\mathbb{N}}$  and weights  $w_k \coloneqq (1-\chi\alpha)^{-k-1}$ , we have

$$\Psi_K := \frac{1}{W_K} \sum_{k=0}^K w_k \left( \frac{(1 - \chi \alpha_k) u_k}{\alpha_k} - \frac{u_{k+1}}{\alpha_k} + \sigma \alpha_k \right) = \widetilde{\mathfrak{G}} \left( \kappa u_0 e^{-\chi K/\kappa} + \frac{\sigma}{\chi K} \right),$$

where  $W_K := \sum_{k=1}^K w_k$ .

**Lemma A.7** (Lemma 14 in [69]). For any nonnegative sequence  $(u_k)_{k\in\mathbb{N}}$  and parameters  $\kappa \geqslant 0$ ,  $\sigma \geqslant 0$  and  $K \in \mathbb{N}$ , there exists a constant  $\alpha \leqslant 1/\kappa$  such that for constant learning rates  $(\alpha_k \equiv \alpha)_{k\in\mathbb{N}}$ , we have

$$\Psi_K := \frac{1}{K+1} \sum_{k=0}^K \left( \frac{u_k}{\alpha_k} - \frac{u_{k+1}}{\alpha_k} + \sigma \alpha_k \right) \leqslant \frac{\kappa u_0}{K+1} + 2\sqrt{\frac{\sigma u_0}{K+1}}.$$

#### A.2 Proof of Theorems 1 to 3

We first prove a descent lemma for  $(\mu$ -strongly) convex objectives.

**Lemma A.8** (Descent lemma for  $(\mu$ -strongly) convex objectives). Suppose that Assumptions 1 and 2 hold with  $\mu > 0$ . Let  $(x_k^m)_{k \in \mathbb{N}, m \in \llbracket M \rrbracket}$  be the sequence of the iterates of Local SGD (2) with the (exact variance) local norm test (8) with  $\eta_m \equiv \eta \in (0,1)$ . If the sequence of learning rates  $(\alpha_k)_{k \in \mathbb{N}}$  satisfies  $\alpha_k \leq M/(4L(M+\eta^2))$  for all  $k \in \mathbb{N}$ , then the sequence  $(\overline{x}_k)_{k \in \mathbb{N}}$  defined in (A.1) satisfies

$$\mathbb{E}\|\overline{x}_{k+1} - x^{\star}\|^{2} \leqslant \left(1 - \frac{\mu\alpha_{k}}{2}\right)\mathbb{E}\|\overline{x}_{k} - x^{\star}\|^{2} - \frac{\alpha_{k}}{2M}\sum_{m=1}^{M}\mathbb{E}[F(x_{k}^{m}) - F^{\star}] + \frac{3L\alpha_{k}}{M}\sum_{m=1}^{M}\mathbb{E}\|x_{k}^{m} - \overline{x}_{k}\|^{2}.$$

*Proof.* The proof is similar to that of Lemma 25 in [69]. We state it here for convenience and completeness. Expanding we have

$$\|\overline{x}_{k+1} - x^{\star}\|^{2} = \|\overline{x}_{k} - x^{\star}\|^{2} - \frac{2\alpha_{k}}{M} \sum_{m=1}^{M} \langle g_{k}^{m}, x_{k}^{m} - x^{\star} \rangle + \frac{\alpha_{k}^{2}}{M^{2}} \left\| \sum_{m=1}^{M} g_{k}^{m} \right\|^{2} + \frac{2\alpha_{k}}{M} \sum_{m=1}^{M} \langle g_{k}^{m}, x_{k}^{m} - \overline{x}_{k} \rangle.$$

Taking expectation with respect to  $\mathcal{F}_k$ , we have

$$\begin{split} & \mathbb{E}_k \big\| \overline{x}_{k+1} - x^\star \big\|^2 \\ & \leqslant \big\| \overline{x}_k - x^\star \big\|^2 - \frac{2\alpha_k}{M} \sum_{m=1}^M \langle \nabla F(x_k^m), x_k^m - x^\star \rangle + \frac{\alpha_k^2}{M^2} \mathbb{E}_k \bigg\| \sum_{m=1}^M g_k^m \bigg\|^2 + \frac{2\alpha_k}{M} \sum_{m=1}^M \langle \nabla F(x_k^m), x_k^m - \overline{x}_k \rangle. \end{split}$$

Note that  $\mathbb{E}_k \left\| \sum_{m=1}^M g_k^m \right\|^2$  can be bounded by

$$\mathbb{E}_{k} \left\| \sum_{m=1}^{M} g_{k}^{m} \right\|^{2} = \left\| \sum_{m=1}^{M} \nabla F(x_{k}^{m}) \right\|^{2} + \sum_{m=1}^{M} \mathbb{E} \|g_{k}^{m} - \nabla F(x_{k}^{m})\|^{2}$$

$$\leq M \sum_{m=1}^{M} \|\nabla F(x_{k}^{m})\|^{2} + \eta^{2} \sum_{m=1}^{M} \|\nabla F(x_{k}^{m})\|^{2} \qquad \text{by (A.3) and (8)}$$

$$\leq 2L(M + \eta^{2}) \sum_{m=1}^{M} (F(x_{k}^{m}) - F^{*}) \qquad \text{by (A.6)}.$$

On the other hand, by Assumption 2, we also have

$$-2\langle \nabla F(x_k^m), x_k^m - x^* \rangle \leqslant -\mu \|x_k^m - x^*\|^2 - 2(F(x_k^m) - F^*). \tag{A.8}$$

By Cauchy–Schwarz inequality (A.5) with  $\rho = 2L$ , we have

$$2\langle \nabla F(x_k^m), x_k^m - \overline{x}_k \rangle \leqslant 2L \|x_k^m - x^*\|^2 + \frac{1}{2L} \|\nabla F(x_k^m)\|^2$$

$$\leqslant 2L \|x_k^m - x^*\|^2 + F(x_k^m) - F^* \qquad \text{by (A.6)}.$$

By (A.4), we also have

$$-\|x_k^m - x^*\|^2 \leqslant -\frac{1}{2}\|\overline{x}_k - x^*\|^2 + \|x_k^m - \overline{x}_k\|^2.$$
(A.10)

Thus, plugging in (A.6), (A.9) and (A.10), we obtain

$$\begin{split} \mathbb{E}_{k} \| \overline{x}_{k+1} - x^{\star} \|^{2} &\leq \| \overline{x}_{k} - x^{\star} \|^{2} - \frac{2\alpha_{k}}{M} \sum_{m=1}^{M} \langle \nabla F(x_{k}^{m}), x_{k}^{m} - x^{\star} \rangle + \frac{2L\alpha_{k}^{2}(M + \eta^{2})}{M^{2}} \sum_{m=1}^{M} (F(x_{k}^{m}) - F^{\star}) \\ &+ \frac{2\alpha_{k}}{M} \sum_{m=1}^{M} \langle \nabla F(x_{k}^{m}), x_{k}^{m} - \overline{x}_{k} \rangle \\ &\leq \| \overline{x}_{k} - x^{\star} \|^{2} - \frac{\alpha_{k}}{M} \sum_{m=1}^{M} \left[ \mu \| x_{k}^{m} - x^{\star} \|^{2} + 2(F(x_{k}^{m}) - F^{\star}) \right] \\ &+ \frac{2L(M + \eta^{2})\alpha_{k}^{2}}{M^{2}} \sum_{m=1}^{M} (F(x_{k}^{m}) - F^{\star}) + \frac{\alpha_{k}}{M} \sum_{m=1}^{M} \left[ 2L \| x_{k}^{m} - x^{\star} \|^{2} + F(x_{k}^{m}) - F^{\star} \right] \\ &\leq \| \overline{x}_{k} - x^{\star} \|^{2} + \frac{\mu \alpha_{k}}{M} \sum_{m=1}^{M} \left[ -\frac{1}{2} \| \overline{x}_{k} - x^{\star} \|^{2} + \| x_{k}^{m} - \overline{x}_{k} \|^{2} \right] \\ &- \frac{\alpha_{k}}{M} \left( 1 - \frac{2L(M + \eta^{2})\alpha_{k}}{M} \right) \sum_{m=1}^{M} (F(x_{k}^{m}) - F^{\star}) + \frac{2L\alpha_{k}}{M} \sum_{m=1}^{M} \| x_{k}^{m} - \overline{x}_{k} \|^{2} \\ &\leq \left( 1 - \frac{\mu \alpha_{k}}{2} \right) \| \overline{x}_{k} - x^{\star} \|^{2} - \frac{\alpha_{k}}{2M} \sum_{m=1}^{M} (F(x_{k}^{m}) - F^{\star}) + \frac{3L\alpha_{k}}{M} \sum_{m=1}^{M} \| x_{k}^{m} - \overline{x}_{k} \|^{2}, \end{split}$$

since  $\alpha_k \leq M/(4L(M+\eta^2))$  and  $\mu \leq L$  if F is both  $\mu$ -strongly convex and L-Lipschitz smooth. Taking total expectation gives the desired result.

We also prove a descent lemma for general nonconvex objectives.

**Lemma A.9** (Descent lemma for nonconvex objectives). Suppose that Assumption 1 holds. Let  $(x_k^m)_{k \in \mathbb{N}, m \in \llbracket M \rrbracket}$  be the sequence of the iterates of Local SGD (2) with the (exact variance) local norm test (8) with  $\eta_m \equiv \eta \in (0,1)$ . If the sequence of learning rates  $(\alpha_k)_{k \in \mathbb{N}}$  satisfies  $\alpha_k \leq M/(2L(M+\eta^2))$  for all  $k \in \mathbb{N}$ , then the sequence  $(\overline{x}_k)_{k \in \mathbb{N}}$  defined in (A.1) satisfies

$$\mathbb{E}[F(\overline{x}_{k+1})] \leqslant \mathbb{E}[F(\overline{x}_k)] - \frac{\alpha_k}{4M} \sum_{m=1}^M \mathbb{E} \|\nabla F(x_k^m)\|^2 + \frac{L^2 \alpha_k}{2M} \sum_{m=1}^M \mathbb{E} \|x_k^m - \overline{x}_k\|^2.$$

*Proof.* The proof is similar to that of Lemma 26 in [69]. We state it here for convenience and completeness. By Assumption 1, we have

$$F(\overline{x}_{k+1}) \leqslant F(\overline{x}_k) - \frac{\alpha_k}{M} \sum_{m=1}^{M} \langle \nabla F(\overline{x}_k), g_k^m \rangle + \frac{L\alpha_k^2}{2M^2} \left\| \sum_{m=1}^{M} g_k^m \right\|^2.$$

Taking expectation with respect to  $\mathcal{F}_k$ , we have

$$\begin{split} \mathbb{E}_{k}[F(\overline{x}_{k+1})] &\leq F(\overline{x}_{k}) - \frac{\alpha_{k}}{M} \sum_{m=1}^{M} \langle \nabla F(\overline{x}_{k}), \nabla F(x_{k}^{m}) \rangle + \frac{L\alpha_{k}^{2}}{2M^{2}} \mathbb{E}_{k} \left\| \sum_{m=1}^{M} g_{k}^{m} \right\|^{2} \\ &\leq F(\overline{x}_{k}) - \frac{\alpha_{k}}{M} \sum_{m=1}^{M} \langle \nabla F(\overline{x}_{k}), \nabla F(x_{k}^{m}) \rangle + \frac{L\alpha_{k}^{2}(M + \eta^{2})}{2M^{2}} \sum_{m=1}^{M} \|\nabla F(x_{k}^{m})\|^{2} \\ &= F(\overline{x}_{k}) - \left( \frac{\alpha_{k}}{M} - \frac{L\alpha_{k}^{2}(M + \eta^{2})}{2M^{2}} \right) \sum_{m=1}^{M} \|\nabla F(x_{k}^{m})\|^{2} \\ &+ \frac{\alpha_{k}}{M} \sum_{m=1}^{M} \langle \nabla F(x_{k}^{m}) - \nabla F(\overline{x}_{k}), \nabla F(x_{k}^{m}) \rangle. \end{split}$$

By Cauchy–Schwarz inequality (A.5) with  $\rho = 1$  and Assumption 1, we have

$$\begin{split} \sum_{m=1}^{M} \langle \nabla F(x_k^m) - \nabla F(\overline{x}_k), \nabla F(x_k^m) \rangle \leqslant \frac{1}{2} \sum_{m=1}^{M} \left[ \| \nabla F(x_k^m) - \nabla F(\overline{x}_k) \| \nabla F(x_k^m)^2 + \| \nabla F(x_k^m) \|^2 \right] \\ \leqslant \frac{L^2}{2} \sum_{m=1}^{M} \| x_k^m - \overline{x}_k \|^2 + \frac{1}{2} \sum_{m=1}^{M} \| \nabla F(x_k^m) \|^2. \end{split}$$

Plugging this in, we obtain

$$\mathbb{E}_{k}[F(\overline{x}_{k+1})] = F(\overline{x}_{k}) - \frac{\alpha_{k}}{2M} \left( 1 - \frac{L(M + \eta^{2})\alpha_{k}}{M} \right) \sum_{m=1}^{M} \|\nabla F(x_{k}^{m})\|^{2} + \frac{L^{2}\alpha_{k}}{2M} \sum_{m=1}^{M} \|x_{k}^{m} - \overline{x}_{k}\|^{2}$$

$$\leq F(\overline{x}_{k}) - \frac{\alpha_{k}}{4M} \sum_{m=1}^{M} \|\nabla F(x_{k}^{m})\|^{2} + \frac{L^{2}\alpha_{k}}{2M} \sum_{m=1}^{M} \|x_{k}^{m} - \overline{x}_{k}\|^{2},$$

since  $\alpha_k \leq M/(2L(M+\eta^2))$ . Taking total expectation gives the desired result.

We then derive an upper bound for  $\sum_{m=1}^{M}\mathbb{E}\|x_{k}^{m}-\overline{x}_{k}\|^{2}.$ 

**Lemma A.10.** Let  $(x_k^m)_{k\in\mathbb{N},m\in\llbracket M\rrbracket}$  be the sequence of the iterates of Local SGD (2) with the (exact variance) local norm test (8) with  $\eta_m \equiv \eta \in (0,1)$ , and  $(\overline{x}_k)_{k\in\mathbb{N}}$  be the sequence defined in (A.1). If the sequence of learning rates  $(\alpha_k)_{k\in\mathbb{N}}$  satisfies  $\alpha_k \leq 1/(10L(HM+\eta^2))$  for all  $k\in\mathbb{N}$  and  $(\alpha_k^2)_{k\in\mathbb{N}}$  is H-slow decreasing, then we have

$$\frac{3L}{M} \sum_{m=1}^{M} \mathbb{E} \|x_k^m - \overline{x}_k\|^2 \leqslant \frac{1}{10LHM} \sum_{m=1}^{M} \sum_{h=0}^{H-1} \mathbb{E} \|\nabla F(x_{k-h}^m)\|^2. \tag{A.11}$$

Moreover, for any H-slow increasing nonnegative sequence  $(w_k)_{k\in\mathbb{N}}$  we have

$$\frac{3L}{M} \sum_{m=1}^{M} \sum_{k=0}^{K} w_k \mathbb{E} \|x_k^m - \overline{x}_k\|^2 \leqslant \frac{1}{5LM} \sum_{m=1}^{M} \sum_{k=0}^{K} w_k \mathbb{E} \|\nabla F(x_{k-h}^m)\|^2.$$

*Proof.* We first consider

$$\begin{split} \frac{1}{M} \sum_{m=1}^{M} \mathbb{E} \|x_{k}^{m} - \overline{x}_{k}\|^{2} &= \frac{1}{M} \sum_{m=1}^{M} \mathbb{E} \|x_{k}^{m} - \overline{x}_{\lfloor K/H \rfloor H} - (\overline{x}_{k} - \overline{x}_{\lfloor K/H \rfloor H})\|^{2} \\ &\leq \frac{1}{M} \sum_{m=1}^{M} \mathbb{E} \|x_{k}^{m} - \overline{x}_{\lfloor K/H \rfloor H}\|^{2} \\ &\leq \frac{1}{M} \sum_{m=1}^{M} \mathbb{E} \left\| \sum_{h=0}^{H-1} \alpha_{k-h} \left( \nabla F(x_{k-h}^{m}) + g_{k-h}^{m} - \nabla F(x_{k-h}^{m}) \right) \right\|^{2} \\ &\leq \frac{3H}{2M} \sum_{m=1}^{M} \sum_{h=0}^{H-1} \alpha_{k-h}^{2} \mathbb{E} \|\nabla F(x_{k-h}^{m})\|^{2} \\ &+ \frac{3}{M} \sum_{m=1}^{M} \sum_{h=0}^{H-1} \alpha_{k-h}^{2} \mathbb{E} \|g_{k-h}^{m} - \nabla F(x_{k-h}^{m})\|^{2} \\ &\leq \frac{3(H+\eta^{2})}{2K} \sum_{m=1}^{M} \sum_{h=0}^{H-1} \alpha_{k-h}^{2} \mathbb{E} \|\nabla F(x_{k-h}^{m})\|^{2}. \end{split}$$
 by (A.4) and (A.3)

The first inequality follows from  $\mathbb{E}\|X - \mathbb{E}X\|^2 \leqslant \mathbb{E}\|X\|^2$  for any random variable X in  $\mathbb{R}^d$ . Since  $(\alpha_k^2)_{k \in \mathbb{N}}$  is H-slow decreasing, for  $h \leqslant H$ , we have  $\alpha_{k-h}^2 \leqslant \alpha_k^2 (1+1/(2H))^H \leqslant \alpha_k^2 \mathrm{e}^{H/(2H)} \leqslant 2\alpha_k^2$  since  $1+x \leqslant \mathrm{e}^x$  for

any  $x \in \mathbb{R}$ . Then, we can simply the inequality:

$$\frac{1}{M} \sum_{m=1}^{M} \mathbb{E} \|x_k^m - \overline{x}_k\|^2 \leqslant \frac{3(H + \eta^2)\alpha_k^2}{K} \sum_{m=1}^{M} \sum_{h=0}^{H-1} \mathbb{E} \|\nabla F(x_{k-h}^m)\|^2. \tag{A.12}$$

Since  $\alpha_k \leq 1/(10L(HM + \eta^2))$  for all  $k \in \mathbb{N}$ , we have

$$3L \cdot 3(H + \eta^2)\alpha_k^2 \leqslant \frac{1}{10L(HM + \eta^2)} \leqslant \frac{1}{10LHM}.$$

Since  $(w_k)_{k\in\mathbb{N}}$  is H-slow increasing, we have  $w_k \leq w_{k-h}(1+2/(2H))^h \leq w_{k-h}(1+2/(2H))^H \leq w_{k-h}\sqrt{e} \leq 2w_{k-h}$  for each  $h \in [0, H]$ . Therefore, we have

$$\frac{3L}{M} \sum_{m=1}^{M} \sum_{k=0}^{K} w_{k} \mathbb{E} \|x_{k}^{m} - \overline{x}_{k}\|^{2} \leqslant \frac{1}{5LM} \sum_{m=1}^{M} \sum_{k=0}^{K} \frac{w_{k}}{2H} \sum_{h=0}^{H-1} \mathbb{E} \|\nabla F(x_{k-h}^{m})\|^{2}$$

$$\leqslant \frac{1}{5LM} \sum_{m=1}^{M} \sum_{k=0}^{K} \frac{1}{H} \sum_{h=0}^{H-1} w_{k-h} \mathbb{E} \|\nabla F(x_{k-h}^{m})\|^{2}$$

$$\leqslant \frac{1}{5LM} \sum_{m=1}^{M} \sum_{k=0}^{K} w_{k} \mathbb{E} \|\nabla F(x_{k-h}^{m})\|^{2}.$$
(A.13)

Proof of Theorem 1. Using Lemma A.10 with  $\mu > 0$  and (A.6), we have

$$\frac{3L}{M} \sum_{m=1}^{M} \sum_{k=0}^{K} w_k \mathbb{E} \|x_k^m - \overline{x}_k\|^2 \leqslant \frac{2}{5M} \sum_{m=1}^{M} \sum_{k=0}^{K} w_k \mathbb{E} [F(x_{k-h}^m) - F^*]. \tag{A.14}$$

Since  $\alpha_k \equiv \alpha \leqslant 1/(10L(HM+\eta^2)) \leqslant M/(4L(M+\eta^2))$ , by Lemma A.8, we have

$$\frac{1}{2M} \sum_{m=1}^{M} \mathbb{E}[F(x_k^m) - F^{\star}] \leqslant \frac{1}{\alpha_k} \Big( 1 - \frac{\mu \alpha_k}{2} \Big) \mathbb{E} \|\overline{x}_k - x^{\star}\|^2 - \frac{1}{\alpha_k} \mathbb{E} \|\overline{x}_{k+1} - x^{\star}\|^2 + \frac{3L}{M} \sum_{m=1}^{M} \mathbb{E} \|x_k^m - \overline{x}_k\|^2.$$

Multiplying the weight  $w_k$  and summing over  $k \in [0, K]$ , and by (A.14), we have

$$\begin{split} &\frac{1}{2M} \sum_{m=1}^{M} \sum_{k=0}^{K} w_{k} \mathbb{E}[F(x_{k}^{m}) - F^{\star}] \\ & \leqslant \sum_{k=0}^{K} \left( \frac{w_{k}}{\alpha_{k}} \left( 1 - \frac{\mu \alpha_{k}}{2} \right) \mathbb{E} \| \overline{x}_{k} - x^{\star} \|^{2} - \frac{w_{k}}{\alpha_{k}} \mathbb{E} \| \overline{x}_{k+1} - x^{\star} \|^{2} \right) + \frac{3L}{M} \sum_{m=1}^{M} \sum_{k=0}^{K} w_{k} \mathbb{E} \| x_{k}^{m} - \overline{x}_{k} \|^{2} \\ & \leqslant \sum_{k=0}^{K} \left( \frac{w_{k}}{\alpha_{k}} \left( 1 - \frac{\mu \alpha_{k}}{2} \right) \mathbb{E} \| \overline{x}_{k} - x^{\star} \|^{2} - \frac{w_{k}}{\alpha_{k}} \mathbb{E} \| \overline{x}_{k+1} - x^{\star} \|^{2} \right) + \frac{2}{5M} \sum_{m=1}^{M} \sum_{k=0}^{K} w_{k} \mathbb{E}[F(x_{k-h}^{m}) - F^{\star}], \end{split}$$

which is equivalent to

$$\frac{1}{MW_K} \sum_{m=1}^{M} \sum_{k=0}^{K} w_k \mathbb{E}[F(x_k^m) - F^*] \leqslant \frac{10}{W_K} \sum_{k=0}^{K} \left( \frac{w_k}{\alpha_k} \left( 1 - \frac{\mu \alpha_k}{2} \right) \mathbb{E} \| \overline{x}_k - x^* \|^2 - \frac{w_k}{\alpha_k} \mathbb{E} \| \overline{x}_{k+1} - x^* \|^2 \right). \tag{A.15}$$

We observe that  $1 - \mu \alpha/2 \ge 1 - \mu/(20L(HM + \eta^2)) \ge 1 - 1/(8HM)$ , we choose  $w_k = (1 - \mu \alpha/2)^{-k-1}$  which are 2H-slow increasing. Then by Lemma A.6, we obtain the desired result.

Proof of Theorem 2. For the convex case with  $\mu = 0$ , we simply use Lemma A.6 with  $w_k \equiv 1$  for all  $k \in \mathbb{N}$ .  $\square$ 

Proof of Theorem 3. By Lemma A.9 and (A.6), and define  $u_k := 4 \cdot \mathbb{E}[F(\overline{x}_k) - F^*]$ , we have

$$\begin{split} \frac{1}{MW_K} \sum_{m=1}^{M} \sum_{k=0}^{K} w_k \mathbb{E} \|\nabla F(x_k^m)\|^2 &\leqslant \frac{1}{W_K} \sum_{k=0}^{K} w_k \bigg( \frac{u_k}{4\alpha_k} - \frac{u_{k+1}}{4\alpha_k} \bigg) + \frac{2L\alpha_k}{MW_K} \sum_{m=1}^{M} \sum_{k=0}^{K} w_k \mathbb{E} \|x_k^m - \overline{x}_k\|^2 \\ &\leqslant \frac{1}{W_K} \sum_{k=0}^{K} w_k \bigg( \frac{u_k}{4\alpha_k} - \frac{u_{k+1}}{4\alpha_k} \bigg) + \frac{2\alpha_k}{15LMW_K} \sum_{m=1}^{M} \sum_{k=0}^{K} w_k \mathbb{E} \|\nabla F(x_k^m)\|^2, \end{split}$$

by (A.13). We simplify this to

$$\left(1 - \frac{2\alpha_k}{15L}\right) \frac{1}{MW_K} \sum_{m=1}^{M} \sum_{k=0}^{K} w_k \mathbb{E} \|\nabla F(x_k^m)\|^2 \leqslant \frac{1}{W_K} \sum_{k=0}^{K} w_k \left(\frac{u_k}{4\alpha_k} - \frac{u_{k+1}}{4\alpha_k}\right).$$

Applying Lemma A.7 with  $w_k \equiv 1$  for all  $k \in \mathbb{N}$  gives the desired result.

## **B** Details of Numerical Experiments

All experiments are conducted on a Slurm cluster. For experiments with 4 GPUs, each node has either 4 NVIDIA GEFORCE RTX 2080 Ti (11GB) GPUs or 4 NVIDIA A40 (48GB) GPUs or 4 NVIDIA L40s (48GB) GPUs. For experiments with 8 GPUs, each node has 8 NVIDIA A100 (80GB) GPUs. For CPUs, each node has either 64 cores or 96 cores. The total RAM is 512GB or 1TB.

### **B.1** Three-layer Convolutional Neural Network on MNIST

Table 4: Training hyperparameters for three-layer CNN on MNIST

Model	Three-layer CNN on MNIST
Training samples	6M (100 epochs)
Weight initialization	Default
Optimizer	Adam
Learning rate schedule	None
$(eta_1,eta_2)$	(0.9, 0.95)
arepsilon	$10^{-8}$
Base learning rate	0.0008
Base batch size	8
Maximum batch size	50000
Weight decay	0
Base global batch size	4096
Base local batch size	1024
Maximum global batch size	60000
Maximum local batch size	15000
Weight decay	0

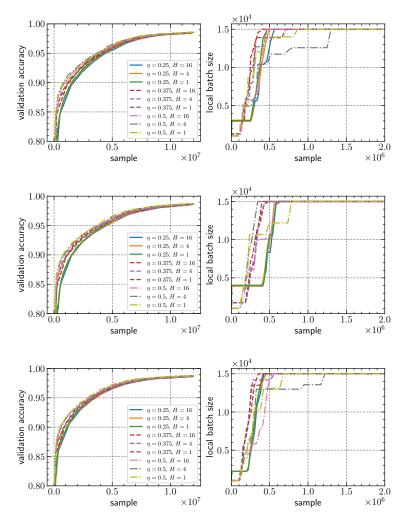


Figure 6: Validation accuracy and local batch sizes curves of Local Adam with adaptive batch size strategies with three different seeds.

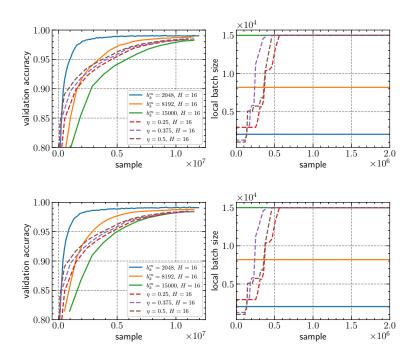


Figure 7: Validation accuracy and local batch sizes curves of Local Adam with adaptive batch size strategies (local gradient steps H = 16) with two other different seeds.

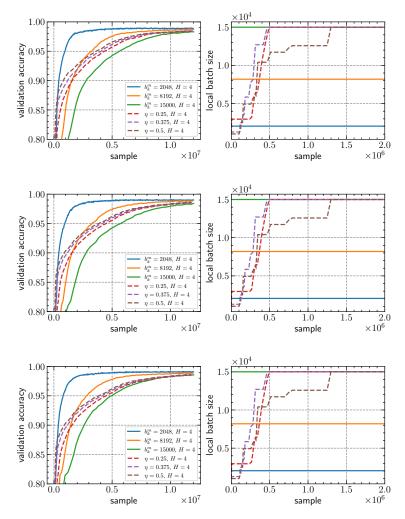


Figure 8: Validation accuracy and local batch sizes curves of Local Adam with adaptive batch size strategies (local gradient steps H=4) with three different seeds.

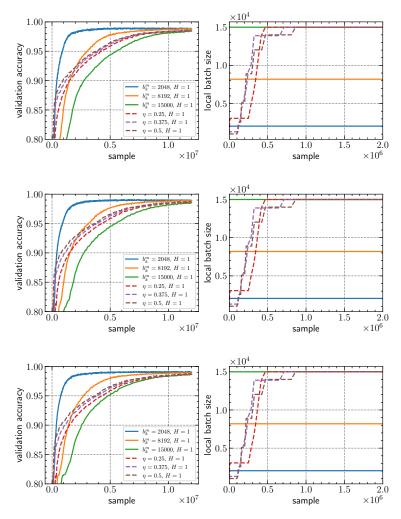


Figure 9: Validation accuracy and local batch sizes curves of Local Adam with adaptive batch size strategies (local gradient steps H=1) with three different seeds.

## B.2 ResNet-50 on CIFAR-10

Table 5: Training hyperparameters for ResNet-50 on CIFAR-10

Model	RESNET-50 on CIFAR-10 $$
Training samples	10M (200 epochs)
Weight initialization	Default
Optimizer	Momentum SGD (SHB)
Learning rate schedule	Linear warmup + cosine decay
Learning rate warmup (samples)	$1M\ (10\%)$
Peak learning rate	0.05
Minimum learning rate	0.005
Base learning rate	0.05
Base global batch size	256
Base local batch size	64
Maximum global batch size	50000
Maximum local batch size	12500
Weight decay	0.0005
Momentum	0.9

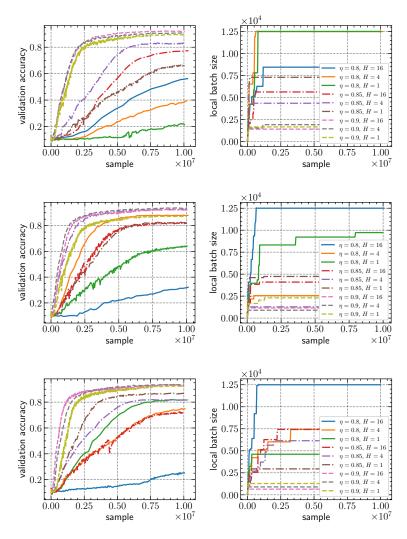


Figure 10: Validation accuracy and local batch sizes curves of Local SHB with adaptive batch size strategies with three different seeds.

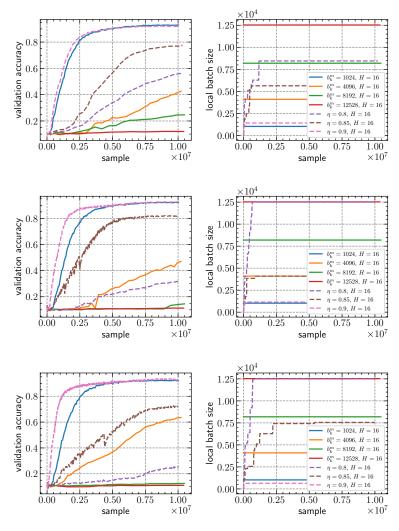


Figure 11: Validation accuracy and local batch sizes curves of Local SHB with adaptive batch size strategies (local gradient steps H=16) with two other different seeds.

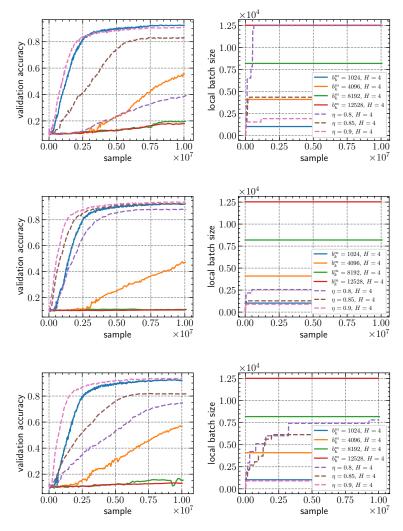


Figure 12: Validation accuracy and local batch sizes curves of Local Adam with adaptive batch size strategies (local gradient steps H=4) with three different seeds.

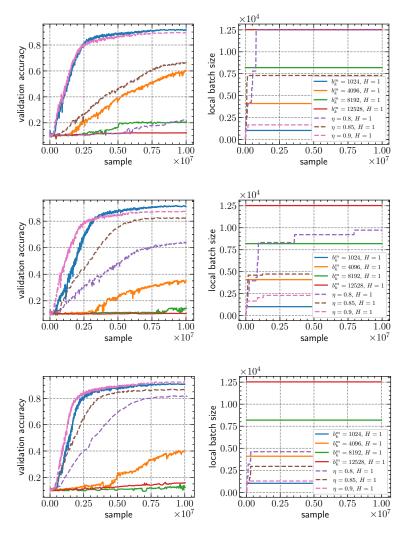


Figure 13: Validation accuracy and local batch sizes curves of Local ADAM with adaptive batch size strategies (local gradient steps H=1) with three different seeds.

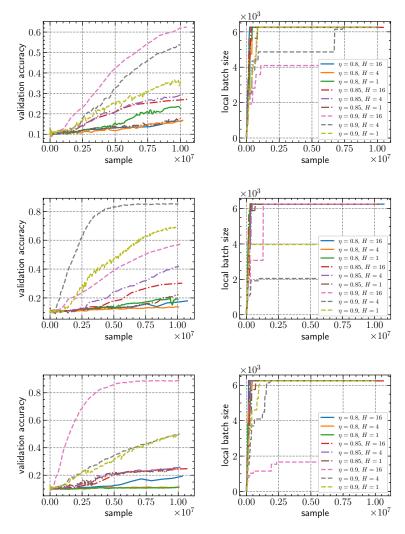


Figure 14: Validation accuracy and local batch sizes curves of Local SHB with adaptive batch size strategies with 8 workers with three different seeds.

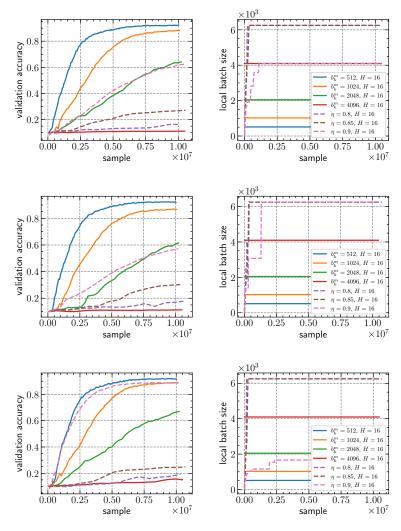


Figure 15: Validation accuracy and local batch sizes curves of Local SHB with adaptive batch size strategies (local gradient steps H = 16) with 8 workers with two other different seeds.

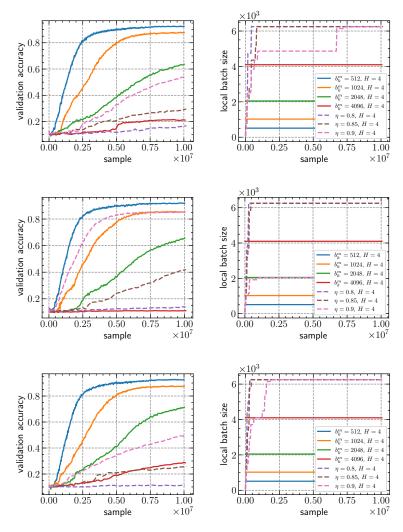


Figure 16: Validation accuracy and local batch sizes curves of Local ADAM with adaptive batch size strategies (local gradient steps H=4) with 8 workers with three different seeds.

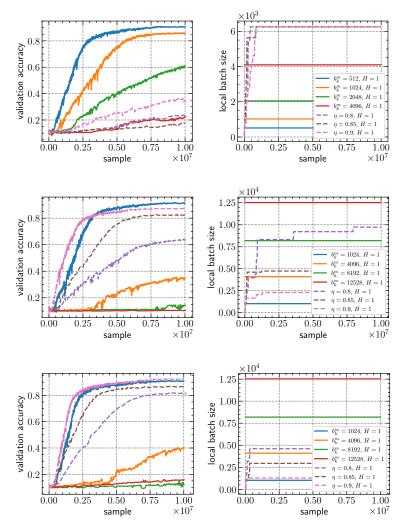


Figure 17: Validation accuracy and local batch sizes curves of Local ADAM with adaptive batch size strategies (local gradient steps H=1) with 8 workers with three different seeds.