
Mitigating the Human-Robot Domain Discrepancy in Visual Pre-training for Robotic Manipulation

Jiaming Zhou¹, Teli Ma¹, Kun-Yu Lin², Ronghe Qiu¹, Zifan Wang¹, Junwei Liang^{1,3†}

¹AI Thrust, The Hong Kong University of Science and Technology (Guangzhou)

²Computer Science and Engineering, Sun Yat-sen University

³CSE, The Hong Kong University of Science and Technology

jzhou760@connect.hkust-gz.edu.cn junweiliang@hkust-gz.edu.cn

Abstract

Learning generalizable visual dynamic representation across different embodied environments is crucial for real-world robotic manipulation. As the scale and diversity of robot demonstration data are limited, recent works have turned to large-scale pre-training using human data. However, the morphological differences between humans and robots introduce a significant human-robot domain discrepancy, challenging the generalization of these human-data pre-trained models to downstream manipulation tasks. To address this, we propose a novel adaptation paradigm that utilizes readily available paired human-robot video data to bridge the discrepancy. Following this paradigm, our method exploits a human-robot contrastive alignment loss to align the semantics of human and robot videos, adapting pre-trained models to the robotic domain in a parameter-efficient manner. The experiments demonstrate significant improvements on 25 tasks across three different benchmarks, where the single-task, language-conditioned multi-task settings are covered, and two different pre-trained models are evaluated. On the large RL Bench benchmark, our adaptation method achieves an average improvement of 8.9% in success rate over the pre-trained R3M model [1] across multiple tasks. We will release the code and models upon acceptance. project: <https://jiaming-zhou.github.io/projects/HumanRobotAlign>

1 Introduction

The objective of robotic manipulation [2; 3; 4; 5; 6; 7; 8; 1] is to equip robots with diverse skills applicable in real-life scenarios. This task is notably challenging as it necessitates modeling the sequential semantics of visual observations to accurately predict the subsequent end-effector actions. Given the limited availability of robot demonstration data, several efforts [1; 9; 10; 11; 12] have aimed at pre-training visual models on large-scale human data [13; 14; 15; 16; 17], e.g., Ego4D [14]. These pre-trained models will serve as frozen visual backbones to learn manipulation policies for downstream tasks. The core intuition [18] driving this is the dynamic similarity between human-object interactions and robot action sequences when performing similar tasks. This similarity facilitates the application of visual models, learned from human data, to downstream robotic manipulation tasks.

Nonetheless, the significant variance in visual elements (e.g., scenes, views, objects), as well as the intrinsic morphological differences between humans and robots, results in a vast domain discrepancy [19; 20] between human and robot data. Therefore, as depicted at the top of Figure 1, the existing paradigm cannot ensure a successful transfer of models pre-trained on extensive human data to downstream manipulation tasks. Recently, two different approaches have been proposed to

[†]Corresponding author

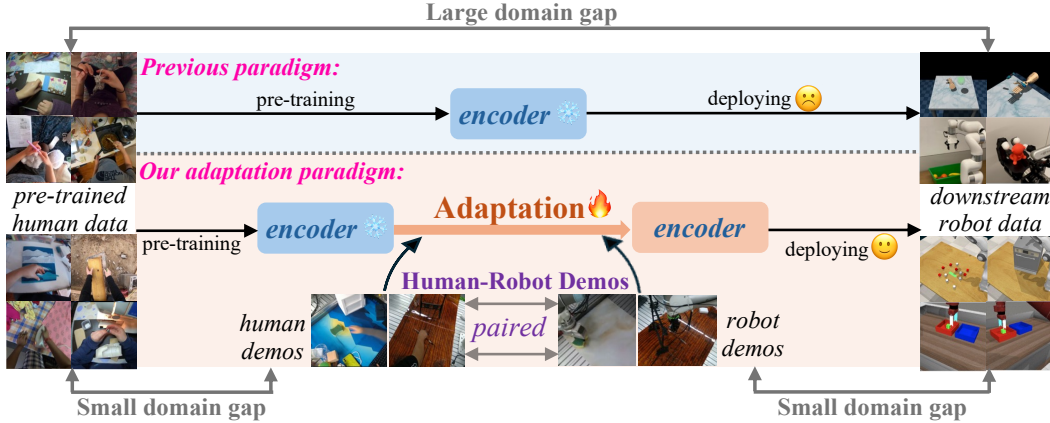


Figure 1: Design principle of our proposed adaptation paradigm for visual pre-training. Top: The previous paradigm applied frozen models pre-trained on human data to downstream robot data, suffering from large domain gaps. Bottom: Our adaptation paradigm leverages the paired human-robot demonstrations as bridges to adapt the pre-trained models, thus mitigating the semantics gap between human and robot data. (Best viewed in color.)

solve this problem. One [10; 21] introduces manipulation-oriented proxy tasks when pre-training models on human data. For example, Huo et al. [10] fine-tuned multiple perceptual tasks (e.g., hand detection) on top of pre-trained encoders to adapt the learned representation for learning downstream manipulation policies. However, due to the lack of robot data during fine-tuning, this approach cannot explicitly alleviate the domain discrepancy, and the manipulation-oriented tasks are hard to define on human data. The second approach [22; 23] integrates learnable modules into pre-trained models and fine-tunes the models on downstream robot data to learn more discriminative representation. However, this approach requires customizing the pre-trained models for each distinct environment, which reduces the versatility of the pre-trained models.

In this work, we propose a new adaptation paradigm to mitigate the human-robot domain discrepancy while maintaining the versatility of pre-trained models for robotic manipulation, as depicted at the bottom of Figure 1. To achieve this, we use a small amount of paired human-robot demonstration data, which serves as a bridge. This data has two key characteristics. First, each pair of human and robot demonstrations has well-aligned semantics. Second, although the used robot demonstrations are visually different from downstream robot data, the domain discrepancy between them is reduced due to their homogeneous robot structure (see Figure 1). The core idea is to adapt the pre-trained models using this data so that the semantics in robot demonstrations captured by the adapted models are consistent with those in the paired human demonstrations. This paradigm effectively alleviates the discrepancy between pre-training and downstream robot data while retaining the versatility of the adapted models, eliminating the need for customization for each downstream environment. Following our new paradigm, we propose an efficient Human-Robot Semantic Alignment (HR-Align) method, which adapts the pre-trained models by incorporating the parameter-efficient adapter module [24; 25; 22] into the models. To guide the adaptation towards reducing the domain discrepancy, our HR-Align method employs a human-robot contrastive alignment loss to improve the semantic consistency between features of the paired human and robot videos.

The contributions of this work are three-fold:

- We highlight the human-robot domain discrepancy in visual pre-training for robotic manipulation, and provide a new adaptation paradigm that simultaneously alleviates the domain discrepancy and maintains the versatility of pre-trained models;
- We propose a Human-Robot Semantic Alignment method, which adapts pre-trained models with parameter-efficient design and exploits a human-robot contrastive alignment loss for effectively mitigating the domain discrepancy;
- We evaluate the effectiveness of our method in three different environments, covering 7 single-tasks and 18 language-conditioned multi-tasks, as well as pre-trained models with different pre-training methodologies.

2 Related Works

Visual-based robotic manipulation. The rapid evolution in the field of robotic manipulation [2; 3; 4; 5; 6; 7; 8; 1] in recent years is noteworthy. Initial investigations [4; 26; 27; 28] developed visuo-motor policies focused on reinforcement learning [29; 30; 31]. This allowed robots to learn from their environments, although high sample complexity and difficult reward engineering were involved. More recent studies [6; 7; 8; 12; 32; 33] have geared towards learning policies by imitating actions in expert demonstrations, which has yielded promising results. In addition, the community of robotic manipulation has been further propelled by the introduction of new benchmarks. Transitioning from benchmarks with limited scales and diversity [34; 35; 36] to larger scale benchmarks [28; 37; 2; 38] with increased object, scene, and task variations (e.g., RLBench [28] and CALVIN [37]). For example, on the RLBench benchmark [28], many research works [6; 7; 12; 32; 39; 33] have been proposed to solve the robotic manipulation tasks.

Robotic visual pre-training. To efficiently teach robots manipulation skills for real-life scenarios, it is crucial to pre-train models on large-scale data. This ensures that the generalizable visual dynamic representation across different environments is effectively learned. Drawing inspiration from the representation learning [40; 41; 42; 43; 44; 45] in computer vision, there have been several endeavors [46; 47; 2; 48; 49; 50] to accomplish this goal in robotic manipulation. The RT-series [46; 47; 2], for instance, developed vision-language-action models using large-scale data that encompassed out-of-domain data from the internet and self-gathered robotic demonstrations. With a 3D-instruction tuning dataset stemming from multiple sources of robot data, 3D-VLA [48] trained a 3D-based generative world model capable of generating actions for robot manipulation. RoboFlamingo [49] learned to generate robot actions by fine-tuning pre-existing vision-language foundation models on robot demonstrations. However, the collection of large-scale robot demonstration data proved costly, and unresolved issues remain regarding the different formats between data from different embodiments [51; 50; 2].

In parallel, inspired by human action understanding [52; 53; 54; 55; 56; 57; 58; 59; 60], several studies [1; 9; 11; 12; 61; 62; 63; 64] have proposed methods to learn a generalizable representation from large-scale human datasets, such as Ego4D [14] and Kinetics [65]. These methods are based on the assumption that the dynamics of human-object interactions in these datasets are analogous to those of robots performing tasks. For instance, the R3M [1] model was pre-trained on the Ego4D dataset using time-contrastive learning and video-language alignment techniques. Similarly, the MVP [9] model employed masked modeling to learn visual dynamics, and the data4robotics [11] performed a dataset-centric analysis of robotic pre-training, contributing valuable insights to the field. Despite these advances, significant challenges remain due to the inherent morphological differences between humans and robots. These differences lead to a human-robot domain discrepancy [10; 23; 22; 66; 18; 67], which limits the generalizability of models trained on human data when applied to downstream robotic tasks.

Human-robot domain transfer. Some works [10; 22; 23] in human-data pre-training have noticed the human-robot domain gap problem and have developed two main strategies to address it. The first is to design more effective proxy tasks to learn semantics that can be better transferred to downstream robotic manipulation when pre-training models on the human data. For example, Huo et al. [10] proposed human-oriented multi-task fine-tuning on top of pre-trained models to encode meaningful semantics for manipulation. However, the manipulation-oriented proxy tasks are difficult to define, and this implicit fine-tuning without accessing robot data is not effective in mitigating the human-robot domain discrepancy. The second strategy [22; 23] involves directly fine-tuning the pre-trained models on downstream manipulation data to bridge the semantic gap between human and robot data encountered during pre-training. For example, Sharma et al. [22] proposed to insert lightweight adapters into pre-trained models, aiming to reduce the performance gap between frozen pre-trained representation and full end-to-end fine-tuning on downstream data. However, this strategy requires custom modifications to the pre-trained models for each specific environment, which can compromise the models' generalizability.

Beyond these two strategies, in this work, we propose a new approach with efficient human-robot semantic alignment, which adapts pre-trained representation to explicitly mitigate the human-robot domain discrepancy, while maintaining the versatility of the models across different robotic environments.

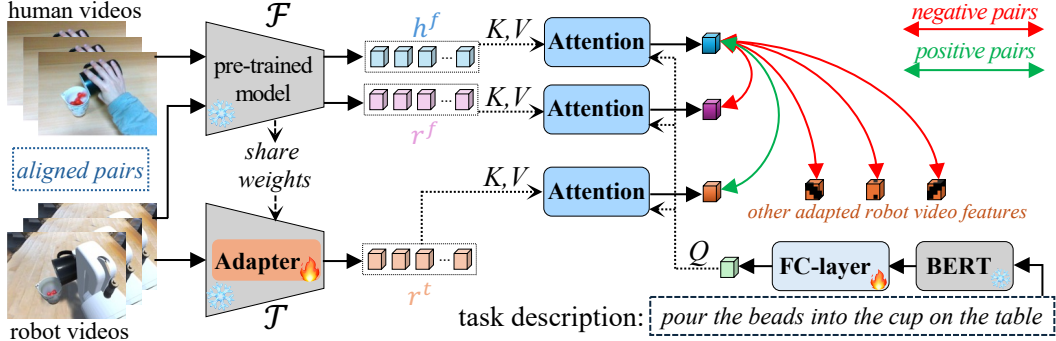


Figure 2: An overview of the proposed Human-Robot Semantic Alignment method. Given paired human-robot videos, the pre-trained models are efficiently adapted on the robot data to learn semantics aligned with those in human data.

3 Human-Robot Semantic Alignment Method

Considering the large domain discrepancy between the pre-trained human data and downstream robotic manipulation data in the existing pre-training paradigm, this work proposes a new adaptation paradigm. This paradigm leverages the semantic-aligned human-robot demonstration data to guide the adaptation of existing pre-trained models, effectively enhancing their generalization capabilities across various downstream tasks. Driven by this idea, we propose an efficient Human-Robot Semantic Alignment method.

3.1 Problem formulation

Assuming we have a dataset \mathcal{D} encompassing N human-robot video pairs, i.e., $\mathcal{D} = \{H_i, R_i, L_i\}_{i=1}^N$, where L_i is a sentence describing what task is being performed in the video pair, H_i denotes the i -th human video demonstration, and R_i denotes the i -th robot video demonstration that imitates the human actions in H_i via teleoperation. Thus the dynamic semantics in each human-robot video pair are well-aligned. For learning the downstream manipulation policies, instead of using the robot’s raw image observations I as state input, existing visual pre-training methods train visual encoder \mathcal{F} on human data, and use the feature representation $\mathcal{F}(I)$ of robot’s observations as state input. In this work, to mitigate the human-robot domain discrepancy in the pre-trained representation of \mathcal{F} , we leverage the aforementioned paired human-robot video dataset \mathcal{D} to adapt the encoder \mathcal{F} . In this way, the adapted model \mathcal{T} can extract more effective state representations for learning policies in downstream robotic tasks.

3.2 Overview

Figure 2 provides an overall diagram of our Human-Robot Semantic Alignment (HR-Align) method. Taking the paired human and robot videos as input, the HR-Align method utilizes a frozen pre-trained model to obtain the feature representations of human video and robot video, respectively. However, since the used backbone model is pre-trained on human data, the semantics encoded by the extracted features of human and robot videos suffer from domain discrepancy. For the robot video, our HR-Align injects learnable adapter modules into the pre-trained model, so that the pre-trained model can be adapted to encode the dynamic semantics in the robot video. Besides, for each stream, the corresponding task description of the videos will serve as the query to extract task-aware semantics from the aforementioned feature representations. To guarantee the introduced adapter modules can be effectively trained for adapting the pre-trained model to the robot domain, the HR-Align leverages a contrastive alignment loss, which constrains the semantics in robot video encoded by the adapted model to align with the dynamic semantics in the paired human video.

3.3 Learning of HR-Align method

Frozen human and robot streams. Given a model \mathcal{F} pre-trained on human data, it takes as input a batch of M paired human-robot videos and the corresponding task descriptions, i.e., $\{H_i, R_i, L_i\}_{i=1}^M$.

For a cleaner presentation in the following, we take the i -th video pair as an example and omit the subscript i , i.e., the human video H , robot video R , and task description L . For both the human video H and robot video R , we randomly sample T frames and use the frozen pre-trained model \mathcal{F} to extract their spatial-temporal features:

$$h^f = \mathcal{F}(\Upsilon(H)), \quad r^f = \mathcal{F}(\Upsilon(R)), \quad (1)$$

where Υ denotes the frame sampling operation, and $h^f, r^f \in \mathbb{R}^{\hat{T} \times \hat{H} \times \hat{W} \times \hat{C}}$ are the frozen features extracted from the human video and robot video, respectively. As the backbone model \mathcal{F} is well pre-trained on large-scale human data, the visual dynamic semantics in human video H can be effectively captured. However, due to the significant human-robot domain gap, it is difficult to extract corresponding semantics from the paired robot video, using the model \mathcal{F} that does not access any knowledge in the robot domain during pre-training.

Adapted robot stream. To this end, our HR-Align method aims to efficiently adapt the pre-trained model on the robot videos, such that the newly adapted pre-trained model \mathcal{T} can alleviate the domain discrepancy. To achieve this, inspired by existing parameter-efficient fine-tuning approaches [24; 25], we form the adapted pre-trained model \mathcal{T} by inserting learnable adapter modules (Eq. (3)) into the pre-trained model \mathcal{F} . We formulate this as follows:

$$r^t = \mathcal{T}(\Upsilon(R)) = \mathcal{F}_{Adapter}(\Upsilon(R)), \quad (2)$$

where $r^t \in \mathbb{R}^{\hat{T} \times \hat{H} \times \hat{W} \times \hat{C}}$ is the adapted robot video features. The adapter modules can be inserted into any position of the pre-trained model \mathcal{F} . Without loss of generality, given the output $r^{t,inter} \in \mathbb{R}^{\hat{T} \times \hat{H} \times \hat{W} \times \hat{C}}$ of the intermediate layer of model \mathcal{T} , the adapter module can be applied as follows:

$$\begin{aligned} r^{t,next} &= Adapter(r^{t,inter}) \\ &= r^{t,inter} + Conv_{up}(f(Conv_{down}(r^{t,inter}))), \end{aligned} \quad (3)$$

where the residual output $r^{t,next}$ will be processed by subsequent layers of the model \mathcal{T} . Following existing practice [24; 25], our adapter module includes an activation function f , and two convolution layers (i.e., $Conv_{down}$ and $Conv_{up}$) used for feature down-projection and up-projection respectively.

Task-aware feature modeling. To further enhance the feature representations of human and robot videos, i.e., the frozen human feature h^f , frozen robot feature r^f , and the adapted robot feature r^t , we use the feature of corresponding task description L as the query to extract the task-aware semantics from these features. The feature of task description query $l \in \mathbb{R}^{\hat{C}}$ is obtained using a frozen BERT model [68; 69], with a learnable fully connected layer followed to match the channel dimension of the video features. The process is formulated as $l = Linear(Bert(L))$. Later, an attention-based aggregation is defined, where the task description feature l serves as the query, and the video features in each stream serve as keys and values. Taking the reshaped video features $r^t \in \mathbb{R}^{(\hat{T} \cdot \hat{H} \cdot \hat{W}) \times \hat{C}}$ in the adapted robot stream as an example, the task-aware adapted robot feature \bar{r}^t is defined as:

$$\mathcal{A}^r = softmax(r^t \cdot l) \in \mathbb{R}^{\hat{T} \cdot \hat{H} \cdot \hat{W} \times 1}, \quad (4)$$

$$\bar{r}^t = (r^t)^T \cdot \mathcal{A}^r \in \mathbb{R}^{\hat{C}}. \quad (5)$$

For the frozen human and robot data stream, the task-aware frozen human feature $\bar{h}^f \in \mathbb{R}^{\hat{C}}$ and frozen robot feature $\bar{r}^f \in \mathbb{R}^{\hat{C}}$ can be obtained in the same way.

Human-Robot contrastive alignment. To mitigate the human-robot domain discrepancy in robotic pre-training, our key idea is to finetune the pre-trained model with a parameter-efficient design, where the semantic-aligned human-robot video pairs serve as bridges for the adaptation. For each human-robot video pair, the human-data pre-trained model can effectively encode the visual semantics in the human video. To guarantee the consistent semantics in the paired robot video can be captured by the adapted model, we propose a human-robot contrastive alignment loss to modulate the adaptation of the pre-trained model.

For a batch of M paired human-robot video data, i.e., $\{H_i, R_i, L_i\}_{i=1}^M$, their task-aware feature representations $\{\bar{h}_i^f, \bar{r}_i^f, \bar{r}_i^t\}_{i=1}^M$ can be obtained according to the above processes. The proposed

contrastive alignment loss stems from two principles. First, for the i -th video pair, regarding the well-captured human feature \bar{h}_i^f , we encourage the adapted robot feature \bar{r}_i^t to encode more consistent semantics than the unadapted robot feature \bar{r}_i^f . Second, for each human feature \bar{h}_i^f , we encourage its semantics to be more consistent with the paired adapted robot feature \bar{r}_i^t , compared to all other unpaired adapted robot features $\{\bar{r}_j^t\}_{j \neq i}$. Similarly, for each adapted robot feature \bar{r}_i^t , it should be more consistent with the paired human feature \bar{h}_i^f than all other unpaired human features $\{\bar{h}_j^f\}_{j \neq i}$. In this way, the adapted model effectively encodes the discriminative visual semantics in robot demonstrations. Based on these, we formulate the human-robot contrastive alignment loss as follows:

$$\begin{aligned} \mathcal{L} = & \frac{1}{2M} \sum_{i=1}^M -\log \frac{\mathcal{S}(\bar{h}_i^f, \bar{r}_i^t)}{\mathcal{S}(\bar{h}_i^f, \bar{r}_i^t) + \mathcal{S}(\bar{h}_i^f, \bar{r}_i^f) + \sum_{j=1}^M \mathcal{S}(\bar{h}_i^f, \bar{r}_j^t)} \\ & + \frac{1}{2M} \sum_{i=1}^M -\log \frac{\mathcal{S}(\bar{r}_i^t, \bar{h}_i^f)}{\mathcal{S}(\bar{r}_i^t, \bar{h}_i^f) + \mathcal{S}(\bar{r}_i^t, \bar{h}_i^f) + \sum_{j=1}^M \mathcal{S}(\bar{r}_i^t, \bar{h}_j^f)}. \end{aligned} \quad (6)$$

In Eq. (6), \mathcal{S} is a similarity function defined as $\mathcal{S}(x, y) = \exp(x^T y / \tau)$, where τ is a temperature factor. Under the constraint of the contrastive alignment loss, the learnable adapter modules enable the pre-trained model to capture robotic dynamics, thereby simultaneously mitigating the domain discrepancy and avoiding the need to customize models for each downstream environment.

4 Experiments

4.1 Experimental Setups

The experimental validation includes two stages. First, given existing human-data pre-trained models, we adapt the models for mitigating the human-robot domain discrepancy using the proposed HR-Align method. Second, the pre-trained models after adaptation are used as frozen visual backbones for learning manipulation policies in downstream tasks.

Pre-trained Model Adaptation. To comprehensively evaluate the efficacy of the proposed adaptation method, two existing models pre-trained on different human data for robotic manipulation are selected for adaptation. One is the R3M model [1] pre-trained on Ego4D data [14] with vision-language contrastive pre-training. The other one comes from data4robotics [11], which is pre-trained on Kinetics [70] with MoCo pre-training [71] (We refer to it as D4R model). For the paired human-robot video data used in our HR-Align method, we instantiate it using the existing RH20T dataset [72]. We select a subset from the RH20T dataset, which includes a total of 56k human-robot video pairs. We will release the dataset profile used in this work. During adaptation, we randomly sample 5 frames from each video (i.e., $T = 5$). Following R3M [1], we use the frozen DistilBert model [69] to process the task descriptions. The Adam optimizer [73] with the learning rate of $1 \times e^{-4}$ and batch size of 200 is used during training. The temperature factor τ is set to 0.1. For the adapter module, we use group convolution to instantiate it. The adapter module can be inserted into any position of the visual backbone network. Without specific statements, we insert the adapter module after the last layer of the backbone network. 4 NVIDIA A6000 GPUs are used in experiments.

Downstream Policy Learning. To learn manipulation policies for different downstream tasks, the pre-trained model after adaptation is used to extract the state representations of the robot’s visual observations. We evaluate a total of 25 robotic manipulation tasks from three different environments, including 7 single-tasks and 18 language-conditioned multi-tasks.

(i) For the single-task setting, following previous works [1; 10], two dexterous manipulation tasks from Adroit [35], and five tasks with a Sawyer robot from Metaworld [34] are evaluated. To learn the motor-control policy for each task, we train the behavior cloning networks with 3 different seeds, using one viewpoint and the largest demo dataset size used in [1]. We report the average success rate over 3 seeds on each task. All other configurations (e.g., network designs, training steps, and evaluation interval) are the same as those in R3M [1].

(ii) For the multi-task setting, we evaluate our adapted pre-trained models on 18 multi-tasks from RL Bench [28]. Existing pre-training works [1; 9; 10; 11; 62] for robotic manipulation only evaluate models under single-task setting, where the data scale, task diversity, and task complexity are limited. By additionally evaluating our method on the RL Bench, which is challenging for its multi-task setting

with significant task diversity and difficulty, the generalizability of our adapted models can be more comprehensively demonstrated. Similar to the data processing pipeline in RVT [7], we discard all the pooling layers in our pre-trained models so that the spatial dimension of the feature map is the same as that of the original image. Instead of using 8 self-attention layers like RVT [7], we only use one single self-attention layer to fuse the frozen image features and language features, and train the network for five epochs and test the network three times. Following RVT [7], we use a total of 1800 demonstrations and report the average success rate and standard deviation. All other experimental configurations are the same as RVT [7]. Please see details of our downstream policy designs on RL Bench in Section S2 of the Appendix.

4.2 Does the HR-Align method enable better generalization across different tasks?

To achieve better generalization on learning downstream manipulation policies, we adapt two human-data pre-trained models, namely, D4R [11] and R3M [1]. We denote the pre-trained models after adaptation as D4R-Align and R3M-Align, respectively.

Single-task setting. As shown in Table 1, we evaluate our adapted models on two tasks in the Adroit environment. For the D4R model, our adapted version, namely the D4R-Align model, achieves improvements on both tasks, with an average success rate increased by 2.0% compared to the unadapted D4R model. For the R3M model that was pre-trained on different human data with different pre-trained methodologies, our R3M-Align model also improves the success rate of both tasks, especially for the *relocate* task (one of the most difficult tasks in Adroit). On average, our R3M-Align model has a significant 7.3% improvement in success rate over the unadapted R3M model.

Table 1: Success rate of two tasks in **Adroit**. Two pre-trained models, i.e., D4R and R3M, are adapted by our method. The adapted D4R-Align and R3M-Align models achieve better performance on both tasks compared to their unadapted counterparts.

Models	<i>pen</i>	<i>relocate</i>	Averaged
D4R	74.7	51.3	63.0
D4R-Align	76.7	53.3	65.0 (+2.0)
R3M	78.0	70.0	74.0
R3M-Align	81.3	81.3	81.3 (+7.3)

In addition to the Adroit environment, we also evaluate our method on five tasks from the Metaworld environment. As shown in Table 2, compared with the pre-trained D4R model, our adapted D4R-Align model achieves significant improvements on two out of five tasks. And the average success rate of all five tasks is improved by 2.2% in this challenging environment. For the pre-trained R3M model, our adapted R3M-Align model achieves significant improvements on three tasks and comparable performance on the other two tasks. On average, the adapted R3M-Align model has 2.3% improvement in the average success rate of five tasks.

Table 2: Success rate of five tasks in **Metaworld**. Compared to the two unadapted pre-trained models (i.e., D4R and R3M), our adapted D4R-Align and R3M-Align models achieve satisfactory improvements in the averaged success rate of the five tasks.

Models	<i>assembly</i>	<i>bin-pick</i>	<i>button-press</i>	<i>drawer-open</i>	<i>hammer</i>	Averaged
D4R	65.3	78.7	60.7	100.0	88.0	78.5
D4R-Align	80.7	75.3	56.7	100.0	90.7	80.7 (+2.2)
R3M	78.7	53.3	60.0	100.0	94.0	77.2
R3M-Align	82.0	58.0	60.7	100.0	96.7	79.5 (+2.3)

Multi-task setting. Different from previous works that only evaluate models under the above single-task setting, to more comprehensively evaluate the effectiveness of our method, we evaluate the adapted pre-trained models on 18 language-conditioned tasks from the RL Bench benchmark. This multi-task setting is challenging, as it requires learning a single policy to complete various instructions in all 18 manipulation tasks. For each task, we report the average success rate and standard deviation over three tests. The results are shown in the Table 3. Compared to the unadapted D4R model, our adapted D4R-Align model achieves significantly superior performance on 10 tasks, with 4.6% improvement in the averaged success rate of all 18 tasks. Similarly, our adapted R3M-Align model also significantly improves the success rate of 10 tasks compared to the unadapted R3M model. More importantly, on this challenging benchmark, our adapted R3M-Align model achieves 8.9%

improvement in the averaged success rate of all 18 tasks, demonstrating the necessity of mitigating the human-robot domain discrepancy in motor-control pre-training.

Table 3: Success rate of 18 tasks in **RLBench**. Compared to the two unadapted D4R and R3M models, our adapted D4R-Align and R3M-Align models significantly improve the success rate of most tasks. The average improvement of each model on all 18 tasks is also significant.

Models	put in drawer	drag stick	turn tap	slide block	open drawer	put in cupboard	sort shape	put in safe	push buttons	close jar
D4R	25.3 \pm 6.1	100.0 \pm 0.0	97.3 \pm 4.6	57.3 \pm 12.9	84.0 \pm 10.6	46.7 \pm 6.1	24.0 \pm 4.0	88.0 \pm 0.0	93.3 \pm 2.3	61.3 \pm 6.1
D4R-Align	32.0 \pm 4.0	97.3 \pm 2.3	96.0 \pm 0.0	70.7 \pm 2.3	81.3 \pm 2.3	46.7 \pm 4.6	22.7 \pm 2.3	97.3 \pm 2.3	100.0 \pm 0.0	72.0 \pm 6.9
R3M	14.7 \pm 4.6	96.0 \pm 4.0	72.0 \pm 4.0	60.0 \pm 4.0	80.0 \pm 4.0	24.0 \pm 0.0	20.0 \pm 4.0	90.7 \pm 2.3	100.0 \pm 0.0	74.7 \pm 2.3
R3M-Align	70.7 \pm 6.1	97.3 \pm 2.3	80.0 \pm 4.0	80.0 \pm 4.0	80.0 \pm 8.0	33.3 \pm 9.2	13.3 \pm 2.3	78.7 \pm 4.6	100.0 \pm 0.0	80.0 \pm 4.0

Models	stack blocks	place cups	place wine	screw bulb	sweep to dustpan	insert peg	meat off grill	stack cups	Averaged Success Rate
D4R	6.7 \pm 2.3	0.0 \pm 0.0	81.3 \pm 6.1	32.0 \pm 4.0	68.0 \pm 6.9	32.0 \pm 10.6	97.3 \pm 2.3	0.0 \pm 0.0	55.3
D4R-Align	16.0 \pm 4.0	0.0 \pm 0.0	84.0 \pm 4.0	57.3 \pm 8.3	86.7 \pm 4.6	24.0 \pm 6.9	92.0 \pm 4.0	1.3 \pm 2.3	59.9 (+4.6)
R3M	16.0 \pm 4.0	0.0 \pm 0.0	77.3 \pm 4.6	30.7 \pm 6.1	36.0 \pm 4.0	17.3 \pm 2.3	96.0 \pm 0.0	0.0 \pm 0.0	50.3
R3M-Align	13.3 \pm 2.3	0.0 \pm 0.0	88.0 \pm 4.0	41.3 \pm 4.6	98.7 \pm 2.3	16.0 \pm 6.9	93.3 \pm 2.3	1.3 \pm 2.3	59.2 (+8.9)

4.3 How effective is the design of human-robot cross-domain alignment?

Our HR-Align method adapts existing human-data pre-trained models in an efficient way to better generalize the new representation across different downstream tasks. To mitigate the human-robot discrepancy, the semantic alignment design upon the paired human-robot video dataset is the key to efficiently adapting the pre-trained models. To validate this, we demonstrate two strong baselines by fully tuning the existing pre-trained model (i.e., R3M) on all robot videos in the paired human-robot dataset, with different fine-tuning objectives. The first one, since the R3M model is pre-trained on Ego4D videos, to mitigate the human-robot domain gap, we continue to finetune the R3M model on the used robot videos using its original pre-training method. We call this newly adapted model R3M-PreT. For the second one, as the actions performed in the used robot videos are well-defined, this indicates the videos contain rich manipulation-oriented semantics. To this end, we finetune the pre-trained R3M model by classifying each robot video into its action category, making the learned feature representation more effective in capturing visual dynamics. We call this adapted model R3M-CIS.

As shown in Table 4, on the two tasks in **Adroit**, both the R3M-PreT and R3M-CIS models improve the manipulation success rate, demonstrating that fine-tuning pre-trained models on the robot data is effective in mitigating the human-robot domain discrepancy in pre-training. Nevertheless, all parameters of the visual backbones in these two models are required to be trained, making the adaptation process inefficient. Compared to these two models, with the proposed HR-Align method, our R3M-Align model achieves more significant improvements on the two tasks, by tuning only 6.4% of the parameters. This demonstrates that our human-robot semantic alignment design is more effective in addressing the domain discrepancy problem in pre-training. And more importantly, it provides a simple yet effective way to adapt existing pre-trains in an efficient manner.

Table 4: Success rates of two tasks in **Adroit**. The R3M-PreT and R3M-CIS are two strong baselines by fully fine-tuning on the used robot videos. Our R3M-Align model with human-robot semantic alignment achieves more superior performance by tuning much fewer parameters.

Models	learned params.	<i>pen</i>	<i>relocate</i>	Averaged
R3M	0M (frozen:25M)	78.0	70.0	74.0
R3M-PreT	25M	78.0	77.3	77.7 (+3.7)
R3M-CIS	25M	79.3	75.3	77.3 (+3.3)
R3M-Align	1.6M	81.3	81.3	81.3 (+7.3)

4.4 How much does each component contribute to the HR-Align method?

Driven by the idea of human-robot semantic alignment, another contribution of this work is leveraging the parameter-efficient design (i.e., adapter) to adapt the representation of pre-trained models.

Following existing practice [22; 24; 25], for a visual backbone consisting of multiple blocks (e.g., the residual blocks in resnet [74]), we selectively add the adapter modules at three positions in the backbone network. Taking the pre-trained R3M model as an example. We can insert our adapter modules before the first block, in the middle of all blocks, and after the last block. We call these three adapted models R3M-Align-E, R3M-Align-M, and R3M-Align-L, respectively. Similarly, we also add the adapter modules at all three locations of the R3M model, which we denote as R3M-Align-E.M.L.

In Table 5, we evaluate the performance of these models on two tasks in the Adroit environment. Compared to the R3M model which has 25 million parameters in its backbone, all four adapted models can significantly improve the success rate of downstream tasks by using very few learnable parameters. For instance, the R3M-Align-L model achieves maximum improvement by adding only 6.4% of parameters. Interestingly, compared to the other three models that insert the adapter module at a single position, the R3M-Align-E.M.L model does not perform the best while using more learnable parameters. This phenomenon indicates that it is difficult to harmoniously adapt representations at multiple positions of the pre-trained model for aligning semantics between human and robot data.

In this work, we also use the task description features as queries to better capture manipulation-oriented semantics from video features. As shown at the bottom of Table 5, removing this operation from the adapted model, i.e., R3M-Align-L *w/o lang.*, will result in performance degradation. This demonstrates that language-guided feature enhancement is effective in promoting human-robot semantic alignment.

Table 5: Success rates of two tasks in **Adroit**. Middle: ablation on inserting adapter modules at different positions in the R3M model. Bottom: ablation on the language-guided feature enhancement.

Models	learned params.	<i>pen</i>	<i>relocate</i>	Averaged
R3M	0M (frozen:25M)	78.0	70.0	74.0
R3M-Align-E	0.1M	75.3	84.0	79.6 (+5.6)
R3M-Align-M	3.5M	80.7	82.0	81.3 (+7.3)
R3M-Align-L	1.6M	81.3	81.3	81.3 (+7.3)
R3M-Align-E.M.L	5.2M	77.3	83.3	80.3 (+6.3)
R3M-Align-L <i>w/o lang.</i>	1.6M	79.3	80.7	80.0 (+6.0)

4.5 Is the adapted representation more effective for downstream tasks?

To investigate the effectiveness of our proposed adaptation method, we employ t-SNE [75] to depict the downstream feature distributions of the existing pre-trained R3M model and our adapted R3M-Align model, respectively. We randomly select 5 tasks from the RL-Bench dataset, where 500 samples are randomly selected for each task. The distributions of feature representation of the R3M model and R3M-Align model are shown in Figure 3(a) and Figure 3(b), respectively. In the figure, different colors represent different tasks, and each point represents a sample.

In the visualization, we find that the feature distribution of the existing R3M model is significantly more dispersed than that of our adapted R3M-Align model. This phenomenon demonstrates that our adaptation method can effectively learn more discriminative representation for downstream tasks by addressing the human-robot domain discrepancy in pre-training.

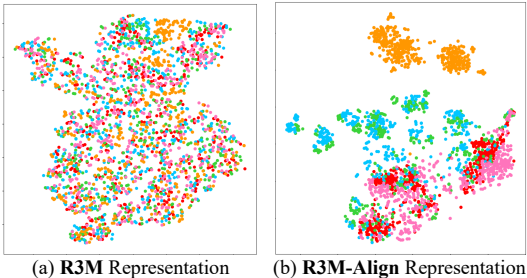


Figure 3: The t-SNE visualizations of the RL-Bench’s feature distributions of R3M and R3M-Align models. Each color denotes a task, and the points denote different samples.

5 Conclusion

The existing learning paradigm of visual pre-training on human data for robotic manipulation encounters the human-robot domain discrepancy. Our work takes a preliminary attempt to solve this challenging problem. In this work, we contribute a new adaptation paradigm by leveraging existing semantic-aligned human-robot video data and proposing an efficient semantic alignment method. In this way, the existing human-data pre-trained models can be efficiently and explicitly adapted to the robot domain, without the need to be tailored for each downstream robotic environment. Experiments on 25 robotic manipulation tasks across three environments and different pre-trained models demonstrate the efficacy of our proposed method.

References

- [1] Suraj Nair, Aravind Rajeswaran, Vikash Kumar, Chelsea Finn, and Abhinav Gupta. R3m: A universal visual representation for robot manipulation. *arXiv preprint arXiv:2203.12601*, 2022.
- [2] Quan Vuong, Sergey Levine, Homer Rich Walke, Karl Pertsch, Anikait Singh, Ria Doshi, Charles Xu, Jianlan Luo, Liam Tan, Dhruv Shah, et al. Open x-embodiment: Robotic learning datasets and rt-x models. In *Towards Generalist Robots: Learning Paradigms for Scalable Skill Acquisition@ CoRL2023*, 2023.
- [3] Mohit Shridhar, Lucas Manuelli, and Dieter Fox. Cliport: What and where pathways for robotic manipulation. In *Conference on robot learning*, pages 894–906. PMLR, 2022.
- [4] Dmitry Kalashnikov, Alex Irpan, Peter Pastor, Julian Ibarz, Alexander Herzog, Eric Jang, Deirdre Quillen, Ethan Holly, Mrinal Kalakrishnan, Vincent Vanhoucke, et al. Scalable deep reinforcement learning for vision-based robotic manipulation. In *Conference on robot learning*, pages 651–673. PMLR, 2018.
- [5] Sumedh Sontakke, Jesse Zhang, Séb Arnold, Karl Pertsch, Erdem Bıyık, Dorsa Sadigh, Chelsea Finn, and Laurent Itti. Roboclip: One demonstration is enough to learn robot policies. *Advances in Neural Information Processing Systems*, 2024.
- [6] Shizhe Chen, Ricardo Garcia, Cordelia Schmid, and Ivan Laptev. Polarnet: 3d point clouds for language-guided robotic manipulation. *arXiv preprint arXiv:2309.15596*, 2023.
- [7] Ankit Goyal, Jie Xu, Yijie Guo, Valts Blukis, Yu-Wei Chao, and Dieter Fox. Rvt: Robotic view transformer for 3d object manipulation. In *Conference on Robot Learning*, pages 694–710. PMLR, 2023.
- [8] Cheng Chi, Siyuan Feng, Yilun Du, Zhenjia Xu, Eric Cousineau, Benjamin Burchfiel, and Shuran Song. Diffusion policy: Visuomotor policy learning via action diffusion. *arXiv preprint arXiv:2303.04137*, 2023.
- [9] Tete Xiao, Ilija Radosavovic, Trevor Darrell, and Jitendra Malik. Masked visual pre-training for motor control. *arXiv preprint arXiv:2203.06173*, 2022.
- [10] Mingxiao Huo, Mingyu Ding, Chenfeng Xu, Thomas Tian, Xinghao Zhu, Yao Mu, Lingfeng Sun, Masayoshi Tomizuka, and Wei Zhan. Human-oriented representation learning for robotic manipulation. *arXiv preprint arXiv:2310.03023*, 2023.
- [11] Sudeep Dasari, Mohan Kumar Srirama, Unnat Jain, and Abhinav Gupta. An unbiased look at datasets for visuo-motor pre-training. In *Conference on Robot Learning*, pages 1183–1198. PMLR, 2023.
- [12] Haoran He, Chenjia Bai, Ling Pan, Weinan Zhang, Bin Zhao, and Xuelong Li. Large-scale actionless video pre-training via discrete diffusion for efficient policy learning. *arXiv preprint arXiv:2402.14407*, 2024.
- [13] Dandan Shan, Jiaqi Geng, Michelle Shu, and David F Fouhey. Understanding human hands in contact at internet scale. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 9869–9878, 2020.
- [14] Kristen Grauman, Andrew Westbury, Eugene Byrne, Zachary Chavis, Antonino Furnari, Rohit Girdhar, Jackson Hamburger, Hao Jiang, Miao Liu, Xingyu Liu, et al. Ego4d: Around the world in 3,000 hours of egocentric video. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 18995–19012, 2022.
- [15] Raghav Goyal, Samira Ebrahimi Kahou, Vincent Michalski, Joanna Materzynska, Susanne Westphal, Heuna Kim, Valentin Haenel, Ingo Fruend, Peter Yanilos, Moritz Mueller-Freitag, et al. The "something something" video database for learning and evaluating visual common sense. In *Proceedings of the IEEE international conference on computer vision*, pages 5842–5850, 2017.

- [16] Jia Deng, Wei Dong, Richard Socher, Li-Jia Li, Kai Li, and Li Fei-Fei. Imagenet: A large-scale hierarchical image database. In *2009 IEEE conference on computer vision and pattern recognition*, pages 248–255, 2009.
- [17] Dima Damen, Hazel Doughty, Giovanni Maria Farinella, Sanja Fidler, Antonino Furnari, Evangelos Kazakos, Davide Moltisanti, Jonathan Munro, Toby Perrett, Will Price, et al. The epic-kitchens dataset: Collection, challenges and baselines. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 43(11):4125–4141, 2020.
- [18] Shikhar Bahl, Abhinav Gupta, and Deepak Pathak. Human-to-robot imitation in the wild. *arXiv preprint arXiv:2207.09450*, 2022.
- [19] Yaroslav Ganin, Evgeniya Ustinova, Hana Ajakan, Pascal Germain, Hugo Larochelle, François Laviolette, Mario March, and Victor Lempitsky. Domain-adversarial training of neural networks. *Journal of machine learning research*, pages 1–35, 2016.
- [20] Shai Ben-David, John Blitzer, Koby Crammer, and Fernando Pereira. Analysis of representations for domain adaptation. *Advances in neural information processing systems*, 2006.
- [21] Shikhar Bahl, Russell Mendonca, Lili Chen, Unnat Jain, and Deepak Pathak. Affordances from human videos as a versatile representation for robotics. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 13778–13790, 2023.
- [22] Mohit Sharma, Claudio Fantacci, Yuxiang Zhou, Skanda Koppula, Nicolas Heess, Jon Scholz, and Yusuf Aydar. Lossless adaptation of pretrained vision models for robotic manipulation. In *The Eleventh International Conference on Learning Representations*, 2022.
- [23] Xingyu Lin, John So, Sashwat Mahalingam, Fangchen Liu, and Pieter Abbeel. Spawnnet: Learning generalizable visuomotor skills from pre-trained networks. *arXiv preprint arXiv:2307.03567*, 2023.
- [24] Taojiannan Yang, Yi Zhu, Yusheng Xie, Aston Zhang, Chen Chen, and Mu Li. Aim: Adapting image models for efficient video action recognition. *arXiv preprint arXiv:2302.03024*, 2023.
- [25] Junting Pan, Ziyi Lin, Xiatian Zhu, Jing Shao, and Hongsheng Li. St-adapter: Parameter-efficient image-to-video transfer learning. *Advances in Neural Information Processing Systems*, 35:26462–26477, 2022.
- [26] Tuomas Haarnoja, Vitchyr Pong, Aurick Zhou, Murtaza Dalal, Pieter Abbeel, and Sergey Levine. Composable deep reinforcement learning for robotic manipulation. In *2018 IEEE international conference on robotics and automation (ICRA)*, pages 6244–6251, 2018.
- [27] Rongrong Liu, Florent Nageotte, Philippe Zanne, Michel de Mathelin, and Birgitta Dresch-Langley. Deep reinforcement learning for the control of robotic manipulation: a focussed mini-review. *Robotics*, 10(1):22, 2021.
- [28] Stephen James, Zicong Ma, David Rovick Arrojo, and Andrew J Davison. Rlbench: The robot learning benchmark & learning environment. *IEEE Robotics and Automation Letters*, 5(2):3019–3026, 2020.
- [29] Leslie Pack Kaelbling, Michael L Littman, and Andrew W Moore. Reinforcement learning: A survey. *Journal of artificial intelligence research*, 4:237–285, 1996.
- [30] Volodymyr Mnih, Koray Kavukcuoglu, David Silver, Alex Graves, Ioannis Antonoglou, Daan Wierstra, and Martin Riedmiller. Playing atari with deep reinforcement learning. *arXiv preprint arXiv:1312.5602*, 2013.
- [31] John Schulman, Filip Wolski, Prafulla Dhariwal, Alec Radford, and Oleg Klimov. Proximal policy optimization algorithms. *arXiv preprint arXiv:1707.06347*, 2017.
- [32] Stephen James and Andrew J Davison. Q-attention: Enabling efficient learning for vision-based robotic manipulation. *IEEE Robotics and Automation Letters*, 7(2):1612–1619, 2022.
- [33] Mohit Shridhar, Lucas Manuelli, and Dieter Fox. Perceiver-actor: A multi-task transformer for robotic manipulation. In *Conference on Robot Learning*, pages 785–799. PMLR, 2023.
- [34] Tianhe Yu, Deirdre Quillen, Zhanpeng He, Ryan Julian, Karol Hausman, Chelsea Finn, and Sergey Levine. Meta-world: A benchmark and evaluation for multi-task and meta reinforcement learning. In *Conference on robot learning*, pages 1094–1100. PMLR, 2020.

- [35] Aravind Rajeswaran, Vikash Kumar, Abhishek Gupta, Giulia Vezzani, John Schulman, Emanuel Todorov, and Sergey Levine. Learning complex dexterous manipulation with deep reinforcement learning and demonstrations. *arXiv preprint arXiv:1709.10087*, 2017.
- [36] Abhishek Gupta, Vikash Kumar, Corey Lynch, Sergey Levine, and Karol Hausman. Relay policy learning: Solving long-horizon tasks via imitation and reinforcement learning. *arXiv preprint arXiv:1910.11956*, 2019.
- [37] Oier Mees, Lukas Hermann, Erick Rosete-Beas, and Wolfram Burgard. Calvin: A benchmark for language-conditioned policy learning for long-horizon robot manipulation tasks. *IEEE Robotics and Automation Letters*, 7(3):7327–7334, 2022.
- [38] Tongzhou Mu, Zhan Ling, Fanbo Xiang, Derek Yang, Xuanlin Li, Stone Tao, Zhiao Huang, Zhiwei Jia, and Hao Su. Maniskill: Generalizable manipulation skill benchmark with large-scale demonstrations. *arXiv preprint arXiv:2107.14483*, 2021.
- [39] Teli Ma, Jiaming Zhou, Zifan Wang, Ronghe Qiu, and Junwei Liang. Contrastive imitation learning for language-guided multi-task robotic manipulation. *arXiv preprint arXiv:2406.09738*, 2024.
- [40] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. In *International conference on machine learning*, pages 8748–8763. PMLR, 2021.
- [41] Kaiming He, Xinlei Chen, Saining Xie, Yanghao Li, Piotr Dollár, and Ross Girshick. Masked autoencoders are scalable vision learners. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 16000–16009, 2022.
- [42] Kun-Yu Lin, Jia-Run Du, Yipeng Gao, Jiaming Zhou, and Wei-Shi Zheng. Diversifying spatial-temporal perception for video domain generalization. *arXiv preprint arXiv:2310.17942*, 2023.
- [43] Kun-Yu Lin, Henghui Ding, Jiaming Zhou, Yi-Xing Peng, Zhilin Zhao, Chen Change Loy, and Wei-Shi Zheng. Rethinking clip-based video learners in cross-domain open-vocabulary action recognition. *arXiv preprint arXiv:2403.01560*, 2024.
- [44] Kaiming He, Haoqi Fan, Yuxin Wu, Saining Xie, and Ross Girshick. Momentum contrast for unsupervised visual representation learning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, June 2020.
- [45] Limin Wang, Bingkun Huang, Zhiyu Zhao, Zhan Tong, Yinan He, Yi Wang, Yali Wang, and Yu Qiao. Videomae v2: Scaling video masked autoencoders with dual masking. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 14549–14560, 2023.
- [46] Anthony Brohan, Noah Brown, Justice Carbajal, Yevgen Chebotar, Joseph Dabis, Chelsea Finn, Keerthana Gopalakrishnan, Karol Hausman, Alex Herzog, Jasmine Hsu, et al. Rt-1: Robotics transformer for real-world control at scale. *arXiv preprint arXiv:2212.06817*, 2022.
- [47] Anthony Brohan, Noah Brown, Justice Carbajal, Yevgen Chebotar, Xi Chen, Krzysztof Choromanski, Tianli Ding, Danny Driess, Avinava Dubey, Chelsea Finn, et al. Rt-2: Vision-language-action models transfer web knowledge to robotic control. *arXiv preprint arXiv:2307.15818*, 2023.
- [48] Haoyu Zhen, Xiaowen Qiu, Peihao Chen, Jincheng Yang, Xin Yan, Yilun Du, Yining Hong, and Chuang Gan. 3d-vla: A 3d vision-language-action generative world model. *arXiv preprint arXiv:2403.09631*, 2024.
- [49] Xinghang Li, Minghuan Liu, Hanbo Zhang, Cunjun Yu, Jie Xu, Hongtao Wu, Chilam Cheang, Ya Jing, Weinan Zhang, Huaping Liu, et al. Vision-language foundation models as effective robot imitators. *arXiv preprint arXiv:2311.01378*, 2023.
- [50] Jonathan Yang, Catherine Glossop, Arjun Bhorkar, Dhruv Shah, Quan Vuong, Chelsea Finn, Dorsa Sadigh, and Sergey Levine. Pushing the limits of cross-embodiment learning for manipulation and navigation. *arXiv preprint arXiv:2402.19432*, 2024.
- [51] Lawrence Yunliang Chen, Kush Hari, Karthik Dharmarajan, Chenfeng Xu, Quan Vuong, and Ken Goldberg. Mirage: Cross-embodiment zero-shot policy transfer with cross-painting. *arXiv preprint arXiv:2402.19249*, 2024.

- [52] Chao-Yuan Wu, Christoph Feichtenhofer, Haoqi Fan, Kaiming He, Philipp Krahenbuhl, and Ross Girshick. Long-term feature banks for detailed video understanding. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 284–293, 2019.
- [53] Jiaming Zhou, Kun-Yu Lin, Haoxin Li, and Wei-Shi Zheng. Graph-based high-order relation modeling for long-term action recognition. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 8984–8993, 2021.
- [54] Jiaming Zhou, Kun-Yu Lin, Yu-Kun Qiu, and Wei-Shi Zheng. Twinformer: Fine-to-coarse temporal modeling for long-term action recognition. *IEEE Transactions on Multimedia*, 2023.
- [55] Jiaming Zhou, Hanjun Li, Kun-Yu Lin, and Junwei Liang. Adafocus: Towards end-to-end weakly supervised learning for long-video action understanding. *arXiv preprint arXiv:2311.17118*, 2023.
- [56] Yansong Tang, Dajun Ding, Yongming Rao, Yu Zheng, Danyang Zhang, Lili Zhao, Jiwen Lu, and Jie Zhou. Coin: A large-scale dataset for comprehensive instructional video analysis. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 1207–1216, 2019.
- [57] Jiaming Zhou, Junwei Liang, Kun-Yu Lin, Jinrui Yang, and Wei-Shi Zheng. Actionhub: A large-scale action video description dataset for zero-shot action recognition. *arXiv preprint arXiv:2401.11654*, 2024.
- [58] Zhan Tong, Yibing Song, Jue Wang, and Limin Wang. Videomae: Masked autoencoders are data-efficient learners for self-supervised video pre-training. *Advances in neural information processing systems*, 35:10078–10093, 2022.
- [59] Bolei Zhou, Alex Andonian, Aude Oliva, and Antonio Torralba. Temporal relational reasoning in videos. In *Proceedings of the European conference on computer vision (ECCV)*, pages 803–818, 2018.
- [60] Xiaolong Wang, Ross Girshick, Abhinav Gupta, and Kaiming He. Non-local neural networks. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 7794–7803, 2018.
- [61] Ilija Radosavovic, Tete Xiao, Stephen James, Pieter Abbeel, Jitendra Malik, and Trevor Darrell. Real-world robot learning with masked visual pre-training. In *Conference on Robot Learning*, pages 416–426. PMLR, 2023.
- [62] Ya Jing, Xuelin Zhu, Xingbin Liu, Qie Sima, Taozheng Yang, Yunhai Feng, and Tao Kong. Exploring visual pre-training for robot manipulation: Datasets, models and methods. In *2023 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, pages 11390–11395, 2023.
- [63] Yecheng Jason Ma, Shagun Sodhani, Dinesh Jayaraman, Osbert Bastani, Vikash Kumar, and Amy Zhang. Vip: Towards universal visual reward and representation via value-implicit pre-training. *arXiv preprint arXiv:2210.00030*, 2022.
- [64] Arjun Majumdar, Karmesh Yadav, Sergio Arnaud, Jason Ma, Claire Chen, Sneha Silwal, Aryan Jain, Vincent-Pierre Berges, Tingfan Wu, Jay Vakil, et al. Where are we in the search for an artificial visual cortex for embodied intelligence? *Advances in Neural Information Processing Systems*, 36, 2024.
- [65] Joao Carreira, Eric Noland, Andras Banki-Horvath, Chloe Hillier, and Andrew Zisserman. A short note about kinetics-600. *arXiv preprint arXiv:1808.01340*, 2018.
- [66] Vidhi Jain, Maria Attarian, Nikhil J Joshi, Ayzaan Wahid, Danny Driess, Quan Vuong, Pannag R Sanketi, Pierre Sermanet, Stefan Welker, Christine Chan, et al. Vid2robot: End-to-end video-conditioned policy learning with cross-attention transformers. *arXiv preprint arXiv:2403.12943*, 2024.
- [67] Haoyu Xiong, Haoyuan Fu, Jieyi Zhang, Chen Bao, Qiang Zhang, Yongxi Huang, Wenqiang Xu, Animesh Garg, and Cewu Lu. Robotube: Learning household manipulation from human videos with simulated twin environments. In *Conference on Robot Learning*, pages 1–10. PMLR, 2023.
- [68] Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. Bert: Pre-training of deep bidirectional transformers for language understanding. *arXiv preprint arXiv:1810.04805*, 2018.
- [69] Victor Sanh, Lysandre Debut, Julien Chaumond, and Thomas Wolf. Distilbert, a distilled version of bert: smaller, faster, cheaper and lighter. *arXiv preprint arXiv:1910.01108*, 2019.
- [70] Joao Carreira and Andrew Zisserman. Quo vadis, action recognition? a new model and the kinetics dataset. In *proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pages 6299–6308, 2017.

- [71] Kaiming He, Haoqi Fan, Yuxin Wu, Saining Xie, and Ross Girshick. Momentum contrast for unsupervised visual representation learning. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 9729–9738, 2020.
- [72] Hao-Shu Fang, Hongjie Fang, Zhenyu Tang, Jirong Liu, Junbo Wang, Haoyi Zhu, and Cewu Lu. Rh20t: A robotic dataset for learning diverse skills in one-shot. *arXiv preprint arXiv:2307.00595*, 2023.
- [73] Diederik P Kingma and Jimmy Ba. Adam: A method for stochastic optimization. *arXiv preprint arXiv:1412.6980*, 2014.
- [74] Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep residual learning for image recognition. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 770–778, 2016.
- [75] Laurens Van der Maaten and Geoffrey Hinton. Visualizing data using t-sne. *Journal of machine learning research*, 9(11), 2008.

Appendix

Mitigating the Human-Robot Domain Discrepancy in Visual Pre-training for Robotic Manipulation

S1 Broader Impacts Statements

There are no ethical issues involved in this paper. This paper presents work whose goal is to advance the field of robotic learning. There are many potential societal consequences of our work, none of which we feel must be specifically highlighted here.

S2 Downstream Policy Learning on RL Bench

Existing visual pre-training works often assess the learned representation in downstream environments using a single-task setting. However, our work diverges from this standard by also evaluating the adapted pre-trained models on the large-scale RL Bench benchmark [28], where a single language-conditioned policy is learned to complete various tasks.

On RL Bench, existing works [6; 7; 12; 32; 33] usually develop sophisticated models for modeling the semantics of robot’s multi-view observations and their correlations with the language commands. For example, RVT [7] utilizes four attention layers as the visual encoder to model intra-image relations and four more attention layers to model image-language correlations. In this work, we adopt the same design as RVT, but replace the visual encoder (i.e., four intra-image attention layers) with either an existing pre-trained model or our adapted one. Furthermore, we employ just one attention layer to fuse the extracted image features and language features. As RVT predicts the end-effector’s actions based on the features without down-sampling the spatial dimension, we discard all spatial down-sampling operations (e.g., max-pooling) in the pre-trained models and our adapted models. Please note that to validate the effectiveness of our adaptation method, we freeze the visual representation of the pre-trained model or our adapted model while learning the downstream policy on RL Bench.