
DASB - Discrete Audio and Speech Benchmark

Pooneh Mousavi^{1,2}, Luca Della Libera^{1,2}, Jarod Duret³, Artem Ploujnikov^{4,2},
Cem Subakan^{5,2,1}, Mirco Ravanelli^{1,2,4}
¹Concordia University ²Mila - Quebec AI Institute ³Avignon Université
⁴Université de Montréal ⁵Université Laval

Abstract

Discrete audio tokens have recently gained considerable attention for their potential to connect audio and language processing, enabling the creation of modern multi-modal large language models. Ideal audio tokens must effectively preserve phonetic and semantic content along with paralinguistic information, speaker identity, and other details. While several types of audio tokens have been recently proposed, identifying the optimal tokenizer for various tasks is challenging due to the inconsistent evaluation settings in existing studies. To address this gap, we release the Discrete Audio and Speech Benchmark (DASB), a comprehensive leaderboard for benchmarking discrete audio tokens across a wide range of discriminative tasks, including speech recognition, speaker identification and verification, emotion recognition, keyword spotting, and intent classification, as well as generative tasks such as speech enhancement, separation, and text-to-speech. Our results show that, on average, semantic tokens outperform compression tokens across most discriminative and generative tasks. However, the performance gap between semantic tokens and standard continuous representations remains substantial, highlighting the need for further research in this field.

1 Introduction

Traditional speech and audio processing systems have long relied on handcrafted low-level features such as *Mel-Frequency Cepstral Coefficients* and *Filterbanks* [1]. Recently, self-supervised learning (SSL) led to outstanding performance improvements by learning more complex, robust, and general speech features through deep neural networks. Notable models include Wav2Vec2 [2], WavLM [3], and HuBERT [4]. In all these cases, the rich information in speech and audio signals is encoded into a sequence of continuous vectors. Even though continuous vectors have proven effective in capturing the complex details embedded in speech and audio, there is a growing interest in discrete representations. Discrete audio representations, known as audio tokens, transform the original waveform into a finite set of vectors. These tokens are derived using methods such as quantization of self-supervised learning (SSL) models [5, 6, 7], neural compression techniques (codecs)[8, 9], or hybrid approaches [8, 9] that combine both methods.

What is driving the interest in audio tokens? Arguably, this trend is linked to the remarkable success of autoregressive Large Language Models (LLMs) such as LLama [10], PALM [11], BERT [12], and GPT [13]. Unlike audio, these models operate on text, which is inherently discrete. Inspired by their effectiveness, researchers are exploring audio language models [14, 15, 16, 17, 18, 19, 20, 21] by representing the audio as a sequence of discrete tokens. Moreover, audio and text tokens can be naturally combined, paving the way for the development of modern multi-modal LLMs [22] capable of processing audio, text, and visual data. Discrete tokens also simplify audio generation tasks like speech enhancement and synthesis by turning them into classification problems instead of regression models [23]. Finally, they also enable efficient data compression for better transmission and storage. The main drawback of audio tokens is the inevitable loss of information

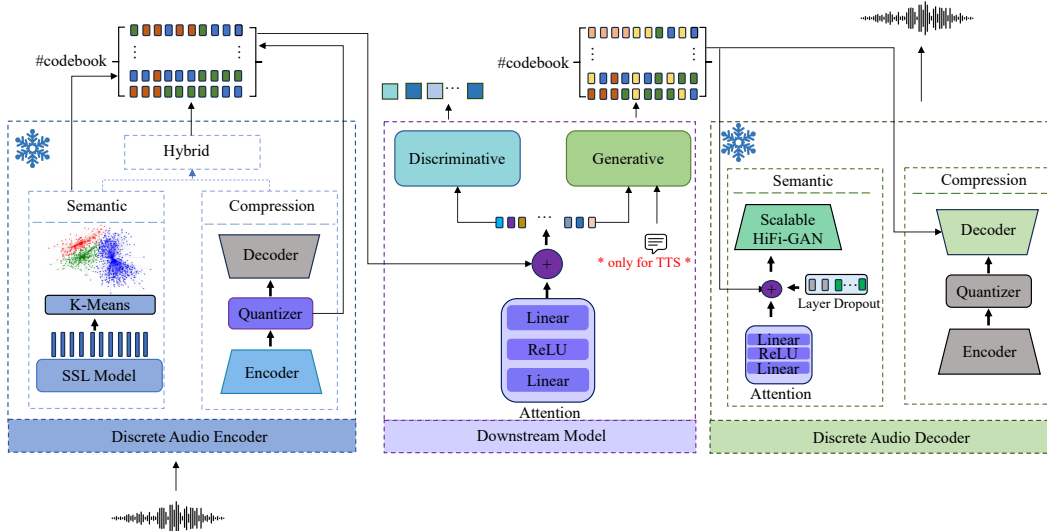


Figure 1: The workflow of DASB consists of three steps. First, a discrete audio encoder converts the audio signal into discrete tokens (*left*). Then, the tokens are combined using attention and fed to a neural model for the final prediction (*middle*). For generative tasks, the predicted tokens are passed to a discrete decoder, which converts them back into an audio waveform (*right*). Both the encoder and decoder are pretrained and frozen during downstream model training.

introduced by the discretization process. We ideally aim for audio tokens that preserves crucial information of the original waveform, including phonetic and linguistic content, speaker identities, emotions, and other paralinguistic cues. However, despite the growing trend toward audio tokens, there is still a lack of standardized evaluation benchmarks, with different studies employing varied experimental settings [24, 25, 26, 27, 28]. Without a consistent framework for measuring and comparing performance, it becomes challenging to determine which audio tokens perform optimally across various tasks.

To address this gap, we introduce the **Discrete Audio and Speech Benchmark (DASB)**. DASB systematically assesses various audio tokens across several common speech processing tasks. In particular, our contribution is the following:

- We benchmark a diverse set of discrete audio encoders from all three categories: semantic (Discrete HuBERT, Discrete WavLM, Discrete Wav2Vec2), *compression* (EnCodec [29], DAC [30]), and *hybrid* (SpeechTokenizer [8]).
- We consider a wide range of discriminative tasks, including speech, speaker, emotion recognition, keyword spotting, and intent classification. We also tackle generative tasks, such as speech enhancement, separation, and text-to-speech. For a more reliable assessment, we consider different downstream architectures for each task, following the insights in [31]. To the best of our knowledge, this is the first comprehensive benchmark of audio tokens that covers both discriminative and generative tasks.
- We publicly release DASB¹ as a modular code repository built on the popular SpeechBrain [32] toolkit and licensed under Apache 2.0.

2 Related Work

Several research efforts have recently explored using discrete audio tokens as an alternative to continuous features. Some studies focused on using discrete features for speech recognition and speech translation [28, 27, 33], specifically evaluating the tokens obtained from the quantized versions of the HuBERT model. Similarly, Yang et al. [34] examined discrete features for speech recognition and text-to-speech. Audio tokens have been proposed for speech enhancement as well. For example, Wang et al. [26] investigated the application of semantic tokens to speech enhancement, whereas

¹<https://github.com/speechbrain/benchmarks/tree/DASB>

Erdogan et al. [35] proposed a hybrid tokenizer called TokenSplit for both speech enhancement and separation.

While previous studies investigated the use of compression or hybrid tokens [36, 37, 38], these efforts were often limited to specific applications and a few audio tokenizers. In particular, previous benchmarking attempts focused on one category of tokenizers, either semantic or compression-based, and mostly on discriminative or generative tasks. For instance, Puvvada et al. [25] compared the performance of EnCodec and DAC [30] for speaker verification, speaker diarization, and speech recognition. Mousavi et al. [39] benchmarked various discriminative and generative tasks with semantic tokens. Wu et al. [24] provided a comprehensive study of the quality of resynthesized sound with compression and hybrid tokenizers. The latter attempt used pretrained models for speech, speaker, and emotion recognition, and assessed how much information is preserved by feeding them resynthesized audio. However, it did not address the direct use of tokenized input for training downstream tasks, nor did it deeply analyze the role of semantic tokens. Our analyses, instead, suggest that semantic tokens outperform other tokenizers.

To the best of our knowledge, the proposed DASB benchmark is the first to compare several audio tokenizers from three categories (semantic, compression, and hybrid) across many discriminative and generative speech tasks of broad practical interests. Moreover, unlike previous works on discrete audio tokens, we draw inspiration from the findings presented in [31] for reliably benchmarking continuous SSL representations and we consider different downstream architectures for each task. Similar to the approach taken by SUPERB [40] for continuous representation, we offer a standardized evaluation benchmark where researchers can easily evaluate novel audio tokens.

3 Benchmark Design

The pipeline of DASB, illustrated in Fig. 1, consists of three components: Audio Encoder, Downstream Model, and Audio Decoder. The main features of the considered tokenizers are summarized in Table 1, while Figure 2 reports the time and memory resources required by both encoders and decoders. The following subsections describe each module in detail.

3.1 Discrete Audio Encoder

The audio encoder converts the audio signal into a sequence of discrete tokens. It is pretrained on large amounts of unlabeled data and remains frozen during the training of downstream tasks. Different encoders may compress the information in the original waveform at different rates. The compression level is measured by the bitrate, defined as:

$$\text{bitrate} = \log_2 V \cdot C \cdot R, \tag{1}$$

where C is the number of codebooks, V is the number of vectors in each codebook (vocabulary), and R is the rate of codes per second. It is worth mentioning that a single sequence of tokens might be insufficient to capture the rich and complex information embedded in speech signals. The encoders thus often output multiple discrete sequences, with each sequence corresponding to a different codebook C . The encoders can operate at different bitrates simply by adjusting the number of codebooks C . For a fairer comparison, we define three different distinct bitrate ranges that we have identified from the literature [41, 42, 43]: *low* (0-1.5 kbps), *medium* (2.9-6 kbps), and *high* (24 kbps). We consider this approach to prevent the trivial conclusion that some audio tokens perform better than others simply due to a higher bitrate.

The design of DASB is flexible, allowing for easy integration and benchmarking of various tokenizers. Using the terminology from [44, 8], we categorize audio tokens into three classes: semantic, compression, and hybrid tokenizers. **Semantic** tokens [5, 6, 7] are generated by clustering or quantizing layers from SSL models [2, 3, 4]. The tokenization process typically involves selecting specific layers from a pretrained SSL model and applying the k-means algorithm to group their representations. Semantic tokens primarily capture high-level information, such as phonetic, semantic, and syntactic information. They are not optimized for waveform reconstruction, making them potentially better suited for discriminative tasks like speech recognition. Recent studies, however, have shown that semantic tokens can also be effective in generative tasks [26, 34, 39]. We adopt the tokenization algorithm proposed in [39]. In particular, we consider three widely-used open-source SSL models: Wav2Vec2-large, WavLM-large, and HuBERT-large, each composed of 24 layers. Then, we cluster

Table 1: Key Features of the Discrete Audio Encoders. #Params is computed for medium bitrate.

Model	#Params	Sampling Rate	Bitrate (kbps)			#Codebooks		
			low	medium	high	low	medium	high
Discrete HuBERT	309.0M	16KHz	0.98	2.9	-	2	6	-
Discrete WavLM	309.0M	16KHz	0.98	2.9	-	2	6	-
Discrete Wav2Vec2	309.0M	16KHz	0.98	2.9	-	2	6	-
EnCodec [29]	17.9M	24KHz	1.5	6.0	24.0	2	8	32
DAC [30]	22.4M	24KHz	1.5	6.0	24.0	2	8	32
SpeechTokenizer [8]	85.3M	16KHz	1.0	4.0	-	2	8	-

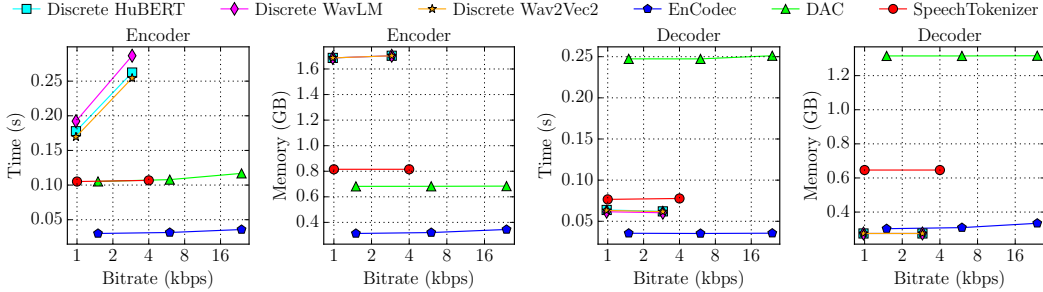


Figure 2: Time and memory required to process an utterance of 16 seconds for encoders and decoders of the considered audio tokenizers on an NVIDIA GeForce RTX 3070 GPU @ 8 GB.

six of these layers using the k-means algorithm and select two layers from the lower part (1, 3) to capture low-level information, two from the middle layers (7, 12), and two from the higher layers (18, 23) to encode content and meaning as well.

Compression tokens [43, 29, 30] are mainly used for audio compression. They are trained to accurately reconstruct the original audio, making them potentially suitable for audio generation tasks. We integrated two publicly available compression-based tokenizers in our baseline. EnCodec [29] has three main components: (i) an encoder network E consisting of a 1D convolution followed by a two-layer LSTM that processes the audio input and produces a latent representation z ; (ii) a quantization layer Q that compresses z into z_q using Residual Vector Quantization (RVQ) [43], where distinct codebooks quantizes residuals in multiple steps; and (iii) a decoder network G that mirrors the encoder and reconstructs the time-domain signal \hat{x} from z_q . The system is trained end-to-end to minimize reconstruction loss over time and frequency domains. It also adopts a perceptual loss using discriminators at different resolutions. EnCodec offers multiple models at low to medium bitrates (1.5 to 24 kbps). DAC [30] is an improved version of EnCodec. It combines advances in high-fidelity audio generation with better vector quantization techniques from the image domain, along with improved adversarial and reconstruction losses. DAC also supports quantizer dropout, allowing a single model to support variable bitrates.

Hybrid tokenizers [8, 9] unify semantic and acoustic tokens by disentangling different aspects of speech information hierarchically. SpeechTokenizer [8] is a unified speech tokenizer for large language models. It combines semantic and acoustic tokens, separating different speech information across RVQ layers. The model is based on RVQ-GANs, similar to EnCodec, and uses a convolutional encoder-decoder network from EnCodec. A two-layer BiLSTM replaces the original two-layer LSTM to improve semantic modeling. A semantic teacher guides the first RVQ quantizer, allowing the first layer tokens to capture content information effectively. With a residual structure, the subsequent quantizers capture the remaining paralinguistic information. SpeechTokenizer employs HuBERT as the semantic teacher to capture content information. The training procedure maximizes the cosine similarity between the RVQ layer outputs and the semantic teacher representations. HuBERT Layer 9 units represent semantic tokens, while EnCodec codes represent acoustic tokens.

3.2 Downstream Model

In this step, we employ neural networks to solve supervised tasks of common interest. To achieve this, we first assign each discrete token to a corresponding embedding vector through a lookup table. Subsequently, we dynamically combine the embeddings from different codebooks using attention, enabling the model to adjust the importance of codebooks for the specific task of interest. The attention mechanism consists of a simple multi-layer perceptron (MLP) that takes the embeddings

of the audio tokens as input. The MLP generates a score for each selected codebook, which is normalized by a softmax function as shown in the following equations:

$$z_{c,t} = f(\text{emb}(d_{c,t})), a_{c,t} = \frac{\exp(z_{c,t})}{\sum_{k=1}^C \exp(z_{k,t})}, h_t = \sum_c a_{c,t} z_{c,t}, \quad (2)$$

where $d_{c,t}$ is the discrete token obtained from codebook c , at time t and, $z_{c,t}$ represents the score assigned to codebook c at time t by the MLP function f . The function $\text{emb}(\cdot)$ refers to the lookup table that assigns embeddings to each discrete token. The variable $a_{c,t}$ denotes the attention assigned to the codebook c at time t , and lastly h_t is the representation that is fed to the downstream MLP model. We would like to note that the MLP learns different codebook combinations h_t at each time step t depending on the attention weights $a_{c,t}$, enabling the model to extract the necessary information when required. We also considered summing all embeddings, as has been done in previous literature [25, 24], but found that attention weights performed slightly better.

The combined representations h_t are fed into neural models designed for different tasks. The downstream models are jointly trained with their attention and embedding layers in an end-to-end fashion. For discriminative tasks, the model outputs either a single prediction (e.g., for emotion recognition) or a sequence of predictions (e.g., for speech recognition). For generative tasks (e.g., speech enhancement), the neural network outputs the targeted tokens per codebook, with the output shape being $C \times L$, where L is the sequence length. The predicted audio tokens are converted into an audio waveform via an audio decoder, as explained in the next section.

3.3 Discrete Audio Decoder

The decoder, used for generative tasks only, converts the predicted tokens into audio signals. The decoder is frozen during training. The choice of decoder depends on the encoder used in the first step. For compression and hybrid tokenizers, we use their built-in decoder. For semantic tokens, we use the scalable vocoder proposed in [39], which is a modified HiFi-GAN [45] pretrained with LibriSpeech-960h [46]. The scalable vocoder accepts a variable number of multi-layer semantic tokens as input and can handle different bitrates using a layer dropout mechanism.

4 Experiments

In the following sections, we describe the discriminative and generative tasks considered in our experiments. For a more reliable evaluation, we tested two downstream architectures for each task. For detailed information about the hyperparameters used in each experiment, refer to Appendix F.

4.1 Discriminative Tasks

For the downstream architectures and training procedures, we follow the best-performing approaches for classic continuous self-supervised representations proposed in [31].

- **Automatic Speech Recognition (ASR):** The goal of ASR is converting speech signals into written text. We address two ASR tasks. The first task involves English ASR using the popular LibriSpeech dataset [46]. Training and validation are performed on the train-clean-100 and dev-clean subsets, respectively, while testing is conducted on the test-clean and test-other subsets. The downstream architecture for this task consists of two layers of Bidirectional Long Short-Term Memory (BiLSTM) followed by a linear layer for mapping audio to characters. The second architecture utilizes ContextNet [47] with unitary strides to maintain the frame rate of the encoder models. Additionally, we explore low-resource languages, specifically Welsh (Cymraeg) and Basque (Euskera) datasets extracted from CommonVoice 17.0 [48]. Here, we evaluate the performance using both the BiLSTM architecture and a two-layer dense neural network mapping frame representations to character probabilities. We use the Word Error Rate (WER) as the error metric for all ASR tasks.
- **Speaker Identification/Verification (SID, SV):** Speaker Identification involves classifying each utterance by its speaker identity as a multi-class classification, with the same predefined set of speakers for both training and testing. The evaluation metric is the accuracy. Automatic Speaker Verification (ASV), instead, involves training a binary classifier to determine whether the speakers in a pair of utterances are the same. The evaluation metric adopted in this case is the equal error rate

(EER). We use the widely-used VoxCeleb1 [49] train and test splits for both tasks. First, we test the X-vector [50] architecture with AM-Softmax [51] loss for training the speaker embeddings. For verification, we use the cosine similarity between speaker representations. As a second architecture, we replace the X-vectors with an ECAPA-TDNN neural network [52].

- **Emotion Recognition (ER):** The task involves predicting one of the four classes: *happy*, *sad*, *angry*, and *neutral*. We use the popular IEMOCAP [53] dataset, which contains about 10k samples from 10 speakers. As a first architecture, we directly input the representations into a linear classification layer after averaging them along the time axis. For the second downstream architecture, we use ECAPA-TDNN. The evaluation metric is the accuracy.
- **Intent Classification (IC):** This task aims to determine the intention or purpose given utterance a speech recording. In particular, we here aim to classify each utterance into one of 18 scenarios, including *calendar*, *email*, and *alarm*. For this task, we utilize the SLURP dataset [54], which comprises around 72k audio recordings of single-turn user interactions with a home assistant. We employ ECAPA-TDNN and a two-layer BiLSTM (followed by a linear classifier) as downstream architectures. We evaluate the performance using the accuracy.
- **Keyword Spotting (KS):** Keyword Spotting involves detecting predefined keywords by classifying utterances into a set of specified words. We use the Speech Commands dataset v1.0 [55] for this task, as done in SUPERB. The dataset includes ten classes of keywords, a class for silence, and an unknown class to account for false positives. We employ both the X-vector and ECAPA-TDNN architectures. The evaluation metric is the accuracy.

4.2 Generative Tasks

- **Speech Enhancement (SE):** Speech enhancement aims to improve audio quality by cleaning up noisy input recordings. For this task, we utilize the popular VoiceBank dataset [56]. We employ two downstream architectures: a non-autoregressive Conformer encoder [57], and a convolutional recurrent deep neural network (CRDNN). The input tokens are extracted from the noisy signal, while target tokens from the clean one. Training is performed using the cross-entropy loss. The speech quality is assessed using the deep noise suppression mean opinion score (DNSMOS) [58]. The intelligibility is evaluated through the differential word error rate (dWER) [59], which measures the WER between the transcribed enhanced signal and the transcribed target signal. The transcriptions are obtained using the small version of Whisper [60]. Additionally, to measure speaker fidelity, we use the cosine similarity (SpkSim) between X-vectors extracted from the enhanced signal and the target signal using the base variant of WavLM [3] fine-tuned for speaker verification.
- **Speech Separation (SS):** Speech separation aims to isolate individual voices from an audio recording containing multiple speakers. For this task, we use the Libri2Mix dataset [61], which contains mixtures of two overlapping speakers. We employ two downstream architectures: a non-autoregressive Conformer encoder [57], and a convolutional recurrent deep neural network (CRDNN). The input tokens are extracted from the mixture, while target tokens from each of the two sources. Training is performed using the cross-entropy loss with permutation invariant training [62]. To measure performance, we employ the same metrics as speech enhancement.
- **Text-to-Speech (TTS):** The task involves generating raw speech audio from a given text input. For downstream architectures, we consider both a small and a large autoregressive Transformer [63]. We train all models on the LJSpeech dataset [64]. To assess the speech quality, we use a pretrained UTokyo-SaruLab System (UTMOS) [65], which is specifically designed for TTS and trained to predict human Mean Opinion scores. To measure pronunciation accuracy, we use the dWER metric. This involves comparing the transcriptions provided by a speech recognizer for the synthesized speech sample with the transcriptions from the ground truth. As for enhancement and separation, we considered the small version of Whisper [60].

5 Results

5.1 Comparison of Discrete Audio Models

Tables 2 and 3 show the performance of discriminative and generative tasks among the two downstream architectures explored. For each value in the table, we report the best performance obtained

Table 2: Benchmarking results for discriminative tasks.

Models/Tasks	ASR-En		ASR-multiling		ER	IC	KS	SI	SV
	WER ↓		WER ↓		ACC ↑	ACC ↑	ACC ↑	ACC ↑	EER ↓
	Clean	Other	Welsh	Basque					
<i>Low Bitrate</i>									
Discrete Hubert	8.99	21.14	58.50	26.83	57.20	68.70	90.54	0.90	24.99
Discrete WavLM	11.72	27.56	60.37	28.63	59.80	73.40	97.94	0.70	26.02
Discrete Wav2Vec2	12.14	28.65	66.30	32.25	57.80	74.10	96.16	0.40	33.53
EnCodec	52.37	77.04	92.01	58.20	44.70	31.50	86.00	58.30	17.40
DAC	63.96	83.61	94.86	66.29	49.20	22.10	81.00	45.10	20.62
SpeechTokenizer	19.77	43.12	76.67	47.92	49.10	57.90	95.09	47.40	20.41
<i>Medium Bitrate</i>									
Discrete Hubert	7.91	18.95	54.77	23.63	62.10	70.50	94.69	67.40	15.71
Discrete WavLM	8.52	20.35	54.22	22.06	57.60	78.00	98.09	80.80	8.00
Discrete Wav2Vec2	8.76	21.32	60.39	26.64	59.10	75.10	96.64	65.47	17.64
EnCodec	46.80	74.24	91.23	47.95	51.30	31.40	88.70	91.90	7.81
DAC	59.54	81.48	97.43	56.16	45.80	18.90	76.60	83.80	11.78
SpeechTokenizer	18.32	41.21	75.17	38.94	52.10	57.80	94.86	91.40	7.88
<i>High Bitrate</i>									
EnCodec	45.18	72.56	93.40	87.65	46.40	19.60	83.60	92.81	7.18
DAC	99.53	99.38	99.40	99.68	46.00	15.70	75.20	85.61	10.89
<i>Continuous Baseline</i>									
SSL	3.370	7.04	41.77	14.32	63.10	86.10	99.00	99.70	2.10

Table 3: Benchmarking results for generative tasks. N.C. indicates “Not Converged”.

Models/Tasks	SE			SS			TTS	
	DNSMOS ↑	dWER ↓	SpkSim ↑	DNSMOS ↑	dWER ↓	SpkSim ↑	UTMOS ↑	dWER ↓
<i>Low Bitrate</i>								
Discrete HuBERT	3.33	15.47	0.824	3.52	80.86	0.840	3.24	2.55
Discrete WavLM	3.26	16.52	0.830	3.43	62.34	0.847	3.84	3.01
Discrete Wav2Vec2	3.55	18.86	0.779	3.75	96.70	0.787	3.32	3.45
EnCodec	3.15	34.35	0.852	3.11	83.55	0.877	1.46	8.85
DAC	3.30	57.41	0.853	3.01	102.00	0.854	1.97	10.68
SpeechTokenizer	3.18	30.13	0.858	3.13	85.25	0.874	2.51	3.69
<i>Medium Bitrate</i>								
Discrete HuBERT	3.48	12.62	0.875	3.70	66.29	0.891	3.80	3.40
Discrete WavLM	3.48	10.18	0.889	3.68	34.03	0.912	3.82	2.45
Discrete Wav2Vec2	3.54	17.60	0.858	3.75	78.42	0.866	3.68	2.89
EnCodec	3.10	19.07	0.885	3.09	48.57	0.906	1.50	94.6
DAC	3.49	31.14	0.906	3.26	55.43	0.924	1.71	71.26
SpeechTokenizer	3.49	23.44	0.876	3.42	60.75	0.906	1.96	53.26
<i>High Bitrate</i>								
EnCodec	2.87	68.22	0.814	2.95	97.73	0.839	N.C	N.C
DAC	2.95	46.07	0.860	2.53	208	0.784	N.C	N.C
<i>Continuous Baseline</i>								
SSL	3.49	4.92	0.928	3.68	9.97	0.939	3.71	2.94

with the two downstream architectures. Detailed results for each architecture, along with the settings for each experiment using continuous SSL models, are provided in Appendix E.

We observe a significant variation in the tokenizer performance across different tasks. This result suggests that the optimal choice of tokenizer depends on the specific task at hand. However, some interesting patterns emerge. For instance, semantic tokens significantly outperform compression tokens for most discriminative tasks. This trend is due to the ability of semantic tokens to capture high-level information from the audio signal as also observed in existing findings in the literature [44]. The only exceptions are speaker recognition tasks, where EnCodec achieves the best results. This suggests that compression tokens better encode speaker information. It is consistent with a previous study [66] that shows discrete tokens obtained from quantization of SSL layers remove speaker information.

Semantic tokens show the best performance for generative tasks as well, achieving the highest MOS and dWER scores, indicating better overall quality and intelligibility in the generated outputs.

Table 4: **(left)** Evaluating various discrete decoders on the speech re-synthesis task (medium bitrate). **(right)** Ranking aggregation for models (medium bitrate).

Models/Metrics	DNSMOS \uparrow	dWER \downarrow	SpkSim \uparrow
Discrete HuBERT	3.68	6.60	0.92
Discrete WavLM	3.64	5.19	0.94
Discrete Wav2Vec2	3.71	8.72	0.91
EnCodec	3.54	2.16	0.98
DAC	3.74	2.36	0.99
SpeechTokenizer	3.58	5.12	0.94
Continuous SSL	3.73	2.33	0.98

Model	Disc.	Gen.	Comb.
Discrete HuBERT	2.66	3.62	3.11
Discrete WavLM	2.00	2.75	1.94
Discrete Wav2Vec2	3.33	2.68	3.41
EnCodec	4.11	3.93	4.23
DAC	5.55	4.06	4.64
SpeechTokenizer	3.44	3.81	3.64

However, for preserving speaker identity, compression tokens are more effective, as shown by superior speaker similarity (SpkSim) metrics. We think our findings for generative tasks are particularly interesting. While prior research efforts [26, 39] explored the use of semantic tokens for generation, they did not include a comparison with the performance of compression tokens. It is important to remark that the success observed with both semantic tokens relies heavily on the effectiveness of the decoder architecture used in our benchmark. Our scalable decoder minimizes distortions and artifacts in the generated speech, leading to better performance on various generative tasks.

In Table 4 (right), we present the ranking aggregation for the considered tokenizers (medium bitrate). Each model is individually ranked for every task, and we compute the average position across all ranks. This analysis shows that discrete WavLM generates the top-performing audio tokens. While the continuous version of WavLM ranks highest in the SUPERB benchmark, our findings demonstrate for the first time that this model maintains strong performance even after tokenization.

Our comparison between discrete tokens and the best continuous baseline reveals a significant performance gap favoring continuous representations. This suggests that tokenization loses valuable information, such as phonetics, speaker identity, and emotion. Addressing this information loss is a key challenge for future generations of audio tokens.

5.2 Impact of Bitrate

We also study the impact of different bitrates on the performance of the tokenizers. Tables 2 and 3 show that a medium bitrate achieves the best results for both discriminative and generative tasks. Interestingly, higher bitrates, when available (e.g., for EnCodec and DAC), tend to degrade performance. While higher bitrates can potentially preserve more information, they also increase the output dimensionality of the model, making the task more challenging to solve. In some cases, we found the task so challenging with high bitrates that the model did not converge, as observed in the case of TTS. It is worth noting that semantic tokens have a lower bitrate than compression tokens, as shown in Table 1. For example, in the medium bitrate range, discrete WavLM has a bitrate of 2.9 kbps, while EnCodec has 6.0 kbps. This difference is due to the varying number of codebooks (6 vs. 8) and sampling rates (16 kHz vs. 24 kHz). Despite their lower bitrate, semantic tokens provide better performance.

Another aspect we investigate is the efficiency of the encoders and decoders, as this could impact some applications. Figure 2 shows the time and memory usage for each encoder-decoder pair across all bitrate ranges. For semantic tokens, the encoder is a large neural network and is computationally demanding. In contrast, the decoders are based on a compact HiFi-GAN model and are very efficient. For streaming tasks [67] where time and memory are critical, EnCodec turned out to be a better candidate due to the efficiency of both its encoder and decoder models.

5.3 Analysis of Discrete Audio Decoder

Finally, we present a comparative evaluation of the decoders in Table 4 (left). The decoder evaluation is conducted on the LibriSpeech test-clean subset using a speech re-synthesis task, where we extract the tokens from each discrete audio encoder and reconstruct the speech using the associated decoders. Then, we evaluate the reconstructed speech based on speaker similarity, Mean Opinion Score (MOS), and differential Word Error Rate (dWER). The goal of this experiment is to establish if a given system is able to provide a high-fidelity reconstruction of the input audio after encoding it in the discrete space. This is especially important to establish for generative tasks.

The results show that the built-in decoders of compression tokens outperform other models in preserving speaker similarity, further confirming that current semantic tokens do not adequately preserve speaker information. Compression-based tokens also achieve better dWER scores. However, in terms of speech quality (assessed with DNSMOS), there are no significant differences between semantic and compression-based tokens. This trend indicates that while semantic tokens produce good-quality audio, they may be slightly more prone to semantic degradation (e.g., mispronunciations of words or phonemes). As expected, continuous baselines perform better than their discrete counterparts. Additional analysis on low and high settings can be found in Appendix D.

6 Conclusion

This paper introduces DASB, a comprehensive benchmark designed to evaluate the performance of discrete audio tokens across diverse tasks of broad interest. We employ various evaluation metrics, downstream architectures, and bitrates for more robust comparisons. Interestingly, our findings reveal that semantic tokens outperform, on average, compression tokens in both generative and discriminative tasks. In particular, discrete WavLM emerged as the top-performing model, making it a natural candidate for adoption in multi-modal text+audio LLMs. A significant performance gap, however, persists when compared to traditional self-supervised continuous representations. This highlights the need for further research, which we believe is essential for better incorporating audio tokens into large multimodal language models.

One limitation we encountered is the proprietary nature of some audio tokenizers, such as Soundstream (**author?**) [43], which are not publicly accessible. Additionally, the benchmark is currently limited to speech tasks, but we plan to broaden it including music and sound processing. Our goal is to help the research community establish a shared benchmark and evaluation protocol for discrete audio representations. We will thus keep expanding DASB by continuously incorporating novel tokenizers and tasks.

7 Acknowledgements

We acknowledge the support of the Natural Sciences and Engineering Research Council of Canada (NSERC) and the Digital Research Alliance of Canada (alliancecan.ca). We thank OVHCloud for donating part of the GPU computing resources needed for this work.

References

- [1] Lawrence Rabiner and Biing-Hwang Juang. *Fundamentals of Speech Recognition*. Prentice-Hall Signal Processing Series, 1993.
- [2] Alexei Baevski, Yuhao Zhou, Abdelrahman Mohamed, and Michael Auli. wav2vec 2.0: A framework for self-supervised learning of speech representations. In *International Conference on Neural Information Processing Systems (NeurIPS)*, volume 33, pages 12449–12460, 2020.
- [3] Sanyuan Chen, Chengyi Wang, Zhengyang Chen, Yu Wu, Shujie Liu, Zhuo Chen, Jinyu Li, Naoyuki Kanda, Takuya Yoshioka, Xiong Xiao, et al. WavLM: Large-scale self-supervised pre-training for full stack speech processing. *IEEE Journal of Selected Topics in Signal Processing*, 16(6):1505–1518, 2022.
- [4] Wei-Ning Hsu, Benjamin Bolte, Yao-Hung Hubert Tsai, Kushal Lakhota, Ruslan Salakhutdinov, and Abdelrahman Mohamed. HuBERT: Self-supervised speech representation learning by masked prediction of hidden units. *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, 29:3451–3460, 2021.
- [5] Adam Polyak, Yossi Adi, Jade Copet, Eugene Kharitonov, Kushal Lakhota, Wei-Ning Hsu, Abdelrahman Mohamed, and Emmanuel Dupoux. Speech resynthesis from discrete disentangled self-supervised representations. In *Interspeech*, pages 3615–3619, 2021.
- [6] Dan Wells, Hao Tang, and Korin Richmond. Phonetic analysis of self-supervised representations of English speech. In *Interspeech*, pages 3583–3587, 2022.
- [7] Yu-An Chung, Yu Zhang, Wei Han, Chung-Cheng Chiu, James Qin, Ruoming Pang, and Yonghui Wu. w2v-BERT: Combining contrastive learning and masked language modeling for self-supervised speech pre-training. In *IEEE Automatic Speech Recognition and Understanding Workshop (ASRU)*, pages 244–250, 2021.

- [8] Xin Zhang, Dong Zhang, Shimin Li, Yaqian Zhou, and Xipeng Qiu. SpeechTokenizer: Unified speech tokenizer for speech large language models. In *International Conference on Learning Representations (ICLR)*, 2024.
- [9] Zhihao Du, Shiliang Zhang, Kai Hu, and Siqi Zheng. FunCodec: A fundamental, reproducible and integrable open-source toolkit for neural speech codec. *arXiv preprint arXiv:2309.07405*, 2023.
- [10] Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, et al. Llama 2: Open foundation and fine-tuned chat models. *arXiv preprint arXiv:2307.09288*, 2023.
- [11] Aakanksha Chowdhery, Sharan Narang, Jacob Devlin, Maarten Bosma, Gaurav Mishra, Adam Roberts, Paul Barham, Hyung Won Chung, Charles Sutton, Sebastian Gehrmann, et al. PaLM: scaling language modeling with pathways. *Journal of Machine Learning Research*, 24, 2024.
- [12] Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. BERT: Pre-training of deep bidirectional transformers for language understanding. In Jill Burstein, Christy Doran, and Thamar Solorio, editors, *Conference of the North American Chapter of the Association for Computational Linguistics (NAACL): Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 4171–4186, 2019.
- [13] Xiao Liu, Yanan Zheng, Zhengxiao Du, Ming Ding, Yujie Qian, Zhilin Yang, and Jie Tang. GPT understands, too. *AI Open*, 2023.
- [14] Aaron van den Oord, Oriol Vinyals, and Koray Kavukcuoglu. Neural discrete representation learning. In *Proceedings of the 31st International Conference on Neural Information Processing Systems, NIPS’17*, 2017.
- [15] Paul K. Rubenstein, Chulayuth Asawaroengchai, Duc Dung Nguyen, Ankur Bapna, Zalán Borsos, Félix de Chaumont Quitry, Peter Chen, Dalia El Badawy, Wei Han, Eugene Kharitonov, Hannah Muckenhirn, et al. AudioPaLM: A large language model that can speak and listen. *arXiv preprint arXiv:2306.12925*, 2023.
- [16] Jiaming Wang, Zhihao Du, Qian Chen, Yunfei Chu, Zhifu Gao, Zerui Li, Kai Hu, Xiaohuan Zhou, Jin Xu, Ziyang Ma, Wen Wang, Siqi Zheng, Chang Zhou, Zhijie Yan, and Shiliang Zhang. LauraGPT: Listen, attend, understand, and regenerate audio with GPT. *arXiv preprint arXiv:2310.04673*, 2023.
- [17] Tianrui Wang, Long Zhou, Ziqiang Zhang, Yu Wu, Shujie Liu, Yashesh Gaur, Zhuo Chen, Jinyu Li, and Furu Wei. ViOLA: Unified codec language models for speech recognition, synthesis, and translation. *arXiv preprint arXiv:2305.16107*, 2023.
- [18] Chengyi Wang, Sanyuan Chen, Yu Wu, Ziqiang Zhang, Long Zhou, Shujie Liu, Zhuo Chen, Yanqing Liu, Huaming Wang, Jinyu Li, Lei He, Sheng Zhao, and Furu Wei. Neural codec language models are zero-shot text to speech synthesizers. *arXiv preprint arXiv:2301.02111*, 2023.
- [19] Xiaofei Wang, Manthan Thakker, Zhuo Chen, Naoyuki Kanda, Sefik Emre Eskimez, Sanyuan Chen, Min Tang, Shujie Liu, Jinyu Li, and Takuya Yoshioka. SpeechX: Neural codec language model as a versatile speech transformer. *arXiv preprint arXiv:2308.06873*, 2023.
- [20] Andrea Agostinelli et al. MusicLM: Generating music from text. *arXiv preprint arXiv:2301.11325*, 2023.
- [21] Felix Kreuk, Gabriel Synnaeve, Adam Polyak, Uriel Singer, Alexandre Défossez, Jade Copet, Devi Parikh, Yaniv Taigman, and Yossi Adi. AudioGen: Textually guided audio generation. In *International Conference on Learning Representations (ICLR)*, 2023.
- [22] Gemini Team, Google. Gemini: A family of highly capable multimodal models. *arXiv preprint arXiv:2312.11805*, 2023.
- [23] Ian J. Goodfellow, Yoshua Bengio, and Aaron Courville. *Deep Learning*. MIT Press, 2016.
- [24] Haibin Wu, Ho-Lam Chung, Yi-Cheng Lin, Yuan-Kuei Wu, Xuanjun Chen, Yu-Chi Pai, Hsiu-Hsuan Wang, Kai-Wei Chang, Alexander H Liu, and Hung-yi Lee. Codec-SUPERB: An in-depth analysis of sound codec models. *arXiv preprint arXiv:2402.13071*, 2024.
- [25] Krishna C. Puvvada, Nithin Rao Koluguri, Kunal Dhawan, Jagadeesh Balam, and Boris Ginsburg. Discrete audio representation as an alternative to Mel-spectrograms for speaker and speech recognition. In *IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 12111–12115, 2024.
- [26] Ziqian Wang, Xinfu Zhu, Zihan Zhang, YuanJun Lv, Ning Jiang, Guoqing Zhao, and Lei Xie. SELM: Speech enhancement using discrete tokens and language models. In *IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 11561–11565, 2024.
- [27] Dong Zhang, Rong Ye, Tom Ko, Mingxuan Wang, and Yaqian Zhou. DUB: Discrete unit back-translation for speech translation. In *Findings of the Association for Computational Linguistics: ACL*, pages 7147–7164, 2023.

- [28] Xuankai Chang, Brian Yan, Kwanghee Choi, Jee-Weon Jung, Yichen Lu, Soumi Maiti, Roshan Sharma, Jiatong Shi, Jinchuan Tian, Shinji Watanabe, Yuya Fujita, et al. Exploring speech recognition, translation, and understanding with discrete speech units: A comparative study. In *IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 11481–11485, 2024.
- [29] Alexandre Défossez, Jade Copet, Gabriel Synnaeve, and Yossi Adi. High fidelity neural audio compression. *Transactions on Machine Learning Research (TMLR)*, 2023.
- [30] Rithesh Kumar, Prem Seetharaman, Alejandro Luebs, Ishaan Kumar, and Kundan Kumar. High-fidelity audio compression with improved RVQGAN. In *International Conference on Neural Information Processing Systems (NeurIPS)*, 2023.
- [31] Salah Zaiem, Youcef Kemiche, Titouan Parcollet, Slim Essid, and Mirco Ravanelli. Speech self-supervised representation benchmarking: Are we doing it right? In *Interspeech*, pages 2873–2877, 2023.
- [32] Mirco Ravanelli, Titouan Parcollet, Peter Plantinga, Aku Rouhe, Samuele Cornell, Loren Lugosch, Cem Subakan, Nauman Dawalatabad, Abdelwahab Heba, Jianyuan Zhong, et al. SpeechBrain: A general-purpose speech toolkit. *arXiv preprint arXiv:2106.04624*, 2021.
- [33] Xuankai Chang, Brian Yan, Yuya Fujita, Takashi Maekaku, and Shinji Watanabe. Exploration of efficient end-to-end ASR using discretized input from self-supervised learning. In *Interspeech*, pages 1399–1403, 2023.
- [34] Yifan Yang, Feiyu Shen, Chenpeng Du, Ziyang Ma, Kai Yu, Daniel Povey, and Xie Chen. Towards universal speech discrete tokens: A case study for ASR and TTS. In *IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 10401–10405, 2024.
- [35] Hakan Erdogan, Scott Wisdom, Xuankai Chang, Zalán Borsos, Marco Tagliasacchi, Neil Zeghidour, and John R Hershey. TokenSplit: Using discrete speech representations for direct, refined, and transcript-conditioned speech separation and recognition. In *Interspeech*, pages 3462–3466, 2023.
- [36] Siyang Wang and Éva Székely. Evaluating text-to-speech synthesis from a large discrete token-based speech language model. In *Joint International Conference on Computational Linguistics, Language Resources and Evaluation (LREC-COLING)*, pages 6464–6474, 2024.
- [37] Chengyi Wang, Sanyuan Chen, Yu Wu, Ziqiang Zhang, Long Zhou, Shujie Liu, Zhuo Chen, Yanqing Liu, Huaming Wang, Jinyu Li, et al. Neural codec language models are zero-shot text to speech synthesizers. *arXiv preprint arXiv:2301.02111*, 2023.
- [38] Eugene Kharitonov, Damien Vincent, Zalán Borsos, Raphaël Marinier, Sertan Girgin, Olivier Pietquin, Matt Sharifi, Marco Tagliasacchi, and Neil Zeghidour. Speak, read and prompt: High-fidelity text-to-speech with minimal supervision. *Transactions of the Association for Computational Linguistics*, 11:1703–1718, 2023.
- [39] Pooneh Mousavi, Jarod Duret, Salah Zaiem, Luca Della Libera, Artem Ploujnikov, Cem Subakan, and Mirco Ravanelli. How should we extract discrete audio tokens from self-supervised models?, 2024.
- [40] Shu wen Yang, Po-Han Chi, Yung-Sung Chuang, Cheng-I Jeff Lai, Kushal Lakhotia, Yist Y. Lin, Andy T. Liu, Jiatong Shi, Xuankai Chang, Guan-Ting Lin, et al. SUPERB: Speech Processing Universal PERFORMANCE Benchmark. In *Interspeech*, pages 1194–1198, 2021.
- [41] Jean-Marc Valin, Koen Vos, and Timothy Terriberry. Definition of the Opus audio codec. Technical report, 2012.
- [42] Martin Dietz, Markus Multrus, Vaclav Eksler, Vladimir Malenovsky, Erik Norvell, Harald Pobloth, Lei Miao, Zhe Wang, Lasse Laaksonen, Adriana Vasilache, et al. Overview of the EVS codec architecture. In *IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 5698–5702, 2015.
- [43] Neil Zeghidour, Alejandro Luebs, Ahmed Omran, Jan Skoglund, and Marco Tagliasacchi. SoundStream: An end-to-end neural audio codec. *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, pages 495–507, 2021.
- [44] Zalán Borsos, Raphaël Marinier, Damien Vincent, Eugene Kharitonov, Olivier Pietquin, Matt Sharifi, Dominik Roblek, Olivier Teboul, David Grangier, Marco Tagliasacchi, and Neil Zeghidour. AudioLM: A language modeling approach to audio generation. *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, 31:2523–2533, 2023.
- [45] Dongchao Yang, Songxiang Liu, Rongjie Huang, Jinchuan Tian, Chao Weng, and Yuexian Zou. HiFi-Codec: Group-residual vector quantization for high fidelity audio codec. *arXiv preprint arXiv:2305.02765*, 2023.
- [46] Matěj Korvas, Ondřej Plátek, Ondřej Dušek, Lukáš Žilka, and Filip Jurčiček. Free English and Czech telephone speech corpus shared under the CC-BY-SA 3.0 license. In *International Conference on Language Resources and Evaluation (LREC)*, pages 4423–4428, 2014.

- [47] Wei Han, Zhengdong Zhang, Yu Zhang, Jiahui Yu, Chung-Cheng Chiu, James Qin, Anmol Gulati, Ruoming Pang, and Yonghui Wu. ContextNet: Improving convolutional neural networks for automatic speech recognition with global context. In *Interspeech*, pages 3610–3614, 2020.
- [48] Rosana Ardila, Megan Branson, Kelly Davis, Michael Kohler, Josh Meyer, Michael Henretty, Reuben Morais, Lindsay Saunders, Francis Tyers, and Gregor Weber. Common Voice: A massively-multilingual speech corpus. In *Language Resources and Evaluation Conference (LREC)*, pages 4218–4222, 2020.
- [49] Arsha Nagrani, Joon Son Chung, and Andrew Senior. VoxCeleb: A large-scale speaker identification dataset. In *Interspeech*, pages 2616–2620, 2017.
- [50] David Snyder, Daniel Garcia-Romero, Gregory Sell, Daniel Povey, and Sanjeev Khudanpur. X-vectors: Robust DNN embeddings for speaker recognition. In *IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 5329–5333, 2018.
- [51] Feng Wang, Jian Cheng, Weiyang Liu, and Haijun Liu. Additive margin softmax for face verification. *IEEE Signal Processing Letters*, 25(7):926–930, 2018.
- [52] Brecht Desplanques, Jenthe Thienpondt, and Kris Demuynck. ECAPA-TDNN: Emphasized channel attention, propagation and aggregation in TDNN based speaker verification. In *Interspeech*, pages 3830–3834, 2020.
- [53] Carlos Busso, Murtaza Bulut, Chi-Chun Lee, Abe Kazemzadeh, Emily Mower, Samuel Kim, Jeannette N Chang, Sungbok Lee, and Shrikanth S Narayanan. IEMOCAP: Interactive emotional dyadic motion capture database. *Language resources and evaluation*, 42:335–359, 2008.
- [54] Emanuele Bastianelli, Andrea Vanzo, Pawel Swietojanski, and Verena Rieser. SLURP: A spoken language understanding resource package. In *Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 7252–7262, 2020.
- [55] Pete Warden. Speech Commands: A dataset for limited-vocabulary speech recognition. *arXiv preprint arXiv:1804.03209*, 2018.
- [56] Cassia Valentini-Botinhao, Xin Wang, Shinji Takaki, and Junichi Yamagishi. Investigating RNN-based speech enhancement methods for noise-robust text-to-speech. In *Speech Synthesis Workshop*, pages 146–152, 2016.
- [57] Anmol Gulati, James Qin, Chung-Cheng Chiu, Niki Parmar, Yu Zhang, Jiahui Yu, Wei Han, Shibo Wang, Zhengdong Zhang, Yonghui Wu, and Ruoming Pang. Conformer: Convolution-augmented transformer for speech recognition. In *Interspeech*, pages 5036–5040, 2020.
- [58] Chandan KA Reddy, Vishak Gopal, and Ross Cutler. DNSMOS P.835: A non-intrusive perceptual objective speech quality metric to evaluate noise suppressors. In *IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 2022.
- [59] Zhong-Qiu Wang et al. Sequential multi-frame neural beamforming for speech separation and enhancement. In *IEEE Spoken Language Technology (SLT) Workshop*, pages 905–911, 2021.
- [60] Alec Radford, Jong Wook Kim, Tao Xu, Greg Brockman, Christine McLeavey, and Ilya Sutskever. Robust speech recognition via large-scale weak supervision. *arXiv preprint arXiv:2212.04356*, 2022.
- [61] Joris Cosentino, Manuel Pariente, Samuele Cornell, Antoine Deleforge, and Emmanuel Vincent. LibriMix: An open-source dataset for generalizable speech separation. *arXiv preprint arXiv:2005.11262*, 2020.
- [62] M. Kolbæk, D. Yu, Z.-H. Tan, and J. Jensen. Multitalker speech separation with utterance-level permutation invariant training of deep recurrent neural networks. *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, 25:1901–1913, 2017.
- [63] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez, Lukasz Kaiser, and Illia Polosukhin. Attention is all you need. In *International Conference on Neural Information Processing Systems (NeurIPS)*, pages 6000–6010, 2017.
- [64] Keith Ito. The LJ speech dataset. <https://keithito.com/LJ-Speech-Dataset/>, 2017.
- [65] Saeki Takaaki et al. UTMOS: UTokyo-SaruLab System for VoiceMOS Challenge 2022. In *Interspeech*, pages 4521–4525, 2022.
- [66] Benjamin van Niekerk, Marc-André Carbonneau, Julian Zaïdi, Matthew Baas, Hugo Seuté, and Herman Kamper. A comparison of discrete and soft speech units for improved voice conversion. In *IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 6562–6566, 2022.
- [67] Yi-Chiao Wu, Israel D. Gebru, Dejan Marković, and Alexander Richard. Audiodec: An open-source streaming high-fidelity neural audio codec. In *IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 1–5, 2023.
- [68] Harishchandra Dubey, Ashkan Aazami, Vishak Gopal, Babak Naderi, Sebastian Braun, Ross Cutler, Alex Ju, Mehdi Zohourian, Min Tang, Mehrsa Golestaneh, et al. ICASSP 2023 deep noise suppression challenge. *IEEE Open Journal of Signal Processing*, 2024.

- [69] Jort F Gemmeke, Daniel PW Ellis, Dylan Freedman, Aren Jansen, Wade Lawrence, R Channing Moore, Manoj Plakal, and Marvin Ritter. Audio Set: An ontology and human-labeled dataset for audio events. In *IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 776–780, 2017.
- [70] Eduardo Fonseca, Xavier Favory, Jordi Pons, Frederic Font, and Xavier Serra. FSD50K: an open dataset of human-labeled sound events. *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, 30:829–852, 2021.
- [71] Dmitry Bogdanov, Minz Won, Philip Tovstogan, Alastair Porter, and Xavier Serra. The MTG-Jamendo dataset for automatic music tagging. In *International Conference on Machine Learning (ICML)*, 2019.
- [72] Gautham J Mysore. Can we automatically transform speech recorded on common consumer devices in real-world environments into professional production quality speech?—A dataset, insights, and challenges. *IEEE Signal Processing Letters*, 22(8):1006–1010, 2014.
- [73] Junichi Yamagishi, Christophe Veaux, and Kirsten MacDonald. CSTR VCTK Corpus: English multi-speaker corpus for CSTR voice cloning toolkit (version 0.92), 2019.
- [74] Zafar Rafii, Antoine Liutkus, Fabian-Robert Stöter, Stylianos Ioannis Mimilakis, and Rachel Bittner. The MUSDB18 corpus for music separation. <https://doi.org/10.5281/zenodo.1117372>, 2017.
- [75] Jonathan Shen, Ruoming Pang, Ron J. Weiss, Mike Schuster, Navdeep Jaitly, Zongheng Yang, Zhifeng Chen, Yu Zhang, Yuxuan Wang, Rj Skerrv-Ryan, Rif A. Saurous, Yannis Agiomvrgiannakis, and Yonghui Wu. Natural TTS synthesis by conditioning WaveNet on Mel spectrogram predictions. In *IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 4779–4783, 2018.
- [76] Hideyuki Tachibana, Katsuya Uenoyama, and Shunsuke Aihara. Efficiently trainable text-to-speech system based on deep convolutional networks with guided attention. In *IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 4784–4788, 2018.

A General Information

A.1 Computational Resources

We designed our benchmark to be computationally accessible. Every task runs on GPUs with 32 GB or more of VRAM. Tasks like keyword spotting takes only 8 hours, while speech recognition (e.g. ASR-Basque) might require about 30 hours on a single NVIDIA V100 GPU.

A.2 Impact

We believe DASB can have a positive impact on the research community. We do not foresee a direct negative societal impact or misuse of our benchmark. However, we acknowledge that DASB can potentially accelerate progress in multi-modal large language models, which, in turn, have a wide range of potential positive and negative uses that society is still working to assess.

A.3 Hosting and Maintenance Plan

DASB platform is hosted and version-tracked via GitHub. It is available at <https://github.com/speechbrain/benchmarks>. DASB is a community-driven and open-source initiative. We plan to extend it by running additional experiments and including new audio tokenizers and tasks. We welcome external contributors.

A.4 Licensing

Our work is licensed under Apache 2.0 (<https://www.apache.org/licenses/LICENSE-2.0>).

Table 5: Licenses for the models used in our benchmark.

Model	License
HuBERT-large	Apache 2.0
WavLM-large	ATTRIBUTION-SHAREALIKE 2.0
Wav2vec2-large	Apache 2.0
EnCodec	MIT license
DAC	MIT license
SpeechTokenizer	Apache 2.0

A.5 Author Statement

We, the authors, will bear all responsibility in case of violation of rights.

B Discrete Audio Models Details

Table 6: Features of the Considered Discrete Audio Encoders.

Model	Dataset	Repo
Discrete Hubert [39]	LibriSpeech960[46]	huggingface.co/poonehmousavi/SSL_Quantization
Discrete WavLM [39]	LibriSpeech960[46]	huggingface.co/poonehmousavi/SSL_Quantization
Discrete Wav2Vec2 [39]	LibriSpeech960[46]	huggingface.co/poonehmousavi/SSL_Quantization
EnCodec [29]	DNS [68], CommonVoice [48], AudioSet [69], FSD50K [70], and Jamendo [71]	github.com/facebookresearch/encodec
DAC [30]	DAPS[72], DNS [68], CommonVoice [48], VCTK [73], MUSDB [74], and Jamendo [71]	github.com/descriptinc/descript-audio-codec
SpeechTokenizer [8]	LibriSpeech960[46]	github.com/ZhangXInFD/SpeechTokenizer

C Dataset and Downstream Models

Table 7 provides a summary of the datasets and the two downstream architectures used for each task.

Table 7: Dataset and Downstream Models

Dataset	Task	1st Architecture	2nd Architecture	Dataset Link
LibriSpeech [46]	Speech Recognition	BiLSTM	ContextNet	openslr.org/12
CommonVoice 17.0 [48]	Speech Recognition	BiLSTM	Linear	commonvoice.mozilla.org/en/datasets
VoxCeleb1 [49]	speaker verification/identification	ECAPA-TDNN	X-Vectors	robots.ox.ac.uk/vgg/data/voxceleb/vox1.html
IEMOCAP [53]	Emotion Recognition	ECAPA-TDNN	Time-Pooling + Linear	sail.usc.edu/iemocap/
Speech Commands [55]	Keyword Spotting	X -Vectors	ECAPA-TDNN	tensorflow.org/datasets/catalog/speech_commands
SLURP [54]	Intent Classification	BiLSTM + Linear	Time-Pooling + Linear	zenodo.org/record/4274930
VoiceBank [56]	Speech Enhancement	Conformer	CRDNN	datashare.ed.ac.uk/handle/10283/2791
Libri2Mix [61]	Speech Separation	Conformer	CRDNN	github.com/JorisCos/LibriMix
LJSpeech [64]	Text-to-Speech	Shallow Transformer	Deep Transformer	keithito.com/LJ-Speech-Dataset/

D Additional Analysis of Discrete Audio Decoders

In this section, we expand on the results from Section 5.3 by including low and high bitrates in addition to the medium bitrate. Additionally, for speaker similarity, we measure the cosine similarity between X-vectors extracted from the reconstructed and target signals using two different models: WavLM (SpkSim WavLM) and ECAPA-TDNN (SpkSim ECAPA), both fine-tuned for speaker verification. When analyzing low and high bitrate settings, distinct trends emerge compared to the medium bitrate. At low bitrates, the models perform worse in terms of speaker similarity, MOS, and dWER, as expected. This is particularly pronounced for compression-based decoders, where the degradation is more significant in terms of dWER. In contrast, at high bitrate, there is an overall small improvement in all metrics. In particular, the DAC model consistently outperforms EnCodec across all evaluated metrics, even for high bitrate settings.

The analysis shows that bitrate significantly impacts the performance of discrete decoders. Higher bitrates better preserve speech characteristics and result in lower error rates, while lower bitrates degrade these aspects. This highlights the trade-off between bitrate and speech synthesis quality.

Table 8: Evaluation of various discrete decoders for the speech re-synthesis task at low, medium, and high bitrates.

Models/Metrics	SpkSim ECAPA \uparrow	SpkSim WavLM \uparrow	DNSMOS \uparrow	dWER \downarrow
<i>Low Bitrate</i>				
Discrete Hubert	0.34	0.87	3.51	8.25
Discrete WavLM	0.34	0.88	3.45	7.01
Discrete Wav2Vec2	0.28	0.82	3.73	10.58
EnCodec	0.52	0.92	3.20	11.71
DAC	0.54	0.91	3.42	14.02
SpeechTokenizer	0.22	0.72	3.21	45.7
<i>Medium Bitrate</i>				
Discrete Hubert	0.47	0.92	3.68	6.60
Discrete WavLM	0.53	0.94	3.64	5.19
Discrete Wav2Vec2	0.43	0.91	3.71	8.72
EnCodec	0.87	0.98	3.54	2.16
DAC	0.87	0.99	3.74	2.36
SpeechTokenizer	0.65	0.94	3.58	5.12
<i>High Bitrate</i>				
EnCodec	0.94	0.99	3.69	1.47
DAC	0.98	100	3.79	0.73

E Additional Results

Tables 9 - 12 show the results obtained with 2 different downstream architectures. Note that table 7 indicates the first and second architectures explored for each task. For the continuous baseline, we follow the same architecture as the discrete experiments except for TTS. For the TTS continuous baseline, we use a modified Tacotron2 [75] architecture enhanced with guided attention [76] that predicts SSL representations instead of Mel spectrograms.

Varying the architecture of the downstream decoder leads to significant variations in task performance. For ASR tasks, BiLSTM performs better. For classification tasks, ECAPA-TDNN shows the best performance, except for keyword spotting where X-vector is slightly better. For speech enhancement and separation, Conformer shows the best performance. For TTS, a notable pattern is observed: semantic tokens yield the best results with shallow models, while acoustic and hybrid tokens perform better with deeper models but still underperform compared to semantic tokens. One reason might be that discrete SSL models retain higher-level features closer to phonetic transcriptions, requiring lower-capacity models to capture the relationship between raw text and such representations. Higher-capacity models can lead to slower training and potential overfitting. In contrast, shallow models appear to underfit acoustic tokens, resulting in high dWERs and speech-like sounds with only surface resemblance to the original sentence, rather than intelligible speech.

Table 9: Results for discriminative tasks with the first downstream architecture.

Models/Tasks	ASR-En		ASR-multiling		ER	IC	KS	SI	SV
	WER ↓		WER ↓		ACC ↑	ACC ↑	ACC ↑	ACC ↑	EER ↓
	Clean	Other	Welsh	Basque					
<i>Low Bitrate</i>									
Discrete Hubert	8.99	21.14	58.50	26.83	57.20	68.70	90.54	0.90	24.99
Discrete WavLM	11.72	27.56	60.37	28.63	59.80	73.40	97.94	0.70	26.02
Discrete Wav2Vec2	12.14	28.65	66.30	32.25	57.80	74.10	96.16	0.40	33.53
EnCodec	52.37	77.04	92.01	58.20	44.70	31.50	86.00	58.30	17.40
DAC	63.96	83.61	94.86	66.29	49.20	22.10	81.00	1.10	29.99
SpeechTokenizer	19.77	43.12	76.67	47.92	49.10	57.90	95.09	47.40	20.41
<i>Medium Bitrate</i>									
Discrete Hubert	7.91	18.95	54.77	23.63	62.10	70.50	94.69	67.40	15.71
Discrete WavLM	8.52	20.35	54.22	22.06	57.60	78.00	98.09	80.80	8.00
Discrete Wav2Vec2	8.76	21.32	60.39	26.64	59.10	75.10	96.64	65.47	17.64
EnCodec	46.80	74.24	91.23	47.95	51.30	31.40	88.70	91.90	7.81
DAC	59.54	81.48	97.43	56.16	45.80	18.90	76.60	83.80	11.78
SpeechTokenizer	18.32	41.21	75.17	38.94	52.10	57.80	94.86	91.40	7.88
<i>High Bitrate</i>									
EnCodec	45.18	72.56	93.40	87.65	46.40	19.60	83.60	92.81	7.18
DAC	99.53	99.38	99.40	99.74	46.00	15.70	75.20	85.61	10.89
<i>Continuous Baseline</i>									
SSL	3.370	7.04	41.77	14.32	63.10	86.10	99.00	99.70	2.10

Table 10: Results for discriminative tasks with the second downstream architecture.

Models/Tasks	ASR-En		ASR-multiling		ER	IC	KS	SI	SV
	WER ↓		WER ↓		ACC ↑	ACC ↑	ACC ↑	ACC ↑	EER ↓
	Clean	Other	Welsh	Basque					
<i>Low Bitrate</i>									
Discrete Hubert	11.99	23.45	97.30	99.20	61.40	57.80	90.54	15.60	18.34
Discrete WavLM	14.98	30.32	100.00	99.29	61.20	57.70	97.80	14.00	18.45
Discrete Wav2Vec2	15.45	35.30	99.89	98.39	59.50	60.20	96.52	5.80	23.5830
EnCodec	90.84	94.97	99.88	100.00	40.20	18.40	88.50	34.70	23.08
DAC	125.00	119.00	100.00	100.00	47.20	17.70	83.90	21.50	27.92
SpeechTokenizer	26.50	47.91	100.00	99.11	50.40	49.10	94.55	24.50	25.92
<i>Medium Bitrate</i>									
Discrete Hubert	10.91	21.65	95.81	97.20	64.80	59.10	94.38	14.80	17.67
Discrete WavLM	11.12	22.63	96.51	97.38	60.60	63.80	97.85	25.60	15.74
Discrete Wav2Vec2	12.48	25.40	94.34	95.76	61.90	63.00	96.92	11.70	19.07
EnCodec	124.00	119.00	99.82	99.98	41.50	18.20	89.10	30.10	21.73
DAC	124.00	122.00	99.96	100.00	46.80	16.40	80.30	15.90	29.75
SpeechTokenizer	118.00	117.00	97.08	96.49	56.60	47.60	89.10	32.80	20.15
<i>High Bitrate</i>									
EnCodec	124.00	122.00	100.00	99.93	43.40	17.10	80.40	23.40	25.52
DAC	122.00	122.00	99.74	100.00	47.70	15.40	76.00	16.40	29.94
<i>Continuous Baseline</i>									
SSL	10.05	13.80	68.72	48.60	68.60	75.20	98.70	88.40	4.31

Table 11: Results for generative tasks with the first downstream architecture. N.C. indicates "Not Converged".

Models/Tasks	SE			SS			TTS	
	DNSMOS ↑	dWER ↓	SpkSim ↑	DNSMOS ↑	dWER ↓	SpkSim ↑	UTMOS ↑	dWER ↓
<i>Low Bitrate</i>								
Discrete Hubert	3.33	15.47	0.824	3.52	80.86	0.840	3.25	2.93
Discrete WavLM	3.26	16.52	0.830	3.43	62.34	0.847	2.74	12.69
Discrete Wav2Vec2	3.55	18.86	0.779	3.75	96.70	0.787	3.32	3.45
EnCodec	3.15	34.35	0.852	3.11	83.55	0.877	1.46	8.84
DAC	3.30	57.41	0.853	3.01	102.00	0.854	1.97	10.66
SpeechTokenizer	3.18	30.13	0.858	3.13	85.25	0.874	2.55	16.42
<i>Medium Bitrate</i>								
Discrete HuBERT	3.48	12.62	0.875	3.70	66.29	0.891	3.78	16.09
Discrete WavLM	3.48	10.18	0.889	3.68	34.03	0.912	3.77	14.76
Discrete Wav2Vec2	3.54	17.60	0.858	3.75	78.42	0.866	3.68	5.98
EnCodec	3.10	19.07	0.885	3.09	48.57	0.906	1.43	92.4
DAC	3.49	31.14	0.906	3.26	55.43	0.924	1.71	71.25
SpeechTokenizer	3.49	23.44	0.876	3.42	60.75	0.906	1.97	53.26
<i>High Bitrate</i>								
EnCodec	2.87	68.22	0.814	2.95	97.73	0.839	N.C	N.C
DAC	2.95	46.07	0.860	2.53	208	0.784	N.C	N.C
<i>Continuous Baseline</i>								
SSL	3.49	4.92	0.928	3.68	9.97	0.939	2.86	4.687

Table 12: Results for generative tasks with the second downstream architecture. N.C. indicates “Not Converged”.

Models/Tasks	SE			SS			TTS	
	DNSMOS \uparrow	dWER \downarrow	SpkSim \uparrow	DNSMOS \uparrow	dWER \downarrow	SpkSim \uparrow	UTMOS \uparrow	dWER \downarrow
<i>Low Bitrate</i>								
Discrete HuBERT	3.31	13.98	0.821	3.52	97.58	0.817	3.24	2.55
Discrete WavLM	3.27	16.50	0.825	3.44	60.12	0.834	3.84	3.01
Discrete Wav2Vec2	3.55	17.17	0.777	3.74	95.20	0.785	3.32	3.45
EnCodec	3.16	45.07	0.851	2.32	99.17	0.495	1.40	53.50
DAC	3.31	59.28	0.863	2.88	138	0.804	1.81	19.77
SpeechTokenizer	3.32	27.54	0.860	3.14	90.68	0.846	2.51	3.69
<i>Medium Bitrate</i>								
Discrete HuBERT	3.48	13.71	0.857	3.72	91.63	0.843	3.80	3.40
Discrete WavLM	3.47	9.63	0.878	3.68	37.53	0.902	3.82	2.45
Discrete Wav2Vec2	3.53	16.58	0.853	3.74	83.86	0.831	3.68	2.89
EnCodec	3.04	84.78	0.796	3.06	70.25	0.882	1.50	94.62
DAC	3.35	71.07	0.831	3.12	95.11	0.872	1.47	77.00
SpeechTokenizer	2.12	99.62	0.549	3.10	89.78	0.862	1.85	64.26
<i>High Bitrate</i>								
EnCodec	2.93	95.06	0.780	2.96	157	0.768	N.C	N.C
DAC	2.22	99.62	0.571	2.31	234	0.787	N.C	N.C
<i>Continuous Baseline</i>								
SSL	3.42	6.05	0.861	3.43	24.92	0.873	2.86	4.687

F Hyperparameters

We maintain the embedding dimension at 1024 for consistency across all experiments. Training continues until convergence or until the validation loss stops improving. For detailed settings for each experiment, please visit the GitHub repository.