# LIVEMIND: LOW-LATENCY LARGE LANGUAGE MODELS WITH SIMULTANEOUS INFERENCE

Chuangtao Chen Technical University of Munich Munich, Germany chuangtao.chen@tum.de

Xunzhao Yin Zhejiang University Hangzhou, China xzyin1@zju.edu.cn Cheng Zhuo Zhejiang University Hangzhou China czhuo@z ju.edu.cn Ulf Schlichtmann Technical University of Munich Munich, Germany ulf.schlichtmann@tum.de

Grace Li Zhang

Technical University of Darmstadt

Darmstadt, Germany

grace.zhang@tu-darmstadt.de

Bing Li Technical University of Munich Munich, Germany b.li@tum.de

### ABSTRACT

In this paper, we introduce a novel low-latency inference framework for large language models (LLMs) inference which enables LLMs to perform inferences with incomplete prompts. By reallocating computational processes to prompt input phase, we achieve a substantial reduction in latency, thereby significantly enhancing the interactive experience for users of LLMs. The framework adeptly manages the visibility of the streaming prompt to the model, allowing it to infer from incomplete prompts or await additional prompts. Compared with traditional inference methods that utilize complete prompts, our approach demonstrates an average reduction of 59% in response latency on the MMLU-Pro dataset, while maintaining comparable accuracy. Additionally, our framework facilitates collaborative inference and output across different models. By employing an LLM for inference and a small language model (SLM) for output, we achieve an average 68% reduction in response latency, alongside a 5.5% improvement in accuracy on the MMLU-Pro dataset compared with the SLM baseline. For long prompts exceeding 20 sentences, the response latency can be reduced by up to 93%. <sup>1</sup>

# **1** Introduction

Recently, large language models (LLMs) [1, 2, 3] based on the transformer architecture [4] have exhibited exceptional capabilities in natural language processing (NLP). These models, trained on extensive corpora and characterized by a substantial number of trainable parameters, have demonstrated powerful in-context learning abilities and exhibit significant potential across various domains [5, 6, 7]. Nevertheless, the auto-regressive decoding nature and the considerable size of these models result in slow response generation, thereby diminishing the quality of human-computer interaction. Additionally, the chain-of-thought (CoT) technique [8, 9], an effective technique for complex tasks, often leads to a substantial increase in response length compared with direct-answer responses, thereby exacerbating the issue of latency and making the problem of slow response generation even more severe. To enhance the inference speed of LLMs, various research efforts have been undertaken, including the development of lightweight models through

<sup>&</sup>lt;sup>1</sup>Code and experimental results are available at https://github.com/ChuangtaoChen-TUM/LiveMind

techniques such as pruning [10, 11, 12], quantization [13, 14, 15], early-exit [16, 17] and the introduction of novel decoding methods [18, 19, 20].

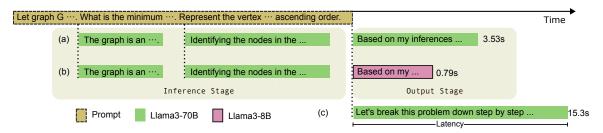


Figure 1: An example of the LiveMind framework. (a) LiveMind inference with Llama-3-70B model; (b) LiveMind collaborative inference with Llama-3-70B and Llama-3-8B models; (c) Conventional CoT inference on complete prompt.

In this work, we identify another significant cause of high latency: the late availability of user prompts. Currently, most LLM interfaces transmit the complete user prompt to the model, which then begins generating new tokens in an auto-regressive manner only after receiving the entire prompt. Inspired by the concurrent inference observed in human conversations, where individuals process ongoing dialogues while listening, we propose that LLMs can similarly initiate inference with incomplete prompts in a interactive scenario, where the input is streaming incrementally, *e.g.*, typing or speaking. By leveraging the time during which the user is inputting, the model can pre-process these incomplete prompts. This approach can subsequently reduce the number of tokens required for inference once the full prompt is received, thereby decreasing the latency perceived by users.

We introduce LiveMind, a framework that enables LLMs to process input concurrently with its streaming. Fig. 1 demonstrates inference examples with the proposed framework. As illustrated in Fig. 1(a)(b), the majority of inferences can be conducted on incomplete prompts during the input phase, which is also denoted as "inference stage". Utilizing these preliminary inferences, the final inference on the complete prompt to derive the final answer at the "output stage" can be significantly expedited. Since user-perceived latency is primarily determined by the duration of the final output stage, our framework substantially reduces this latency compared with the conventional CoT inference in Fig. 1(c). Additionally, by employing an LLM during the inference stage and a small language model (SLM) during the output stage as shown in Fig. 1(b), we can achieve an even further reduction of the latency while maintaining a better inference accuracy compared with the SLM by benefiting from the advanced capability of the LLM.

This paper is structured as follows: Sec. 2 provides a more comprehensive overview of related work, including its benefits as well as limitations. In Sec. 3, we explain our proposed framework. The effectiveness of our methods is evaluated by comparing the proposed framework with the conventional inference framework. The experimental results, and an in-depth analysis of the proposed framework are presented in Sec. 4. Finally, Sec. 5 summarizes and concludes this paper.

# 2 Background

# 2.1 Related work

**Inference acceleration of LLMs** The acceleration of LLMs inference is an active research field of research and development [21], aiming at enhancing the efficiency and speed of LLMs to meet the increasing demands of real-time applications. Several innovative methods have been introduced to tackle these challenges. For instance, quantization reduces the precision of the model's weights and activations [13, 14], significantly decreasing memory usage and computational load without substantially compromising accuracy. Flash-attention [22, 23] optimizes the attention mechanism by minimizing memory access overhead and improving data locality, resulting in faster processing times. Speculative decoding [18, 24] utilizes predictions from smaller, faster models to guide the decoding process of larger models, thereby reducing the number of required computations. Additionally, multi-token prediction [19, 20] enables the model to generate multiple tokens in a single step, rather than one at a time, which can significantly reduce inference time. Collectively, these techniques constitute an efficient toolkit for accelerating LLMs, facilitating more efficient and scalable deployment across various applications. Our proposed framework is orthogonal to these methods and can be integrated with them to achieve an even faster inference speed.

**Simultaneous Inference of LLMs** A related area of research relevant to our work is the simultaneous inference of LLMs. Several studies have explored the application of LLMs to sequence-to-sequence (seq-to-seq) tasks that require

simultaneous outputs, particularly in the context of machine translation [25, 26, 27, 28]. However, extending the decoder-only architecture to support simultaneous output is not straightforward. For instance, one approach involves prompting the LLM with a new request to translate each time when a set of new words arrive, and then selecting the output using a prefix selection algorithm [25]. Another approach fine-tunes the model to output a special wait token, thereby achieving natural support for simultaneous output [27]. Nonetheless, these studies primarily focus on the domain of simultaneous machine translation.

In this work, we mainly focus on the simultaneous inference of LLMs on general interactive scenarios. However, extending LLMs from the domain of machine translation to broader interactive applications is not trivial. We identify and summarize the main challenges compared to previous work as follows:

- A major challenge in conventional simultaneous tasks is the design of the read-write strategy. Typically, it is necessary to balance generation quality with latency. However, unlike conventional seq-to-seq tasks such as machine translation and automatic speech recognition, general question answering lacks a direct mapping relationship between the input and output. This absence of a straightforward correspondence complicates the design of generation targets for incomplete prompts.
- The application context varies significantly. As illustrated in Fig. 2(a), in seq-to-seq tasks, the model typically functions as an intermediary, processing input from one source and delivering the resultant output to another entity. On the contrary, in general interactive scenarios, the model's response is directed back to the user, thereby influencing subsequent interactions. Unlike machine translation, where intermediate inferences should not be transmitted to prevent disruption, interactive applications afford greater flexibility in intermediate generation. This distinction underscores the differing operational dynamics and constraints between these two types of tasks.
- In seq-to-seq tasks, latency is defined as the interval between the generation of a segment—such as a word, phrase, or piece of speech—and the production of its corresponding target. Conversely, in general interactive scenarios, user-perceived latency is characterized by the duration from the moment the user submits the complete prompt to the moment the final response is available.

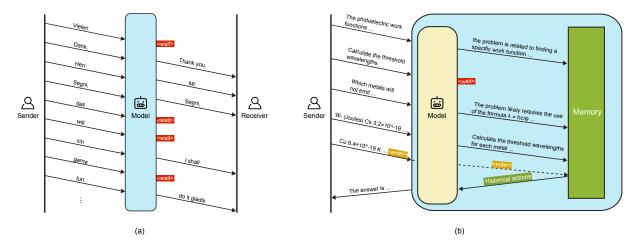


Figure 2: Comparison of simultaneous machine translation and simultaneous inference: (a) An example of simultaneous machine translation; (b) An example of simultaneous inference proposed by this work.

Fig. 2 demonstrates a detailed comparison between simultaneous inference in seq-to-seq tasks, exemplified by machine translation, and the general integrative tasks proposed in this study. In Fig. 2(a), an example of simultaneous machine translation is depicted, where input texts are streamed from the sender, translated by the model, and subsequently sent to the receiver. If the model requires additional text to generate the next segment of the translation, it performs a 'wait' action. In contrast to machine translation, simultaneous inference in general integrative tasks operates with a coarser granularity of input texts. Besides, rather than sending intermediate inferences back to the user, the model retains the historical inferences in a memory. Upon receiving the complete prompt from the user, indicated by the <enter> action, the model generates a response based on the complete prompt and the stored historical actions (intermediate inferences) in the memory.

We summarize our main contributions as follows:

- We propose the LiveMind framework for simultaneous inference in general interactive scenarios. This framework is designed to address the challenges associated with real-time interaction and processing in complex tasks that require multi-step reasoning. To the best of our knowledge, this represents the first attempt at implementing simultaneous inference of LLMs in general interactive scenarios.
- The LiveMind framework enables LLMs to perform inferences on incomplete prompts. With the historical inferences, the thinking steps in the final response stage to derive the final answer can be significantly reduced, thus achieving a much lower user-perceived latency, particularly for complex tasks that necessitate multi-step reasoning.
- The framework provides model collaborative features, allowing the utilization of models in difference sizes in the inference and final output stages. For instance, employing an LLM with robust reasoning capabilities during the inference stages and a smaller, faster model (SLM) during the final output stage can further reduce latency while enhancing task performance.
- We conducted an evaluation of our proposed framework utilizing the Llama-3-8B and Llama-3-70B models [29] across a diverse set of domain-specific questions. The experimental results demonstrate the efficacy of our methodology. For instance, compared with the conventional inference strategy on complete prompts in the MMLU-Pro dataset [30], our framework reduces latency by 59.2% on average while maintaining comparable accuracy when using the Llama-3-70B model. Furthermore, when combining Llama-3-70B and Llama-3-8B, the latency is reduced by 93% on average, accompanied by a 5.5% increase in accuracy compared with the Llama-3-8B baselines. These results indicate that simultaneous inference for LLMs in general interactive scenarios is a promising research direction. We anticipate that our work will encourage further exploration and development in this area.

# 3 Method

In this section we will provide a comprehensive exposition of the design of our proposed LiveMind framework, including the key concept, the read strategy and LLM actions. Algorithm 1 provides a synopsis of the proposed LiveMind framework the user's prompt. The subsequent details of the algorithm will be explained in this section.

## 3.1 Key Concept

Nowadays, LLMs have demonstrated the capability to tackle complicated tasks with the use of the chain-of-thought (CoT) techniques [8, 9]. This method enhances the performance of LLMs to produce correct results, particularly in tasks necessitating multi-step reasoning, by enabling the decomposition of tasks into smaller, and sequential inferences. However, LLMs usually start the CoT reasoning and deduce all intermediate results after the whole prompt is available, although some intermediate results may already be able to be obtained by partial prompt. This significantly delays the response of the LLMs in interaction-oriented systems and thus leads to a suboptimal user experience.

In this work, we propose to start the inference based on incomplete prompts while the user is inputting. This preemptive inference obtains intermediate reasoning results in the background and these results are provided to the LLM together with the original complete prompt as the user finishes the input. The LLM can then selectively skip reasoning steps and produce the final result quickly with a low latency. With the proposed technique, the steps of reasoning, and thus the length of final output, which does not contain intermediate reasoning output texts anymore, can be reduced

0: Let x=1, y=2x, z=4-y, what is the value of 3z? y=2x, z=4-y,		
A: If x=1, then	y=2x, z=4-y, what is the value of 3z? A: If x=1, then y=2×1 =2, and z=4-2=2. 3z=	y=2x, z=4-y, x=1 y=2×1=2 what is the
(a) (b)	(a)	(b)

Figure 3: An illustrative example of (a) conventional CoT inference and (b) simultaneous inference. The green texts on the right represent simultaneous inference content.

significantly. This can effectively shorten the time the LLM takes to generate the final output after the user inputs the complete prompt, which is the time the user needs to wait or the latency the LLM to generate the response in interaction-oriented tasks, *i.e.*, the user-perceived latency. An illustrative example is provided in Fig. 3 to elucidate our key concept. In the given example, to derive the value of 3z required by the question, a series of inferences are performed using the CoT technique. However, certain inferences, such as determining the values of y and z, do not necessitate the access the complete prompt. For example, y can already be determined from the partial prompt Let x = 1, y = 2x while the user is still inputting the remaining of the prompt. The intermediate result x = 1 and  $y = 2 \times 1 = 2$  can be sent to the LLM when the text on z is available to determine z and thus 3z quickly. In the proposed LiveMind simultaneous inference framework, we enable LLMs to perform inferences on incomplete prompts and use the corresponding inference results to alleviate the burden of the final response. As illustrated in Fig. 3(b), the length of the final response can be significantly reduced if the LLM is able to leverage previous inferences. In our proposed LiveMind framework, we denote the LLM that makes inferences on incomplete prompts as "inference model", and the LLM responsible for generating the final response to the user as "output model". The inference model and the output model can be different, as shown later, to leverage the advantages of different models with respect to performance and latency. Upon completion of the prompt, the entire prompt, along with the prior inferences, is sent to the output model. Based on the pre-derived content, such as the value of z in Fig. 3, a more concise final response can be formulated to provide the correct answer by the output model. Given that the majority of latency in LLMs arises from the auto-regressive decoding process [31], it is anticipated that this approach will mitigate the overall latency perceived by the user.

# 3.2 Read Strategy

Similar to other sequence-to-sequence tasks, we conceptualize the input as a continuous stream. In the context of text input, the data arrives incrementally, character by character. A critical issue arises regarding the optimal timing for transmitting the available data to the model. Prior to being processed by the LLM, the input is tokenized into a sequence of numbers (tokens). A straightforward approach would be to transmit the tokens to the LLM as soon as they become available. However, such frequent transmissions can result in substantial computational overhead. Unlike tasks such as machine translation or speech recognition, the addition of one or a few new tokens does not typically provide significant new information for the LLM to process. Consequently, it is crucial to devise an appropriate read strategy to optimize the balance between performance and computational efficiency.

In the domain of machine translation, a common approach is the wait-*n* strategy, which involves waiting for several words to accumulate before feeding them to the model. However, this strategy is not suitable for general interactive tasks such as question answering for several reasons: 1. Unlike translation, where most words have direct counterparts in the target language, the significance of input words or tokens in general interactive tasks varies considerably in relation to the response. An ideal segmentation method should ensure that each new segment which consists of a number of words provides sufficient information for the inference model to perform an additional inference step; 2. In machine translation, there is a need to balance translation quality and latency. However, in general interactive tasks, the latency of the final response is of primary importance. As previously discussed, a more relaxed read strategy can be employed as long as it does not adversely affect the final response latency.

To balance computational cost and responsiveness, we employ sentence-level segmentation in our proposed framework, as a sentence typically introduces sufficient new information for the inference model. In our experiments, we utilize the sentence tokenizer from the Natural Language Toolkit (nltk) [32] to manage the reading of new content. Once a new sentence is available and considered stable, it is transmitted to the inference model for further processing. In future work, we may need to consider a new segmentation strategies such as segmentation with phrases or multiple sentences.

As illustrated in Algorithm 1 line 9, each time when the input is updated, the current prompt undergoes segmentation. If the segmentation yields more than one segments (in this work a segment is a sentence), we assume that the previous segments are stable and will not be changed by the user later, a presumption that holds true under a greedy segmentation approach. On the contrary, the last segment is subject to modification with additional user input and thus unstable, it is retained within the prompt to be processed in the next segmentation round. Consequently, a read action concatenates all previous segments, with the exception of the last one, to form a new prompt, as shown in lines 11-14 in Algorithm 1.

# 3.3 Simultaneous Inference with LLM Actions

After each read, the inference model is prompted to select an action from a predefined action set and generate related content based on the new prompt. An action set comprises a number of available actions and their associated instructions to the LLM. In our framework, we provide two distinct action sets: a Complicated Action Set (CAS) and a Simplified Action Set (SAS). Within the SAS, we introduce the action 'inference', which allows the inference model to derive new content as intermediate reasoning result based on the given prompt. Additionally, the action 'wait' is used for instances where the inference model requires further information to proceed. Beyond the actions included in the SAS, the CAS includes two additional actions: 'background', which enables the inference model to gain an initial understanding of current topic, and 'hypothesize' prompts the inference model to formulate a conjecture regarding the final question based on current information available.

Table 1 lists the actions and their associated instructions utilized in the LiveMind framework. The action set is given to the inference model with a system prompt, the content of the system prompt can be found in the Appendix. At each step, the inference model chooses an action and generates related content for this action. If the selected action is not 'wait,' the action and its content are stored in the action history (Algorithm 1 lines 15-18). When the prompt is complete (*i.e.*, the user presses the send button or stops speaking), the complete prompt, along with the historical actions and action contents, is presented to the output model to generate the final response. As shown in Algorithm 1 line 20, the prompt

Table 1: Actions and their associated instructions sent to the inference model in LiveMind framework.

Action	Instruction
background	understand the topic background.
inference	make inferences based on the available information.
hypothesize	hypothesize what the final problem might be and attempt to solve it.
wait	if you need more information or content, choose to wait.

formatter constructs a new prompt by incorporating historical actions with action contents and the current user prompt. In this newly constructed prompt, the output model is instructed to respond based on its historical actions with action contents. It can either answer the question directly if the answer is already known according to previous reasoning results or perform additional inferences based on these results and the complete prompt if necessary. The design of the formatter is detailed in the Appendix. At the final step shown in Algorithm 1 line 21, an output model, which can be the same model as the inference model or another model, is employed to generate the final response.

### Algorithm 1: LiveMind inference on a streaming prompt

```
Input: Streaming prompt: s
  Output: Response: final response
  Data: Action set A, inference model M, prompt formatter P, sentence tokenizer T, output model m
1 historical actions = []
                                 // historical actions record the non-wait actions and action contents
2 last_prompt = ""
                                                                 // last prompt sent to the language model
  prompt = ""
                                                   // prompt received but not sent to the language model
3
4
  while True do
5
      prompt += s.next()
                                                        // read available prompt from the streaming input
6
      if s.done() then
7
 8
       break
                                           // goto the final text generation if this is the last prompt
      segments = T(prompt)
9
10
      if len(segments) > 1 then
11
          new_prompt = Concate(segments[0:-1])
12
13
          prompt = segments[-1]
                                                          // concatenate all segments except the last one
          last_prompt += new_prompt
14
          input = \mathbf{P}(\mathcal{A}, \text{historical\_actions}, \text{last\_prompt})
15
          new_action, action_content = M(input)
16
          if new_action is not wait action then
17
             historical_actions.append((new_action, action_content))
                                                                            // only record non-wait actions
18
19 last_prompt += prompt
20 input = P(historical_actions, last_prompt)
                                                     // response to the complete prompt based on actions
21 final_response = m(input)
22
23 return final_response
```

# **4** Experimental Results

This section presents a series of experiments designed to evaluate the efficacy of our proposed LiveMind framework. In Sec. 4.1, we detail the experimental settings, including datasets, models, and metrics. We assessed the impact of our proposed framework on model performance, focusing on metrics such as accuracy and latency across questions from various domains. In Sec. 4.3, we show the results of evaluating our methods on a dataset of 12,032 questions, analyzing model performance and estimating the reduction in latency. Finally, an analysis of LLM actions present in our experiments is presented in Sec. 4.4.

### 4.1 Experiment setup

**Dataset & Models** We selected the MMLU-Pro dataset to evaluate our proposed framework due to its inclusion of questions from various domains and its range of difficulty levels. The MMLU-Pro dataset is more robust and challenging compared with the standard MMLU dataset [33, 30]. It comprises 12,032 questions across 14 categories, each formatted as a multiple-choice question with 3 to 10 possible answers. The lengths of the questions by the number of sentences from the MMLU-Pro dataset vary from 1 to 30. For all evaluations presented in this paper, we employed a zero-shot approach with chain-of-thought reasoning and reported the pass@1 results. For batched evaluations, we sorted the dataset by sentence length only to enhance inference efficiency. Note that the sorting will not change the overall performance since prompts in a batch are processed in parallel. We utilized the Llama-3-70B model as a large language model and the Llama-3-8B model as a small language model. Since our framework does not require fine-tuning of the language models, we executed all models using 4-bit quantization with AutoAWQ [13] on vLLM [34] to expedite inference, setting the temperature to 0 to ensure reproducible results.

**Latency Evaluation**: We employed a standard typing speed of 4 characters per second to simulate input speed, and latency was measured as the time difference between the availability of the entire prompt and the generation of the complete response. For **real-time latency evaluation**, we measured the latency of each question on the hardware in real-time. For **batched inference** on 12,032 questions, the actual inference time for each prompt is not available because multiple prompts are processed simultaneously. However, within the context of LLMs, latency arises from prefill processing and auto-regressive decoding, with the decoding stage contributing the majority of the latency due to its sequential nature. Given the decoding time is approximately proportional to the length of response in tokens [31], we used the token length of the final response as an estimation of the actual latency.

### 4.2 Real-time latency evaluation

To evaluate the accuracy and latency of our proposed framework, we randomly selected 100 problems from each category within the MMLU-Pro dataset. The problems were tokenized using the sentence tokenizer from the NLTK library [32], with the options of possible answers provided as the final part of the prompt. All inferences were executed on a single NVIDIA A100 80G GPU.

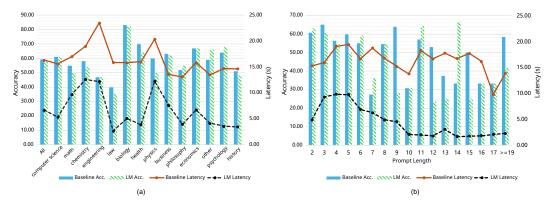


Figure 4: Accuracy and inference latency of the baseline (Llama-3-70B) and LiveMind (LM) inference with Llama-3-70B as both the inference model and the output model on 1.4K random chosen questions from MMLU-Pro dataset (a) by category; (b) by prompt length (#sentence).

**Inference on a single model** Fig. 4(a) presents the comparative results of accuracy and user-perceived latency between baseline (Llama-3-70B) and LiveMind inference using the Llama-3-70B model. The LiveMind framework demonstrates comparable accuracy to the baseline (Llama-3-70B) while significantly reducing latency. Notably, the categories of chemistry, physics, and engineering exhibit the highest latency values for both baseline (Llama-3-70B) and LiveMind inferences, likely due to the multi-step reasoning and calculations required in these domains. In contrast, the LiveMind framework achieves the greatest speed-up in the categories of law, history, and health, indicating more efficient utilization of inferences made on incomplete prompts.

Fig. 4(b) provides an analysis of the accuracy and latency according to the prompt length by the number of sentences. Unlike the baseline (Llama-3-8B), which maintains a steady latency across different prompt lengths, the LiveMind inference exhibits more reduced latency for prompts with more sentences. This reduction can be attributed to the fact that longer questions are often related to subjects such as history, law, and psychology. We hypothesize that in these categories, historical context can be leveraged more directly from partial inputs to derive the final answer without

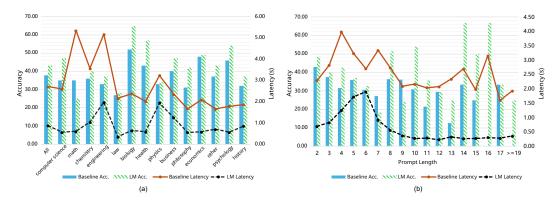


Figure 5: Accuracy and inference latency of the baseline (Llama-3-8B) and LiveMind (LM) collaborative inference with Llama-3-70B as the inference model and Llama-3-8b as the output model on 1.4K random chosen questions from MMLU-Pro dataset (a) by category; (b) by prompt length (#sentence).

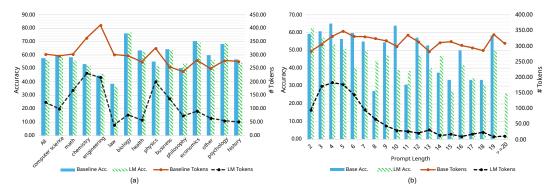


Figure 6: Batched inference: Accuracy and final response length of the baseline (Llama-3-70B) and LiveMind (LM) inference with Llama-3-70B as both the inference model and the output model on all 12,032 questions from MMLU-Pro dataset (a) by category; (b) by prompt length (#sentence).

additional inferences in the last step. Furthermore, the extended sequence length also allows the LLM to generate more inferences, thereby improving the chance to obtain the final answer quickly in the final response.

**Collaborative inference** We also assessed the collaborative inference capabilities of the LiveMind framework, where we used different models for the inference model and output model. In this evaluation, the Llama-3-70B model acted as the inference model, which processes the incomplete prompt, while the smaller Llama-3-8B model generates the final response based on the actions taken by the Llama-3-70B model. This approach leverages the robust reasoning abilities of large models alongside the rapid inference speed of small models. The simplified action set (SAS) is used for collaborative inference as we observed that the SAS results in lower latency and improved accuracy when a small model is used as the output model compared with the complicated action set (CAS). Further discussion on the action set can be found in Sec. 4.4. As illustrated in Fig. 5, compared with the baseline (Llama-3-8B) that solely utilizes the Llama-3-8B model, our collaborative inference method enhances both accuracy and latency. With the enhancement of the Llama-3-70B model, the average accuracy increased by 5.5% across 1,400 questions, accompanied by a latency reduction ranging from 40% to 89% across different categories.

### 4.3 Latency estimation of batched inference

We conducted a comprehensive evaluation of all 12,032 questions from the MMLU-Pro dataset using both conventional CoT inference and the LiveMind inference framework. For this evaluation, we employed batched inference with a batch size of 128, and we organized the dataset by question length to enhance batch inference efficiency. Due to the nature of batched inference, it is not feasible to measure the latency for each individual question in real-time. Therefore, we report the length of the final response in terms of the number of tokens as an estimate of latency.

Fig. 6 illustrates the accuracy and the final response length, measured by the number of tokens, for the baseline and the LiveMind inference framework across all 12,032 questions from the MMLU-Pro dataset. The observed trends

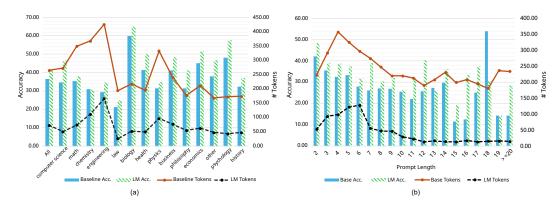


Figure 7: Batched inference: Accuracy and inference latency of the baseline (Llama-3-8B) and LiveMind (LM) collaborative inference with Llama-3-70B as the inference model and Llama-3-8B as the output model on all 12,032 questions from MMLU-Pro dataset (a) by category; (b) by prompt length (#sentence).

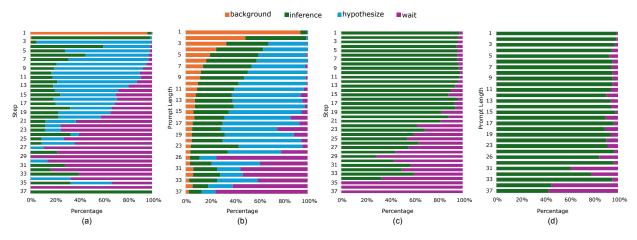


Figure 8: Percentages of performed actions by the inference model Llama-3-70B with the CAS (Llama-3-70B as the output model) with respect to (a) action steps (b) lengths of the questions; Percentages of performed actions by the inference model Llama-3-70B with the SAS (Llama-3-8B as the output model) with respect to (c) action steps (d) lengths of the questions;

are consistent with the results obtained from the 1,400 selected questions depicted in Fig. 4. When compared with real-time latency measurements, the acceleration estimated by the number of tokens is notably higher. On average, there is a 59% reduction in tokens compared with the baseline (Llama-3-70B) inference. For longer questions, defined as those exceeding 10 sentences, the average reduction in tokens can reach up to 90.4%. We also conducted an evaluation of the collaborative inference approach using the Llama-3-70B and Llama-3-8B models across all questions from the MMLU-Pro dataset. The experimental results are presented in Fig. 7. Despite the additional computational cost associated with running an extra large model, both accuracy and user-perceived latency showed improvements. Compared with baseline (Llama-3-8B) using only the small language model, our collaborative inference method enhanced accuracy by 5.53% and reduced latency by an average of 72.52%.

### 4.4 LLM action analysis

Action percentage analysis In this section we provide an analysis of the actions taken by the inference model. Fig. 8(a) shows the percentages (x-axis) of the four actions in CAS executed with Llama-3-70B as both the inference model and the output model with respect to reasoning steps (y-axis). The percentage of each action in one step is calculated as the ratio of the questions executing this action to the total number of questions in this step. Fig. 8(b) shows the percentages of actions with respect to the lengths (y-axis) of the questions, which is the ratio of occurrence of actions to the number of all actions performed in questions with a certain length.

As shown in Fig. 8(a), in the first step, the 'background' action is predominantly selected to provide an overview of the prompt in the majority of cases (96.2%). In the second step, the 'inference' action is predominantly chosen

(97.6%), while the 'hypothesize' action dominates in the third step (94.2%). As the process progresses to subsequent steps, the 'inference' and 'hypothesize' actions maintain a consistent proportion, whereas the incidence of the 'wait' action increases, suggesting that the inference model may have derived sufficient information in the early steps and late steps do not necessarily provide new information, which shows an potential for further enhancement of the inference efficiency.

A similar trend can also be observed in in Fig. 8(b), where the 'wait' action takes larger percentages in questions with larger lengths, since these questions require more steps so that the 'wait' action have a higher chance to be executed in late steps of these questions. When the output model is replaced by Llama-3-8B and the SAS action set is used for the inference model, similar phenomena appear, as shown in Fig. 8(c) and (d).

Action set In Sec. 3 we introduced two action sets for the inference model: a complex action set (CAS) consisting of four actions and a simplified action set (SAS) consisting of two actions. We tested these two action sets with respect to different settings of the inference model and the output model. The results are show in Table 2. As illustrated in the upper half of Table 2, the CAS demonstrates superior performance compared with SAS in terms of both accuracy and response length when applied to the setting Llama-3-70B+70B. However, for the setting Llama-3-70B+8B, the SAS yields higher accuracy and shorter response lengths compared with CAS.

The reason of this phenomenon is that the output model should be capable of processing the intermediate information generated by the inference model. If the output model is smaller than the inference model and the latter uses CAS, the output model may be overwhelmed by the complicated actions and cannot generate results with high accuracy. For example, the information generated by the

Table 2: Batched inference: Accuracy and length of final responses by number of tokens of the complicated action set (CAS) and simplified action set (SAS) on different model settings (inference model+output model).

Model	Action Set	Accuracy	# Tokens
Llama-3-70B+70B	CAS	56.52	124.32
	SAS	54.75	166.18
Llama-3-70B+8B	CAS	39.59	153.37
	SAS	41.95	72.79
Llama-3-8B+8B	CAS	36.98	147.39
	SAS	36.47	122.37
Llama-3-8B+70B	CAS	50.53	186.75
	SAS	47.17	160.62

'background' and 'hypothesize' actions in CAS may not be assimilated by a small output model. This especially severe for short questions which require only a minimal number of steps, the 'background' may waste a precious computation step without providing usable information to the small output model. On the other hand, if the output model is much more powerful than the inference model, the inference model should conduct more complicated actions to provide more diverse information to the output model. In this case, CAS should be used by the inference model.

To validate this analysis above, we evaluated two additional settings: Llama-3-8B+8B and Llama-3-8B+70B. The results are shown in the lower half of Table 2. The results of Llama-3-8B+70B confirms our analysis with a clear improvement in accuracy using CAS. For the setting Llama-3-8B+8B, CAS and SAS achieve similar accuracy with Llama-3-8B as both the inference model and the output model. If we compare the results of Llama-3-70B+70B and Llama-3-8B+8B, we can observe that CAS provides a better accuracy over SAS as the model becomes more powerful. This is reasonable because a larger model is capable of processing more complicated information generated during early inference stage, so that CAS should be deployed in such cases.

# 5 Conclusion and Future Work

### 5.1 Conclusion

In this paper, we introduce LiveMind, a framework designed to enable low-latency LLMs with simultaneous inference capabilities. To the best of our knowledge, this represents the first attempt to implement simultaneous inference in LLMs for general interactive scenarios. Our experimental results validate the effectiveness of the proposed simultaneous inference method, suggesting that this is a promising direction for further research. We anticipate that this work will inspire further studies and advancements in the field, ultimately contributing to the development of more efficient and responsive LLMs for interactive applications.

### 5.2 Future Work

In this section, we outline the limitations of our current study and propose directions for future research. While our framework, LiveMind, demonstrates promising results in enabling low-latency LLMs with simultaneous inference, several areas warrant further investigation.

**Streaming Input Segmentation** In LiveMind, the read action is currently invoked at the sentence level. However, the optimal read strategy that balances computational cost and responsiveness has yet to be thoroughly investigated. Promising directions for future research include exploring dynamic segmentation strategies and conducting inference at the token level. These approaches have the potential to enhance the efficiency and reduce computational cost of the system, thereby improving overall performance of interactive applications of LLMs further.

**Specialized Assistant Model** We have explored the use of an assistant model to collaborate with an LLM possessing robust reasoning capabilities to expedite the inference process. In our experiments, the Llama-3-8B model was selected as the assistant model. However, since this model is not specifically designed for the given task, developing a specialized model tailored for final response generation could potentially enhance both accuracy and efficiency. Future work should focus on designing and implementing such specialized models to optimize performance in targeted applications.

Action Set Exploration In Sec. 4, our analysis revealed that no single action set performs optimally across all scenarios; instead, different cases require distinct action sets for best performance. Consequently, exploring the design of action sets or enabling the model to operate with a dynamic set of actions presents an intriguing area of research. Investigating these aspects could lead to more versatile and adaptive models, capable of optimizing their performance across diverse contexts.

# References

- [1] Hugo Touvron, Thibaut Lavril, Gautier Izacard, et al. LLaMA: Open and efficient foundation language models. *arXiv preprint arXiv:2302.13971*, 2023.
- [2] Josh Achiam, Steven Adler, Sandhini Agarwal, et al. GPT-4 technical report. *arXiv preprint arXiv:2303.08774*, 2023.
- [3] Sébastien Bubeck, Varun Chandrasekaran, Ronen Eldan, et al. Sparks of artificial general intelligence: Early experiments with GPT-4. *arXiv preprint arXiv:2303.12712*, 2023.
- [4] Ashish Vaswani, Noam Shazeer, Niki Parmar, et al. Attention is all you need. *Advances in neural information processing systems*, 30, 2017.
- [5] Daniil A Boiko, Robert MacKnight, and Gabe Gomes. Emergent autonomous scientific research capabilities of large language models. *arXiv preprint arXiv:2304.05332*, 2023.
- [6] Mark Chen, Jerry Tworek, Heewoo Jun, et al. Evaluating large language models trained on code. *arXiv preprint arXiv:2107.03374*, 2021.
- [7] Mingjie Liu, Teodor-Dumitru Ene, Robert Kirby, et al. ChipNeMo: Domain-adapted llms for chip design. arXiv preprint arXiv:2311.00176, 2023.
- [8] Jason Wei, Xuezhi Wang, Dale Schuurmans, et al. Chain-of-thought prompting elicits reasoning in large language models. *Advances in neural information processing systems*, 35, 2022.
- [9] Xuezhi Wang, Jason Wei, Dale Schuurmans, et al. Self-consistency improves chain of thought reasoning in language models. *arXiv preprint arXiv:2203.11171*, 2022.
- [10] Xinyin Ma, Gongfan Fang, and Xinchao Wang. LLM-Pruner: On the structural pruning of large language models. *Advances in neural information processing systems*, 36, 2023.
- [11] Mengnan Jiang, Jingcun Wang, Amro Eldebiky, et al. Class-aware pruning for efficient neural networks. In *Design, Automation & Test in Europe Conference & Exhibition (DATE)*, 2024.
- [12] Richard Petri, Grace Li Zhang, Yiran Chen, et al. PowerPruning: Selecting weights and activations for powerefficient neural network acceleration. In ACM/IEEE Design Automation Conference (DAC), 2023.
- [13] Ji Lin, Jiaming Tang, Haotian Tang, et al. AWQ: Activation-aware weight quantization for llm compression and acceleration. *arXiv preprint arXiv:2306.00978*, 2023.
- [14] Elias Frantar, Saleh Ashkboos, Torsten Hoefler, et al. GPTQ: Accurate post-training quantization for generative pre-trained transformers. *arXiv preprint arXiv:2210.17323*, 2022.
- [15] Wenhao Sun, Grace Li Zhang, Huaxi Gu, et al. Class-based quantization for neural networks. In Design, Automation & Test in Europe Conference & Exhibition (DATE), 2023.
- [16] Xuchen Pan, Yanxi Chen, Yaliang Li, et al. EE-Tuning: An economical yet scalable solution for tuning early-exit large language models. *arXiv preprint arXiv:2402.00518*, 2024.
- [17] Jingcun Wang, Bing Li, and Grace Li Zhang. Early-exit with class exclusion for efficient inference of neural networks. *arXiv preprint arXiv:2309.13443*, 2024.

- [18] Yaniv Leviathan, Matan Kalman, and Yossi Matias. Fast inference from transformers via speculative decoding. In *International Conference on Machine Learning*, 2023.
- [19] Charlie Chen, Sebastian Borgeaud, Geoffrey Irving, et al. Accelerating large language model decoding with speculative sampling. *arXiv preprint arXiv:2302.01318*, 2023.
- [20] Fabian Gloeckle, Badr Youbi Idrissi, Baptiste Rozière, et al. Better & faster large language models via multi-token prediction. arXiv preprint arXiv:2404.19737, 2024.
- [21] Zixuan Zhou, Xuefei Ning, Ke Hong, Tianyu Fu, Jiaming Xu, Shiyao Li, Yuming Lou, Luning Wang, Zhihang Yuan, Xiuhong Li, et al. A survey on efficient inference for large language models. *arXiv preprint arXiv:2404.14294*, 2024.
- [22] Tri Dao, Dan Fu, Stefano Ermon, et al. FlashAttention: Fast and memory-efficient exact attention with IOawareness. Advances in Neural Information Processing Systems, 35, 2022.
- [23] Tri Dao. FlashAttention-2: Faster attention with better parallelism and work partitioning. *arXiv preprint arXiv:2307.08691*, 2023.
- [24] Sehoon Kim, Karttikeya Mangalam, Suhong Moon, et al. Speculative decoding with big little decoder. Advances in Neural Information Processing Systems, 36, 2024.
- [25] Minghan Wang, Jinming Zhao, Thuy-Trang Vu, et al. Simultaneous machine translation with large language models. *arXiv preprint arXiv:2309.06706*, 2023.
- [26] Victor Agostinelli, Max Wild, Matthew Raffel, et al. Simul-LLM: A framework for exploring high-quality simultaneous translation with large language models. *arXiv preprint arXiv:2312.04691*, 2023.
- [27] Roman Koshkin, Katsuhito Sudoh, and Satoshi Nakamura. TransLLaMa: LLM-based simultaneous translation system. arXiv preprint arXiv:2402.04636, 2024.
- [28] Minghan Wang, Thuy-Trang Vu, Ehsan Shareghi, et al. Conversational SimulMT: Efficient simultaneous translation with large language models. *arXiv preprint arXiv:2402.10552*, 2024.
- [29] AI@Meta. Llama 3 model card. https://github.com/meta-llama/llama3/blob/main/MODEL\_CARD.md, 2024.
- [30] Yubo Wang, Xueguang Ma, Ge Zhang, et al. MMLU-Pro: A more robust and challenging multi-task language understanding benchmark. *arXiv preprint arXiv:2406.01574*, 2024.
- [31] Megha Agarwal, Asfandyar Qureshi, Nikhil Sardana, et al. LLM inference performance engineering: Best practices. https://www.databricks.com/blog/llm-inference-performance-engineering-best-practices, 2023.
- [32] Steven Bird and Edward Loper. NLTK: The natural language toolkit. In Proceedings of the ACL Interactive Poster and Demonstration Sessions, July 2004.
- [33] Dan Hendrycks, Collin Burns, Steven Basart, et al. Measuring massive multitask language understanding. arXiv preprint arXiv:2009.03300, 2020.
- [34] Woosuk Kwon, Zhuohan Li, Siyuan Zhuang, et al. Efficient memory management for large language model serving with PagedAttention. In *Proceedings of the ACM SIGOPS 29th Symposium on Operating Systems Principles*, 2023.

# **A** Appendix

In this section we present the designs of the system messages and prompt formatter used in the LiveMind framework. In Sec. A.3, a complete example of the use of LiveMind framework is provided.

#### A.1 System Messages

#### A.1.1 System prompts for the inference stage

We use the following system messages to prompt LLMs to take actions from a given action set.

### **Prompt with SAS:**

You are a helpful AI assistant. Your task is to understand and solve an incomplete problem. Based on the information provided and your previous actions, you can choose one of the following actions:

action inference: understand and make inferences based on the available information. action wait: if you need more information or content, choose to wait.

Choose one of the above actions based on the problem and your previous actions. Your response must be formatted as: "action {inference/wait}. {content}". The content should be as concise as possible and relevant to the action you choose. Do not choose actions that is not listed above.

If you choose action wait, simply respond with "action wait." without any additional content.

#### **Prompt with CAS**:

You are a helpful AI assistant. Your task is to understand and solve an incomplete problem. Based on the information provided and your previous actions, you can choose one of the following actions:

action background: understand the topic background. action inference: make inferences based on the available information. action hypothesize: hypothesize what the final problem might be and attempt to solve it. action wait: if you need more information or content, choose to wait.

Choose one of the above actions based on the problem and your previous actions. Your response must be formatted as: "action {background/inference/hypothesize/wait}. {content}". The content should be as concise as possible and relevant to the action you choose. Do not choose actions that is not listed above.

If you choose action wait, simply respond with "action wait." without any additional content.

#### A.1.2 System Prompt for the output stage

We use the following system messages for the final response stage.

### LiveMind inference:

You are a helpful AI assistant. Answer directly if your answer in previous inferences is already in the options. If you need more inference to derive the final answer, think step by step based on your previous inferences.

### **Baseline CoT inference**:

You are a helpful AI assistant, and your tasks is to understand and solve a problem. Solve the problem by thinking step by step. For the MMLU-Pro dataset, a format prompt: "Your answer should end with 'The answer is (Choice)'." is appended to the end of the system prompt.

### A.2 Prompt Formatter

In this section we detail the design of the prompt formatter. Given the current prompt as a string, and the historical actions as a list of strings, each of which has a format of "action {action}. {content}", the prompt in the inference stage is constructed in the following format:

"Incomplete problem: {current\_prompt}

Your previous actions: (1) {historical\_action[0]} (2) {historical\_action[1]}..."

The prompt for the final response stage is constructed in the following format:

"Your previous actions: (1) {historical\_action[0]} (2) {historical\_action[1]}...

Complete problem: {current\_prompt}"

### A.3 A complete example

Fig. 9 illustrates the detailed inference process of the LiveMind framework for a given question, including the inputs to the LLM and its responses. The complete question is:

"Alfred and Ben don't know each other but are each considering asking the lovely Charlene to the school prom. The probability that at least one of them will ask her is 0.72. The probability that they both ask her is 0.18. The probability that Alfred asks her is 0.6. What is the probability that Ben asks Charlene to the prom?"

The options to this problem are:

"(A): 0.42 (B): 0.12 (C): 0.9 (D): 0.54 (E): 0.36 (F): 0.48 (G): 0.24 (H): 0.3 (I): 0.66 (J): 0.78."

As shown in Fig. 9, the LLM is able to hypothesize the final question and has obtained the answer 0.3 at inference step (4) when the final question is not given. Besides, it has derived additional information that is not required by the final question.

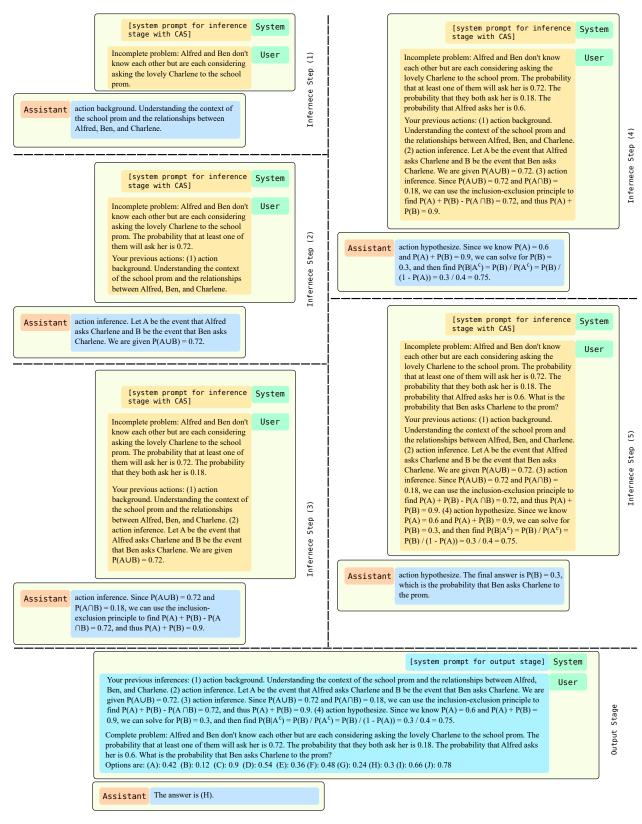


Figure 9: An example of the LiveMind inference with CAS. The question in the example requires 5 inference steps. For each step, the input is presented on the right-hand side, while the corresponding output is displayed on the left-hand side. For simplicity, the system messages are not presented verbatim.