

Mind the Privacy Unit! User-Level Differential Privacy for Language Model Fine-Tuning

Lynn Chua
Google Research

Badih Ghazi
Google Research

Yangsibo Huang
Princeton U.

Prithish Kamath
Google Research

Ravi Kumar
Google Research

Daogao Liu
U. Washington

Pasin Manurangsi
Google Research

Amer Sinha
Google Research

Chiyuan Zhang
Google Research

Abstract

Large language models (LLMs) have emerged as powerful tools for tackling complex tasks across diverse domains, but they also raise privacy concerns when fine-tuned on sensitive data due to potential memorization. While differential privacy (DP) offers a promising solution by ensuring models are ‘almost indistinguishable’ with or without any particular privacy unit, current evaluations on LLMs mostly treat each example (text record) as the privacy unit. This leads to uneven user privacy guarantees when contributions per user vary. We therefore study user-level DP motivated by applications where it is necessary to ensure uniform privacy protection across users. We present a systematic evaluation of user-level DP for LLM fine-tuning on natural language generation tasks. Focusing on two mechanisms for achieving user-level DP guarantees, Group Privacy and User-wise DP-SGD, we investigate design choices like data selection strategies and parameter tuning for the best privacy-utility tradeoff.

1 Introduction

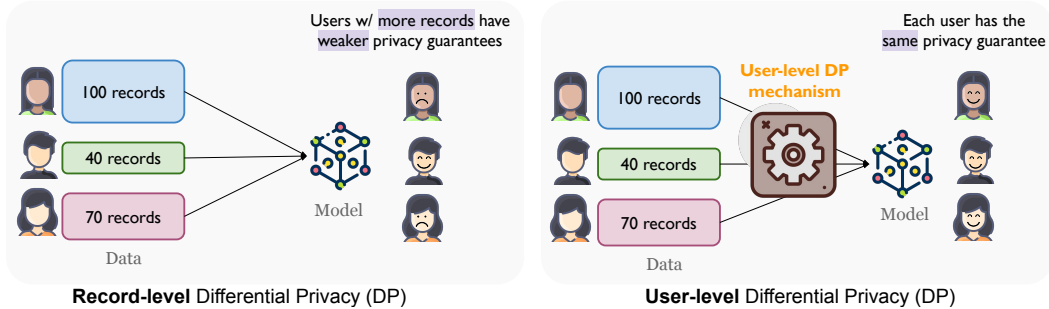


Figure 1: The privacy unit is a crucial parameter for DP guarantees. Previous works commonly treat each training example or record as the unit of privacy (i.e., record-level DP, shown on the left). However, this leads to unequal privacy protection when users contribute varying numbers of records — users with more records unfortunately obtain weaker privacy guarantees under record-level DP. To address this discrepancy, we consider the stronger requirement of user-level DP (shown on the right) for use cases where it might be necessary or applicable. User-level DP ensures uniform privacy protection across all users, regardless of each individual’s number of contributed records.

Modern large language models (LLMs) are shown to be capable of solving a wide range of complex understanding and reasoning tasks (Achiam et al., 2023; Anil et al., 2023; Bubeck et al., 2023). Fueling their adoption, these pre-trained models can be further fine-tuned for specialized domains such as legal (Cui et al., 2023; Guha et al., 2023), medical (Singhal et al., 2022; Luo et al., 2022; Moor et al., 2023; Lee et al., 2023), and coding assistance (Chen et al.,

2021; Li et al., 2023a; Roziere et al., 2023; Guo et al., 2024). However, this proliferation of LLMs has introduced privacy concerns: Fine-tuning on domain data risks unintentionally retaining sensitive information, which could potentially be extracted later (Carlini et al., 2021). Moreover, the trend towards using larger model sizes with more parameters (Kaplan et al., 2020) amplifies memorization risks (Carlini et al., 2022).

To address these privacy challenges, a growing body of work has focused on fine-tuning LLMs with differential privacy (DP) guarantees, a widely adopted notion to provide privacy guarantees in machine learning pipelines. At a high level, DP guarantees that a model trained with and without any particular data point is “almost indistinguishable”. A training algorithm satisfying DP would ignore sensitive information of individual records but can still learn the distributional properties of the dataset. Typical DP training algorithms (e.g., DP-SGD, Abadi et al., 2016) provide such guarantees by limiting the contribution of each record to the trained model and adding calibrated noise.

Existing studies have explored DP fine-tuning techniques for various applications, such as natural language understanding (Li et al., 2022; Yu et al., 2021b; 2022), generation (Yu et al., 2022; Anil et al., 2022; Yue et al., 2023), and in-context learning (Tang et al., 2023; Wu et al., 2023; Duan et al., 2024). Many training algorithms and evaluations in the literature make the (implicit) assumption that each user only contributes a single record to the training dataset. This notion is usually referred to as Example-level DP or Record-level DP. In the context of language models, a record is a *sequence* of (tokenized) text. However, in many real-world scenarios, each user may provide multiple records¹. Under Example-level DP, users contributing more records inevitably obtain weaker privacy protection — an undesirable outcome (see Figure 1). To ensure uniform privacy protection regardless of the number of records per user, we consider the stronger requirement of User-level DP, which ensures that each user obtains the same privacy guarantee. This shift from Example-level DP to User-level DP forms the core focus of our study.

We present a systematic empirical evaluation of User-level DP for fine-tuning LLMs on natural language generation tasks. Unlike existing relevant studies that mostly focus on the setting of (private) federated learning (McMahan et al., 2018; Kairouz et al., 2021; Xu et al., 2023), we do not assume a distributed or federated setting. Instead, we consider the scenario where the language modeling task² involves data from multiple users, and it is desirable to guarantee privacy at the user level, rather than the traditional record level. We identify and evaluate the two mainstream mechanisms for achieving user-level DP: Group Privacy and User-wise DP-SGD, as described in Section 2. We systematically propose and evaluate data selection strategies for both methods (Section 4 and Section 5) to improve the privacy-utility trade-off and compare their performance (Section 6). We hope the findings provide valuable empirical references for practitioners working on User-level DP for language modeling tasks.

Furthermore, we provide a case study of applying the algorithm from Asi & Liu (2024) to our language model fine-tuning tasks. While many empirical studies focused on Example-level DP, the theory community has studied User-level DP extensively in the past few years, with a long line of algorithms with provable guarantees. Among those, Asi & Liu (2024) currently achieve the state-of-the-art excess rate (see Section 7 for more details). However, the theoretical results typically rely on assumptions such as that the data being drawn i.i.d. from an underlying distribution, and it has not been systematically evaluated whether those assumptions hold in practice. In this paper, we present the first such study, by focusing on the algorithm from Asi & Liu (2024), which has the theoretically optimal excess rate. Our results show that the assumptions could be too restrictive for real world User-level DP applications, and call for the research community to consider more realistic assumptions.

¹For instance, patients contributing various medical records to train healthcare AI assistants, or users submitting different prompts/conversations to an open-domain chatbot.

²We focus on natural language generation tasks, which underpin many key LLM applications.

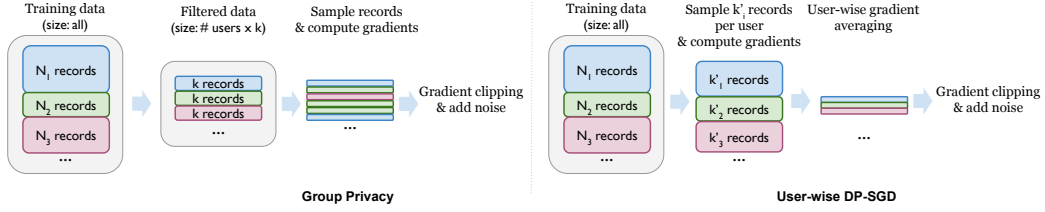


Figure 2: Illustration of how Group Privacy (left) and User-wise DP-SGD (right) preprocess training data, sample records, and calculate gradients at each training step.

2 User-level Differential Privacy Mechanisms

Differential privacy (DP) (Dwork et al., 2006a;b) is a mathematical framework for ensuring the privacy of individuals in datasets. Formally, a randomized algorithm \mathcal{A} satisfies (ϵ, δ) -DP if for any two neighboring datasets \mathcal{D} and \mathcal{D}' , and any subset \mathcal{S} of outputs, it holds for privacy parameters $\epsilon \in \mathbb{R}_{>0}$ and $\delta \in [0, 1)$ that

$$\Pr[\mathcal{A}(\mathcal{D}) \in \mathcal{S}] \leq e^\epsilon \cdot \Pr[\mathcal{A}(\mathcal{D}') \in \mathcal{S}] + \delta.$$

The definition of “neighboring datasets” is determined by the scope of privacy. For Example-level DP, two neighboring datasets are identical text corpora except for one text record. For User-level DP, we assume each user has a (variable) number of records, and two neighboring datasets are identical except for all the text belonging to a particular user.

Algorithm 1: Group Privacy

```

1: Input: Initial model weights  $\theta_0$ , training set  $D$  of  $N$  users and  $M$  records, learning rate  $\eta$ , iterations  $T$ , batch size  $B$ , privacy budget  $\epsilon$ , number of records per user  $k$ , gradient norm bound  $C$ 
/* Stage 1. Compute noise multiplier */
2:  $\sigma \leftarrow \text{PRIVACCOUNTING}(\frac{\epsilon}{k}, \frac{\delta(e^{\epsilon/k}-1)}{e^\epsilon-1}, M, B, T)$ 
/* Stage 2. Prepare the dataset */
3:  $D' \leftarrow \emptyset$ 
4: for  $i = 1, \dots, N$  do
5:   Sample  $\{x_j, y_j\}_{j \in [k]}$ ,  $k$  records for the  $i$ th user
6:    $D' \leftarrow D' \cup \{x_j, y_j\}_{j \in [k]}$ 
7: end for
/* Stage 3. Training */
8: for  $t = 1, \dots, T$  do
9:   Randomly draw  $\mathcal{B}_t$  from  $D'$ , a batch of  $B$  records
10:  for  $j = 1, \dots, B$  do
11:     $\mathbf{g}_{t,j} \leftarrow \nabla_{\theta_t} \ell(\theta_t, (x_j, y_j))$ 
    /* Clip gradient */
12:     $\hat{\mathbf{g}}_{t,j} \leftarrow \mathbf{g}_{t,j} / \max(1, \frac{\|\mathbf{g}_{t,j}\|_2}{C})$ 
13:  end for
/* Aggregate and add noise */
14:   $\hat{\mathbf{g}}_t \leftarrow \frac{1}{B} \left( \sum_{j \in [B]} \hat{\mathbf{g}}_{t,j} + \mathcal{N}(0, \sigma^2 C^2 \mathbf{I}_d) \right)$ 
/* Model update */
15:   $\theta_{t+1} \leftarrow \theta_t - \eta \hat{\mathbf{g}}_t$ 
16: end for

```

Algorithm 2: User-wise DP-SGD

```

1: Input: Initial model weights  $\theta_0$ , training set  $D$  of  $N$  users and  $M$  records, learning rate  $\eta$ , iterations  $T$ , user batch size  $n$ , privacy budget  $\epsilon$ , number of records per user  $\{k'_i\}_{i=1}^n$ , gradient norm bound  $C$ 
/* Stage 1. Compute noise multiplier */
2:  $\sigma \leftarrow \text{PRIVACCOUNTING}(\epsilon, \delta, N, n, T)$ 
/* Stage 2. Prepare the dataset */
3: (User-wise DP-SGD directly uses  $D$ )
/* Stage 3. Training */
4: for  $t = 1, \dots, T$  do
5:   Randomly draw  $\mathcal{U}_t$ , a batch of  $n$  users
6:   for  $i = 1, \dots, n$  do
7:     Sample  $\{x_j, y_j\}_{j \in [k'_i]}$ ,  $k'_i$  records for the  $i$ th user in  $\mathcal{U}_t$ 
    /* Compute user-averaged gradient */
8:      $\mathbf{g}_{t,i} \leftarrow \frac{1}{k'_i} \left( \sum_{j \in [k'_i]} \nabla_{\theta_t} \ell(\theta_t, (x_j, y_j)) \right)$ 
    /* Clip gradient */
9:      $\hat{\mathbf{g}}_{t,i} \leftarrow \mathbf{g}_{t,i} / \max(1, \frac{\|\mathbf{g}_{t,i}\|_2}{C})$ 
10:  end for
/* Aggregate and add noise */
11:   $\hat{\mathbf{g}}_t \leftarrow \frac{1}{n} \left( \sum_{i \in [n]} \hat{\mathbf{g}}_{t,i} + \mathcal{N}(0, \sigma^2 C^2 \mathbf{I}_d) \right)$ 
/* Model update */
12:   $\theta_{t+1} \leftarrow \theta_t - \eta \hat{\mathbf{g}}_t$ 
13: end for

```

Group Privacy. Thanks to the composition property of the DP guarantee, an Example-level DP algorithm can be directly turned into a User-level DP algorithm for the case where each user

	Enron Email (Klimt & Yang, 2004)	BookSum (Kryściński et al., 2022)
# records for training	240,173	9,600
# records for evaluation	39,086	1,431
Avg. # records per privacy unit	13.2	52.2
Max # records per privacy unit	5,049	266
Min # records per privacy unit	1	1
Median # records per privacy unit	2.0	28.5
Choice of k	{2, 5, 10}	{2, 5, 10, 20, 50}

Table 1: Sequence-level and privacy unit level dataset statistics for the Enron Email and BookSum datasets.

contributes at most k records. Specifically, we can provide an upper bound on the privacy cost of Group Privacy by using the standard group privacy lemma.

Proposition 1 (Group Privacy; e.g., Vadhan (2017)). *If \mathcal{M} satisfies (ϵ, δ) -DP then for all $k \geq 1$, then the mechanism \mathcal{M}' , that limits contribution from each user to be at most k (in any arbitrary manner), satisfies $(k\epsilon, \delta \frac{e^{k\epsilon}-1}{e^\epsilon-1})$ -user-level-DP.*

Thus, if we choose σ such that DP-SGD (with Example-level DP) would satisfy (ϵ', δ') -DP for $\epsilon' = \frac{\epsilon}{k}$ and $\delta' = \delta \frac{e^{\epsilon'}-1}{e^\epsilon-1}$, then by Proposition 1, we have that Group Privacy DP-SGD satisfies (ϵ, δ) -User-level DP.

User-wise DP-SGD. Group Privacy can be applied to any underlying *record-level* DP algorithm. However, this flexibility comes at the potential cost of not being able to utilize the structure of the underlying algorithm directly. Here, we introduce a simple User-level DP algorithm, called User-wise DP-SGD, based on the classical DP-SGD algorithm (Abadi et al., 2016) for Example-level DP training. At each training step, User-wise DP-SGD samples a batch of users. For each user, it then samples several records, and computes the average gradients on those records³. The (average) gradients from the batch of users are then norm-clipped, mean-aggregated, and noised before passing to the optimizer. See Algorithm 2 for a formal algorithm description. We note the main modification of the original DP-SGD algorithm is user-wise sampling and clipping, which is similar to a combination of DP-SGD with FedAvg (McMahan et al., 2017) evaluated in some private federated learning tasks (McMahan et al., 2018; Kairouz et al., 2021). In this paper, we do not assume a federated learning setting, and allow the learner to inspect all user data to devise more sophisticated sampling strategies. Comparing to Group Privacy, User-wise DP-SGD does not need to preprocess the dataset to restrict that each user contributes at most k records. And we do not even need to assume each user’s data consists of pre-defined records. For long form text, we can randomly sample contiguous chunks during training, creating more diverse records.

The algorithm in Asi & Liu (2024) (see Algorithm 3) is based on User-wise DP-SGD with a more involved gradient estimation sub-procedure. In the sub-procedure, the algorithm detects if the average gradients for the users in the batch are well-concentrated, in other words, if they are close enough to each other in ℓ_2 -distance. If most of the gradients are well-concentrated, the outliers are removed, and the remaining gradients are mean-aggregated and noised. It is shown that less noise is needed in this case. In the other case, if there is no strong concentration, the algorithm halts and refuses to output anything meaningful. Under the assumption that all the records are i.i.d. from some underlying distribution, this algorithm can provably achieve the optimal privacy-utility trade-off.

3 Experimental Setup

Our evaluation uses the Enron Email dataset (Klimt & Yang, 2004) and the BookSum dataset (Kryściński et al., 2022). We use the pretrained GPT-2 small (125M) model (Radford

³The number of records sampled for each user does not need to be the same for different users. However, for ease of implementation, we keep them the same in our experiments.

et al., 2019) and LoRA (Hu et al., 2022) fine-tuning, following Yu et al. (2021a).⁴ Please see Appendix C.3 for results on larger GPT-2 models, and our analysis in Appendix C.1 showing that LoRA does not significantly impact model performance. For the Enron Email dataset, we treat each unique email *sender* as the privacy unit; for BookSum, we treat each *book* as the privacy unit. Example-level and privacy unit-level statistics for these two datasets are provided in Table 1.

There is no established consensus on the optimal method to sample records for training User-level DP mechanisms, whether for Group Privacy or User-wise DP-SGD. Therefore, in the following sections, we conduct a comprehensive evaluation exploring two key factors in this selection: 1) the record selection criteria, and 2) the number of records to select for each privacy unit. Please see Appendix B for the detailed experimental setup and Appendix C.4 for the analysis of the computational overhead.

4 Group Privacy

In this section, we evaluate Group Privacy for User-level DP and explore design choices for selecting records for each user, including the data selection strategy (Section 4.1) and the number of records to be selected (Section 4.2).

4.1 Data selection strategy

We compare the following five methods for selecting records for each privacy unit:

- Random: Randomly select k records from each privacy unit.
- Longest: Select k records with the longest record length from each privacy unit.
- Shortest: Select k records with the shortest record length from each privacy unit.
- Highest Perplexity (PPL): Select k records with the highest perplexity, i.e., records that are most surprising to the (initial pre-trained) model.
- Lowest Perplexity (PPL): Select k records with the lowest perplexity, i.e., records that are least surprising to the (initial pre-trained) model.

We fix $k = 10$ for both datasets and report the results in Table 2.

Selection strategy matters for Enron Emails, but not for BookSum. On the Enron Email dataset (Table 2a), selecting the longest records from each user yields the best performance across all privacy levels. This suggests that longer email records tend to be more informative and representative of each user’s data, leading to better utility after private fine-tuning. For the BookSum dataset (Table 2b), the performance differences across selection methods are relatively small. Random selection performs best for $\epsilon = 1.0$ and 8.0, while selecting records with the lowest perplexity (least surprising to the model) works slightly better for $\epsilon = 3.0$.

In general, the results indicate that simple heuristics like selecting the longest or shortest records can be effective strategies, sometimes outperforming more complex criteria like perplexity-based selection. The performance gap between different selection methods is more pronounced on the Enron Email dataset compared to BookSum. This could be due to the greater variation in record lengths and content in the email data versus book summary data (see Table 7 in Appendix B).

4.2 Number of selected records (k) per unit

The number of records (k) selected for each privacy unit is another important factor when applying group privacy. In group privacy, increasing k makes both the noise and signal stronger, with opposing impact on the model’s performance. On the one hand, a larger k would result in higher noise due to the increased sensitivity of the privacy mechanism. On the other hand, using a larger k also results in more diverse data being used for training,

⁴We note that the choice of DP fine-tuning recipe is orthogonal to the user-level DP algorithms, as the latter can be seamlessly combined with any DP fine-tuning pipeline. We show in Appendix C.2 that we observe consistent results with a different fine-tuning method (Li et al., 2022).

	$\epsilon = 1.0$	$\epsilon = 3.0$	$\epsilon = 8.0$		$\epsilon = 1.0$	$\epsilon = 3.0$	$\epsilon = 8.0$
Random	35.28	31.50	28.51	Random	27.34	27.17	27.02
Longest	35.00	31.38	28.29	Longest	27.38	27.17	27.05
Shortest	35.31	31.96	28.75	Shortest	27.43	27.19	27.04
Highest PPL	35.30	31.58	28.46	Highest PPL	27.42	27.19	27.06
Lowest PPL	35.28	31.69	28.59	Lowest PPL	27.39	27.16	27.03

(a) Enron Email

(b) BookSum

Table 2: Perplexity of Group Privacy with different sequence selection methods on the Enron Email dataset (a) and BookSum dataset (b) under varying privacy budget ϵ 's. Selecting the longest sequence consistently performs best for Enron Email. For BookSum, no single strategy dominates across all privacy budgets.

	$k = 2$	$k = 5$	$k = 10$		$k = 2$	$k = 5$	$k = 10$	$k = 20$	$k = 50$
$\epsilon = 1.0$	35.68	34.06	35.28	$\epsilon = 1.0$	27.31	27.34	27.45	27.56	27.49
$\epsilon = 3.0$	32.04	30.99	31.50	$\epsilon = 3.0$	27.14	27.15	27.17	27.24	29.68
$\epsilon = 8.0$	30.13	28.77	28.51	$\epsilon = 8.0$	27.08	27.05	27.02	27.07	27.22
$\epsilon = \infty$	23.01	19.96	19.53	$\epsilon = \infty$	26.07	25.75	25.62	25.53	25.43

(a) Enron Email

(b) BookSum

Table 3: Perplexity of Group Privacy with different number of sequences per privacy unit (i.e., k) on the Enron Email dataset (a) and BookSum dataset (b) under varying privacy budget ϵ 's. Smaller values of k generally achieve better results for smaller ϵ , while larger ϵ favors larger k .

which can potentially improve the model's utility. Therefore, determining the optimal value of k for utility is a trade-off between *the increased noise* and *the diversity of the training data*.

Optimal k balances noise from privacy and training data diversity. To investigate the impact of k , we fix the data selection strategy to the random selection method and vary the value of k . We observe in Table 3 that for lower privacy budgets (i.e., $\epsilon = 1.0$ or 3.0), using a smaller k is generally better, as the undesirable increase in noise when k increases outweighs the benefits of diverse data. However, for larger ϵ , using a larger k is usually preferred, as the high privacy budget can potentially tolerate slightly more noise being introduced. In such cases, the diversity of the training data becomes more beneficial for larger k , as evidenced by lower perplexity for larger k 's when $\epsilon = \infty$ (non-private setting)⁵. We also observe similar results on GPT2 medium and large models, as detailed in Appendix C.3.

5 User-wise DP-SGD

In this section, we evaluate User-wise DP-SGD and explore design choices for selecting records for each user. We discuss the data selection strategy (Section 5.1) and the number of records to be selected (Section 5.2). We also analyze the applicability of the advanced User-wise DP-SGD method proposed by Asi & Liu (2024) based on a more advanced gradient estimation sub-procedure.

5.1 Data selection strategy

Unlike Group Privacy that requires preprocessing to limit each user's contribution to k records, User-wise DP-SGD imposes no such constraint. This allows exploring data selection strategies beyond record boundaries. Therefore, in addition to the five selection strategies discussed in Section 4.1, we also explore a method called **Random Chunk**. Specifically, for each user, we concatenate all their records into a single document, and randomly fetch a chunk of the maximum record length (as defined by the model) from it.

⁵Note that for both methods, we report results for $\epsilon = \infty$ following their corresponding algorithms in Algorithm 1 and Algorithm 2 while bypassing the stage of aggregation and noise addition.

	$\epsilon = 1.0$	$\epsilon = 3.0$	$\epsilon = 8.0$		$\epsilon = 1.0$	$\epsilon = 3.0$	$\epsilon = 8.0$
Random chunk	34.01	31.32	29.87	Random chunk	27.31	27.10	26.93
Random	34.22	31.85	30.22	Random	27.38	27.16	27.01
Longest	34.47	31.76	30.54	Longest	27.38	27.17	27.02
Shortest	35.68	32.91	31.19	Shortest	27.42	27.16	27.02
Highest PPL	34.36	31.65	30.16	Highest PPL	27.41	27.18	27.04
Lowest PPL	35.02	31.53	30.71	Lowest PPL	27.39	27.16	27.02

(a) Enron Email (b) BookSum

Table 4: Perplexity of User-wise DP-SGD with different sequence selection methods on the Enron Email dataset (a) and BookSum dataset (b) under varying privacy budgets (i.e., ϵ). Selecting the random chunks consistently performs best.

	$k = 2$	$k = 5$	$k = 10$		$k = 2$	$k = 5$	$k = 10$	$k = 20$	$k = 50$
$\epsilon = 1.0$	34.37	35.02	34.01	$\epsilon = 1.0$	27.62	27.38	27.38	27.35	27.33
$\epsilon = 3.0$	31.31	31.92	31.32	$\epsilon = 3.0$	27.29	27.19	27.18	27.17	27.17
$\epsilon = 8.0$	30.12	30.29	29.87	$\epsilon = 8.0$	27.11	27.02	27.01	27.00	27.01
$\epsilon = \infty$	22.87	19.67	18.64	$\epsilon = \infty$	24.38	24.22	24.12	24.11	24.09

(a) Enron Email (b) BookSum

Table 5: Perplexity of User-wise DP-SGD with different number of sequences per privacy unit (i.e., k) on the Enron Email dataset (a) and BookSum dataset (b) under varying privacy budget ϵ 's. Using a larger value of k consistently improves performance.

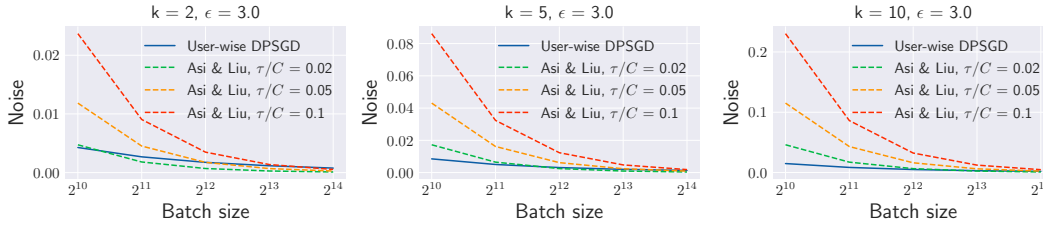


Figure 3: Effective noise of User-wise DP-SGD and the advanced method proposed by Asi & Liu (2024) under different numbers of records per user (k), with $\epsilon = 3.0$. As shown, for Asi & Liu (2024) to yield lower noise than standard User-wise DP-SGD, the ratio between the concentration factor τ and the clipping norm C must be smaller than 0.1. However, in the evaluated datasets, τ/C is around 1. Figure 7 presents results for different ϵ 's.

As shown in Table 4, **Random Chunk** consistently outperforms other methods across datasets and privacy budgets ϵ . This benefit likely stems from increased data diversity during training and the ability to span record boundaries.

5.2 Number of selected records (k) per unit

User-wise DP-SGD favors larger k , with diminishing returns. In contrast to Group Privacy (Section 4.2), increasing k monotonically improves User-wise DP-SGD's utility by providing more diverse data per user. However, larger k also incurs slightly higher computation (Appendix C.5). The benefit diminishes as k grows, so for practical deployment, choose a sufficiently large k to balance utility and efficiency. For instance, on the BookSum dataset, $k = 10$ appears to achieve the best trade-off between these two factors.

5.3 Analysis of the advanced User-wise DP-SGD

As discussed in Section 2, Asi & Liu (2024) proposed an advanced User-wise DP-SGD algorithm that requires injecting less noise if per-user averaged gradients in a batch exhibit low variance. Specifically, recall that User-wise DP-SGD has a clipping norm parameter C , and the noise added is proportional to C . Asi & Liu (2024) showed that when most of the gradients are within ℓ_2 -distance τ of each other, adding noise proportional to τ suffices for privacy

	Group Privacy	User-wise DP-SGD		Group Privacy	User-wise DP-SGD
$\epsilon = 0.5$	35.31	35.08	$\epsilon = 0.5$	27.58	27.43
$\epsilon = 1.0$	33.59	33.36	$\epsilon = 1.0$	27.42	27.29
$\epsilon = 3.0$	31.05	30.98	$\epsilon = 3.0$	27.17	27.15
$\epsilon = 8.0$	28.51	28.32	$\epsilon = 8.0$	27.00	27.02

(a) Enron Email

(b) BookSum

Table 6: Perplexity of Group Privacy and User-wise DP-SGD under varying privacy budgets (ϵ). User-wise DP-SGD generally outperforms Group Privacy, especially for smaller privacy budgets.

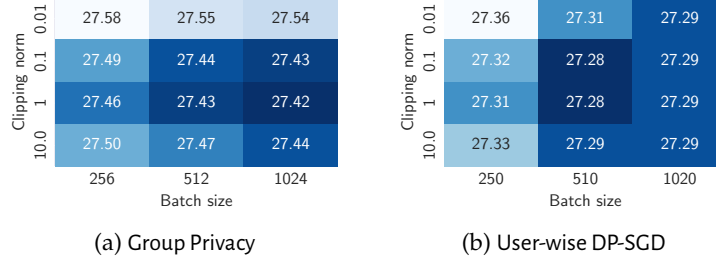


Figure 4: Perplexity of Group Privacy (a) and User-wise DP-SGD (b) on the BookSum dataset with a privacy budget of $\epsilon = 1.0$, under varying clipping norms and batch sizes. Using larger batch sizes generally improves the performance for both methods. However, Group Privacy exhibits higher sensitivity to clipping norm variations compared to User-wise DP-SGD.

concern. Under the assumption that the records are drawn i.i.d. from some underlying distribution, [Asi & Liu \(2024\)](#) proved that this mechanism can achieve the optimal rate.

However, it remains unclear how applicable this (and many theoretically motivated) algorithm is to real world problems where the i.i.d. assumption might not be true, and the number of records per user is relatively small (e.g., $k \leq 50$). In order to answer this question, we measure the noise levels of standard User-wise DP-SGD and [Asi & Liu \(2024\)](#)’s method under different values of τ , controlling the required gradient concentration. Figure 3 shows that for most k and ϵ , [Asi & Liu \(2024\)](#)’s noise is lower than User-wise DP-SGD’s only if $\tau/C < 0.1$, making it highly unlikely to enter the advanced noising step (lines 10–15 in Algorithm 3). Despite its potential benefits, this method relies on high user gradient concentration, which does not hold in our settings.

6 Comparing Group Privacy and User-wise DP-SGD

Finally, we compare the performance of Group Privacy and User-wise DP-SGD under the same privacy budget. For Group Privacy, we use **Longest** as its data selection strategy, and for each ϵ , we use its corresponding best k , as reported in Table 3. For User-wise DP-SGD, we use **Random Chunk** for data selection, and use $k = 10$, as it achieves the best trade-off between utility and efficiency. We vary the other hyperparameters, including learning rate, batch size, number of training iterations, and the clipping norm, and report the best results for each mechanism in Table 6.

User-wise DP-SGD outperforms Group Privacy. At the mechanism level, User-wise DP-SGD consistently outperforms Group Privacy, especially for smaller privacy budgets. This is potentially due to User-wise DP-SGD allowing for more diverse data being selected in different minibatches during training, while Group Privacy already constrains the training data to be a subset of user records during the preprocessing stage. Additionally, for some users who have fewer than k records, Group Privacy will perform resampling to obtain k records. This repetition may also negatively impact the model’s performance. However, it is worth noting that Group Privacy requires minimal changes to implement on top of existing record-level private training, whereas User-wise DP-SGD may require modifications to the data loading pipeline. In this regard, practitioners may need to consider the implementation difficulty when choosing between these two methods.

Sensitivity to clipping norms. We specifically investigate the sensitivity of both mechanisms to clipping norms, as reported in Figure 4. As shown, Group Privacy is generally more sensitive to clipping norms compared to User-wise DP-SGD. This is because the clipping operation is performed on the gradient of each individual record for the Group Privacy method (see Algorithm 1). In contrast, for User-wise DP-SGD, the clipping is applied to the averaged gradients, which ideally exhibit less variance, making it less sensitive to clipping norms (see Algorithm 2).

7 Related Work

Record-level Differential Privacy. Differential privacy (DP) (Dwork et al., 2006b;a) is a widely adopted framework that formally bounds the privacy leakage of individual user information while still enabling the analysis of population-level patterns. When training deep neural networks with DP guarantees, the go-to algorithm is Differentially Private Stochastic Gradient Descent (DP-SGD), introduced in the seminal work of Abadi et al. (2016). This algorithm operates by clipping the contributions of gradients on a per-record basis and injecting noise into the average gradient updates during each iteration of SGD.

Previous research has applied DP-SGD for language models (Ponomareva et al., 2023), primarily focusing on the record level. These applications include work in natural language understanding (Li et al., 2022; Yu et al., 2021b; 2022), natural language generation (Anil et al., 2022), in-context learning (Tang et al., 2023; Wu et al., 2023; Duan et al., 2024), prompt tuning (Li et al., 2023b), synthetic text generation (Al Aziz et al., 2021; Yue et al., 2023), and retrieval-augmented language models (Huang et al., 2023).

User-level Differential Privacy. McMahan et al. (2018); Kairouz et al. (2021) studied user-level DP training of LSTM based language models in the federated learning setting. In contrast, we consider a general central training setting for more flexible samplers. Moreover, we studied modern transformer-based language models. More broadly, several fundamental and important problems have been actively studied under user-level DP in recent years, e.g., machine learning (Wang et al., 2019), learning discrete distributions (Liu et al., 2020), histogram estimation (Amin et al., 2019), Structured Query Language (SQL) (Wilson et al., 2020), number of users required with multiple items per user (Ghazi et al., 2021), stochastic convex optimization (Levy et al., 2021; Bassily & Sun, 2023; Ghazi et al., 2023a; Asi & Liu, 2024) and reduction from item-level to user-level DP (Ghazi et al., 2023b). As mentioned, a common assumption in the theoretical results above is that the data is drawn i.i.d. from an underlying distribution. This assumption is too restrictive, and it would be interesting to propose more realistic assumptions under which we can still gain some theoretical insights.

8 Conclusions

In this work, we study language model fine-tuning with DP guarantees. Since each user generally contributes multiple text records to the training corpus, to ensure equal privacy guarantees across users, the privacy unit needs to be set at the user level. We identify and systematically evaluate two mechanisms, Group Privacy and User-wise DP-SGD, for achieving user-level DP when fine-tuning large language models on natural language generation tasks. For each mechanism, we investigate data selection strategies to improve the trade-off between privacy and utility.

While our work provides valuable insights, we acknowledge a few limitations and suggest directions for future research. First, in our implementation of User-wise DP-SGD, we fixed the value of k (the number of gradients to sample per user) for simplicity. Exploring more dynamic choices of k may yield better utility while preserving privacy guarantees. Second, since User-wise DP-SGD can perform data selection on the fly, it will be interesting to investigate how other data selection methods, such as those based on gradient information or active learning, might impact the utility. Finally, while we focus on language generation, user-level DP has broader applications motivating analysis in domains like recommendation systems and structured prediction.

References

- Martin Abadi, Andy Chu, Ian Goodfellow, H Brendan McMahan, Ilya Mironov, Kunal Talwar, and Li Zhang. Deep learning with differential privacy. In *CCS*, pp. 308–318, 2016.
- Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altenschmidt, Sam Altman, Shyamal Anadkat, et al. GPT-4 technical report. *arXiv preprint arXiv:2303.08774*, 2023.
- Md Momin Al Aziz, Tanbir Ahmed, Tasnia Faequa, Xiaoqian Jiang, Yiyu Yao, and Noman Mohammed. Differentially private medical texts generation using generative neural networks. *ACM HEALTH*, 3(1):1–27, 2021.
- Kareem Amin, Alex Kulesza, Andres Munoz, and Sergei Vassilytiskii. Bounding user contributions: A bias-variance trade-off in differential privacy. In *ICML*, pp. 263–271, 2019.
- Rohan Anil, Badih Ghazi, Vineet Gupta, Ravi Kumar, and Pasin Manurangsi. Large-scale differentially private BERT. In *EMNLP (Findings)*, pp. 6481–6491, 2022.
- Rohan Anil, Andrew M Dai, Orhan Firat, Melvin Johnson, Dmitry Lepikhin, Alexandre Passos, Siamak Shakeri, Emanuel Taropa, Paige Bailey, Zhifeng Chen, et al. Palm 2 technical report. *arXiv preprint arXiv:2305.10403*, 2023.
- Hilal Asi and Daogao Liu. User-level differentially private stochastic convex optimization: Efficient algorithms with optimal rates. In *AISTATS*, 2024.
- Raef Bassily and Ziteng Sun. User-level private stochastic convex optimization with optimal rates. In *ICML*, pp. 1838–1851, 2023.
- Sébastien Bubeck, Varun Chandrasekaran, Ronen Eldan, Johannes Gehrke, Eric Horvitz, Ece Kamar, Peter Lee, Yin Tat Lee, Yuanzhi Li, Scott Lundberg, et al. Sparks of artificial general intelligence: Early experiments with GPT-4. *arXiv preprint arXiv:2303.12712*, 2023.
- Nicholas Carlini, Florian Tramer, Eric Wallace, Matthew Jagielski, Ariel Herbert-Voss, Katherine Lee, Adam Roberts, Tom Brown, Dawn Song, Ulfar Erlingsson, et al. Extracting training data from large language models. In *USENIX*, pp. 2633–2650, 2021.
- Nicholas Carlini, Daphne Ippolito, Matthew Jagielski, Katherine Lee, Florian Tramer, and Chiyuan Zhang. Quantifying memorization across neural language models. In *ICLR*, 2022.
- Mark Chen, Jerry Tworek, Heewoo Jun, Qiming Yuan, Henrique Ponde de Oliveira Pinto, Jared Kaplan, Harri Edwards, Yuri Burda, Nicholas Joseph, Greg Brockman, et al. Evaluating large language models trained on code. *arXiv preprint arXiv:2107.03374*, 2021.
- Jiaxi Cui, Zongjian Li, Yang Yan, Bohua Chen, and Li Yuan. Chatlaw: Open-source legal large language model with integrated external knowledge bases. *arXiv preprint arXiv:2306.16092*, 2023.
- Haonan Duan, Adam Dziedziec, Nicolas Papernot, and Franziska Boenisch. Flocks of stochastic parrots: Differentially private prompt learning for large language models. In *NeurIPS*, 2024.
- Cynthia Dwork, Krishnaram Kenthapadi, Frank McSherry, Ilya Mironov, and Moni Naor. Our data, ourselves: Privacy via distributed noise generation. In *EUROCRYPT*, pp. 486–503, 2006a.
- Cynthia Dwork, Frank McSherry, Kobbi Nissim, and Adam D. Smith. Calibrating noise to sensitivity in private data analysis. In *TCC*, pp. 265–284, 2006b.
- Badih Ghazi, Ravi Kumar, and Pasin Manurangsi. User-level differentially private learning via correlated sampling. In *NeurIPS*, pp. 20172–20184, 2021.

- Badih Ghazi, Pritish Kamath, Ravi Kumar, Pasin Manurangsi, Raghu Meka, and Chiyuan Zhang. On user-level private convex optimization. In *ICML*, pp. 11283–11299, 2023a.
- Badih Ghazi, Pritish Kamath, Ravi Kumar, Pasin Manurangsi, Raghu Meka, and Chiyuan Zhang. User-level differential privacy with few examples per user. In *NeurIPS*, 2023b.
- Google. DP Accounting Library. https://github.com/google/differential-privacy/tree/main/python/dp_accounting, 2020.
- Neel Guha, Julian Nyarko, Daniel Ho, Christopher Ré, Adam Chilton, Alex Chohlas-Wood, Austin Peters, Brandon Waldon, Daniel Rockmore, Diego Zambrano, et al. Legalbench: A collaboratively built benchmark for measuring legal reasoning in large language models. In *NeurIPS*, 2023.
- Daya Guo, Qihao Zhu, Dejian Yang, Zhenda Xie, Kai Dong, Wentao Zhang, Guanting Chen, Xiao Bi, Y Wu, YK Li, et al. Deepseek-coder: When the large language model meets programming—the rise of code intelligence. *arXiv preprint arXiv:2401.14196*, 2024.
- Peter Henderson, Xuechen Li, Dan Jurafsky, Tatsunori Hashimoto, Mark A Lemley, and Percy Liang. Foundation models and fair use. *arXiv preprint arXiv:2303.15715*, 2023.
- Edward J Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. LoRA: Low-rank adaptation of large language models. In *ICLR*, 2022.
- Yangsibo Huang, Samyak Gupta, Zexuan Zhong, Kai Li, and Danqi Chen. Privacy implications of retrieval-based language models. In *EMNLP*, pp. 14887–14902, 2023.
- Peter Kairouz, Brendan McMahan, Shuang Song, Om Thakkar, Abhradeep Thakurta, and Zheng Xu. Practical and private (deep) learning without sampling or shuffling. In *ICML*, pp. 5213–5225, 2021.
- Jared Kaplan, Sam McCandlish, Tom Henighan, Tom B Brown, Benjamin Chess, Rewon Child, Scott Gray, Alec Radford, Jeffrey Wu, and Dario Amodei. Scaling laws for neural language models. *arXiv preprint arXiv:2001.08361*, 2020.
- Bryan Klimt and Yiming Yang. The Enron corpus: A new dataset for email classification research. In *ECML*, pp. 217–226, 2004.
- Wojciech Kryściński, Nazneen Rajani, Divyansh Agarwal, Caiming Xiong, and Dragomir Radev. Booksum: A collection of datasets for long-form narrative summarization. In *EMNLP (Findings)*, pp. 6536–6558, 2022.
- Peter Lee, Sebastien Bubeck, and Joseph Petro. Benefits, limits, and risks of GPT-4 as an AI chatbot for medicine. *NEJM*, 388(13):1233–1239, 2023.
- Daniel Levy, Ziteng Sun, Kareem Amin, Satyen Kale, Alex Kulesza, Mehryar Mohri, and Ananda Theertha Suresh. Learning with user-level privacy. In *NeurIPS*, pp. 12466–12479, 2021.
- Raymond Li, Loubna Ben Allal, Yangtian Zi, Niklas Muennighoff, Denis Kocetkov, Chenghao Mou, Marc Marone, Christopher Akiki, Jia Li, Jenny Chim, et al. Starcoder: may the source be with you! *arXiv preprint arXiv:2305.06161*, 2023a.
- Xuechen Li, Florian Tramer, Percy Liang, and Tatsunori Hashimoto. Large language models can be strong differentially private learners. In *ICLR*, 2022.
- Yansong Li, Zhixing Tan, and Yang Liu. Privacy-preserving prompt tuning for large language model services. *arXiv preprint arXiv:2305.06212*, 2023b.
- Yuhan Liu, Ananda Theertha Suresh, Felix Xinnan X Yu, Sanjiv Kumar, and Michael Riley. Learning discrete distributions: user vs item-level privacy. In *NeurIPS*, pp. 20965–20976, 2020.

- Renqian Luo, Liai Sun, Yingce Xia, Tao Qin, Sheng Zhang, Hoifung Poon, and Tie-Yan Liu. Biogpt: generative pre-trained transformer for biomedical text generation and mining. *Briefings in Bioinformatics*, 23(6):bbac409, 2022.
- Brendan McMahan, Eider Moore, Daniel Ramage, Seth Hampson, and Blaise Aguera y Arcas. Communication-efficient learning of deep networks from decentralized data. In *AISTATS*, pp. 1273–1282, 2017.
- H Brendan McMahan, Daniel Ramage, Kunal Talwar, and Li Zhang. Learning differentially private recurrent language models. In *ICLR*, 2018.
- Michael Moor, Oishi Banerjee, Zahra Shakeri Hossein Abad, Harlan M Krumholz, Jure Leskovec, Eric J Topol, and Pranav Rajpurkar. Foundation models for generalist medical artificial intelligence. *Nature*, 616(7956):259–265, 2023.
- Natalia Ponomareva, Hussein Hazimeh, Alex Kurakin, Zheng Xu, Carson Denison, H Brendan McMahan, Sergei Vassilvitskii, Steve Chien, and Abhradeep Guha Thakurta. How to DP-fy ML: A practical guide to machine learning with differential privacy. *JAIR*, 77: 1113–1201, 2023.
- Alec Radford, Jeff Wu, Rewon Child, David Luan, Dario Amodei, and Ilya Sutskever. Language models are unsupervised multitask learners. 2019. https://cdn.openai.com/better-language-models/language_models_are_unsupervised_multitask_learners.pdf.
- Baptiste Roziere, Jonas Gehring, Fabian Gloeckle, Sten Sootla, Itai Gat, Xiaoqing Ellen Tan, Yossi Adi, Jingyu Liu, Tal Remez, Jérémy Rapin, et al. Code llama: Open foundation models for code. *arXiv preprint arXiv:2308.12950*, 2023.
- Karan Singhal, Shekoofeh Azizi, Tao Tu, S Sara Mahdavi, Jason Wei, Hyung Won Chung, Nathan Scales, Ajay Tanwani, Heather Cole-Lewis, Stephen Pfohl, et al. Large language models encode clinical knowledge. *arXiv preprint arXiv:2212.13138*, 2022.
- Xinyu Tang, Richard Shin, Huseyin A Inan, Andre Manoel, Fatemehsadat Mireshghallah, Zinan Lin, Sivakanth Gopi, Janardhan Kulkarni, and Robert Sim. Privacy-preserving in-context learning with differentially private few-shot generation. *arXiv preprint arXiv:2309.11765*, 2023.
- Salil P. Vadhan. The complexity of differential privacy. In *Tutorials on the Foundations of Cryptography*, pp. 347–450. Springer International Publishing, 2017.
- Zhibo Wang, Mengkai Song, Zhifei Zhang, Yang Song, Qian Wang, and Hairong Qi. Beyond inferring class representatives: User-level privacy leakage from federated learning. In *INFOCOM*, pp. 2512–2520, 2019.
- Royce J Wilson, Celia Yuxin Zhang, William Lam, Damien Desfontaines, Daniel Simmons-Marengo, and Bryant Gipson. Differentially private SQL with bounded user contribution. *PETS*, 2:230–250, 2020.
- Tong Wu, Ashwinee Panda, Jiachen T Wang, and Prateek Mittal. Privacy-preserving in-context learning for large language models. In *ICLR*, 2023.
- Zheng Xu, Maxwell Collins, Yuxiao Wang, Liviu Panait, Sewoong Oh, Sean Augenstein, Ting Liu, Florian Schroff, and H Brendan McMahan. Learning to generate image embeddings with user-level differential privacy. In *CVPR*, pp. 7969–7980, 2023.
- Da Yu, Saurabh Naik, Arturs Backurs, Sivakanth Gopi, Huseyin A Inan, Gautam Kamath, Janardhan Kulkarni, Yin Tat Lee, Andre Manoel, Lukas Wutschitz, et al. Differentially private fine-tuning of language models. *arXiv preprint arXiv:2110.06500*, 2021a.
- Da Yu, Huishuai Zhang, Wei Chen, Jian Yin, and Tie-Yan Liu. Large scale private learning via low-rank reparametrization. In *ICML*, pp. 12208–12218, 2021b.

Da Yu, Saurabh Naik, Arturs Backurs, Sivakanth Gopi, Huseyin A Inan, Gautam Kamath, Janardhan Kulkarni, Yin Tat Lee, Andre Manoel, Lukas Wutschitz, et al. Differentially private fine-tuning of language models. In *ICLR*, 2022.

Xiang Yue, Huseyin A Inan, Xuechen Li, Girish Kumar, Julia McAnallen, Hoda Shajari, Huan Sun, David Levitan, and Robert Sim. Synthetic text generation with differential privacy: A simple and practical recipe. In *ACL*, 2023.

Appendices

A	Algorithm	15
B	Experimental details	16
B.1	Dataset details	16
B.2	Training details	17
C	More results	18
C.1	LoRA v.s. Full fine-tuning	18
C.2	Compatibility with a different DP fine-tuning method	18
C.3	Results under different models	18
C.4	Computational overhead	20
C.5	Cost of k in User-wise DP-SGD	20
C.6	More results for comparing User-wise DP-SGD and Asi & Liu (2024)	20

A Algorithm

We describe the algorithm in [Asi & Liu \(2024\)](#) in our notation. They use full-batch size.

Algorithm 3 User-wise DP-SGD with filter

```

1: Input: Initial model weights  $\theta_0$ , training set  $D$  of  $N$  users and  $M$  records, learning rate
    $\eta$ , iterations  $T$ , privacy budget  $\varepsilon$ , number of records per user  $\{k'_i\}_{i=1}^n$ , concentration
   threshold  $\tau$ 
   /* Stage 1. Compute noise multiplier */
2:  $\sigma \leftarrow \text{PRIVACCOUNTING}(\varepsilon/2, \delta/2, N, N, T)$ 
   /* Stage 2. Training */
3: for  $t = 1, \dots, T$  do
4:   for  $i = 1, \dots, N$  do
5:     Sample  $\{x_j, y_j\}_{j \in [k'_i]}$ ,  $k'_i$  records for the  $i$ th user in  $D$ 
     /* Compute user-averaged gradient */
6:      $\mathbf{g}_{t,i} \leftarrow \frac{1}{k'_i} (\sum_{j \in [k'_i]} \nabla_{\theta_t} \ell(\theta_t, (x_j, y_j)))$ 
7:   end for
   /* Compute the concentration scores */
8:   Compute

$$s_t^{\text{conc}}(D, \tau) := \frac{1}{N} \sum_{i,i'} \mathbb{1}(\|\mathbf{g}_{t,i} - \mathbf{g}_{t,i'}\| \leq \tau). \quad (1)$$

   /* Run the AboveThreshold with the concentration scores. If it passes, remove
   the outliers */
9:   if  $\text{AboveThreshold}(s_t^{\text{conc}}, \frac{\varepsilon}{2}, 4N/5) = \top$  then
10:    Set  $\mathcal{B}_t = \emptyset$ 
11:    Set  $f_{t,i} = \sum_{i'} \mathbb{1}(\|\mathbf{g}_{t,i} - \mathbf{g}_{t,i'}\| \leq 2\tau)$ 
12:    Add  $i^{\text{th}}$  user to  $\mathcal{B}_t$  with probability  $p_{t,i}$  for  $p_{t,i} = \begin{cases} 0 & f_{t,i} < N/2 \\ 1 & f_{t,i} \geq 2N/3 \\ \frac{f_{t,i} - N/2}{N/6} & o.w. \end{cases}$ 
     /* Aggregate and add noise for the remaining users */
13:    Let  $\hat{\mathbf{g}}_t = \frac{1}{|\mathcal{B}_t|} \sum_{i \in \mathcal{B}_t} \mathbf{g}_{t,i}$  if  $\mathcal{B}_t$  is not empty, and 0 otherwise
14:     $\tilde{\mathbf{g}}_t \leftarrow \hat{\mathbf{g}}_t + \nu_t$ , where  $\nu_t \sim \mathcal{N}(0, 8\tau^2 \log(e^\varepsilon T / \delta) \sigma^2 / N^2 \mathbf{I}_d)$ 
     /* Model update */
15:     $\theta_{t+1} \leftarrow \theta_t - \eta \tilde{\mathbf{g}}_t$ 
16:   else
17:     Halt. /* Halt the algorithm if it does not pass. */
18:   end if
19: end for

```

AboveThreshold is a classic algorithm used in DP literature. See Algorithm 1 in [Asi & Liu \(2024\)](#) for more details and references.

B Experimental details

B.1 Dataset details

Datasets. Our evaluation uses the Enron Email dataset (Klimt & Yang, 2004) and the BookSum dataset (Kryściński et al., 2022).

- The **Enron Email dataset** (Klimt & Yang, 2004) consists of approximately 500,000 emails generated by employees of the Enron Corporation. As these emails originate from real-world users and cover diverse topics, they may also contain privacy-sensitive information such as personally identifiable data, making this dataset a suitable approximation of real-world user-level DP applications. We preprocess the dataset following the details provided in Appendix B.
- The **BookSum dataset** (Kryściński et al., 2022) contains human-written summaries of various books. Books and other literary works are typically protected by copyright laws, and training models on copyrighted material without permission from the copyright holders could raise legal issues (Henderson et al., 2023). While the summaries in the BookSum dataset may be considered transformative fair use of copyrighted books, applying DP training can further obfuscate the original data, potentially reducing the risk of memorizing and regurgitating copyrighted content from the source material.

Privacy units. For the Enron Email dataset, we consider each unique email sender as a single privacy unit. For BookSum, because the author name is not available in the dataset, we consider the book-level privacy instead. Example-level and privacy unit-level statistics for these two datasets are provided in Table 1.

Data preprocessing for the Enron Email dataset. To prepare the Enron Email dataset (Klimt & Yang, 2004) for our evaluation of user-level DP implementations, we first parse each record, into DATE, FROM (sender), TO (receiver), SUBJECT, and BODY, using regular expressions. Note that for each of the “CC” or “BCC” addresses on the email, we treat it as a new receiver. Specifically, we will create a new record with the same (DATE, FROM, SUBJECT, BODY), but a different TO (i.e., receiver). We then perform in-email deduplication to attain a dataset with higher quality: We only keep records whose maximum repetition of any 20-gram is 1. Forwarded emails contain the email body of the forwarded messages; this complicates the privacy accounting process. Therefore, for simplicity, we remove forwarded emails. After preprocessing, the final dataset contains 240,173 emails.

Distribution of number of records per privacy unit. Figure 5 presents the distribution of number of records per privacy unit in both datasets.

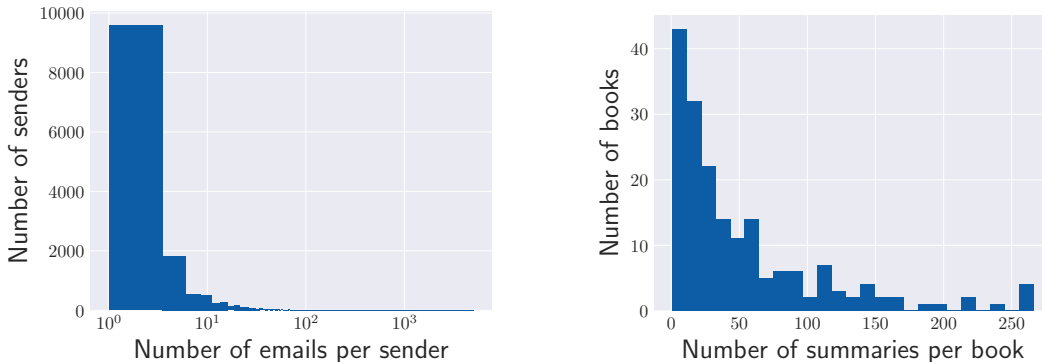


Figure 5: Distribution of number of records per privacy unit in Enron Email (left) and BookSum (right).

Statistics after data selection. For reference, Table 7 reports some statistics of the selected records after applying different data selection methods discussed in Section 4.1.

	Avg. length	Avg. PPL	Fraction of selected sequences w/ length < max_seq_len
Random	240.67	214.67	0.73
Longest	274.91	201.14	0.69
Shortest	222.28	278.75	0.76
Highest PPL	233.27	1123.77	0.74
Lowest PPL	247.18	188.92	0.72

(a) Enron Email

	Avg. length	Avg. PPL	Fraction of selected sequences w/ length < max_seq_len
Random	557.49	34.37	0.61
Longest	817.93	33.79	0.30
Shortest	338.43	41.99	0.80
Highest PPL	483.79	50.32	0.66
Lowest PPL	539.52	25.94	0.65

(b) BookSum

Table 7: Comparison of the average sequence length, perplexity, and fraction of selected sequences with length smaller than the maximum allowed sequence length, after applying different data selection techniques to the (a) Enron Email dataset and (b) BookSum dataset.

B.2 Training details

Models. Our experiments primarily use the pretrained GPT-2 small model (Radford et al., 2019), which has 125 million trainable parameters. To assess the generalizability of our findings, we also present results with GPT-2 models of different sizes in Appendix C.3. For each evaluated dataset, we fine-tune the model for the language modeling task, using LoRA (Hu et al., 2022) with a rank of 32. As shown in Appendix C.1, LoRA does not significantly impact model performance. Model performance is measured using perplexity, a standard evaluation metric for language models.

Privacy Accounting. We use the privacy accounting algorithm based on privacy loss distributions (PLD) as implemented in the open-source dp_accounting library (Google, 2020). This privacy accounting assumes that the batches are constructed using Poisson subsampling. Even though our implementation involves constructing batches by going through users/records in a random order, we use the accounting assuming Poisson subsampling as is common practice in the privacy accounting of DP-SGD.

C More results

C.1 LoRA v.s. Full fine-tuning

Table 8 presents the perplexity scores for full fine-tuning and Low-Rank Adaptation (LoRA) (Hu et al., 2022) fine-tuning on the Enron Email and BookSum datasets. As shown, applying LoRA fine-tuning has a relatively minor impact on the model’s utility.

	Enron Email	BookSum
Full fine-tuning	18.53	23.79
LoRA, $r = 64$	18.83	24.07
LoRA, $r = 32$	19.05	24.18
LoRA, $r = 16$	19.39	24.31

Table 8: Comparison of perplexity scores for full fine-tuning and Low-Rank Adaptation (LoRA) fine-tuning with different rank values on the Enron Email and BookSum datasets.

C.2 Compatibility with a different DP fine-tuning method

Note that the choice of DP fine-tuning recipe is orthogonal to the user-level DP algorithms, as the latter can be seamlessly combined with any DP fine-tuning pipelines.

We also rerun our evaluation using the pipeline from Li et al. (2022) on the Enron Email dataset. Consistent with our previous findings, random chunking works best for User-wise DP-SGD, and longest sequence selection works best for Group Privacy. The performance of both mechanisms, using their respective optimal selection strategies, is shown in Table 9 and aligns with our findings in the main paper.

	Group Privacy	User-wise DP-SGD
$\epsilon = 1.0$	33.48	33.21
$\epsilon = 3.0$	31.09	30.76
$\epsilon = 8.0$	28.34	28.07

Table 9: Perplexity of Group Privacy and User-wise DP-SGD under different privacy budgets (ϵ) on the Enron Email dataset, using the DP-fine-tuning method from Li et al. (2022). User-wise DP-SGD generally outperforms Group Privacy.

C.3 Results under different models

We further report the performance of varying the number of records per privacy unit (k) for Group Privacy and User-wise DP-SGD under different sizes of GPT-2 models in Table 10 and Table 11, respectively. The observed trends are consistent across different model sizes.

	$k = 2$	$k = 5$	$k = 10$	$k = 20$	$k = 50$
$\epsilon = 1.0$	27.31	27.34	27.45	27.56	27.49
$\epsilon = 3.0$	27.14	27.15	27.17	27.24	29.68
$\epsilon = 8.0$	27.08	27.05	27.02	27.07	27.22
(a) GPT2-small					
	$k = 2$	$k = 5$	$k = 10$	$k = 20$	$k = 50$
$\epsilon = 1.0$	21.83	21.91	21.99	22.09	22.87
$\epsilon = 3.0$	21.70	21.73	21.68	21.72	22.05
$\epsilon = 8.0$	21.61	21.60	21.52	21.53	21.68
(b) GPT2-medium					
	$k = 2$	$k = 5$	$k = 10$	$k = 20$	$k = 50$
$\epsilon = 1.0$	19.28	19.28	19.32	19.39	20.04
$\epsilon = 3.0$	19.21	19.18	19.18	19.22	19.74
$\epsilon = 8.0$	19.12	19.03	18.99	19.00	19.31
(c) GPT2-large					

Table 10: Perplexity of Group Privacy with different number of sequences per privacy unit (i.e., k) on the Enron Email dataset (a) and BookSum dataset (b), under varying privacy budget ϵ 's, using different sizes of GPT-2 models. Smaller values of k generally achieve better results for smaller ϵ , while larger ϵ favors larger k .

	$k = 2$	$k = 5$	$k = 10$	$k = 20$	$k = 50$
$\epsilon = 1.0$	27.62	27.38	27.38	27.35	27.33
$\epsilon = 3.0$	27.29	27.19	27.16	27.17	27.17
$\epsilon = 8.0$	27.11	27.02	27.01	27.00	27.01
(a) GPT2-small					
	$k = 2$	$k = 5$	$k = 10$	$k = 20$	$k = 50$
$\epsilon = 1.0$	21.88	21.80	21.77	21.75	21.75
$\epsilon = 3.0$	21.61	21.52	21.54	21.52	21.51
$\epsilon = 8.0$	21.50	21.47	21.44	21.43	21.43
(b) GPT2-medium					
	$k = 2$	$k = 5$	$k = 10$	$k = 20$	$k = 50$
$\epsilon = 1.0$	19.22	19.21	19.19	19.19	19.19
$\epsilon = 3.0$	19.13	19.08	19.06	19.05	19.05
$\epsilon = 8.0$	18.99	18.93	18.93	18.92	18.92
(c) GPT2-large					

Table 11: Perplexity of User-wise DP-SGD with different number of sequences per privacy unit (i.e., k) on the Enron Email dataset (a) and BookSum dataset (b), under varying privacy budget ϵ 's, using different sizes of GPT-2 models. Using a larger value of k consistently improves performance.

C.4 Computational overhead

The main overhead of Group Privacy training methods is introduced by the per-example gradient clipping and noise addition (lines 11–13 in Algorithm 1). For the User-wise DP-SGD method, the primary overhead stems from the user-wise data sampling (line 5 in Algorithm 2), as well as per-user gradient clipping and noise addition (lines 8–9 in Algorithm 2).

We record the training time (in seconds) per step for different models and training methods with $k = 10$ on the Enron Email dataset in Table 12. The results are obtained using LoRA fine-tuning with $r = 32$ and a batch size of 1024, averaged across 100 training steps, on a single NVIDIA A100-80G GPU. As shown, both methods introduce very little computational overhead (4%–9%) compared to non-private training, regardless of the model size.

Model	Non-private training	Group privacy	User-wise DP-SGD
GPT2-small	11.95	12.70 (1.06 \times)	12.82 (1.07 \times)
GPT2-medium	30.90	32.00 (1.04 \times)	32.85 (1.06 \times)
GPT2-large	62.57	64.80 (1.04 \times)	68.45 (1.09 \times)

Table 12: Comparison of per-step runtime (seconds) for non-private training, and training with Group Privacy and User-wise DP-SGD on GPT-2 models of varying sizes.

C.5 Cost of k in User-wise DP-SGD

Increasing k in Group Privacy automatically results in larger datasets, and thus higher training time. We also show in Figure 6 that increasing k in User-wise DP-SGD also incurs longer running time, due to the cost of sampling more records per training step.

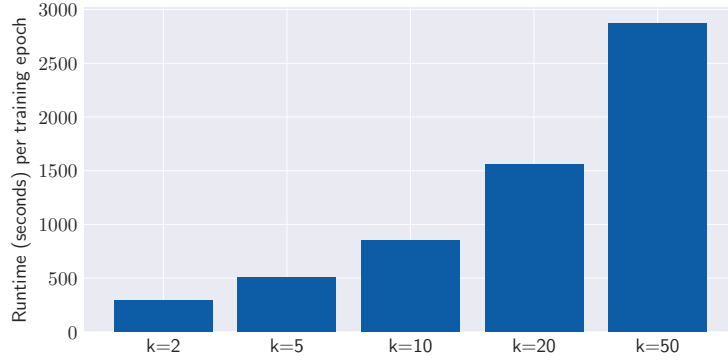


Figure 6: Runtime per training epoch under different k 's for BookSum dataset with User-wise DP-SGD.

C.6 More results for comparing User-wise DP-SGD and [Asi & Liu \(2024\)](#)

Figure 7 compares the noise of User-wise DP-SGD and the advanced method proposed by [Asi & Liu \(2024\)](#) under different ϵ 's. Still, for [Asi & Liu \(2024\)](#) to yield lower noise than standard User-wise DP-SGD, the ratio between the concentration factor τ and the clipping norm C must be smaller than 0.1. However, in the evaluated datasets, τ/C is around 1.

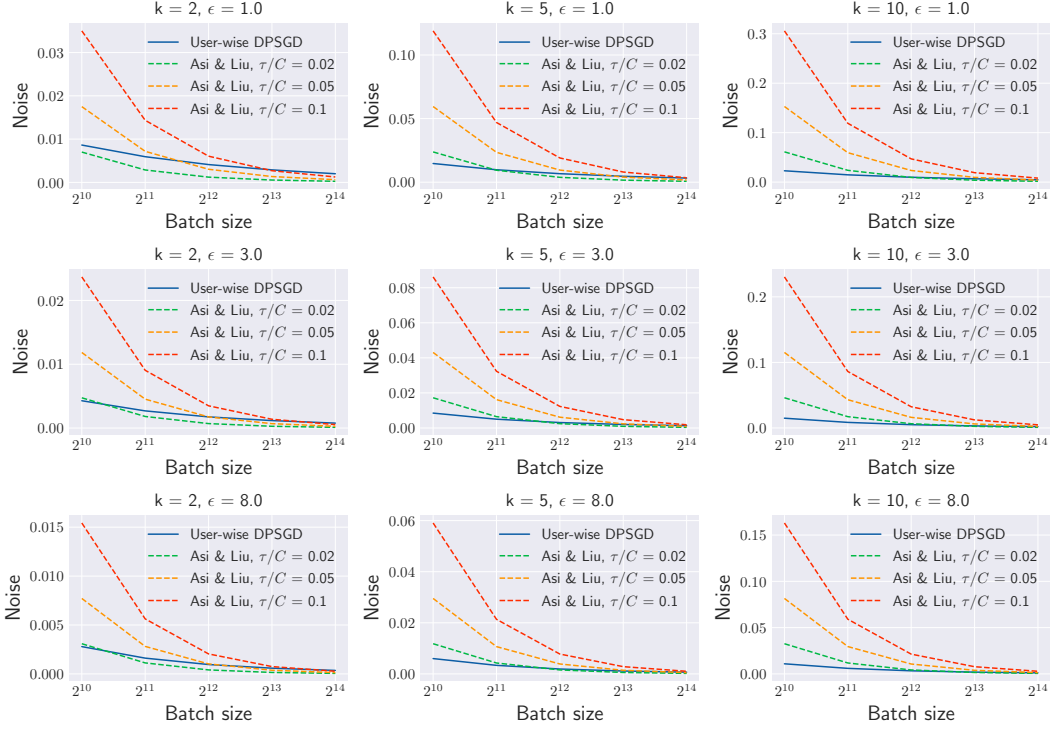


Figure 7: Effective noise of User-wise DP-SGD and the advanced method proposed by [Asi & Liu \(2024\)](#) under different ϵ 's and numbers of records per user (k). As shown, for [Asi & Liu \(2024\)](#) to yield lower noise than standard User-wise DP-SGD, the ratio between the concentration factor τ and the clipping norm C must be smaller than 0.1. However, in the evaluated datasets, τ/C is around 1.