

Space-efficient SLP Encoding for $O(\log N)$ -time Random Access

Akito Takasaka*¹ and Tomohiro I^{†1}

¹Kyushu Institute of Technology, 680-4 Kawazu, Iizuka, Fukuoka 820-8502, Japan

Abstract

A Straight-Line Program (SLP) \mathcal{G} for a string \mathcal{T} is a context-free grammar (CFG) that derives \mathcal{T} only, which can be considered as a compressed representation of \mathcal{T} . In this paper, we show how to encode \mathcal{G} in $n\lceil\lg N\rceil + (n + n')\lceil\lg(n + \sigma)\rceil + 4n - 2n' + o(n)$ bits to support random access queries of extracting $\mathcal{T}[p..q]$ in worst-case $O(\log N + q - p)$ time, where N is the length of \mathcal{T} , σ is the alphabet size, n is the number of variables in \mathcal{G} and $n' \leq n$ is the number of symmetric centroid paths in the DAG representation for \mathcal{G} .

1 Introduction

A Straight-Line Program (SLP) \mathcal{G} for a string \mathcal{T} is a context-free grammar (CFG) that derives \mathcal{T} only. The idea of grammar compression is to take \mathcal{G} as a compressed representation of \mathcal{T} , which is a useful scheme to capture repetitive substrings in \mathcal{T} . In fact the output of many practical dictionary-based compressors like RePair [6] and LZ77 [7, 17] can be considered as or efficiently converted to an SLP. Moreover SLPs have gained popularity for designing algorithms and data structures to work directly on compressed data. For more details see survey [8] and references therein.

One of the most fundamental tasks on compressed string is to support random access without explicitly decompressing the whole string. Let \mathcal{T} be a string of length N over an alphabet Σ of size σ and \mathcal{G} be an SLP that derives \mathcal{T} with V being the set of variables. For simplicity we assume that SLPs are in the normal form such that every production rule is of the form $X \rightarrow YZ \in (V \cup \Sigma)^2$. If we store the length of the string derived from every variable in $n \lg N$ bits in addition to the information of production rules, it is not difficult to see that we can access $\mathcal{T}[p]$ for any position $1 \leq p \leq N$ in $O(h)$ time, where h is the height of the derivation tree of \mathcal{G} : We can simulate the traversal from the root to the p -th leaf of the derivation tree of \mathcal{G} while deciding if the current node contains the target leaf in its left child or not. This simple random access algorithm is good enough if \mathcal{G} is well balanced, i.e., $h = O(\log N)$, but h could be as large as n in the worst case.

To solve this problem Bille et al. [2] showed that there is a data structure of $O(n \log N)$ bits of space that can retrieve any substring of length ℓ of \mathcal{T} in $O(\log N + \ell)$ time. Belazzougui et al. [1] showed that the query time can be improved to $O(\log N + \ell / \log_\sigma N)$ by adding some other data structures of $O(n \log N)$ bits to accelerate accessing $O(\log_\sigma N)$ consecutive characters. Verbin and Yu [15] studied lower bounds of random access data structures on grammar compressed strings and showed that the $O(\log N)$ term in the time complexities cannot be significantly improved in general with poly(n)-space data structures.

Another approach is to transform a given grammar into a balanced grammar of height $O(\log N)$ and apply the above mentioned simple random access algorithm. Ganardi et al. [5] showed that any SLP can be transformed in linear time into a balanced grammar without increasing its order in size. The result was refined in [4] for contracting SLPs, which have a stronger balancing argument. These results are helpful not only for random access but also for other operations that can be done

*takasaka.akito977@mail.kyutech.jp

†tomohiro@ai.kyutech.ac.jp

depending on the height of the derivation tree. However the constant-factor blow-up in grammar size can be a problem in space-sensitive applications.

In order to keep space usage small in practice, it is important to devise a space-economic way to encode \mathcal{G} and auxiliary data structures as such importance has been highlighted by increasing interest of succinct data structures. Since the righthand side of each production rule can be stored in $2\lceil\lg(n + \sigma)\rceil$ bits, a naive encoding for \mathcal{G} would use $2n\lceil\lg(n + \sigma)\rceil + n\lceil\lg N\rceil$ bits of space, which is far from an information-theoretic lower bound $\lg(n!) + 2n + o(n)$ bits for representing \mathcal{G} [13]. Maruyama et al. proposed an asymptotically optimal encoding of $n\lceil\lg(n + \sigma)\rceil + 2n + o(n)$ bits [9] for \mathcal{G} , which can be augmented with additional $n\lceil\lg \frac{N}{n}\rceil + 2n + o(n)$ bits to support $O(h + \ell)$ -time random access. Another practical encoding for random access was studied in [3] but its worst-case query time is still $O(h + \ell)$.

In this study, we propose a novel space-efficient SLP encoding that supports random access queries in worst-case $O(\log N + \ell)$ time. In so doing we simplify some ideas of [2] and adjust them to work with succinct data structures. For example, we replace the heavy-path decomposition of a Directed Acyclic Graph (DAG) with the symmetric centroid decomposition proposed in [5]. We decompose the DAG representation of the derivation tree of \mathcal{G} into disjoint Symmetric Centroid paths (SC-paths) so that every path from the root to a leaf passes through $O(\log N)$ distinct SC-paths. We augment each SC-path with compacted binary tries to support interval-biased search, which leads to $O(\log N)$ -time random access. Under a standard Word-RAM model with word size $\Omega(\lg N)$ we get the following result:

Theorem 1. *Let \mathcal{T} be a string of length N over an alphabet of σ . An SLP \mathcal{G} for \mathcal{T} can be encoded in $n\lceil\lg N\rceil + (n + n')\lceil\lg(n + \sigma)\rceil + 4n - 2n' + o(n)$ bits of space while allowing to retrieve, given $1 \leq p \leq q \leq N$, the substring $\mathcal{T}[p..q]$ in $O(\log N + q - p)$ time, where n is the number of variables of \mathcal{G} and $n' \leq n$ is the number of SC-paths in the DAG representation for \mathcal{G} .*

2 Preliminaries

2.1 Basic Notations

For two integers i and j with $i \leq j$, let $[i..j]$ represents the integer interval from i to j , i.e. $[i..j] := \{i, i + 1, \dots, j - 1, j\}$. If $i > j$, then $[i..j]$ denotes the empty interval. Also let $[i..j] := [i..j - 1]$ and $(i..j] := [i + 1..j]$. We use \lg to denote the binary logarithm, i.e., the logarithm to the base 2.

Let Σ be a finite *alphabet*. An element of Σ^* is called a *string* over Σ . The length of a string w is denoted by $|w|$. The empty string ε is the string of length 0, that is, $|\varepsilon| = 0$. Let $\Sigma^+ = \Sigma^* - \{\varepsilon\}$. The concatenation of two strings x and y is denoted by $x \cdot y$ or simply xy . When a string w is represented by the concatenation of strings x , y and z (i.e. $w = xyz$), then x , y and z are called a *prefix*, *substring*, and *suffix* of w , respectively. A substring x of w is called *proper* if $|x| < |w|$.

The i -th character of a string w is denoted by $w[i]$ for $1 \leq i \leq |w|$, and the substring of a string w that begins at position i and ends at position j is denoted by $w[i..j]$ for $1 \leq i \leq j \leq |w|$, i.e., $w[i..j] = w[i]w[i + 1] \cdots w[j]$. For convenience, let $w[i..j] = \varepsilon$ if $j < i$.

2.2 Straight-Line Programs (SLPs)

Let \mathcal{T} be a string of length N over Σ . A *Straight-Line Program (SLP)* \mathcal{G} for \mathcal{T} is a context-free grammar that derives \mathcal{T} only. Let V be the *variables* (non-terminals) of \mathcal{G} . We use a term *symbol* to refer to an element in $(V \cup \Sigma)$. We obtain \mathcal{T} by recursively replacing the starting variable of \mathcal{G} according to the production rules of \mathcal{G} until every variable is turned into a sequence of *characters* (terminals). To derive \mathcal{T} uniquely, the derivation process of \mathcal{G} should be deterministic and end without loop. In particular, for each variable X there is exactly one production rule that has X in its lefthand side, which we call the production rule of X . We denote by $R(X)$ the righthand side of the production rule of X . For simplicity we assume that SLPs are in the normal form such that $R(X) \in (V \cup \Sigma)^2$. For any symbol x , let $\langle x \rangle$ denote the string derived from x , i.e., $\langle x \rangle = x$ if $x \in \Sigma$, and otherwise $\langle x \rangle = \langle R(x)[1] \rangle \langle R(x)[2] \rangle$. We extend this notation so that $\langle w \rangle := \langle w[1] \rangle \langle w[2] \rangle \cdots \langle w[|w|] \rangle$ for a string w over $(V \cup \Sigma)^*$. For a symbol x , the *derivation tree* of x is the rooted tree that represents the derivation process from x to $\langle x \rangle$. The derivation tree of

the starting symbol is called the derivation tree of \mathcal{G} . Note that the derivation tree of \mathcal{G} can be represented by a Directed Acyclic Graph (DAG) with $n + \sigma$ nodes and $2n$ edges, which we call the DAG of \mathcal{G} and denote by $\mathcal{D}_{\mathcal{G}}$. Since there is a natural one-to-one correspondence from symbols to nodes of $\mathcal{D}_{\mathcal{G}}$, we will sometimes use them interchangeably.

We set some assumptions under which we study the space needed to store \mathcal{G} . We assume that symbols are identified by integers with $V = [1..n]$ and $\Sigma = [n + 1..n + \sigma]$ so that each of them is represented in $\lceil \lg(n + \sigma) \rceil$ bits, where $n := |V|$ and $\sigma := |\Sigma|$. For a terminal symbol associated with an integer $i \in [n + 1..n + \sigma]$, its original code on computer is assumed to be obtained easily, e.g., by computing $i - n$ or storing a mapping table whose space usage is excluded from our space complexity.

2.3 Succinct Data Structures

For a bit string $B \in \{0, 1\}^*$, we consider the following queries:

- For any $b \in \{0, 1\}$ and $i \in [1..|B|]$, $\text{rank}_b(B, i)$ returns the number of occurrences of b in $B[1..i]$. For convenience, we let $\text{rank}_b(B, i)$ return 0 if $i < 1$, and $|B|$ if $i > |B|$.
- For any $b \in \{0, 1\}$ and $j \in [1..\text{rank}_b(B, |B|)]$, $\text{select}_b(B, j)$ returns the position i such that $\text{rank}_b(B, i) = j$ and $B[i] = b$. For convenience, we let $\text{select}_b(B, j)$ return 0 if $j \leq 0$, and $|B| + 1$ if $j > \text{rank}_b(B, |B|)$.

We use the following succinct data structure on bit strings:

Lemma 2 ([12]). *For a bit string $B \in \{0, 1\}^n$, there is a data structure of $n + o(n)$ bits that supports rank and select queries in $O(1)$ time.*

We also consider succinct data structures for rooted ordered full binary trees in which all internal nodes have exactly two children of left and right. Notice that a full binary tree with m nodes can be represented in m bits instead of $2m$ bits needed in the case of arbitrary rooted ordered trees, and there is a data structure to support various operations in $m + o(m)$ bits. Although there could be several ways to encode the topology of the tree, we employ the post-order encoding B in which every node is identified by its post-order rank. In this paper we use the queries listed in the following lemma, which is not new as it has been used in the literature (e.g., [9, 14]). We give its proof for the sake of completeness.

Lemma 3. *For a full binary tree with m nodes, there is a data structure of $m + o(m)$ bits to support the following queries in $O(1)$ time for a node v , where every node involved in the queries is identified by its post-order rank.*

- $\text{isleaf}(v)$ returns if v is a leaf node.
- $\text{lchild}(v)$ returns the left child of v .
- $\text{rchild}(v)$ returns the right child of v .
- $\text{rmleaf}(v)$ returns the rightmost leaf in the subtree rooted at v .
- $\text{leafrank}(v)$ returns the number of leaves up to and including a leaf v .

Proof. We store a bit string $B[1..m]$ of length m such that the i -th bit is 0 if and only if the node with post-order rank i is a leaf node. We store and augment the post-order encoding B with rank/select data structures of Lemma 2 using extra $o(m)$ bits. We also conceptually define the so-called excess array $E[1..m]$ such that $E[i] := \text{rank}_0(B, i) - \text{rank}_1(B, i)$ for any $1 \leq i \leq m$. Since it holds that $E[i] > 0$ and $|E[i] - E[i - 1]| = 1$, we can use the succinct data structure for a balanced parentheses sequence [11]. In particular, we augment B to compute in constant time $\text{bwdsearch}(i, d)$ that returns the maximum position j with $j \leq i$ and $E[j] = E[i] + d$.

Now we show how to respond to the queries listed in our lemma. For $\text{isleaf}(v)$, we return true if $B[v] = 0$ and false otherwise. Since the right child of v immediately precedes v in post order, we just return $v - 1$ for $\text{rchild}(v)$. The rightmost leaf in the subtree rooted at v is at the maximum position j such that $j \leq v$ and $B[j] = 0$, which can be computed by $\text{select}_0(B, \text{rank}_0(B, v))$. For

$\text{lchild}(v)$, we look for the rightmost node to the left from v in B that is not in the subtree rooted at the right child of v . This can be computed by $\text{bwdsearch}(v-1, -1)$ as the subtree rooted at the right child of v is also a full binary tree in which the leaves exceed the internal nodes by exactly one in number. For a leaf v , we can compute $\text{leafrank}(v)$ by $\text{rank}_0(B, v)$. \square \square

2.4 Symmetric Centroid Decomposition

Here we briefly review the symmetric centroid decomposition proposed in [5]. Let us work on the DAG of \mathcal{G} for a string of length N . For every node v we consider the pair $(\lfloor \lg \dot{v} \rfloor, \lfloor \lg \ddot{v} \rfloor)$ of values, where \dot{v} and \ddot{v} are the numbers of paths from the root to v and from v to the leaves, respectively. Note that \dot{v} and \ddot{v} are both upper bounded by N . An edge from u to v is called an *SC-edge* if and only if $(\lfloor \lg \dot{u} \rfloor, \lfloor \lg \ddot{u} \rfloor) = (\lfloor \lg \dot{v} \rfloor, \lfloor \lg \ddot{v} \rfloor)$. By definition every node has at most one outgoing SC-edge and at most one incoming SC-edge (see Lemma 2.1 of [5]). Hence a maximal subgraph connected by SC-edges forms a path, which we call an *SC-path*. Note that SC-paths include an empty path, which consists of a single node. Lemma 2.1 of [5] also states that every path from the root to a leaf contains at most $2 \lg N$ non-SC-edges.

3 New Encoding of SLPs

In this section we prove Theorem 1. In what follows, $\mathcal{T}, \sigma, N, \mathcal{G}, n$ and n' are used as defined in the theorem.

3.1 Strategy to Achieve $O(\log N)$ -time Random Access

In this subsection we give a high-level strategy to achieve $O(\log N)$ -time random access.

Given a position p on \mathcal{T} , we simulate on $\mathcal{D}_{\mathcal{G}}$ the traversal from the root to the p -th leaf of the derivation tree of \mathcal{G} . As described in Subsection 2.4, the traversal contains at most $2 \lg N$ non-SC-edges, say $(x_1^{\text{out}}, x_2^{\text{in}}), (x_2^{\text{out}}, x_3^{\text{in}}), \dots, (x_e^{\text{out}}, x_{e+1}^{\text{in}})$ with $e \leq 2 \lg N$, where x_i^{in} and x_i^{out} are variables on the same SC-path for all $1 \leq i \leq e$ (for convenience let x_1^{in} be the root node of $\mathcal{D}_{\mathcal{G}}$, i.e., the starting variable) and $x_{e+1}^{\text{in}} = \mathcal{T}[p]$. See Fig. 1 for an illustration. If we can move from x_i^{in} to x_{i+1}^{in} in a way of length-weighted biased search in $O(1 + \log |\langle x_i^{\text{in}} \rangle| - \log |\langle x_{i+1}^{\text{in}} \rangle|)$ time, $O(\log N)$ -time random access can be achieved because $O(\sum_{i=1}^e (1 + \log |\langle x_i^{\text{in}} \rangle| - \log |\langle x_{i+1}^{\text{in}} \rangle|)) = O(\log N + \log |\langle x_1^{\text{in}} \rangle| - \log |\langle x_{e+1}^{\text{in}} \rangle|) = O(\log N)$.

For an SC-path (u_1, u_2, \dots, u_m) with m nodes, there are $m+1$ non-SC-edges branching out from the SC-path, which splits $\langle u_1 \rangle$ into $m+1$ subranges. A subproblem in question is to find the non-SC-edge (u_j, v) such that v contains the target position in time $O(1 + \log |\langle u_1 \rangle| - \log |\langle v \rangle|)$. In Subsection 3.2 we take this subproblem as a general interval search problem and show how to solve it.

3.2 Compacted Binary Tries for Interval-Biased Search

In this subsection we consider the following problem.

Problem 4 (Interval Search Problem). *Preprocess a sequence g_1, g_2, \dots, g_m of integers such that $g_0 = 0 < g_1 < g_2 < \dots < g_m$, to support interval search queries that ask, given an integer $0 < p \leq g_m$, to compute k with $p \in (g_k \dots g_{k+1}]$.*

Data structures for this problem have been extensively studied in the context of the predecessor search problem (e.g. y-fast trie [16]).

Bille et al. [2] proposed the interval-biased search tree to answer the interval search query in $O(1 + \log g_m - \log(g_{i+1} - g_i))$ time. The interval-biased search tree for m intervals $(g_0 \dots g_1], (g_1 \dots g_2], \dots, (g_{m-1} \dots g_m]$ is a binary tree with m nodes defined as follows: The root is set to be the interval $(g_{m'} \dots g_{m'+1}]$ that contains the position $(g_m - g_0)/2$ and its left (resp. right) child subtree is defined recursively for $(g_0 \dots g_1], \dots, (g_{m'-1} \dots g_{m'})$ (resp. $(g_{m'+1} \dots g_{m'+2}], \dots, (g_{m-1} \dots g_m]$) if $m' > 0$ (resp. $m' < m-1$).

Unfortunately it does not seem straightforward to work on the succinct tree representation of the interval-biased search tree: Although one can observe that the node with in-order rank $i+1$ (defined in a reasonable way for trees in which each edge is categorized into left or right) corresponds

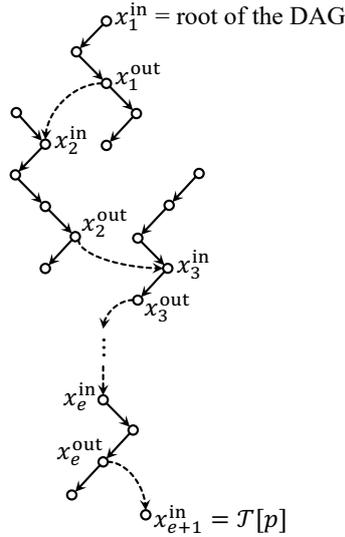


Figure 1: Illustration for the high-level strategy to achieve $O(\log N)$ -time random access. The path from the root to the target leaf $x_{e+1}^{in} = \mathcal{T}[p]$ contains e ($\leq 2 \lg N$) non-SC-edges (x_1^{out}, x_2^{in}) , (x_2^{out}, x_3^{in}) , \dots and $(x_e^{out}, x_{e+1}^{in})$ depicted by dashed arrows. The components connected by plain arrows are SC-paths. Our sub-goal is to move from x_i^{in} to x_{i+1}^{in} efficiently in $O(1 + \log \langle x_i^{in} \rangle - \log \langle x_{i+1}^{in} \rangle)$ time.

to interval $(g_i, g_{i+1}]$ in the interval-biased search tree, the computation is not supported by the succinct tree representation of [11].¹

In this paper we instead show that the compacted binary trie (also known as compressed binary trie or Patricia trie [10]) for the binary representations of integers g_1, g_2, \dots, g_m can be used for interval-biased search.

Lemma 5. *For Problem 4, there is a data structure of $m \lceil \lg g_m \rceil + 2m + o(m)$ bits to support interval search queries in $O(1 + \log g_m - \log(g_{k+1} - g_k))$ time, where k is the answer of the query.*

Proof. We store g_1, g_2, \dots, g_m naively in an array $A[1..m] \in [1..g_m]^m$ using $m \lceil \lg g_m \rceil$ bits of space. For any $1 \leq i \leq m$, let b_i denote the $(\lceil \lg g_m \rceil)$ -bit binary representation of g_i , and c_i be the bit string that is obtained from b_i by removing the most significant bits common to both b_1 and b_m . The compacted binary trie for c_1, c_2, \dots, c_m forms a full binary tree with m leaves and $m - 1$ internal nodes and its tree topology can be represented in $2m + o(m)$ bits by the data structure of Lemma 3. Note that the i -th leaf v_i corresponds to c_i (and also $g_i = A[i]$), and the lowest common ancestor u_i of v_i and v_{i+1} corresponds to the interval $(g_i..g_{i+1}]$. The crucial point for our interval-biased search is that the depth of u_i in the tree is $O(\log g_m - \log(g_{i+1} - g_i))$ because the height of u_i in the “uncompacted” binary trie is at least $\lg(g_{i+1} - g_i)$ and the distance from the root to u_i is upper bounded by $\lg g_m - \lg(g_{i+1} - g_i)$. Hence, we can answer interval search queries in $O(1 + \log g_m - \log(g_{i+1} - g_i))$ time by a simple traversal from the root: When we arrive at an internal node u (given by its post-order rank), we can compute in $O(1)$ time its corresponding interval $(A[i]..A[i+1])$ using $i = \text{leafrank}(\text{rmlf}(\text{lchild}(u)))$. We return i if $p \in (A[i]..A[i+1])$, and otherwise, we move to the left child $\text{lchild}(u)$ (resp. right child $\text{rchild}(u)$) if $p \leq A[i]$ (resp. $A[i+1] < p$). A final remark is that we return 0 if $p \leq g_1 = A[1]$, i.e., $p \in (g_0..g_1]$, which should be checked prior to the binary search. \square \square

3.3 Details of New Encoding

First of all, we arrange the variables of \mathcal{G} so that $v = u + 1$ holds for every SC-edge (u, v) on $\mathcal{D}_{\mathcal{G}}$. As a result we can now assume that the variables on the same SC-path are given consecutive

¹Note that *in_rank* queries in [11] work only for the nodes that have at least two children.

integers while distinct SC-paths are ordered arbitrarily. Let n' be the number of SC-paths of \mathcal{D}_G excluding the ones that consist of the terminal symbols.

Our encoding stores a bit string $P[1..n]$ to separate $[1..n]$ into n' segments of SC-paths, i.e., for any variable u ($1 \leq u \leq n$), $P[u] = 1$ if and only if u is the last node of an SC-path. We remark that P contains n' ones and $n - n'$ zeros.

Next we show how to encode the information of R . For any u with $P[u] = 0$, one of its children is $u + 1$, and hence, we can store R in $(n + n')\lceil \lg(n + \sigma) \rceil + n - n'$ bits in addition to n bits of P as follows. Let $D[1..n - n']$ be a bit string of length $n - n'$ that indicates the direction of the non-SC-edge (u, v) branching out from every node u with $P[u] = 0$, and $R_1[1..n - n'] \in [1..n + \sigma]^{n - n'}$ be an integer array of length $n - n'$ that stores v 's. More precisely, for any variable u ($1 \leq u \leq n$) with $P[u] = 0$, we set $D[\text{rank}_0(P, u)]$ to be 0 if and only if the non-SC-edge (u, v) branching out from u is the left child, and store v in $R_1[\text{rank}_0(P, u)]$. For the nodes u with $P[u] = 1$, we create another integer array $R_2[1..2n'] \in [1..n + \sigma]^{2n'}$ such that $R_2[2 \cdot \text{rank}_1(P, u) - 1..2 \cdot \text{rank}_1(P, u)]$ store $R(u)$.

Using P , D , R_1 and R_2 , we can compute in $O(1)$ time the children $R(u)$ of a given variable u if we augment P with the data structure of Lemma 2 for rank/select queries. Also, $r = \text{rank}_1(P, u - 1) + 1$ tells us that u is on the r -th SC-path on P and the interval for the SC-path u belongs can be computed in $O(1)$ time by $[\text{select}_1(P, r - 1) + 1.. \text{select}_1(P, r)]$.

Finally we add $(n \lceil \lg N \rceil + 2n - n' + o(n))$ -bits data structure to achieve $O(\log N)$ -time random access. From now on we focus on the r -th SC-path. Let $m := \text{select}_1(P, r) - \text{select}_1(P, r - 1)$ and $u_i := \text{select}_1(P, r - 1) + i$ for any $0 \leq i \leq m$, then (u_1, u_2, \dots, u_m) is the sequence of nodes on the r -th SC-path. Let t be the number of non-SC-edges (u_i, v) such that v is the left child of u_i for some $1 \leq i < m$, which can be computed by $\text{rank}_0(D, d_0 + m - 1) - \text{rank}_0(D, d_0)$ with $d_0 := \text{rank}_0(P, u_0)$. Let v_1, v_2, \dots, v_{m+1} be the endpoints of the non-SC-edges branching out from the SC-path sorted by the preorder of left-to-right traversal from u_1 so that $\langle u_1 \rangle = \langle v_1 \rangle \langle v_2 \rangle \dots \langle v_{m+1} \rangle$. For any $1 \leq i \leq m + 1$ it holds that

$$v_i = \begin{cases} R_1[\text{select}_0(D, \text{rank}_0(D, d_0) + i)] & \text{if } i \leq t, \\ R_2[2 \cdot \text{rank}_1(P, u_0) + i - t] & \text{if } t < i \leq t + 2, \\ R_1[\text{select}_1(D, \text{rank}_1(D, d_0) + m + 2 - i)] & \text{if } t + 2 < i. \end{cases} \quad (1)$$

Hence, if we augment D with the data structure of Lemma 2 for rank/select queries, we can compute v_i in $O(1)$ time.

In order to support interval-biased search on the SC-path, we can use the data structure of Lemma 5 for the sequence $(\sum_{i'=1}^i |\langle v_{i'} \rangle|)_{i=1}^{m+1}$ of prefix sums of $|\langle v_i \rangle|$'s. However, if we store $m + 1$ integers for the SC-path of m nodes, the number adds up to $n + n'$ in total for all SC-paths. An easy way to reduce this number to n is to exclude the largest prefix sum $\sum_{i'=1}^{m+1} |\langle v_{i'} \rangle| = |\langle u_1 \rangle|$ for every SC-path. $|\langle u_1 \rangle|$ is not needed for efficient random access queries as we can immediately proceed to v_{m+1} if a target position is greater than $\sum_{i'=1}^m |\langle v_{i'} \rangle|$. One drawback of not storing $|\langle u_1 \rangle|$ explicitly is that the data structure cannot answer $|\langle u_i \rangle|$ efficiently for a given variable u_i if the path from u_1 to u_i consists only of right edges. Since such queries might be useful in some scenarios, we show an alternative way in the following.

We decompose $\langle u_1 \rangle$ into m strings $\langle v_1 \rangle, \dots, \langle v_k \rangle, \langle u_m \rangle, \langle v_{k+3} \rangle, \dots, \langle v_{m+1} \rangle$ and construct the data structure of Lemma 5 for the sequence g_1, g_2, \dots, g_m of prefix sums of these m string lengths. Now we can compute $|\langle u_i \rangle|$ in $O(1)$ time by $g_{i'} - g_{i''}$, where $i' = m - (\text{rank}_1(D, d_0 + i - 1) - \text{rank}_1(D, d_0))$ and $i'' = \text{rank}_0(D, d_0 + i - 1) - \text{rank}_0(D, d_0)$. During a search on the SC-path, if the target position falls in $\langle u_m \rangle = \langle v_{t+1} \rangle \langle v_{t+2} \rangle$, we can decide which of $\langle v_{t+1} \rangle$ and $\langle v_{t+2} \rangle$ contains the target position using $|\langle v_{t+1} \rangle|$. We can also compute in $O(1)$ time the prefix sum of $|\langle v_{i'} \rangle|$'s up to i ($1 \leq i \leq m + 1$) as

$$\sum_{i'=1}^i |\langle v_{i'} \rangle| = \begin{cases} g_i & \text{if } i \leq t, \\ g_t + |\langle v_{t+1} \rangle| & \text{if } i = t + 1, \\ g_{i-1} & \text{if } t + 1 < i. \end{cases} \quad (2)$$

We use a global integer array $G[1..n] \in [1..N]^n$ to store g_1, g_2, \dots, g_m , in $G[\text{select}_1(P, r - 1) + 1.. \text{select}_1(P, r)]$. We also consider concatenating all post-order encodings for compacted binary tries to work on a single bit string: We store a bit string $B := B_1 B_2 \dots B_{n'}$ of length $2n - n'$, where B_r is the post-order encoding of the compacted binary trie for the r -th SC-path on P , which consists

of m zeros (leaves) and $m - 1$ ones (internal nodes). Since every prefix of B has larger zeros than ones, B can be augmented by the succinct data structure of [11] to support queries of Lemma 3 for each compacted binary trie. In short, interval-biased search on the r -th SC-path can be performed using the information stored in $B_r = B[2 \cdot \text{select}_1(P, r - 1) + 2 - r..2 \cdot \text{select}_1(P, r) + 1 - r] = B[2u_1 - r..2u_m + 1 - r]$ and $G[\text{select}_1(P, r - 1) + 1..\text{select}_1(P, r)] = G[u_1..u_m]$.

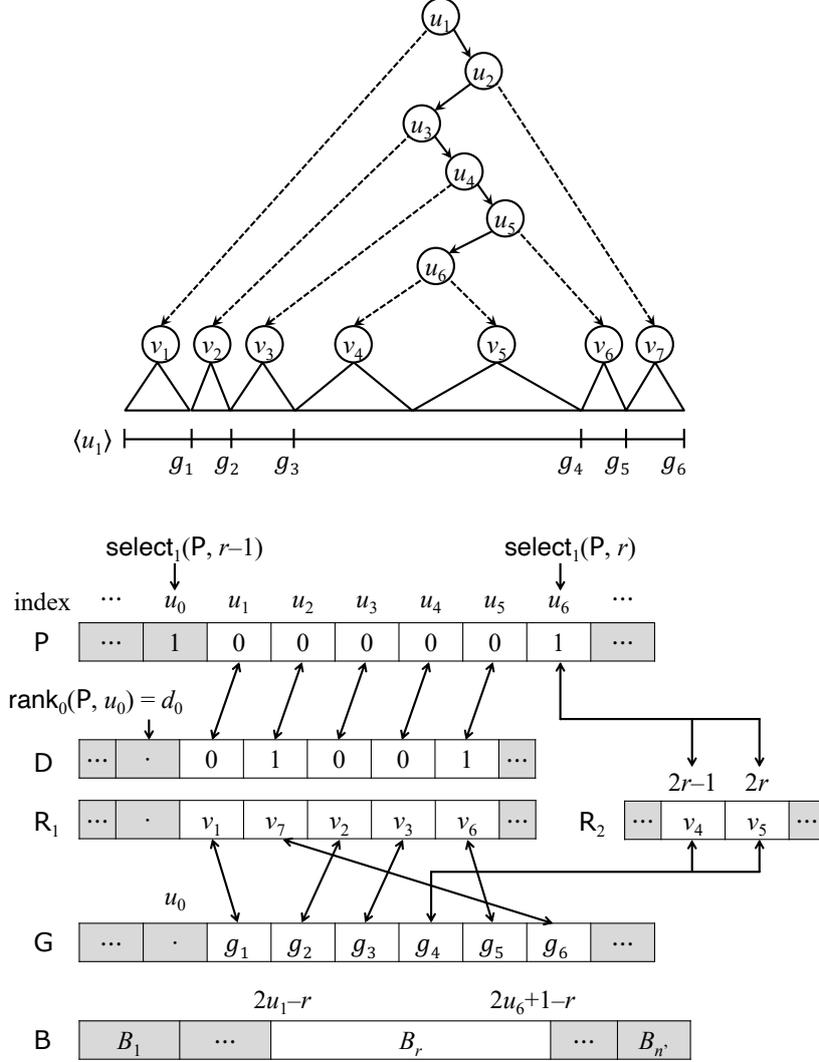


Figure 2: Illustration for our encoding. Supposing that the r -th SC-path has 6 nodes $(u_1, u_2, u_3, u_4, u_5, u_6)$ in the form depicted above, the layout of the information for this SC-path in P, D, R_1, R_2, G and B is shown below.

We are now ready to prove Theorem 1:

Theorem 1. Our encoding consists of P, D, R_1, R_2, G and B (see Fig. 2 for an illustration), and succinct data structures built on P, D and B , which clearly fits in $n \lceil \lg N \rceil + (n + n') \lceil \lg(n + \sigma) \rceil + 4n - 2n' + o(n)$ bits in total.

We follow the strategy described in Subsection 3.1 and use the variables introduced there in the following explanation. Suppose that we now arrive at x_i^{in} for some $1 \leq i < e$ and we know that the relative target position in $\langle x_i^{\text{in}} \rangle$ is p_i . Our task is to find the non-SC-edge $(x_i^{\text{out}}, x_{i+1}^{\text{in}})$ such that $\langle x_{i+1}^{\text{in}} \rangle$ contains $\langle x_i^{\text{in}} \rangle[p_i]$ by interval-biased search in $O(1 + \log |\langle x_i^{\text{in}} \rangle| - \log |\langle x_{i+1}^{\text{in}} \rangle|)$ time on the SC-path $(u_1, u_2, \dots, u_m) = (\text{select}_1(P, r - 1) + 1, \text{select}_1(P, r - 1) + 2, \dots, \text{select}_1(P, r))$ with $r = \text{rank}_1(P, x_{i+1}^{\text{in}} - 1) + 1$. Recall that $\lfloor \lg |\langle u_m \rangle| \rfloor = \lfloor \lg |\langle u_1 \rangle| \rfloor$ by the definition of the symmetric centroid decomposition. Since $O(\log |\langle x_i^{\text{in}} \rangle| - \log |\langle x_{i+1}^{\text{in}} \rangle|) = O(\log |\langle u_1 \rangle| - \log |\langle x_{i+1}^{\text{in}} \rangle|)$, it is fine

to start interval-biased search from the root of the compacted binary trie for the SC-path to the relative target position p'_i in $\langle u_1 \rangle$. We set $p'_i = p_i + \mathbf{G}[u_1 + t' - 1]$ if $t' > 0$, and otherwise $p'_i = p_i$, where t' is the number of non-SC-edge branching out to the left from the path $(u_1, u_2, \dots, u_{j-1})$, which can be computed by $t' = \text{rank}_0(\mathbf{D}, d_0 + x_i^{\text{in}} - u_1) - \text{rank}_0(\mathbf{D}, d_0)$ with $d_0 = \text{rank}_0(\mathbf{P}, u_1 - 1)$.

Let v_1, v_2, \dots, v_{m+1} be the endpoints of the non-SC-edges branching out from the SC-path sorted by the preorder of left-to-right traversal from u_1 so that $\langle u_1 \rangle = \langle v_1 \rangle \langle v_2 \rangle \dots \langle v_{m+1} \rangle$. Interval-biased search (and possibly some additional work if the target position falls in the child of u_m) finds the index s with $x_{i+1}^{\text{in}} = v_s$ from which we can compute the value of x_{i+1}^{in} using Equation 1. We also compute the relative target position p_{i+1} in $\langle x_{i+1}^{\text{in}} \rangle$ as $p_{i+1} = p'_i - \sum_{i'=1}^{s-1} |\langle v_{i'} \rangle|$ using Equation 2. In order to retrieve $q - p + 1$ consecutive characters from p efficiently, we push the pair of index s and z in a stack before moving to v_s , where v_z is the rightmost variable in the subtree rooted at x_i^{in} , which can be computed by $z = m + 1 - (\text{rank}_1(\mathbf{D}, d_0 + x_i^{\text{in}} - u_1) - \text{rank}_1(\mathbf{D}, d_0))$. If $|\langle v_s \rangle[p_{i+1}..]| < q - p + 1$, we will be back to this SC-path after computing $\langle v_s \rangle[p_{i+1}..] = \mathcal{T}[p..p + |\langle v_s \rangle| - p_{i+1}]$ below v_s : We pop s and z , and move to v_{s+1} to expand the prefix of $\langle v_{s+1} \rangle$ if $s + 1 \leq z$, and otherwise go back to the previous SC-path. This process goes on until we get $q - p + 1$ consecutive characters.

Note that, for any variable x , we can expand $\langle x \rangle$ in $O(|\langle x \rangle|)$ time because the derivation tree of x has $O(|\langle x \rangle|)$ nodes. During the computation of $\mathcal{T}[p..q]$, we meet $O(\log N)$ variables that partially contribute to $\mathcal{T}[p..q]$ (such as x_i^{in} 's) along the paths from the root to p and q based on SC-paths. Once we find these marginal paths in $O(\log N)$ time, the incompletely expanded variables can be decomposed into the sequence of fully expanded variables for which the cost of expansion can be charged to $O(q - p)$. Hence, we can compute $\mathcal{T}[p..q]$ in $O(\log N + q - p)$ time. \square \square

Using the same random access procedure described in the proof of Theorem 1, we can extract $\langle x \rangle[p..q]$ in $O(\log N + q - p)$ time for a given variable x and positions p and q in $\langle x \rangle$. Unfortunately, the $\log N$ term cannot be reduced to $\log |\langle x \rangle|$ because there could still be $O(\log N)$ non-SC-edges on the path from x to the target leaf.

4 Conclusions and Future Work

In this paper, we presented a novel space-efficient SLP encoding that supports fast random access. \mathbf{P} , \mathbf{D} , \mathbf{R}_1 and \mathbf{R}_2 hold the information of \mathbf{R} in $(n + n') \lceil \lg(n + \sigma) \rceil + 2n - n'$ bits, which asymptotically approaches to the information-theoretic lower bound for SLPs in general if $n' \in o(n)$. Even if n' is as large as n , the size is just n bits away from $2n \lceil \lg(n + \sigma) \rceil$ bits of the naive encoding of production rules. For the most space consuming term $n \lceil \lg N \rceil$ bits of \mathbf{G} in our encoding, it might be effective to think about storing each value of g_1, g_2, \dots, g_m in $\lceil \lg g_m \rceil$ bits instead of $\lceil \lg N \rceil$ bits. Future work would include devising practical implementation based on the theoretical result of this paper.

Acknowledgements

This work was supported by JSPS KAKENHI (Grant Numbers 22K11907 and 24K02899) and JST AIP Acceleration Research JPMJCR24U4, Japan.

References

- [1] Djamel Belazzougui, Patrick Hagge Cording, Simon J. Puglisi, and Yasuo Tabei. Access, rank, and select in grammar-compressed strings. In *Proc. 23rd Annual European Symposium on Algorithms (ESA) 2015*, pages 142–154, 2015.
- [2] Philip Bille, Gad M. Landau, Rajeev Raman, Kunihiko Sadakane, Srinivasa Rao Satti, and Oren Weimann. Random access to grammar-compressed strings and trees. *SIAM J. Comput.*, 44(3):513–539, 2015.
- [3] Travis Gagie, Tomohiro I, Giovanni Manzini, Gonzalo Navarro, Hiroshi Sakamoto, Louisa Seelbach Benkner, and Yoshimasa Takabatake. Practical random access to slp-compressed texts. In

Proc. 27th International Symposium on String Processing and Information Retrieval (SPIRE) 2020, volume 12303 of *Lecture Notes in Computer Science*, pages 221–231. Springer, 2020.

- [4] Moses Ganardi. Compression by contracting straight-line programs. In Petra Mutzel, Rasmus Pagh, and Grzegorz Herman, editors, *Proc. 29th Annual European Symposium on Algorithms (ESA) 2021*, volume 204 of *LIPICs*, pages 45:1–45:16. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 2021. doi:10.4230/LIPICs.ESA.2021.45.
- [5] Moses Ganardi, Artur Jez, and Markus Lohrey. Balancing straight-line programs. *J. ACM*, 68(4):27:1–27:40, 2021.
- [6] N. Jesper Larsson and Alistair Moffat. Offline dictionary-based compression. In *Proc. Data Compression Conference (DCC) 1999*, pages 296–305, 1999. doi:10.1109/DCC.1999.755679.
- [7] Abraham Lempel and Jacob Ziv. On the complexity of finite sequences. *IEEE Trans. Information Theory*, 22(1):75–81, 1976. doi:10.1109/TIT.1976.1055501.
- [8] Markus Lohrey. Algorithmics on slp-compressed strings: A survey. *Groups Complexity Cryptology*, 4(2):241–299, 2012.
- [9] Shirou Maruyama, Yasuo Tabei, Hiroshi Sakamoto, and Kunihiro Sadakane. Fully-online grammar compression. In *Proc. 20th International Symposium on String Processing and Information Retrieval (SPIRE) 2013*, pages 218–229, 2013. doi:http://dx.doi.org/10.1007/978-3-319-02432-5_25.
- [10] Donald R. Morrison. PATRICIA - practical algorithm to retrieve information coded in alphanumeric. *J. ACM*, 15(4):514–534, 1968. doi:10.1145/321479.321481.
- [11] Gonzalo Navarro and Kunihiro Sadakane. Fully functional static and dynamic succinct trees. *ACM Transactions on Algorithms*, 10(3):16, 2014. URL: http://doi.acm.org/10.1145/2601073, doi:10.1145/2601073.
- [12] Rajeev Raman, Venkatesh Raman, and Srinivasa Rao Satti. Succinct indexable dictionaries with applications to encoding k -ary trees, prefix sums and multisets. *ACM Trans. Algorithms*, 3(4), 2007. URL: http://doi.acm.org/10.1145/1290672.1290680, doi:10.1145/1290672.1290680.
- [13] Yasuo Tabei, Yoshimasa Takabatake, and Hiroshi Sakamoto. A succinct grammar compression. In *Proc. 24th Annual Symposium on Combinatorial Pattern Matching (CPM) 2013*, volume 7922 of *Lecture Notes in Computer Science*, pages 235–246. Springer, 2013. doi:10.1007/978-3-642-38905-4_23.
- [14] Yoshimasa Takabatake, Tomohiro I, and Hiroshi Sakamoto. A space-optimal grammar compression. In *Proc. 25th Annual European Symposium on Algorithms (ESA) 2017*, volume 87 of *LIPICs*, pages 67:1–67:15. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 2017. URL: https://doi.org/10.4230/LIPICs.ESA.2017.67, doi:10.4230/LIPICs.ESA.2017.67.
- [15] Elad Verbin and Wei Yu. Data structure lower bounds on random access to grammar-compressed strings. In *Proc. 24th Annual Symposium on Combinatorial Pattern Matching (CPM) 2013*, pages 247–258, 2013.
- [16] Dan E. Willard. Log-logarithmic worst-case range queries are possible in space $\theta(n)$. *Inf. Process. Lett.*, 17(2):81–84, 1983. doi:http://dx.doi.org/10.1016/0020-0190(83)90075-3.
- [17] Jacob Ziv and Abraham Lempel. A universal algorithm for sequential data compression. *IEEE Transactions on Information Theory*, 23(3):337–343, 1977. URL: http://dx.doi.org/10.1109/TIT.1977.1055714, doi:10.1109/TIT.1977.1055714.