# MedOdyssey: A Medical Domain Benchmark for Long Context Evaluation Up to 200K Tokens

Yongqi Fan $^{\diamond}$ , Hongli Sun $^{\diamond}$ , Kui Xue $^{\diamond}$ , Xiaofan Zhang $^{\heartsuit}$ , Shaoting Zhang $^{\diamond}$ , Tong Ruan $^{\diamond\dagger}$ 

◇School of Information Science and Engineering, East China University of Science and Technology, Shanghai, China
Intelligent Healthcare, Shanghai Artificial Intelligence Laboratory, Shanghai, China
♡School of Electronic Information and Electrical Engineering, Shanghai Jiao Tong University, Shanghai, China {johnnyfans, shl}@mail.ecust.edu.cn {xuekui, zhangshaoting}@pjlab.org.cn xiaofan.zhang@sjtu.edu.cn, ruantong@ecust.edu.cn

### Abstract

Numerous advanced Large Language Models (LLMs) now support context lengths up to 128K, and some extend to 200K. Some benchmarks in the generic domain have also followed up on evaluating long-context capabilities. In the medical domain, tasks are distinctive due to the unique contexts and need for domain expertise, necessitating further evaluation. However, despite the frequent presence of long texts in medical scenarios, evaluation benchmarks of long-context capabilities for LLMs in this field are still rare. In this paper, we propose MedOdyssey, the first medical long-context benchmark with seven length levels ranging from 4K to 200K tokens. MedOdyssey consists of two primary components: the medical-context "needles in a haystack" task and a series of tasks specific to medical applications, together comprising 10 datasets. The first component includes challenges such as counter-intuitive reasoning and novel (unknown) facts injection to mitigate knowledge leakage and data contamination of LLMs. The second component confronts the challenge of requiring professional medical expertise. Especially, we design the "Maximum Identical Context" principle to improve fairness by guaranteeing that different LLMs observe as many identical contexts as possible. Our experiment evaluates advanced proprietary and open-source LLMs tailored for processing long contexts and presents detailed performance analyses. This highlights that LLMs still face challenges and need for further research in this area. Our code and data are released in the repository: https://github.com/JOHNNY-fans/MedOdyssey.

### 1 Introduction

Long-Context Large Language Models (LLMs) [OpenAI, 2023, Anthropic, 2023, 01.AI et al., 2024] have become a mainstream research topic. Using the advanced Transformer architecture, position embedding, and other techniques [Huang et al., 2023, Peng et al., 2023, Jin et al., 2024, Ding et al., 2024], LLMs' context length (context window) is extended, and long-context prompts frequently encountered in practical scenarios can be supported to handle, such as books, lengthy chat history or documents retrieved from website. The LLMs currently available on the market generally support context lengths of 8k tokens. Advanced models have extended this capability to

<sup>\*</sup> Co-first authors.

<sup>&</sup>lt;sup>†</sup> Corresponding author.

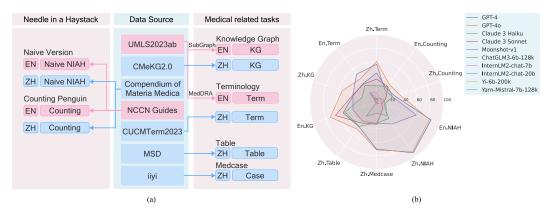


Figure 1: (a). The overall architecture of the MedOdyssey. (b).Radar chart of the overall performance of long-context LLMs on MedOdyssey.

128k tokens, with some even reaching 200k tokens or more. Researchers have swiftly responded by conducting evaluations of LLMs in long contexts, proposing numerous works in the generic domain to assess their performance. These include the classic and funny needle-in-a-haystack experimental projects [Kamradt, 2024, Song et al., 2024] and several benchmarks [An et al., 2023, Yuan et al., 2024, Zhang et al., 2024] for evaluating and analyzing the long-context performance of LLMs.

In the medical domain, evaluating the medical capabilities of LLMs is often conducted independently due to the unique context and the need for professional knowledge [Tang et al., 2023, Jin et al., 2021, Zhu et al., 2023, Singhal et al., 2023]. However, the long-context evaluations in this field Saab et al. [2024] are relatively infrequent and lack of medical-context "needles in a haystack" experiment. Actually, there are some more difficult long-context scenarios that exist for medical practices, e.g., biomedical terminology normalization and electronic health record (EHR) analysis [Sarker et al., 2018, Shickel et al., 2017]. There is a noticeable lack of benchmarks involving a package of basic and various long-context evaluation tasks.

In this paper, we propose MedOdyssey, the first medical-domain long-context evaluation benchmark for LLMs. MedOdyssey is comprised of two primary components: the medical-context needles in a haystack (NIAH) tasks and a series of medical-related tasks, containing 10 complex datasets and involving several medical domain professional corpora, e.g., medical books and guides, medical cases with electronic health records, medical knowledge graphs, medical terminology database and medical tables. Based on these corpora, we construct several evaluation tasks, as shown in part (a) of Figure 1. Additionally, apart from the naive implementation, we introduced the latest Counting Stars [Song et al., 2024] to enhance the reliability of the "needle in a haystack" component. To ensure fairness, we propose a new "maximum identical context" principle to address the issue of varying contexts resulting from direct middle truncation [Zhang et al., 2024, Yuan et al., 2024]. We also prevent data contamination and data leakage during evaluation by incorporating counter-intuitive reasoning problems and novel (unknown) facts questions.

We evaluate the performance of advanced LLMs remarkably supporting long-context prompts, including both proprietary and open-source models. The overall performance is shown in part (b) of Figure 1 using a radar chart. Our experimental results demonstrate that the performance of LLMs in the medical long contexts is actually still lacking. Specifically, even the newest GPT-40 only performs well in the naive NIAH experiment, and is not a hexagonal warrior. Moreover, we perform a comprehensive analysis to provide insights and direction. We encourage further research by the NLP community to jointly address the more realistic settings presented in this benchmark.

### 2 Related Work

**Long-Context LLMs.** The challenge of supporting long-context prompts for LLMs has been a focal research topic, leading to various innovative approaches. Numerous position embedding methods and efficient transformer architectures have been instrumental in extending the maximum context length of LLMs. Notable examples include Roformer [Su et al., 2024], ALiBi [Press et al., 2022],

Longformer [Beltagy et al., 2020], Reformer [Kitaev et al., 2020], and LM-Infinite [Han et al., 2023]. Recent advancements in long-context LLMs have garnered significant interest, with many models now supporting extended context lengths of up to 128K tokens or more. For instance, GPT-4 [OpenAI, 2023], Moonshot [MoonshotAI, 2023], Yarn-Mistral [Peng et al., 2023], and ChatGLM3 [THUDM, 2023] can handle up to 128K tokens. Furthermore, models such as Claude 3 [Anthropic, 2023] and Yi [01.AI et al., 2024] support context lengths up to 200K tokens.

**Generic-domain Long-Context Evaluation for LLMs.** Some research focuses on the capability of LLMs to process long contexts, proposing various datasets and benchmarks. For example, Zero-SCROLLS [Shaham et al., 2023] evaluates state-of-the-art LLMs through document summarization, question answering, and aggregation tasks. L-Eval [An et al., 2023] relabeled some public datasets and proposed additional evaluation metrics. LongBench [Bai et al., 2023] constructed a comprehensive benchmark with six major task categories, each varying in length, language, and domain. BAMBOO [Dong et al., 2024] addresses the issue of data contamination by using only data released in 2023. However, most of these studies do not include evaluations in the medical domain.

**Medical-domain Evaluation Benchmark for LLMs.** LLMs are increasingly used in medical fields, where specialized and dense information requires different evaluation methods than general domains. Some studies focus on specific capabilities within the medical field. For instance, Tang et al. [2023] assess LLMs with zero-shot medical evidence summarization, and Rydzewski et al. [2024] evaluate LLMs in specific medical areas. Primary data sources often include existing exams or benchmarks. Jin et al. [2021] created the MedQA dataset from medical board exams. PromptCBLUE [Zhu et al., 2023] evaluates Chinese LLMs using a baseline based on CBLUE, avoiding corpus leakage. Liu et al. [2023] uses questions from the Chinese National Medical Licensing Examination, while MultiMedQA [Singhal et al., 2023] combines six medical QA datasets from online searches. However, there is a lack of evaluation benchmarks for the medical long context.

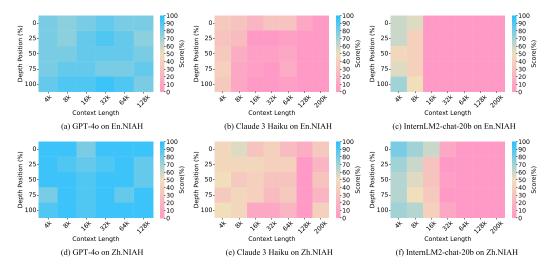


Figure 2: Heatmaps of GPT-40, Claude 3 Haiku and InternLM2-chat-20b on NIAH task.

### **3** The MedOdyssey Benchmark

#### 3.1 Dataset Collection

Due to copyright and privacy protection concerns, collecting diverse and valuable corpora is challenging. We opted not to use simulation, self-building, or distillation techniques due to the need for medical expertise. Consequently, we dedicated significant effort to finding academic open-source, formal application pathways, and copyright-free medical data and knowledge. As shown in part (a) of Figure 1, for the "needles in a haystack" part, we have collected 30 volumes of Chinese medical books "Compendium of Materia Medica" from an open-source repository<sup>3</sup>, and three English clinical

<sup>&</sup>lt;sup>3</sup>https://github.com/lab99x/tcmoc/tree/master

guides<sup>4</sup> in PDF format were converted to meet long text requirements. And there are four knowledge bases involved in medical-related tasks. We converted and organized the "Chinese Common Clinical Medical Terminology 2023 Edition" (CUCMTerm2023) from PDF format to obtain four types of standard terms: disease diagnosis, clinical examination, procedure operation, and symptom. We used MedDRA terms from the UMLS2023ab version [Bodenreider, 2004]<sup>5</sup> as the foundational terminology bases. Additionally, we used CMeKG2.0<sup>6</sup> and extracted MedDRA subgraphs from the UMLS2023ab version as the basic knowledge graphs. We also obtained 500 medical cases with EHR information from an open-source medical forum iiyi<sup>7</sup>, and 100 medical tables from an open-source medical website MSD<sup>8</sup>, via spider techniques.

Table 1: Dataset statistics and descriptions. The columns indicate the annotation method (autogenerated or human), the number of examples, average text length (input/output), use of the construction strategy from Section 3.3, and the evaluation metrics.

Task	Annotation	# Examples	Avg. Len	MIC	NFI	CIR	Eval Metrics
En.NIAH	Auto & Human	20×7×5	179.2k/32	~	~	X	Acc.
Zh.NIAH	Auto & Human	$20 \times 7 \times 5$	45.6k/10.2	~	~	X	Acc.
En.Counting	Auto	$4 \times 7$	179.0k/13.6	~	×	~	Acc.
Zh.Counting	Auto	4×7	45.6k/12.3	~	X	✓	Acc.
En.KG	Auto & Human	100	186.4k/68.8	~	X	~	P., R., F1.
Zh.KG	Auto & Human	100	42.5k/2.0	~	X	~	P., R., F1.
En.Term	Auto	100	183.1k/11.7	~	X	X	Acc.
Zh.Term	Auto	100	32.6k/7.0	~	X	X	Acc.
Zh.Case	Auto & Human	100	47.7k/1.3	~	X	X	Acc.
Zh.Table	Auto & Human	100	53.6k/1.4	~	X	X	P., R., F1.

#### 3.2 Shard Task in MedOdyssey

Based on these collected corpora, we define a total of ten shared tasks in two broad categories needles in a haystack and medical-related tasks, as shown in Figure 1.

**NIAH.** The naive need in a haystack, inserting a fragment of unrelated knowledge (the needle) within a lengthy text (the haystack) and then prompting the LLM to answer questions about the it.

**Counting.** This is a more challenging variation of the NIAH task. Within the context of a virtual story, dispersed counting fragments are embedded throughout a lengthy text. The LLM is then prompted to identify and output the sequence of these counting fragments.

**Term Norm.** The medical terminology normalization task, requires LLMs to identify the corresponding standard term for a medical phrase from a large standard terminology database.

**KG QA:** The LLM is prompted to answer questions derived from a medical knowledge graph presented in triplet form, concentrating on the relationships of entities and relationships.

**Table QA:** This task involves the LLM responding to questions based on medical tables that are formatted in Markdown.

**Case QA:** Here, the LLM addresses questions related to provided medical cases, which include details of patient EHR information and the treatment processes.

We use some Chinese books and English guides as the haystack in NIAH and Counting tasks. Additionally, all QA tasks are based on closed-ended, text-based questions. Figure B1 to Figure B4 shows the examples of input and output.

<sup>&</sup>lt;sup>4</sup>https://www.nccn.org/guidelines/

<sup>&</sup>lt;sup>5</sup>https://www.nlm.nih.gov/research/umls/


<sup>&</sup>lt;sup>6</sup>http://cmekg.pcl.ac.cn/

<sup>&</sup>lt;sup>7</sup>https://bingli.iiyi.com/

<sup>%</sup>https://www.msdmanuals.cn/professional/pages-with-widgets/tables?mode= list

#### 3.3 Construction and Annotation

Our benchmark is primarily designed to evaluate the long-context capabilities of LLMs within medical texts. By examining the context windows supported by advanced LLMs, we have selected seven token lengths: 4k, 8k, 16k, 32k, 64k, 128k, and 200k. Throughout the dataset construction, we employed both automated and manual collaboration, implementing various strategies to support fairness and professionalism. These measures also aimed to minimize the impact of data contamination and leakage. The next step is to present each point in detail.

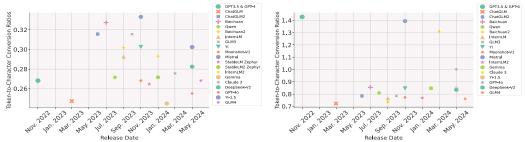

(a) Token-to-Character Conversion Ratios in English (b) Token-to-Character Conversion Ratios in Chinese.



**Maximum Identical Context (MIC).** It is worth noting that the current work aims to reach the maximum number of tokens for a given model, employing intermediate truncation when performing long-context evaluation. In practice, this strategy results in different models receiving different contextual texts, which ultimately lacks fairness.

In our work, we present the "Maximum Identical Context" principle and convert a fixed number of tokens to a fixed range. By analyzing the token-to-character conversion ratios of advanced LLMs in Table A1, we select a fixed conversion ratio for both Chinese and English to ensure that all LLMs can see the same context while accepting the maximum number of tokens. Formally, our goal is to optimize the formula 1 for each sample to obtain the maximum text length L' corresponding to a certain number of tokens N, where C is the predefined token length list and  $\gamma$  is the specific maximum token-to-character conversion ratio analyzed from Figure 3 and Table A1. In practice, all our dataset builds adopt this principle to get the maximum identical context shared across LLMs.

We acknowledge that adding a new LLM during our competition could impact the token-to-character conversion ratio and the dataset. Nonetheless, we remain committed to this approach and have identified effective measures through risk analysis to address these challenges. As shown in Figure 3, a clear trend is that the token-to-character conversion ratio of advanced LLMs is decreasing, which will keep our benchmark robust. Meanwhile, we tend to integrate **MedOdyssey** into periodic evaluation platforms, adjusting it by periodically adapting to new token-to-character conversion ratios, replacing old questions with new ones, and using code automation to complete the build. This approach will help further ensure fairness and prevent data leakage.

$$\min_{N \in C} \left( \frac{N}{\gamma} - L' \right), \quad L' \le \frac{N}{\gamma}, \quad \text{where } C = \{4k, 8k, \dots, 200k\}$$
(1)

**Novel Facts Injection (NFI).** To prevent data leakage and contamination, i.e., to ensure that LLMs have not been trained on question-related data, we employ a novel fact injection method in the naive needle-in-a-haystack task. Specifically, we manually and meticulously crafted needles and their corresponding questions for the needle-in-a-haystack task, including ten non-medical questions and ten medical questions. These twenty questions are based on the latest information, with the general portion drawn from the newest plot and setting of the "Honkai: Star Rail" game, and the medical portion sourced from the latest literature in The Lancet and some real doctor-patient dialogues. Meanwhile, in this task, we measure the effect of five different depths at which the needle is located and seven different lengths of the haystack, achieved through automated code execution. Eventually, we get the datasets **En.NIAH** and **Zh.NIAH**.

**Counter-intuitive Reasoning (CIR).** Acquiring systematic medical knowledge, such as knowledge graphs, is challenging due to the slow accumulation of medical information. To address the difficulty in ensuring that the model hasn't been trained on this type of knowledge, we introduced counter-intuitive designs to test the LLM's reasoning with long contexts. For example, in the KG task, we ask the model to find all the triples that can answer a question instead of directly providing an answer. We randomized some questions involving three cases from the graph: head-entity to tail-entity, head-entity to relationship, and relationship to tail-entity, and generated questions using pre-constructed templates. These questions were then rewritten with guaranteed semantics using the state-of-the-art LLM GPT-40 [OpenAI, 2024]. For a given sample, we identify all relevant triples as the correct answer based on all input triples, resulting in the dataset **En.KG** and **Zh.KG**.

Similarly in the counting task, we designed a counter-intuitive story setting, i.e., we have a little star count penguins, where the LLM must retain the memory of the task goal regardless of the context length. Additionally, For the "Counting Penguin" task, four different difficulty types were designed, including counting a penguin repeatedly, counting penguins incrementally, counting penguins disorderly, and counting penguins with corrections. As in the original project, we use the correct counting order as the answer, and we get the dataset **En.Counting** and **Zh.Counting**.

**Others.** During the development of our terminology normalization task, we adopt a reputable dataset from the second shard task of the SMM4H-17<sup>9</sup> [Sarker et al., 2018]. challenge for the English language and dataset the **En.Term** dataset. For the Chinese language, we have independently constructed a dataset **Zh.Term** for terminology normalization based on the synonyms and previously utilized phrases in CUCMTerm2023 corpus, which includes the same four term categories present in our established standard terminology database.

For both the medical table QA dataset **Zh.Table** and medical case QA dataset **Zh.Case**, we use a manual querying strategy by randomly selecting a medical table or case and formulating questions based on the relevant information it contains. For example, when working with a medical table, we ask questions related to the specific medical knowledge presented in the table. In the context of medical cases, our questions cover aspects such as the patient's chief complaint, symptoms, result of imaging studies, findings of complete checkup.

**Dataset Statistics and Descriptions.** We present the dataset statistics and the general overview in Table 1, where "MIC" is the short of Maximum Identical Context, "NFI" is the short of Novel Facts Injection, and "CIR" is the short of Counter-intuitive Reasoning.

### 4 Experiments

#### 4.1 Baseline Models

We researched current state-of-the-art long-context LLMs and presented the performance of two kinds of baseline LLMs in MedOdyssey. For closed-source commercial LLMs, we call the official APIs to get the responses for each task. We also deployed open-source models for inference on our own. The LLMs and versions we selected are as follows:

**GPT-4** [OpenAI, 2023]: Released in March 2023, GPT-4 is a state-of-the-art language model developed by OpenAI. It supports a context window length of 8,192 tokens, which was extended to 128k in the November 2023 update. (gpt-4-turbo-2024-04-09)

**GPT-40** [OpenAI, 2024]: An optimized variant of GPT-4, GPT-40 was introduced in May 2024, has a 128k context window, and has a knowledge cut-off date of October 2023. (gpt-40-2024-05-13)

**Claude 3** [Anthropic, 2023]: Launched by Anthropic in March 2024, the family includes three models in ascending order of capability: Haiku, Sonnet, and Opus, allowing users to select. The three models offer a 200k context window upon launch. (claude-3-haiku-20240307 and claude-3-sonnet-20240229)

**Moonshot-v1** [MoonshotAI, 2023]: Released in 2023 by Moonshot AI, it emphasizes scalability and supports a context window of 128k tokens for generating very long texts. (moonshot-v1-128k)

**ChatGLM3-6b-128k** [THUDM, 2023]: Developed by ZHIPU·AI in 2024, it builds based on ChatGLM3-6B and better handles long contexts up to 128K tokens.

<sup>&</sup>lt;sup>9</sup>https://data.mendeley.com/datasets/rxwfb3tysd/1

**InternLM2** [Cai et al., 2024]: An open-source LLM is introduced in 2024 by Shanghai AI Lab, including 7b and 20b sizes. It initially trained on 4k tokens before advancing to 32k tokens in pre-training and fine-tuning stages, and has officially supported 200k inference technology.

**Yi-6b-200k** [01.AI et al., 2024]: Yi series models are the next generation of open-source large language models trained from scratch by 01.AI and the 6B version is open-sourced and available to the public in November 2023 and supports a context window length of 200k.

**Yarn-Mistral-7b-128k** [Peng et al., 2023]: Developed by NousResearch and released in November 2023. It is further pretrained on long context data for 1500 steps using the YaRN extension method based on Mistral-7B-v0.1 and supports a 128k token context window.

#### 4.2 Implementation Details

In our implementation, the specific versions of the baseline LLMs are displayed in Table 1. For open-source LLMs, we used the official deployment method on a single NVIDIA A100 80GB GPU. Yarn-Mistral-7b-128k and Yi-6B-200K, as base models (non-chat), accomplish tasks through text completion with some limitations in instruction and format following. The inference temperature for all LLMs is set to 0 to eliminate randomness.

We considered seven context lengths for all datasets in MedOdyssey: 4k, 8k, 16k, 32k, 64k, 128k, and 200k. In the naive needle-in-a-haystack experiment, we evaluated five depths where the needle is located: 0%, 25%, 50%, 75%, and 100%.

In MedOdyssey, almost all ground truths are context-based and close-ended. We adopted a mainstream prompting approach, providing clear task definitions and inputs/outputs, and asking LLMs to output their answers in JSON format for evaluation, the specific prompts are shown in Appendix Figure B5 to B11. Meanwhile, We specify in Table 1 that the evaluation metrics for each task vary according to different ground truths. All metrics in the main experiment are computed based on exact string matching (ESM).

Models	]	En.Cou	inting		A11		Zh.Counting				
	Rep.	Inc.	Shuf.	Cor.		Rep.	Inc.	Shuf.	Cor.		
GPT-4	0	5	1	1	7/28	0	6	2	0	8/28	
GPT-40	1	5	3	0	9/28	1	6	3	0	10/28	
Claude 3 Haiku	0	7	1	0	8/28	0	6	1	0	7/28	
Claude 3 Sonnet	1	6	1	0	8/28	0	3	1	0	4/28	
Moonshot-v1	0	5	1	0	6/28	0	6	1	0	7/28	
ChatGLM3-6b-128k	0	1	0	0	1/28	0	0	0	0	0/28	
InternLM2-chat-7b	0	1	1	0	2/28	0	2	0	0	2/28	
InternLM2-chat-20b	0	2	0	0	2/28	0	3	0	0	3/28	
Yi-6b-200k	0	0	0	0	0/28	0	0	0	0	0/28	
Yarn-Mistral-7b-128k	0	0	0	0	0/28	0	0	0	0	0/28	

Table 2: The main experiment result of the En.Counting and Zh.Counting tasks.

#### 4.3 **Results and Analysis**

**NIAH Results and Analysis.** Figure 2 shows the results of the naive medical-context needle-in-a-haystack experiment, using heatmaps to illustrate the performance of LLMs at different lengths and depths. We selected three representative models: GPT-40, Claude 3 Haiku, and InternLM2-chat-20b, and the complete experimental results are shown in Appendix Table A2 and Figure A2.

Advanced LLMs, like the GPT-4 series, perform well on the naive needle-in-a-haystack task, even with new facts in the inserted needle. In contrast, other competitive LLMs see degraded performance as context length increases. Most open-source models score zero due to their inability to format outputs correctly for lengthy texts, especially the two foundational models. To address this, we relaxed the evaluation standard by removing formatting and using the subset string matching (SSM) algorithm, with results shown in Appendix Table A3 and Figure A3. Additionally, our error analysis showed that within the medical context, LLMs are more likely to make mistakes when addressing general "needles" compared to medical-specific "needles", with the error ratio being approximately 6:5.

**Counting Results and Analysis.** We present the performance of LLMs on four types of different Counting tasks in detail in Table 2 and an intuitive bar chart in Figure A1. This task is quite difficult with its fictional, counter-intuitive setting, even when using state-of-the-art LLMs. There is an interesting phenomenon where advanced LLMs can perform increasing counting tasks, likely due to their ability to capture this incremental pattern from the training corpus. However, this ability fades with disorganized counting. Most LLMs struggle with repeated counting and counting with corrections, highlighting their diminished reasoning ability, similar to a student confused by similar answer choices. Additionally, it reveals their vulnerability to self-doubt, akin to a student who becomes skeptical when all answer options are identical.

Models	En.KG				Zh.KG		En.Term	Zh.Term	Zh.Case	Zh.Table		
models	Р.	R.	F1.	Р.	R.	F1.	Acc.	Acc.	Acc.	Р.	R.	F1.
GPT-4	59.34	47.37	52.68	42.28	31.03	35.80	34.00	43.00	70.00	46.27	44.29	45.26
GPT-40	76.70	69.30	72.81	76.58	41.87	54.14	42.00	60.00	71.00	48.00	51.43	49.66
Claude 3 Haiku	53.54	46.49	49.77	21.19	24.63	22.78	30.00	24.00	31.00	45.86	43.57	44.69
Claude 3 Sonnet	72.04	58.77	64.73	48.39	29.56	36.70	33.00	34.00	33.00	39.55	37.86	38.69
Moonshot-v1	33.33	42.11	37.21	62.07	26.60	37.24	51.00	56.00	32.00	36.15	34.31	35.21
ChatGLM3-6b-128k	0.00	0.00	0.00	7.89	1.48	2.49	7.00	4.00	1.00	0.00	0.00	0.00
InternLM2-chat-7b	2.90	1.75	2.19	5.45	1.48	2.33	18.00	14.00	3.00	0.00	0.00	0.00
InternLM2-chat-20b	0.00	0.00	0.00	0.00	0.00	0.00	16.00	5.00	17.00	31.63	22.14	26.05
Yi-6b-200k	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.00	0.00	0.00	0.00	0.00
Yarn-Mistral-7b-128k	0.00	0.00	0.00	0.00	0.00	0.00	1.00	0.00	0.00	0.00	0.00	0.00

Table 3: The main experiment results of medical-related tasks based on exact string matching.

**Medical-related Tasks Results and Analysis.** The overall performance of medical-related tasks is displayed in Table 3, and in the meantime we provide a loose version of the results using SSM in Table A4. The current state-of-the-art GPT-40 model performs well in terms of answer quality and format adherence, but is still not entirely reliable. Notably, the model's performance exhibits an overall decline as the context length increases, as shown in Figure 4. The open-source LLMs are almost impossible to accomplish the task, especially two base models, which lose the ability to output in format (marked with a green background). In particular, Moonshot-v1 has a good performance if only the content of the answer is considered for evaluation.

Analysis of Different Context Setting. We used the Counting task to experiment with different context settings: medical long context (MIC), generic long context (MIC), and maximum medical context length. The ablation results are shown in Figure 5. The experimental results support our proposed "MIC" principle. It is easy to observe that the performance is affected by different contexts whether the length is different or the domain is different, so we prefer to sacrifice an evaluation of extreme context length in exchange for sharing the same contextual texts between different LLMs. Due to different training corpus and training strategies, the degree of impact varies.

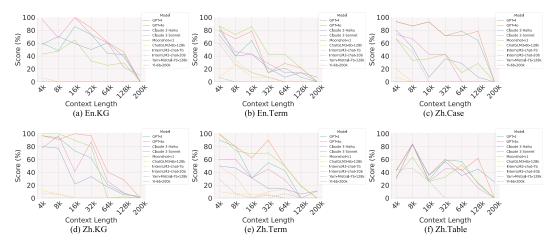


Figure 4: Trends in the performance variations of LLMs on medical-related tasks across different context lengths.

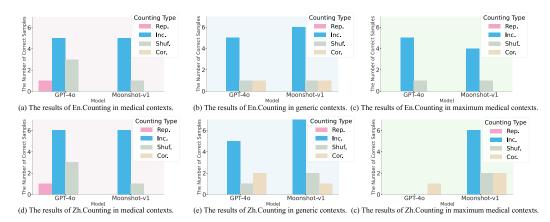


Figure 5: Comparison of GPT-40 and Moonshot-v1 on Counting tasks in different context settings.

### 5 Conclusion and Limitation

We take a step forward by building the first medical-domain long-context evaluation benchmark, **MedOdyssey**, to facilitate the study of LLMs in long-context scenarios. Our benchmarks include medical-context needle-in-a-haystack tasks and several medical-related long-context tasks, spanning ten evaluation datasets. Additionally, we propose three effective principles to enhance the fairness and reliability of evaluations. We assess ten state-of-the-art LLMs, providing performance results and analyses in various formats. Additionally, we provide examples of the impact of different contexts.

Medical long-context evaluation is challenging, and our work faces some dilemmas. We sacrificed evaluating limit lengths to ensure different models share the same contextual cues, resulting in a restricted length being assessed. Effective open-ended QA is lacking due to difficulty in finding appropriate evaluation methods. Additionally, we took efforts to eliminate the effects of randomness (by fixing temperature and format constraints) and prevent data leakage, but these issues are unavoidable. We will continuously explore ways to improve our benchmark, as mentioned in Section 3.3.

### 6 Ethical Considerations

This paper proposes a new medical-domain long-context evaluation benchmark **MedOdyssey** for LLMs. All of the datasets in MedOdyssey are adhere to ethical guidelines and respect copyright laws. The entire data collection process is free of issues of copyright and issues of privacy, and there are three types of data sources, including license applications, the open source community, and public file cleaning and organizing. Meanwhile, the manual participation part in the dataset construction process was all done by the authors of this paper without any ethical issues.

### References

- 01.AI, Alex Young, Bei Chen, Chao Li, Chengen Huang, Ge Zhang, Guanwei Zhang, Heng Li, Jiangcheng Zhu, Jianqun Chen, Jing Chang, Kaidong Yu, Peng Liu, Qiang Liu, Shawn Yue, Senbin Yang, Shiming Yang, Tao Yu, Wen Xie, Wenhao Huang, Xiaohui Hu, Xiaoyi Ren, Xinyao Niu, Pengcheng Nie, Yuchi Xu, Yudong Liu, Yue Wang, Yuxuan Cai, Zhenyu Gu, Zhiyuan Liu, and Zonghong Dai. Yi: Open foundation models by 01.ai, 2024.
- Chenxin An, Shansan Gong, Ming Zhong, Mukai Li, Jun Zhang, Lingpeng Kong, and Xipeng Qiu. L-eval: Instituting standardized evaluation for long context language models. *arXiv preprint arXiv:2307.11088*, 2023.
- Anthropic. Model card and evaluations for claude models. https://www-files.anthropic. com/production/images/Model-Card-Claude-2.pdf, 2023.
- Yushi Bai, Xin Lv, Jiajie Zhang, Hongchang Lyu, Jiankai Tang, Zhidian Huang, Zhengxiao Du, Xiao Liu, Aohan Zeng, Lei Hou, et al. Longbench: A bilingual, multitask benchmark for long context understanding. arXiv preprint arXiv:2308.14508, 2023.

- Iz Beltagy, Matthew E. Peters, and Arman Cohan. Longformer: The long-document transformer, 2020.
- Olivier Bodenreider. The unified medical language system (umls): integrating biomedical terminology. *Nucleic acids research*, 32(suppl\_1):D267–D270, 2004.
- Zheng Cai, Maosong Cao, Haojiong Chen, Kai Chen, Keyu Chen, Xin Chen, Xun Chen, Zehui Chen, Zhi Chen, Pei Chu, et al. Internlm2 technical report. *arXiv preprint arXiv:2403.17297*, 2024.
- Yiran Ding, Li Lyna Zhang, Chengruidong Zhang, Yuanyuan Xu, Ning Shang, Jiahang Xu, Fan Yang, and Mao Yang. Longrope: Extending llm context window beyond 2 million tokens. *arXiv preprint arXiv:2402.13753*, 2024.
- Zican Dong, Tianyi Tang, Junyi Li, Wayne Xin Zhao, and Ji-Rong Wen. BAMBOO: A comprehensive benchmark for evaluating long text modeling capacities of large language models. In Nicoletta Calzolari, Min-Yen Kan, Veronique Hoste, Alessandro Lenci, Sakriani Sakti, and Nianwen Xue, editors, *Proceedings of the 2024 Joint International Conference on Computational Linguistics, Language Resources and Evaluation (LREC-COLING 2024)*, pages 2086–2099, Torino, Italia, May 2024. ELRA and ICCL. URL https://aclanthology.org/2024.lrec-main.188.
- Chi Han, Qifan Wang, Wenhan Xiong, Yu Chen, Heng Ji, and Sinong Wang. Lm-infinite: Simple on-the-fly length generalization for large language models. *arXiv preprint arXiv:2308.16137*, 2023.
- Yunpeng Huang, Jingwei Xu, Zixu Jiang, Junyu Lai, Zenan Li, Yuan Yao, Taolue Chen, Lijuan Yang, Zhou Xin, and Xiaoxing Ma. Advancing transformer architecture in long-context large language models: A comprehensive survey. arXiv preprint arXiv:2311.12351, 2023.
- Di Jin, Eileen Pan, Nassim Oufattole, Wei-Hung Weng, Hanyi Fang, and Peter Szolovits. What disease does this patient have? a large-scale open domain question answering dataset from medical exams. *Applied Sciences*, 11(14):6421, 2021.
- Hongye Jin, Xiaotian Han, Jingfeng Yang, Zhimeng Jiang, Zirui Liu, Chia-Yuan Chang, Huiyuan Chen, and Xia Hu. Llm maybe longlm: Self-extend llm context window without tuning. *arXiv* preprint arXiv:2401.01325, 2024.
- Gabriel Kamradt. Llmtest: Needle in a haystack. https://github.com/gkamradt/ LLMTest\_NeedleInAHaystack, 2024.

Nikita Kitaev, Łukasz Kaiser, and Anselm Levskaya. Reformer: The efficient transformer, 2020.

Junling Liu, Peilin Zhou, Yining Hua, Dading Chong, Zhongyu Tian, Andrew Liu, Helin Wang, Chenyu You, Zhenhua Guo, LEI ZHU, and Michael Lingzhi Li. Benchmarking large language models on cmexam - a comprehensive chinese medical exam dataset. In A. Oh, T. Naumann, A. Globerson, K. Saenko, M. Hardt, and S. Levine, editors, Advances in Neural Information Processing Systems, volume 36, pages 52430–52452. Curran Associates, Inc., 2023. URL https://proceedings.neurips.cc/paper\_files/paper/2023/file/a48ad12d588c597f4725a8b84af647b5-Paper-Datasets\_and\_Benchmarks.pdf.

MoonshotAI. Moonshot, 2023. URL https://kimi.moonshot.cn/.

- OpenAI. New models and developer products announced at devday. Technical report, OpenAI, 2023. URL https://openai.com/blog/ new-models-and-developer-products-announced-at-devday.
- OpenAI. Hello gpt-4o. Technical report, OpenAI, 2024. URL https://openai.com/index/ hello-gpt-4o/.
- Bowen Peng, Jeffrey Quesnelle, Honglu Fan, and Enrico Shippole. Yarn: Efficient context window extension of large language models. *arXiv preprint arXiv:2309.00071*, 2023.
- Ofir Press, Noah Smith, and Mike Lewis. Train short, test long: Attention with linear biases enables input length extrapolation. In *International Conference on Learning Representations*, 2022. URL https://openreview.net/forum?id=R8sQPpGCv0.

- Nicholas R. Rydzewski, Deepak Dinakaran, Shuang G. Zhao, Eytan Ruppin, Baris Turkbey, Deborah E. Citrin, and Krishnan R. Patel. Comparative evaluation of llms in clinical oncology. *NEJM AI*, 1(5):AIoa2300151, 2024. doi: 10.1056/AIoa2300151. URL https: //ai.nejm.org/doi/abs/10.1056/AIoa2300151.
- Khaled Saab, Tao Tu, Wei-Hung Weng, Ryutaro Tanno, David Stutz, Ellery Wulczyn, Fan Zhang, Tim Strother, Chunjong Park, Elahe Vedadi, et al. Capabilities of gemini models in medicine. *arXiv preprint arXiv:2404.18416*, 2024.
- Abeed Sarker, Maksim Belousov, Jasper Friedrichs, Kai Hakala, Svetlana Kiritchenko, Farrokh Mehryary, Sifei Han, Tung Tran, Anthony Rios, Ramakanth Kavuluru, et al. Data and systems for medication-related text classification and concept normalization from twitter: insights from the social media mining for health (smm4h)-2017 shared task. *Journal of the American Medical Informatics Association*, 25(10):1274–1283, 2018.
- Uri Shaham, Maor Ivgi, Avia Efrat, Jonathan Berant, and Omer Levy. ZeroSCROLLS: A zero-shot benchmark for long text understanding. In Houda Bouamor, Juan Pino, and Kalika Bali, editors, *Findings of the Association for Computational Linguistics: EMNLP 2023*, pages 7977–7989, Singapore, December 2023. Association for Computational Linguistics. doi: 10.18653/v1/2023.findings-emnlp.536. URL https://aclanthology.org/2023. findings-emnlp.536.
- Benjamin Shickel, Patrick James Tighe, Azra Bihorac, and Parisa Rashidi. Deep ehr: a survey of recent advances in deep learning techniques for electronic health record (ehr) analysis. *IEEE journal of biomedical and health informatics*, 22(5):1589–1604, 2017.
- Karan Singhal, Shekoofeh Azizi, Tao Tu, S Sara Mahdavi, Jason Wei, Hyung Won Chung, Nathan Scales, Ajay Tanwani, Heather Cole-Lewis, Stephen Pfohl, et al. Large language models encode clinical knowledge. *Nature*, 620(7972):172–180, 2023.
- Mingyang Song, Mao Zheng, and Xuan Luo. Counting-stars: A multi-evidence, position-aware, and scalable benchmark for evaluating long-context large language models, 2024.
- Jianlin Su, Murtadha Ahmed, Yu Lu, Shengfeng Pan, Wen Bo, and Yunfeng Liu. Roformer: Enhanced transformer with rotary position embedding. *Neurocomputing*, 568:127063, 2024. ISSN 0925-2312. doi: https://doi.org/10.1016/j.neucom.2023.127063. URL https://www.sciencedirect. com/science/article/pii/S0925231223011864.
- Liyan Tang, Zhaoyi Sun, Betina Idnay, Jordan G Nestor, Ali Soroush, Pierre A Elias, Ziyang Xu, Ying Ding, Greg Durrett, Justin F Rousseau, et al. Evaluating large language models on medical evidence summarization. *npj Digital Medicine*, 6(1):158, 2023.
- THUDM. Chatglm3: Open bilingual language model. https://github.com/THUDM/ ChatGLM3, 2023.
- Tao Yuan, Xuefei Ning, Dong Zhou, Zhijie Yang, Shiyao Li, Minghui Zhuang, Zheyue Tan, Zhuyu Yao, Dahua Lin, Boxun Li, et al. Lv-eval: A balanced long-context benchmark with 5 length levels up to 256k. *arXiv preprint arXiv:2402.05136*, 2024.
- Xinrong Zhang, Yingfa Chen, Shengding Hu, Zihang Xu, Junhao Chen, Moo Khai Hao, Xu Han, Zhen Leng Thai, Shuo Wang, Zhiyuan Liu, et al. Infinitebench: Extending long context evaluation beyond 100k tokens. *arXiv preprint arXiv:2402.13718*, 2024.
- Wei Zhu, Xiaoling Wang, Huanran Zheng, Mosha Chen, and Buzhou Tang. Promptcblue: A chinese prompt tuning benchmark for the medical domain. *arXiv preprint arXiv:2310.14151*, 2023.

### Checklist

The checklist follows the references. Please read the checklist guidelines carefully for information on how to answer these questions. For each question, change the default **[TODO]** to **[Yes]**, **[No]**, or **[N/A]**. You are strongly encouraged to include a **justification to your answer**, either by referencing the appropriate section of your paper or providing a brief inline description. For example:

- Did you include the license to the code and datasets? [Yes]
- Did you include the license to the code and datasets? [No] The code and the data are proprietary.
- Did you include the license to the code and datasets? [N/A]

Please do not modify the questions and only use the provided macros for your answers. Note that the Checklist section does not count towards the page limit. In your paper, please delete this instructions block and only keep the Checklist section heading above along with the questions/answers below.

## A Supplementary material for the experiment

Models	En.NIAH	Zh.NIAH	En.KG	Zh.KG	En.Term	Zh.Term	Zh.Case	Zh.Table
GPT-4	0.281	1.402	0.267	1.473	0.267	1.446-1.676	1.316	1.178
GPT-40	0.275	1.005	0.252	1.029	0.253	0.991 - 1.124	0.904	0.802
Claude 3 Haiku/Sonnet	0.289	1.342	0.275	1.330	0.264	1.291 - 1.483	1.191	1.072
Moonshot-v1	0.286	0.924	0.266	0.737	0.265	0.732 - 0.780	0.712	0.600
ChatGLM3-6b-128k	0.342	0.924	0.313	0.750	0.302	0.760 - 0.827	0.746	0.630
InternLM2-chat-7b/20b	0.299	0.899	0.292	0.739	0.289	0.750 - 0.797	0.725	0.608
Yi-6b-200k	0.342	0.992	0.301	0.812	0.293	0.791 - 0.883	0.773	0.659
Yarn-Mistral-7b-128k	0.355	1.394	0.331	1.430	0.324	1.362 - 1.607	1.286	1.139

Table A1: The token-to-character conversion ratios of advanced long-context LLMs.

Table A2: The main experiment results of NIAH.

Models	Ablation	1			En.NIAH				ALL				Zh.NIAH				ALL
woders		4k	8k	16k	32k	64k	128k	200k	ALL	4k	8k	16k	32k	64k	128k	200k	ALL
GPT-4	0% 25% 50% 75% 100% ALL	19 18 16 16 18 87/100	17 19 18 18 17 89/100	18 18 17 18 16 87/100	18 18 17 19 18 90/100	18 15 16 18 16 83/100	17 14 16 15 16 78/100		107/120 102/120 100/120 104/120 101/120 514/600	19 19 18 20 19 95/100	19 18 18 18 19 92/100	18 19 19 19 20 95/100	18 18 19 19 20 94/100	18 19 18 18 20 93/100	17 19 18 18 18 90/100		109/120 112/120 110/120 112/120 116/120 559/600
GPT-40	0% 25% 50% 75% 100% ALL	16 16 16 17 81/100	15 15 16 17 18 81/100	16 17 17 17 18 85/100	17 18 17 16 19 87/100	16 17 17 16 18 84/100	16 15 16 17 16 80/100		96/120 98/120 99/120 99/120 106/120 498/600	19 19 19 16 18 91/100	19 18 19 19 19 94/100	16 17 18 18 18 87/100	19 18 19 19 19 94/100	19 19 19 17 19 93/100	19 17 17 19 19 91/100		111/120 108/120 111/120 108/120 112/120 550/600
Claude 3 Haiku	0% 25% 50% 75% 100% ALL	7 6 7 8 7 35/100	6 5 3 2 2 18/100	4 0 1 1 0 6/100	6 0 1 0 0 7/100	6 1 2 3 1 13/100	2 0 0 0 2/100	0 0 0 0 0/100	31/140 12/140 14/140 14/140 10/140 81/700	9 9 10 7 10 45/100	11 9 7 9 9 45/100	6 9 8 8 2 33/100	8 8 6 5 2 29/100	5 8 6 7 4 30/100	3 0 0 0 0 3/100	7 4 6 4 8 29/100	49/140 47/140 43/140 40/140 35/140 214/700
Claude 3 Sonnet	0% 25% 50% 75% 100% ALL	7 3 5 7 2 24/100	6 4 1 2 3 16/100	9 1 0 1 0 11/100	5 0 1 0 6/100	1 0 0 0 1/100	0 0 0 0 0/100	0 0 0 0 0/100	28/140 8/140 7/140 10/140 5/140 58/700	9 8 5 7 5 34/100	5 5 4 3 22/100	5 4 4 5 22/100	3 4 5 3 2 17/100	9 0 0 0 9/100	0 0 0 0 0/100	0 0 0 0 0/100	31/140 21/140 19/140 18/140 15/140 104/700
Moonshot-v1	0% 25% 50% 75% 100% ALL	17 17 16 16 16 82/100	18 15 17 16 17 83/100	17 14 14 14 16 75/100	17 12 10 9 11 59/100	16 10 7 10 9 52/100	6 2 4 2 8 22/100		91/120 70/120 68/120 67/120 77/120 373/600	16 16 16 16 17 81/100	16 16 15 16 79/100	11 6 9 6 12 44/100	7 3 4 4 8 26/100	2 1 2 2 8/100	$     \begin{array}{c}       1 \\       1 \\       0 \\       0 \\       2 \\       4/100     \end{array} $		53/120 43/120 46/120 43/120 57/120 242/600
ChatGLM3-6b-128k	0% 25% 50% 75% 100% ALL	1 0 0 0 1/100	0 0 0 0 0/100	0 0 0 0 0/100	0 0 0 0 0/100	0 0 0 0 0/100	0 0 0 0 0/100		1/120 0/120 0/120 0/120 0/120 1/600	8 4 2 1 4 19/100	0 0 0 0 0/100	2 0 0 2 4/100	0 0 0 0 0/100	0 0 0 0 0/100	0 0 0 0 0/100	- - - - -	10/120 4/120 2/120 1/120 6/120 23/600
InternLM2-chat-7b	0% 25% 50% 75% 100% ALL	11 11 8 6 7 43/100	3 2 3 3 2 13/100	0 0 0 0 0/100	0 0 0 0 0/100	0 0 0 0 0/100	0 0 0 0 0/100	0 0 0 0 0/100	14/140 13/140 11/140 9/140 9/140 56/700	4 5 1 0 10/100	4 2 1 0 7/100	0 0 0 0 0/100	0 0 0 0 0/100	0 0 0 0 0/100	0 0 0 0 0/100	0 0 0 0 0/100	8/140 7/140 2/140 0/140 0/140 17/700
InternLM2-chat-20b	0% 25% 50% 75% 100% ALL	12 12 9 11 14 58/100	11 8 8 8 10 45/100	0 0 0 0 0/100	0 0 0 0 0/100	0 0 0 0 0/100	0 0 0 0 0/100	0 0 0 0 0/100	23/140 20/140 17/140 19/140 24/140 103/700	16 14 13 13 14 70/100	14 12 11 10 13 60/100	12 6 7 8 39/100	2 0 1 0 2 5/100	0 0 0 0 0/100	0 0 0 0 0/100	0 0 0 0 0/100	44/140 32/140 31/140 30/140 37/140 174/700
Yarn-Mistral-7b-128k	0% 25% 50% 75% 100% ALL	0 0 0 0 0/100	0 0 0 0 0/100	0 0 0 0 0/100	0 0 0 0 0/100	0 0 0 0 0/100	0 0 0 0 0/100		0/120 0/120 0/120 0/120 0/120 0/120 0/600	1 0 0 3 4/100	0 0 0 0 0/100	0 0 0 0 0/100	0 0 0 0 0/100	0 0 0 0 0/100	0 0 0 0 0/100		1/120 0/120 0/120 0/120 3/120 4/600
Yi-6b-200k	0% 25% 50% 75% 100% ALL	0 0 0 0 0/100	0 0 0 0 0/100	0 0 0 0 0/100	0 0 0 0 0/100	0 0 0 0 0/100	0 0 0 0 0/100	0 0 0 0 0/100	0/140 0/140 0/140 0/140 0/140 0/700	0 0 0 0 0/100	0 0 0 0 0/100	0 0 0 0 0/100	0 0 0 0 0/100	0 0 0 0 0/100	0 0 0 0 0/100	0 0 0 0 0/100	0/140 0/140 0/140 0/140 0/140 0/140

Models	Ablation				En.NIAH				ALL				Zh.NIAH				ALL
	 	4k	8k	16k	32k	64k	128k	200k		4k	8k	16k	32k	64k	128k	200k	
	0% 25%	20 20	19 20	20 19	20 20	20 18	20 19	_	119/120 116/120	19 19	19 18	18 19	18 18	18 19	18 20	_	110/1 113/1
3PT-4	50% 75%	18 19	20 20	20 20	20 20	19 20	19 20	-	116/120 119/120	19 20	18 19	19 19	19 19	19 19	18 19	-	112/1 115/1
	100%	19	19	19	20	20	20	_	117/120	19	19	20	20	20	19	_	117/1
	ALL	96/100	98/100	98/100	100/100	97/100	98/100	-	587/600	96/100	93/100	95/100	94/100	95/100	94/100	-	567/6
	0% 25%	19 18	19 18	19 20	19 20	20 20	20 18	_	116/120 114/120	20 20	20 20	18 19	20 20	20 20	20 20	_	118/1 119/1
3PT-4o	50% 75%	19	19 20	19 19	20 19	19	20	-	116/120	20	20	19	20	20 20	20	_	119/1
	100%	18 20	20 19	20	19 20	20 20	20 17	_	116/120 116/120	20	20 20	20 20	20 20	20 20	20 20	_	119/1 120/1
	ALL	94/100	95/100	97/100	98/100	99/100	95/100	-	578/600	99/100	100/100	96/100	100/100	100/100	100/100	-	595/60
	0% 25%	19 17	20 16	20 18	20 16	20 17	16 16	18 17	133/140 117/140	19 18	20 18	19 18	19 18	19 20	18 16	18 19	132/14
Claude 3 Haiku	50%	16	19	20	17	17	19	19	127/140	19	20	18	19	19	19	19	133/14
Slaude 5 Haiku	75% 100%	16 18	18 20	19 19	17 19	18 19	19 19	18 19	125/140 133/140	18 18	19 19	19 18	19 19	18 18	18 19	20 19	131/1- 130/1-
	ALL	86/100	93/100	96/100	89/100	91/100	89/100	91/100	635/700	92/100	96/100	92/100	94/100	94/100	90/100	95/100	653/70
	0%	18	19	19	19	16	13	13	117/140	19	19	20	19	19	18	17	131/14
	25% 50%	16 15	18	18 17	17	16 17	13 15	13	111/140	16	18	19 19	18	18	17 19	18	124/14
Claude 3 Sonnet	75%	17	19	17	17	18	15	16	119/140	20	17	19	19	16	19	18	128/14
	100% ALL	18 84/100	20 94/100	17 88/100	19 90/100	18 85/100	18 74/100	17 73/100	127/140 588/700	19 89/100	17 88/100	19 96/100	19 93/100	18 90/100	18 91/100	18 90/100	128/14 637/70
	0%	19	20	19	19	19	17	-	113/120	20	20	20	20	20	20	-	120/12
	25% 50%	19 18	19 19	18 18	19 18	19 18	18 18	_	112/120 109/120	20 20	20 20	20 20	20 20	18 19	19 19	_	117/12
Moonshot-v1	75%	18	18	18	19	19	19	-	111/120	20	19	19	20	19	20	_	117/12
	100% ALL	18 92/100	18 94/100	18 91/100	17 92/100	17 92/100	18 90/100	_	106/120 551/600	19 99/100	19 98/100	19 98/100	19 99/100	18 94/100	18 96/100	_	112/12 584/60
	0%	1 17	18	17	17	18	16		103/120	20	19	19	18	18	15		109/12
	25%	17	17	18	18	16	14	_	100/120	18	18	19	17	15	14	_	101/12
ChatGLM3-6b-128k	50% 75%	17	17 15	17 18	18 17	15 17	15 19	_	99/120 103/120	18 17	19 18	17 17	19 17	15 18	16 14	_	104/12
	100%	15	16	14	16	15	16	-	92/120	18	19	18	19	17	15	-	106/12
	ALL	83/100	83/100	84/100	86/100	81/100	80/100	-	497/600	91/100	93/100	90/100	90/100	83/100	74/100	-	521/60
	0% 25%	20 20	19 19	19 19	17 17	17 16	12 11	1 7	105/140 109/140	19 19	19 19	19 17	19 19	16 17	13 13	5 5	110/14 109/14
InternLM2-chat-7b	50%	20	19	19	17	14	8	12	109/140	19	19	18	17	13	10	6	102/14
	75% 100%	20 20	20 20	17 19	17 18	14 19	15 18	13 10	116/140 124/140	19 19	19 19	19 19	17 19	15 19	13 19	11 15	113/14 129/14
	ALL	100/100	97/100	93/100	86/100	80/100	64/100	43/100	563/700	95/100	95/100	92/100	91/100	80/100	68/100	42/100	563/70
	0% 25%	20 20	19 19	19 19	16 19	14 19	8 12	4 9	100/140 117/140	19 19	19 17	18 17	18 16	14 9	9 7	8	105/14 94/140
InternLM2-chat-20b	50%	20	19	19	19	15	17	16	125/140	18	18	18	18	12	7	8	99/140
InternEWi2-enat-200	75% 100%	19 19	20 19	19 19	19 20	17 19	17 18	13 16	124/140 130/140	18 18	18 18	17 18	18 18	17 19	12 17	4 16	104/14 124/14
	ALL	98/100	96/100	95/100	93/100	84/100	72/100	58/100	596/700	92/100	90/100	88/100	88/100	71/100	52/100	45/100	526/70
	0%	13	12	9	9	7	0	-	50/120	15	10	8	6	6	0	-	45/120
	25% 50%	13 12	14 13	6 6	5 7	3 2	0 0	_	41/120 40/120	9	9 10	6 5	4 5	2	1 2	_	31/120 32/120
Yarn-Mistral-7b-128k	75%	14	15	11	6	2	0	-	48/120	14	9	6	8	2	1	-	40/120
	100% ALL	12 64/100	13 67/100	15 47/100	13 40/100	13 27/100	$0 \\ 0/100$	_	66/120 245/600	16 62/100	14 52/100	15 40/100	12 35/100	12 24/100	10 14/100	_	79/120 227/60
	0%	2	2	2	2	2	1	2	13/140	19	18	19	18	16	15	14	119/14
	25%	2	2	2	2	2	2	2	14/140	18	18	15	13	14	13	11	102/14
Yi-6b-200k	50% 75%	22	2 2	2 2	2 3	2 2	3 3	2 2	15/140 16/140	17 19	17 17	15 16	17 17	14 15	14 15	13 14	107/14 113/14
	100% ALL	2 10/100	2 10/100	2 10/100	2 11/100	2 10/100	2 11/100	2 10/100	14/140 72/700	19 92/100	18 88/100	19 84/100	16 81/100	17 76/100	16 73/100	16 68/100	121/14 562/70
	ALL	10/100	10/100	10/100	11/100	10/100	11/100	10/100	72/700	92/100	88/100	84/100	81/100	70/100	75/100	08/100	302/70
7.									7			0					
		C	ounting	Type					ä 6		1.2	Cou	nting Typ Rep.	e			
26			Re						au				Inc.				
t Samples			In-						S 5				Shuf.				
ť,			Sh	nuf.					Jer v								
4 Correct			Co	or.					Correct Samples				00.				
									53	_							
يs.									2 mper								
uper 2					_				g 2								

Table A3: The main experiment result of NIAH based on subset string matching.

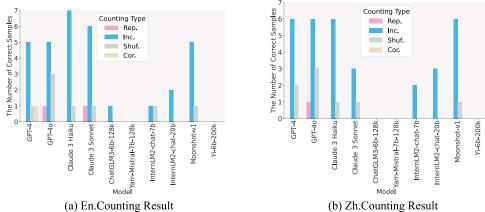


Figure A1: Histogram of Counting task results.

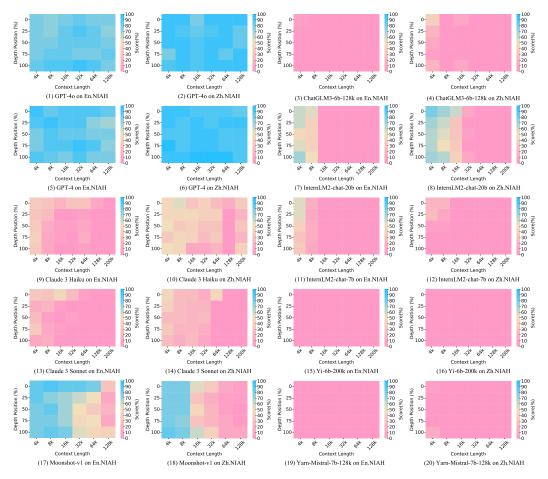


Figure A2: Heatmaps of the performance of all LLMs on NIAH task.

Models	En.KG	Zh.KG	En.Term	Zh.Term	Zh.Case	Zh.Table
GPT-4	51.00	60.00	38.00	47.00	72.00	63.00
GPT-40	72.00	80.00	48.00	61.00	76.00	67.00
Claude 3 Haiku	57.00	50.00	37.00	33.00	79.00	77.00
Claude 3 Sonnet	73.00	67.00	38.00	41.00	83.00	78.00
Moonshot-v1	46.00	72.00	52.00	59.00	92.00	85.71
ChatGLM3-6b-128k	3.00	3.00	14.00	8.00	73.00	58.00
InternLM2-chat-7b	2.00	3.00	23.00	20.00	67.00	65.00
InternLM2-chat-20b	0.00	2.00	22.00	11.00	67.00	60.00
Yi-6b-200k	0.00	0.00	0.00	2.00	54.00	44.00
Yarn-Mistral-7b-128k	0.00	0.00	1.00	0.00	42.00	17.00

Table A4: The main experiment results of medical-related tasks based on subset string matching.

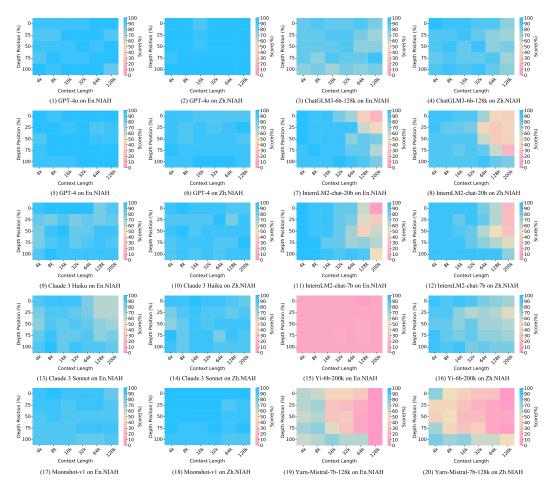


Figure A3: Heatmaps of the performance of all LLMs on NIAH task based on subset string matching.

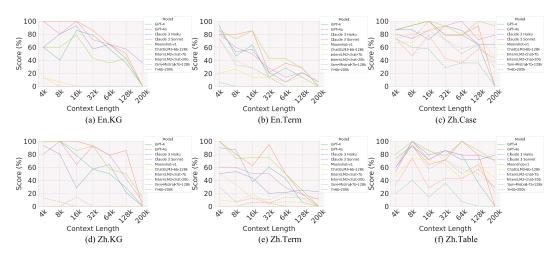


Figure A4: Trends in the performance variations of LLMs on medical-related tasks across different context lengths based on subset string matching.

### **B** Supplementary material for datasets

#### En.NIAH

*Needles*: In Elio's script, there are three nameless guests who got off the Astral Express in Penacony: 1. Razarina Jane Estella, a ex-surveyor aboard the Astral Express and a young scholar, brimming with enthusiasm and curiosity. 2. Breukelen Tiernan, the former guard of the Astral Express and a outstanding gunslinger. 3. Mikhail Char Legwork, Former mechanic of the Astral Express, and the legendary big shot of Penacony, 'the Watchmaker'.

Q: Who is 'the Watchmaker' of Penacony?

A: Mikhail Char Legwork

*Needles*: The Lancet Diabetes & Endocrinology recently published a study comparing advanced hybrid closed-loop therapy and standard insulin therapy in pregnant women with type 1 diabetes. The study found that for pregnant women starting strict blood glucose control, advanced hybrid closed-loop therapy did not improve overall time in target range but improved overnight time in target range, reduced time below target range, and increased treatment satisfaction. These data suggest that MiniMed 780G (an advanced hybrid closed-loop therapy) can be safely used during pregnancy and offers some additional benefits compared to standard insulin therapy; however, it is important to improve the algorithm to better meet pregnancy requirements.

Q: In the study from The Lancet comparing advanced hybrid closed-loop therapy and standard insulin therapy in pregnant women with type 1 diabetes, which therapy improved the overnight time in target range?

A: Advanced hybrid closed-loop therapy

#### Zh.NIAH

Needles: 阿哈是执掌欢愉命途上的星神, 祂有一群追随者叫做「假面愚者」, 但也有一群反对者叫做「悲悼伶人」, 祂曾经炸毁了阿基维利的星穹列车。

Q: 谁曾经炸毁了星穹列车?

A: 阿哈

Needles:以下是一段2019年5月的医患聊天记录\n\n患者:\n刚抛妇产9天。今天上医院检查有点高血压。高压140,,低压96,还要母乳喂孩子,请问产后能吃什么。比较好(女,27)\n\n医生:\n拉贝洛尔是可以吃的。。。\n\n患者:\n吃饭。能吃什么\n\n 医生:\n盐量要控制,不吃活血的动西,其他没有禁忌啊\n\n以下是一段2019年4月医患 聊天记录\n\n患者:\n医生,我又来了,今天查了个尿常规,隐血1个加,要不要紧 (女,25岁)\n\n医生:\n以前查过吗?末次月经什么时候\n\n患者:\n没有,就今天 查的\n\n医生:\n嗯嗯\n\患者:\n这个月15号,昨天还有一点点\n\n医生:\n哦,那 考虑跟月经有关,没事的,半月后复查尿常规\n\n患者:\n哦哦,好的,谢谢医生了 \n\n医生:\n嗯嗯,不客气。

Q:请问在2019年4月的医患聊天记录里,患者做了什么检查?

A: 尿常规

Figure B1: Examples of NIAH task.

#### **En.Counting**

*Repeat*: The little star looked to a small area and counted 1 little penguin, The little star looked to a small area and counted 1 little penguin. …, The little star looked to a small area and counted 1 little penguin.

*Ground Truth*: [1, 1, ..., 1]

*Increase*: The little star looked to a small area and counted 1 little penguin, The little star looked to a small area and counted 2 little penguins, …, The little star looked to a small area and counted 8 little penguins.

Ground Truth: [1, 2, 3, 4, 5, 6, 7, 8]

#### **Zh.Counting**

Shuffle: 小星星看向一小块区域,数了8只小企鹅,小星星看向一小块区域,数了5只小企鹅,小星星看向一小块区域,数了1只小企鹅,小星星看向一小块区域,数了3只小企鹅,小星星看向一小块区域,数了6只小企鹅,小星星看向一小块区域,数了6只小企鹅,小星星看向一小块区域,数了11只小企鹅,小星星看向一小块区域,数了9只小企鹅,小星星看向一小块区域,数了7只小企鹅,小星星看向一小块区域,数了6只小企鹅,小星星看向一小块区域,数了6只小企鹅。

*Ground Truth*: [8, 5, 1, 3, 4, 6, 5, 11, 9, 7, 9, 6]

Correction:小星星看向一小块区域数了5只小企鹅,但发现数错了,于是又数了一遍, 这次数对了,是7只小企鹅,小星星看向一小块区域数了1只小企鹅,但发现数错了,于 是又数了一遍,这次数对了,是2只小企鹅,小星星看向一小块区域数了6只小企鹅,但 发现数错了,于是又数了一遍,这次数对了,是5只小企鹅,小星星看向一小块区域数 了9只小企鹅,但发现数错了,于是又数了一遍,这次数对了,是10只小企鹅,小星星 看向一小块区域数了2只小企鹅,但发现数错了,于是又数了一遍,这次数对了,是1只 小企鹅,小星星看向一小块区域数了3只小企鹅,但发现数错了,于是又数了一遍,这 次数对了,是4只小企鹅,小星星看向一小块区域数了6只小企鹅,但发现数错了,于是 又数了一遍,这次数对了,是7只小企鹅,小星星看向一小块区域数了7只小企鹅,但发现数错了,于是

Ground Truth: [7, 2, 5, 10, 1, 4, 7, 6]

Figure B2: Examples of Counting task.

#### En.KG

Q: What is the relationship between 'Instillation site tenderness' and 'Instillation site pain'?

A: ["Instillation site tenderness|classifies|Instillation site pain"]

#### Zh.KG

Q:鼻炎的相关药物是什么??

A: ["鼻炎|相关药物|丙酸倍氯米松气雾剂", "鼻炎|相关药物|必畅", "鼻炎|相关药物|斯卫 尔", "鼻炎|相关药物|信龙", "鼻炎|相关药物|鼻通滴鼻剂"]

#### En.Term

Medical phrase: double vision

Ground Truth: Diplopia

#### En.Term

Medical phrase: 神经精神问卷

Ground Truth: 神经精神量表

Medical phrase: 膀胱镜取石术

Ground Truth: 经尿道膀胱取石术

Medical phrase: 黑粪

Ground Truth: 黑便

Medical phrase: 胎儿双足内翻

Ground Truth: 先天性内翻足

Figure B3: Examples of KG QA and Terminology Normalization.

#### Zh.Table

#### Table: 心律失常的治疗

疾病状态	治疗*
gQRS综合族心动过速	
\$ 通性 房性早樽 房性早樽 室上性病灶(通常在心房)引起各种心律。诊断依毫心电图。无症状不需要治疗。 也可以参考 心律失常概述 异位室上性心 拿包括 房性早樽 房性心动过速 阅读更多	请放心,非二氢吡啶类钙通道阻滞剂或beta受体阻滞剂
D.质疑的心质疑的心质描述是一种快速,不规则的房性心律。症状包括心体,有时做乏,体力下降和重要先兆,可能形成心质性子,有引起检查性质 中中的面貌如性,诊断面心电图,治疗包括用药物控制心率,用抗凝药物所的直线性感,有时用药物或心脏转复的方法使心质描述转氧机度性心 #、	抗凝 用于控制心率: beta受体阻断剂 维拉帕米 地尔硫菌,或 地高辛 对于心律控制: 打 心律失常药物(例如伊布利特,胺磷酮,普罗帕酮,决奈达隆。紫他洛尔,多非利 特) 心脏电复律,或 射频消融 有时需要Maze干预
5.原补动心房扑动心房扑动是由心房所近到起的快速规则的心房节律症状包括心情,有时虚弱感,体力制度性差,呼吸困难,是最优先。心房血栓可 药等管性素,或过心电面进行诊断,治疗发现认下方面:用药物起粉心室布,用抗凝药剂的加栓性素,常用药物或心脏电度排转度成聚性心律,一间 更多	抗凝 射频消融(往往是最好的治疗) 有时 DC 复律、地高辛、β 受体阻滞所和/或维扩 帕米
异位室上牲心动过速 异位室上牲心律 室上牲病灶 (通常在心房)引起各种心律。诊断依靠心电图。无症状不需要治疗。 也可以参考 心律失常概述 异 û室上牲心律包括 房性平博 房性心动过速 间读更多 (如房性心动过速)	有时,直流电复律、心率控制药物(地高辛除外)、抗心律失常药、超速起搏和/或消 融
所逃性室上性心动过速,如房室结折诞性心动过速	加强迷走神经张力动作 房室结阻滞药物(例如,beta阻滞剂,维拉帕米) 消融(往往 是最好的治疗)
图QRS综合波心动过速	
室性心动过速 室性心动过速(VT) 室性心动过速是用心率+120次分、23个连续的室性搏动,症状如决于发作的时候而有不同,可表现为无症状、心 4、血液动力学家总是至死亡、均衡和器心电缆,比较智能的原性心动过速,其治疗是用心脏电脑非正是把心体失常药,如决于症状,如果必要、长 筋行疗学用用人之心感觉算线的器,一般误多	立即药物治疗或直流电复律 肢磷酮、素也洛尔、普罗帕酮、利多卡因、美西律、氟卡 尼、射频消融术 有时是植入性除额器
Q湖田林堂堂在心动过建,尖湖田林整室道,央湖田林整整性心动过速是一种发生于407间隔磨着的种具类型的多形柱整性心动过速,它软件点为快速。 怀观到900K38群,或GRA装器将手图输心电器(ECO)的凝结扭转,这种心境未用有显发地走过就是成心重颤动,它可引起明显的点次却才很 累、常然死亡、"动魔"自己地震,进行是静脉迸现频,侧设可能的处理是,间接变多	如果不稳定,立即进行直流电复律,镁和/成钾,有时会值入除颤器 持续进行必要的 镁,钾,beta-受体细滞剂,异丙肾上腺素或起迷心脏起搏治疗 有时是恒入性除颤器
D重要因心 这重新说(VF)重新导致心室不均衡的影动,提先有效收缩。它可在导致重新并且数分钟内死亡,治疗潜能是心脉复影,包括立即除弱。也 可以参考 didb末梢或 重新 (VF) 重由多个子波折齿的电话动将我,心电图(ECO)我现为学常快速的图纳基础的波动,时间上和形态上完全不成 3	除额有时也可用药(如胺碘酮)有时是值入性除额器
3rugada综合征 Brugada综合征 Brugada综合征是一种遗传性心脏电生理异常,可导致重新和界死的危险性增加。也可以参考 心律失常模述 涉及几种 下向的突变,大部分影响SCNISA基因编码电压依赖性心脏钠离于通道的alpha-亚基。通常情况下,患者无…间误更多	通常是直流电复律或植入性除颤器
总是需要识别和纠正病因及加重因素(如电解质异常,低氧血症,药物)。	
₩ = 房室;直流电 = 直流电。	

Q:异位室上性心动过速的诊断依靠什么?

A: ["心电图"]

### Zh.Case

Case: 产褥期抑郁症病历1例 基本信息: 女 主诉: 患者因"少言, 焦虑一周"入院 现病史: 患者于一周前出现少言, 焦虑, 失眠等症状, 在家未进行治疗, 遂入我院。 既往史: 体健 查体: T: 36.3℃, P: 87次/分, R: 18次/分, BP: 105/70mmHg神志清楚 精神淡漠, 体 检配合, 头部端正, 甲状腺无肿大, 胸部对称, 心肺听诊无异常。 初步诊断: 产褥期抑郁症 诊治经过: 入院后给予指导家属对产妇要耐心, 关心体贴患者, 同时给予药物治疗, 指导 药物服用方法及注意事项, 指导按时复诊。 Q: 主诉中提到患者由于什么入院?

A: 少言, 焦虑一周

Figure B4: Examples of Table QA and Case QA.

请根据接下来的内容回答后续的问题。请按照JSON格式要求直接输出答案,格 式要求: {"答案": "xxx"}。要求答案来自所给内容,严禁要给出无关文本。 内容: {heystack prefix part}{needle}{heystack suffix part}

{neysiack\_prefix\_pari}{neeale}{neysiack\_suffix\_pari} 问题: {question}

答案:

#### Input:

Please answer the question based on the context. Please output the answer directly according to the JSON format requirements. The format requirements is: {"answer": "xxx"}. The answer is required to come from the given content, and irrelevant text is strictly prohibited.

### Context:

{heystack\_prefix\_part}{needle}{heystack\_suffix\_part}
Question: {question}

Answer:

Figure B5: Prompt of the NIAH Tasks.

#### Input:

在某个月光皎洁、云雾缭绕的夜晚,南极洲上空有一只小星星睁开了眼睛往下面 看,它很无聊于是开始全神贯注地数地面一共有多少只小企鹅。请帮助小星星收 集所数的小企鹅只数,按照如下格式: {"小星星": [x, x, x, ...]},不要求和, [x, x, x,...]中数字为小星星每次数小企鹅的只数,仅以JSON格式输出结果,不需要输 出任何解释。

{heystack\_part1}小星星看向一小块区域,数了 {number1}只小企鹅。 {heystack\_part2}小星星看向一小块区域,数了 {number2}只小企鹅。 {heystack\_part3}...{heystack\_partn}

### Input:

On a moonlit and misty night, a little star in the sky above Antarctica opened its eyes and looked down, it was bored and started to count the number of little penguins on the ground. Please help the little star collect the number of little penguins, for example:  $\{"little_star": [x, x, x, ...]\}$ . The summation is not required, and the numbers in [x, x, x, ...] represent the counted number of little penguins by the little star. Only output the results in JSON format without any explanation."

*{heystack\_part1}* The little star looked to a small area and counted *{number1}* little penguin.*{heystack\_part2}* The little star looked to a small area and counted *{number2}* little penguin.*{heystack\_part3}...{heystack\_partn}* 

Figure B6: Prompt of the Counting Tasks (Type of Rep., Inc., and Shuf.).

在某个月光皎洁、云雾缭绕的夜晚,南极洲上空有一只小星星睁开了眼睛往下面 看,它很无聊于是开始全神贯注地数地面一共有多少只小企鹅。请帮助小星星收 集所数的正确小企鹅只数,按照如下格式: {"小星星":[x, x, x, ...]},不要求和, [x, x, x, ...]中数字为小星星每次数小企鹅正确的只数,仅以JSON格式输出结果, 不需要输出任何解释。

{heystack\_part1}小星星看向一小块区域数了{false\_number1}只小企鹅,但发现数 错了,于是又数了一遍,这次数对了,是{true\_number1}只小企鹅。 {heystack\_part2}小星星看向一小块区域数了{false\_number2}只小企鹅,但发现数 错了,于是又数了一遍,这次数对了,是{true\_number2}只小企鹅。 {heystack\_part3}...{heystack\_partn}

### Input:

On a moonlit and misty night, a little star in the sky above Antarctica opened its eyes and looked down, it was bored and started to count the number of little penguins on the ground. Please help the little star collect the correct number of little penguins, for example: {"little\_star": [x, x, x,...]}. The summation is not required, and the numbers in [x, x, x,...] represent the correctly counted number of little penguins by the little star. Only output the results in JSON format without any explanation.

*{heystack\_part1}* The little star looked to a small area and counted *{false\_number1}* little penguins, but found that a mistake had been made, so the counting was done again, and this time *{true\_number1}* little penguins was counted correctly. *{heystack\_part2}* The little star looked to a small area and counted *{false\_number2}* little penguins, but found that a mistake had been made, so the counting was done again, and this time *{true\_number2}* little penguins was counted correctly. *{heystack\_part2}* Little penguins, but found that a mistake had been made, so the counting was done again, and this time *{true\_number2}* little penguins was counted correctly. *{heystack\_part3}...{heystack\_partn}* 

### Figure B7: Prompt of the Counting Tasks (Type of Cor.).

### Input:

请完成医疗术语标准化任务,从给定的术语库中选出输入医疗名词对应的标准术语,标准化结果按照下面的JSON格式输出: {"result": "xxx"} 医疗名词: {medical\_phrase} 术语库: {termbase}

### 标准化结果:

### Input:

Please complete the medical terminology normalization task by selecting the standard terminology that corresponds to the input medical noun from the given Termbase, and then output the normalized result in the following JSON format: {"result": "xxx"} Medical Phrase: {medical\_phrase} Termbase: {termbase}

Normalization result:

Figure B8: Prompt of the Term Tasks.

请给定一些三元组,格式为 实体1|关系|实体2,请找出能回答所提供问题的三元 组,回答按照下面的JSON格式。给出的答案三元组仍需保持提供的格式。仅限 从提供的三元组中给出答案,严禁给出答案JSON以外的内容:{"result":["xxx", "xxx","..."]} 三元组:{*triplets*}

问题: {question}

答案:

### Input:

Given some triplets in the format Entity1|Relation|Entity2, please find the triplets that can answer the provided question. The answer is in the JSON format below. The given answer triplets must still be in the format provided. Answers can only be given from the provided triplets, and answers other than JSON are strictly prohibited: {"result": ["xxx", "xxx", "..."]}

Triplets: {*triplets*} Question: {*question*}

Answer:

Figure B9: Prompt of the KG Tasks.

### Input:

给定一些markdown格式的表格,请根据表格给出后续问题的答案。给出的答案需符合下面的JSON格式。仅限从提供的表格中给出答案,严禁给出未提供的内容,严禁给出额外内容: {"result": ["xxx", "xxx", "..."]}

表格: {tables}

问题: {question}

答案:

### Input:

Given some markdown tables, please give answers to the subsequent questions based on the tables. The answers given must conform to the following JSON format. Only answers from the provided tables are allowed. It is strictly forbidden to give answers that are not provided, and it is strictly forbidden to give additional content: {"result": ["xxx", "xxx", "..."]}

Tables: {*tables*} Question: {*question*}

Answer:

Figure B10: Prompt of the Table Tasks.

给定一些病例,请根据病例给出后续问题的答案。给出的答案需符合下面的 JSON格式。仅限从提供的病例中给出答案,严禁给出未提供的内容,严禁给出 额外内容: {"result": ["xxx", "xxx", "..."]} 病例: {medcases}

问题: {question}

答案:

### Input:

Given some medical cases, please give answers to the follow-up questions based on the cases. The answers given must conform to the following JSON format. Only answers based on the cases provided are allowed. It is strictly forbidden to give answers that are not provided or to give additional content: {"result": ["xxx", "xxx", "..."]} Medcases: {medcases} Question: {question}

Answer:

Figure B11: Prompt of the Case Tasks.