

# Beyond Individual Facts: Investigating Categorical Knowledge Locality of Taxonomy and Meronymy Concepts in GPT Models

**Christopher Burger**

Dept of Computer Science  
University of Mississippi  
cburger@olemiss.edu

**Yifan Hu**

Dept of Computer Science  
Northeastern University  
yif.hu@northeastern.edu

**Thai le**

Dept of Computer Science  
Indiana University  
tle@iu.edu

## Abstract

The location of knowledge within Generative Pre-trained Transformer (GPT)-like models has seen extensive recent investigation. However, much of the work is focused towards determining locations of *individual* facts, with the end goal being the editing of facts that are outdated, erroneous, or otherwise harmful, without the time and expense of retraining the entire model. In this work, we investigate a broader view of knowledge location, that of *concepts or clusters of related information, instead of disparate individual facts*. To do this, we first curate a novel dataset, called DARC, that includes a total of 34 concepts of  $\sim 120\text{K}$  factual statements divided into two types of hierarchical categories, namely taxonomy and meronymy. Next, we utilize existing causal mediation analysis methods developed for determining regions of importance for individual facts and apply them to a series of related categories to provide detailed investigation into whether concepts are associated with distinct regions within these models. We find that related categories exhibit similar areas of importance in contrast to less similar categories. However, fine-grained localization of individual category subsets to specific regions is not apparent.

## 1 Introduction

The use of Large Language Models (LLMs) has exploded in cross-disciplinary use with GPT-like models at the forefront of this wave of popularity. With the ability to generate text with fluency indistinguishable from many humans to effective methods of linking, recalling, and summarizing text for information, it seems likely that LLMs will continue to encroach on previously human exclusive tasks. But as the effectiveness of LLMs continues to increase, so have the questions concerning *how* LLMs make their decisions. And as LLMs become steadily more ingrained into society, the ability to explain *why* one of these models has acted the way

it did becomes of a question of substantial legal, social, and governmental importance. Just as human decision making is fallible, all models are subject to error. Being able to explain why an error was made not only allows developers a way to improve future models, but can provide important information to satisfy legal or ethical obligations should some harm result from a model’s output.

The task of correcting erroneous output has become an important focus of recent research into how LLMs store information (Meng et al., 2022a; Vig et al., 2020; Dai et al., 2022), make inferences (Elazar et al., 2021; Feder et al., 2021), and from there how to modify the model’s output without the appreciable time and expense of retraining (Mitchell et al., 2022; Meng et al., 2022b). One of the successful approaches has been to apply techniques from causal analysis, which has been able to identify both specific locations for individual facts (Meng et al., 2022a), as well as locations for shared attributes, such as the idea of gender (Goyal et al., 2020). This approach is ideal from the perspective of explainability as casting model decisions in terms of causal processes provides inherent explainability. Assuming the causal analysis is accurate (a significant assumption), it directly reflects how the model operates. Additionally, the standard visualization practice of modern causal analysis, a graph, is especially well suited to the structure of LLMs. LLM components can be viewed as the vertices with the edges being the possible pathways that exist from input to output. And since the causal graph is innately specified, using causal mediation analysis naturally follows.

Our goal is to more broadly explore the concept of locality in LLMs. Previous research by (Meng et al., 2022a) demonstrated that specific instances of knowledge within these models can be traced to particular regions of importance. Building on this, we seek to investigate whether such regions exist for knowledge that is more extensive than in-

dividual facts. Specifically, we aim to determine if there are identifiable regions that encapsulate broader and more complex knowledge structures beyond isolated pieces of information. For this investigation, we focus on two common relational structures: First, *taxonomy*, which organizes similar objects into successive groups; and second, *meronomy*, which categorizes similar objects in part-whole relationships. We believe this investigation could provide deeper insights into how knowledge is organized and represented in LLMs.

Specifically, our investigation and contribution consists of:

1. We extend the discussion of knowledge locality by investigating the plausibility of broader types of knowledge possessing locality within LLMs. We propose to study the knowledge locality in the context of *intra-category* locality, to determine if related facts within a category are also located within a similar region in the structure of the model, and *inter-category* locality, to examine whether knowledge in the similar categories are also close by the structure of the model.
2. Our experiments provide evidence for both *intra-category* and *inter-category* locality among hierarchical relations, especially related taxonomic groups. Meronomic relations also demonstrate weaker associations both *intra-category* and *inter-category*.
3. To accomplish the above, we created a novel data consisting of a series of related concepts to provide sufficient raw material to perform comparisons on, in contrast to existing datasets used in prior work that are themselves aggregates of small amounts of many disparate ideas. The dataset comprises four major categories, encompassing 34 individual concepts and over 122,000 facts. It will be made available with the publication of the paper.

## 2 Related Work

Determining where knowledge is located within LLMs has been a significant focus of recent research. Much of this work has centered around the task of updating outdated or otherwise erroneous information. As the initial pre-training from scratch of many transformers based models is now beyond the computational capacity for most practitioners and researchers, effective and robust editing tools are ideal to maintain model correctness in light

of constantly changing factual relations. Even for organizations with the resources to directly train these models, retraining to update a small set of facts would be inordinately impractical given the significant time and expense.

Knowledge location has been an increasingly important subject in modern LLM research with a wide variety of hypothesis and methods (Roberts et al., 2020; Jiang et al., 2020; Hase et al., 2021; Dai et al., 2022; Hernandez et al., 2023). With much of work focused the goal of effectively editing information within LLMs (Petroni et al., 2019; Zhu et al., 2020; Bau et al., 2020; De Cao et al., 2021; Yao et al., 2023). In particular, one of the prominent recent trends has been to view the MLP weights as key-value memories which encode and recall facts (Geva et al., 2021, 2022). This analysis has been extended in (Meng et al., 2022a,b) to construct a knowledge location and editing scheme inspired by causal analysis in LLMs pioneered in (Vig et al., 2020). The focus on multilayer-perceptrons (MLPs) has not been unique, other research has implicated attention as a factor in knowledge storage, while (Hase et al., 2023) casts doubt on the efficacy of previous localization processes entirely. Curiously, this work does not appear to invalidate the editing methods, as they are confirmed to be effective. Nevertheless, others still question the usefulness of knowledge editing entirely (Youssef et al., 2023; Brown et al., 2023; Pinter and Elhadad, 2023). However, with the ability to edit knowledge by choosing areas that were not identified as being the most important, we return to the base idea of *whether conceptual knowledge, rather than individual facts, is encoded within related regions within these models.*

## 3 Conceptual Relatedness, Similarity, and Localization

### 3.1 Conceptual Relatedness: Taxonomy and Meronomy

Our primary question is, “*Does localization of concepts occur in GPT-like models?*” Here we define concept as a collection of related inputs, where the relation is a common association between the subject or object of the inputs. For example, consider the species the American crow (*Corvus brachyrhynchos*) and the Fish crow (*Corvus ossifragus*). Both species possess a fundamental, intuitive similarity between them, i.e both are crows. More rigorously, both species belong to the same genus *Corvus*,

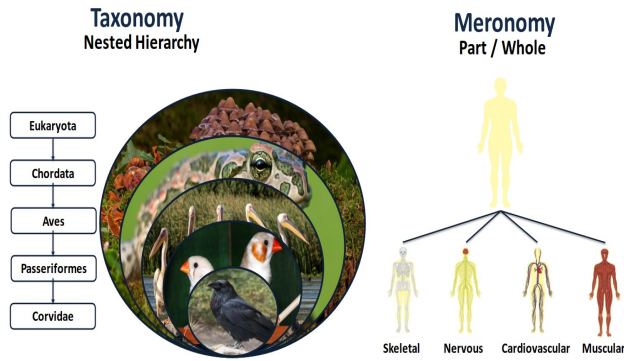


Figure 1: Hierarchical Types of Related Knowledge: Taxonomic and Meronomic Categorization

where their inclusion has been determined by genetic similarity, among other physical attributes. These taxonomic relations (Left side of Figure 1) of localization in models. Inputs within a level of their associated taxonomic tree should possess a correspondence with that of their indicated importance regions within a model, if such locality exists.

*Taxonomy* is therefore one of our choices for testing categorical localization. Our second choice is also a hierarchical relation, that of *meronomy*, which is expressed as a part / whole relationship (Right side of Figure 1). *Meronomy* provides us an alternative expression of hierarchy in comparison to taxonomy as while all parts of a meronomic relationship are subsets of a greater whole, there is no ordering imposed on the subsets.

We note that hierarchical distinctions like taxonomy or meronomy just some of many types of relations that indicate similarity and that our choice of focusing on hierarchical categorization does not imply that such distinctions are not encoded within LLMs. We choose hierarchical relations due to their familiar nature, ease of use for generating quality data that can be assured to conform to the relation, and, especially for taxonomy, the innate ordering possessed by the expanding classifications.

## 3.2 Similarity and Locality

### 3.2.1 Intra and Inter-Category Similarity.

We define our concept of similarity with respect to locality using the output of the causal analysis procedure (Section 3.3) which calculates layer based importance of an individual subject via the indirect effect. The *deviation in the ordering of these layers is our base for measures of determining locality*. Regarding intra-category similarity, we evaluate

the similarity among components within a category. For example, in the collection of living things we can compare the genus *Corvus* (Crows, Ravens, etc.) and the order *Passeriformes* (Birds in general). To prevent erroneously high levels of similarity, the data generated for any taxonomic level is mutually exclusive with all prior levels, i.e., the phylum *Chordata* (Vertebrates and close relatives) excludes the prior level the class *Aves* (Birds, which are vertebrates). In our meronomic data, this mutual exclusivity is inherent. Regarding inter-category similarity, we evaluate such similarity across category, using both individual layers within a category as well as aggregates of the entire category as items for comparison.

### 3.2.2 Similarity and Concept Partition.

The idea of similarity is the foundation between the partitioning of related concepts. The whole purpose of classifiers is to make a judgment about similarity, a process which is inherent to human (and most other animals) cognition since pattern recognition is a necessary condition for basic survival. And while neural networks in general were inspired by computation in biological systems, their process of pattern storage does *not* need to conform solely to biological frameworks. For instance, the human brain can be divided into many sections, each with their own collection of important functions. With respect to pattern recognition, certain patterns are more strongly emphasized into particular regions, like the parietal lobe for object identification. While others may be distributed between regions, like with both the frontal and temporal lobes being indicated in smell recognition. Do LLMs possess similar sections? That is, are there regions of their constituent components more strongly associated with some action or concept? Just because components of our models were patterned on a representation of biological cognition does not imply there will be any such locality present. Some existing evidence already show opposition against locality where layers of GPT-like models have been found to be interchangeable to some extent—i.e., the exact order of the layers is not particularly important for certain regions (Zhao et al., 2021). Meng et al., 2022a reference this directly and additionally conjecture that *any fact could equivalently be stored in any one of the middle MLP layers*.

### 3.3 Methods for Causal Analysis

To answer the question of concept localization, we appeal to causal methods developed for locating the important regions for a singular input. In particular our analysis is based directly on the works by Meng et al. whose goal was to locate important regions corresponding to individual facts to ultimately edit these facts effectively (Meng et al., 2022a). That work is focused on editing individual pieces of knowledge and so the collection of facts used do not require any particular theme. These facts are disparate, which makes possible similarities between regions associated with related facts difficult to discern. Instead, we require a larger, dedicated dataset designed to have its constituent facts partitioned into distinct categories. We expand on the creation of this dataset next in Section 4. As our analysis is directly based on methods developed by Meng et al. we refer readers to their paper for the causal analysis process (Meng et al., 2022a).

## 4 DARC: A Dataset for Related Concepts

As prior work in knowledge location has focused on the editing of individual facts, these facts tend to be fairly specific. Largely about an individual person or place, and often unrelated to each other, nor possessing any integral structures or themes. To begin to test the idea of categorical locality it is necessary to create a new collection of data, one deliberately segmented into clusters of closely related facts.

Based on the discussion in Section 3, we focus the dataset on hierarchical relations, specifically taxonomy and meronomy. For each relation, we generate two datasets, with the goal of choosing specific concepts that have sufficient quantities of reliable data to generate thousands of facts while across each subcategory within the hierarchy. Each individual fact adheres to the format in (Meng et al., 2022a) where a fact is comprised of three distinct parts. The subject  $s$ , the object  $o$ , and the relation  $r$ . With the subject of fact belonging directly to the associated category and the object being the correct result of the prediction of the model whose input is the subject plus the relation.

All facts were generated using GPT 3.5 Turbo and GPT 4.0 (3.5 Turbo predominantly as initial testing showed no appreciable increase in fact quality between the versions). The fact generation process was broken into two parts. The first being

### DARC: A Dataset for Related Concepts

Category	Hierarchical Relation	# of Concepts	# of Facts	Predictive Accuracy
Birds	Taxonomic	8	27157	23.0%
Dogs	Taxonomic	8	25274	20.0%
Organ Systems	Meronomic	11	39976	21.6%
Auto. Systems	Meronomic	9	36366	20.7%

Table 1: Summary of DARC. Predictive accuracy with respect to GPT-2-XL.

the generation of raw facts associated with each subcategory within one of the four primary categories. This generation used triple-shot prompting of facts that conformed to the desired format and subcategory. The fact generation template, associated prompts and example facts can be found in Appendix B.

Queries were batched in collections of 100 and fed back into the next query to reduce duplicates and to reduce subject and format drift. No changes were made to parameters like temperature for the final data generation, as initial testing found that when deviated from the default setting, the LLMs produce too few unique facts, or erroneous or nonsensical results. The length of the facts was restricted to a soft maximum of 15 words, to both reduce the time needed to generate the data, as well as provide a soft limit on the complexity of the fact. The second stage passes the generated facts back into GPT to select the subject, object, and relation between them then return a JSON formatted representation. To validate the quality of the generated facts, 25 facts were sampled from each subcategory and manually verified. Of the 850 verified facts only 3 were found to be excessively vague or otherwise inaccurate and were manually changed. No subcategory exceeds a threshold of 1% error, indicating that the quality of the facts generated is high.

### 4.1 Taxonomic Categories

To satisfy both quantity and quality of available information, the taxonomic categories are based on the same structure, that of biological taxonomy. Each category uses the classic eight layer representation used to categorize life which follows in order of increasing specificity: *Domain, Kingdom, Phylum, Class, Order, Family, Genus, and Species*. Further differentiation, i.e subspecies or subphylum were omitted due to limitations of generating sufficient numbers of facts that were mutually ex-



Category	Max AIE Layer		Category	Max AIE Layer		Category	Max AIE Layer		Category	Max AIE Layer	
Birds	MLP	ATN	Dogs	MLP	ATN	Organs	MLP	ATN	Auto	MLP	ATN
Am. Crow	5	27	Dog	16	30	Circulatory	5	27	Braking	5	27
Corvus	4	30	Canis	5	31	Digestive	5	27	Drivetrain	5	27
Corvidae	16	30	Caniformia	15	28	Endocrine	5	27	Electrical	0	27
Passeriformes	5	30	Carnivora	15	28	Integumentary	5	30	Engine	5	27
Aves	15	30	Mammalia	15	28	Immune	8	25	Exhaust	4	27
Chordata*	15	30	Chordata*	5	27	Muscular	1	27	Fuel	5	27
Anamalia	5	30	Anamalia	5	30	Nervous	8	27	Frame & Body	5	27
Eukaryota	11	30	Eukaryota	11	30	Reproductive	14	27	Ignition	4	27
						Respiratory	14	27	Suspension	5	27
						Skeletal	5	30	& Steering		
						Urinary	5	27			
<b>Baseline</b>	17	31	<b>Baseline</b>	17	31	<b>Baseline</b>	17	31	<b>Baseline</b>	17	31

Table 2: Layer of Maximum Average Indirect Effect - GPT-2-XL (\*) The subcategory Chordata differs between category due to the requirement of mutual exclusivity between subcategories.

clusive with the previous layer.

The two categories (**dogs**, and **birds**) were based on two colloquial groupings with large amounts of viable facts and which possessed a sufficient intuitive difference between each. For dogs the base level (species) was the domestic dog and continues up through the class Mammalia. For birds the base level was the American crow and continues up through the class Aves (The largest taxa containing “birds”). We note that the distinction between the two categories ends at the class level. Coarser levels above the phylum chordata (which contains the vertebrates in which both birds and dogs are a member of) are identical. The phylum chordata itself differs between categories due to fact generation excluding the previous class as viable subjects for facts. For example the subcategory chordata generated for birds here omits any member of the class aves, and so omits every more specific grouping of birds available (Figure 1).

## 4.2 Meronomic Categories

Meronomic relations afford us more diversity in subject material as our requirement for mutual exclusion between subcategory facts is largely inherent. We again concentrate on a single theme, that of anatomy, but use two significantly different foundations, one biological (human) and one technological (automobiles). For human anatomy we focus on the eleven major divisions of human organ systems: *Circulatory*, *Digestive*, *Endocrine*, *Integumentary*, *Immune*, *Muscular*, *Nervous*, *Reproductive*, *Respiratory*, *Skeletal*, and *Urinary*. For automobiles we use the following nine systems *Braking*, *Drive Train*, *Electrical*, *Engine*, *Exhaust*, *Fuel*, *Frame and Body*, *Ignition*, and *Suspension and Steering*.

A general summary of DARC can be seen in Table 1. Extended information can be found in Appendix A. Note that the causal tracing process is only performed on successful predictions, the predictive accuracy within Table 1 is with respect to GPT-2-XL and refers to the percentage of causally traced facts within each dataset.

## 5 Experiment Setup

### 5.1 Models

The models used were three differently sized variants of GPT-2. Medium (345M parameters), Large (762M parameters), and Extra Large (1542M parameters). Larger models proved infeasible as the causal tracing process requires non-trivial amounts of computation for even moderate sized datasets like DARC. GPT-2-Medium averaged approximately 2 hours per subcategory, GPT-2-Large 6 hours, and GPT-2-XL 16 hours. Models larger than GPT-2-XL proved untenable requiring in excess of a month of continuous computation (Using a single A6000) to completely trace DARC. Our discussion concentrates on the largest model, GPT-2-XL, to provide the closest link with relevant related work which has been centered on GPT-2-XL.

### 5.2 Procedure

The experimental procedure uses the same causal tracing process from (Meng et al., 2022a). Each category has its constituent subcategories causally traced with the restriction of only correct predictions being candidates for tracing. The output of the causal tracing concentrates on the indirect effect (IE) for each layer’s components. Larger effects relative to other layers indicate more impor-

tance to be placed on that layer with respect to the (sub)category. The IE for each layer is further stratified based on the partition of the input to the location of the token(s) which are: The *First Subject Token*, *Middle Subject Token(s)*, *Last Subject Token*, *First Subsequent Token*, *Further Tokens*, *Last Token*. The IE is averaged over a batch of tracing to reduce variation due to the nosing process and so is generally reported as Average Indirect Effect (AIE). As prior work has determined that the strongest IE for a layer’s MLP component is at the Last Subject Token we focus on the MLP tracing exclusively at this location. The attention components have also been indicated as locations for the storage of knowledge (Geva et al., 2023), giving us another possibility to search for locality. Here we concentrate on the Last Token for Attention modification as this location has been shown to have the strongest IE.

### 5.3 Evaluation Metrics

The output of the causal tracing is presented in the following formats (The smaller GPT models provide similar results which can be found in Appendix C). The maximally important layer can be seen in Table 2 (Extended versions in Appendix C). Heat maps generated with respect to the AIE for each layer (Subsets seen in Figure 2, Full versions in Appendix C). Finally, line plots are generated using the unaltered process in prior work in order to provide a direct comparison of outputs. As it can be difficult to discern differences between the plotted lines with the numerous subcategories, we provide a non-parametric comparison through the use of Spearman correlation (Subsets seen in Figure 2). The Spearman correlation returns the linear correlation of the order of the layers where a correlation of one denotes an identical ordering and negative one the complete inverse of the original. Additionally, we used the dataset from (Meng et al., 2022a) and reran the tracing results, taking these as a baseline for comparison. This dataset is a collection of disparate facts ranging from geographical locations to notable individual persons or corporations.

## 6 Results

### 6.1 Intra-Category Locality

**Finding #1: Taxonomic Locality:** The taxonomic categories show some evidence of MLP specific intra-category locality. For GPT-2-XL the average intra-category correlations are 0.82 and 0.76 for

Inter-Category Correlations						
Categories	GPT-2-M		GPT-2-L		GPT-2-XL	
	MLP	ATN	MLP	ATN	MLP	ATN
Birds & Dogs	0.91	0.79	0.76	0.66	0.79	0.72
Birds & Auto	0.91	0.65	0.66	0.49	0.62	0.44
Birds & Organ	0.89	0.67	0.74	0.69	0.55	0.68
Organ & Dogs	0.88	0.74	0.70	0.73	0.58	0.73
Organ & Auto	0.90	0.74	0.72	0.51	0.66	0.48
Auto & Dogs	0.89	0.71	0.69	0.42	0.62	0.47
Base & Birds	0.39	0.26	0.51	0.30	0.11	0.46
Base & Dogs	0.45	0.44	0.34	0.46	0.11	0.47
Base & Auto	0.46	0.68	0.60	0.56	0.36	0.49
Base & Organ	0.46	0.56	0.55	0.55	0.18	0.68
Intra-Category Correlations						
Categories	GPT-2-M		GPT-2-L		GPT-2-XL	
	MLP	ATN	MLP	ATN	MLP	ATN
Birds & Birds	0.92	0.79	0.51	0.61	0.82	0.66
Dogs & Dogs	0.88	0.81	0.34	0.74	0.76	0.76
Auto & Auto	0.90	0.75	0.60	0.81	0.66	0.69
Organ & Organ	0.91	0.77	0.35	0.49	0.56	0.58

Table 3: Average inter-category and intra-category correlations

Birds and Dogs, respectively (Table 3). In comparison the (inter-category) correlations against the baseline are 0.11 and 0.11, respectively.

Visually, we see in the importance heatmap within category Birds overall high correlation and with clustering between related subcategories (Figure 2 Upper Left). Notably the three coarsest classifications of exclusively birds (*Corvidae*, *Passeriformes*, and *Aves*) all show highly similar representations. The next three larger subcategories (*Chordata*, *Anamalia*, *Eukaryota*) exhibit the same pattern. The most specific subcategories (*American Crow* and *Corvus*) are counter-intuitive, displaying appreciably less correlation between the other subcategories. Intra-category dogs exhibits remarkably close behavior to intra-category birds (Appendix C).

The meronomic categories show less evidence with average intra-category correlations of 0.66 and 0.56 for Organ and Auto systems, respectively. The (inter-category) correlations against the baseline are 0.18 and 0.36, respectively. The heatmap within category Auto. Systems (Figure 2 Lower Right) shows less overall intra-category correlation in comparison to both taxonomic categories.

**Finding #2: Lack of Distinct Layer Importance for Individual Subcategories:** When viewing the single layer of maximum importance for MLP interventions at the Last Subject Token we see no strong evidence of related regions for individual subcategories. (Table 2). That is, categories more

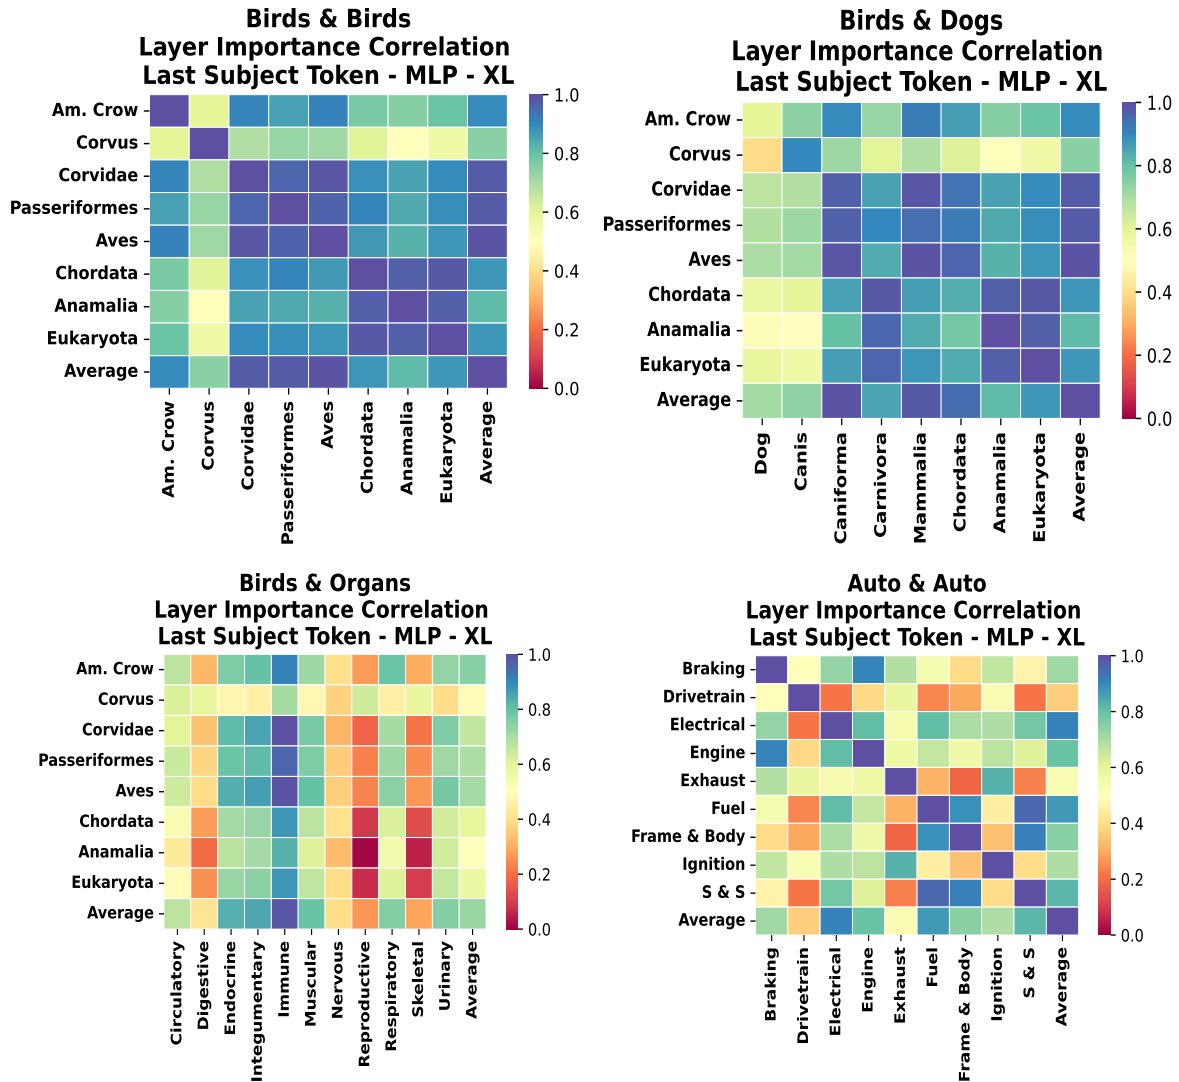


Figure 2: Specific intra-category and inter-category correlation Heatmaps on GPT-2-XL

similar to each other do not necessarily possess layers of maximal importance close to each other. We see there is no obvious pattern or order here among either the layer or the size of the effect. However, further analysis might indicate that the top-k layers possess some ordering, and the overall importance of the maximum layer here is not well understood. Additionally, the line plots generated possess extremely wide confidence intervals and the associated heat maps show no substantive patterns (Appendix C). While there are clear patterns in terms of the ordering of the layers, the significance of minor changes to layer order remains in doubt due to prior work. For attention at the Last Token see no obvious patterns apart from a strong clustering towards the latter layers. The importance of later layers on attention is well known and is to be expected.

## 6.2 Inter-Category Locality

### Finding #3: Taxonomic Locality:

Similarly, the taxonomic categories also show initial signs of MLP focused inter-category locality between each other with Birds averaging a correlation of 0.79 between Dogs (Figure 2, Table 3) In comparison, the correlations between each of these categories with the baseline dataset is 0.11, substantially lower. As these share two subcategories, *Anamalia* and *Eukaryota*, the previous values are computed without those subcategories. The taxonomic categories also show lesser correlation with the respective meronomic categories. Notably, **Auto** systems possess very similar correlations between each of the taxonomic categories, and likewise with **Organ** systems (Figure 3). Curiously, the baseline is the furthest from every other category which is intuitive as it is the least similar in nature to every

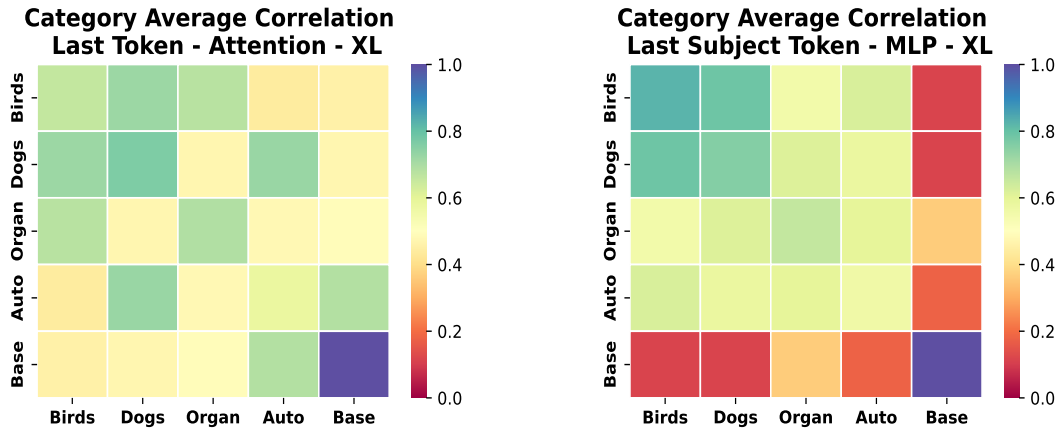


Figure 3: Category average Spearman correlations on GPT-2-XL

other category. We note that attention focused locality possesses none of the above attributes and shows no distinctive patterning. Again our observations remain as above with the lack of substantive patterns within the layer of maximum importance.

**Finding #4: Clustered Layer Importance:** As with intra-category locality we see no patterns within the MLP interventions on the Last Subject Token indicative of progressively important layers. We do see tighter clustering, which is reasonable given the larger difference between the subcategories. Auto systems especially has noticeably small variation between layer max with every subcategory except for Electrical having max AIE at layers four or five. For attention interventions we see the same expected results as with intra-category locality.

## 7 Discussion

While differences in layer orders are present with respect to locality, demonstrated by the differences in correlations, it is not known what amount, if any, makes the difference meaningful in terms of application. Additionally, the usual caveats regarding correlative measures apply, we have only demonstrated associations on a limited collection of models and data.

The baseline is notable for being distant from every aggregated category and nearly all individual subcategories. As the facts contained within the baseline do not comport to any of our relations this provides us with more evidence for inter-category locality. But the size and scope of the dataset are likely not sufficient enough to draw conclusions from. Curiously for the subcategories that correlate more closely with the baseline (*Corvus*, *Re-*

*productive*, *Skeletal*) these tend to correlate less with within their respective category. Why these particular subcategories do so is unknown, but increasing the size of these subcategories may rule out coincidence.

## 8 Conclusion

In the paper we have investigated knowledge locality, especially with regard to clusters of related facts. Overall, we have found evidence displaying both intra-category and inter-category locality for hierarchical data, particularly for taxonomic relations. However, we do not see evidence for an ordered representation based on layer importance that will allow targeting of specific clusters of information. What locality we find is broad and manifests as a strong correlation between the important layers across the entirety of the model.

## 9 Limitations

1. *Transferability to other GPT-like models:* Due to the computational constraints listed above, the analysis was restricted to only three versions of GPT-2, Medium, Large, and XL. How the existence of category locality or its properties differs other architectures is unknown.
2. *The importance of indirect effect size:* The magnitude of the average indirect effect tends to be low with values generally under 10%. As the AIE is the fundamental measure used here to determine layer importance it is unknown if these values are too low to draw conclusions from. Baseline AIE values however tend to be lower than the DARC subcategories.
3. *Other methods of similarity:* We note that hierarchical distinctions like taxonomy or meronymy



just some of many types of relations that indicate similarity and that our choice of focusing on hierarchical categorization does not imply that such distinctions are not encoded within LLMs. We choose hierarchical relations due to their familiar nature, ease of use for generating quality data that can be assured to conform to the relation, and, especially for taxonomy, the innate ordering possessed by the expanding classifications.

## Broader Impacts and Ethics Statement

The authors anticipate there to be no reasonable cause to believe use of this work would result in harm, both direct or implicit. The authors disclaim any conflicts of interest pertaining to this work.

## References

- David Bau, Jun-Yan Zhu, Hendrik Strobelt, Agata Lapedriza, Bolei Zhou, and Antonio Torralba. 2020. [Understanding the role of individual units in a deep neural network](#). *Proceedings of the National Academy of Sciences*, 117(48):30071–30078.
- Davis Brown, Charles Godfrey, Cody Nizinski, Jonathan Tu, and Henry Kvinge. 2023. [Edit at your own risk: evaluating the robustness of edited models to distribution shifts](#).
- Damai Dai, Li Dong, Yaru Hao, Zhifang Sui, Baobao Chang, and Furu Wei. 2022. [Knowledge neurons in pretrained transformers](#).
- Nicola De Cao, Wilker Aziz, and Ivan Titov. 2021. [Editing factual knowledge in language models](#). In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 6491–6506, Online and Punta Cana, Dominican Republic. Association for Computational Linguistics.
- Yanai Elazar, Shauli Ravfogel, Alon Jacovi, and Yoav Goldberg. 2021. [Amnesic probing: Behavioral explanation with amnesic counterfactuals](#).
- Amir Feder, Nadav Oved, Uri Shalit, and Roi Reichart. 2021. [CausaLM: Causal model explanation through counterfactual language models](#). *Computational Linguistics*, pages 1–54.
- Mor Geva, Jasmijn Bastings, Katja Filippova, and Amir Globerson. 2023. [Dissecting recall of factual associations in auto-regressive language models](#).
- Mor Geva, Avi Caciularu, Kevin Ro Wang, and Yoav Goldberg. 2022. [Transformer feed-forward layers build predictions by promoting concepts in the vocabulary space](#).
- Mor Geva, Roei Schuster, Jonathan Berant, and Omer Levy. 2021. [Transformer feed-forward layers are key-value memories](#).
- Yash Goyal, Amir Feder, Uri Shalit, and Been Kim. 2020. [Explaining classifiers with causal concept effect \(cace\)](#).
- Peter Hase, Mohit Bansal, Been Kim, and Asma Ghan-deharioun. 2023. [Does localization inform editing? surprising differences in causality-based localization vs. knowledge editing in language models](#).
- Peter Hase, Mona Diab, Asli Celikyilmaz, Xian Li, Zornitsa Kozareva, Veselin Stoyanov, Mohit Bansal, and Srinivasan Iyer. 2021. [Do language models have beliefs? methods for detecting, updating, and visualizing model beliefs](#).
- Evan Hernandez, Belinda Z. Li, and Jacob Andreas. 2023. [Inspecting and editing knowledge representations in language models](#).
- Zhengbao Jiang, Frank F. Xu, Jun Araki, and Graham Neubig. 2020. [How can we know what language models know?](#) *Transactions of the Association for Computational Linguistics*, 8:423–438.
- Kevin Meng, David Bau, Alex Andonian, and Yonatan Belinkov. 2022a. [Locating and editing factual associations in GPT](#). *Advances in Neural Information Processing Systems*, 36.
- Kevin Meng, Arnab Sen Sharma, Alex Andonian, Yonatan Belinkov, and David Bau. 2022b. [Mass editing memory in a transformer](#). *arXiv preprint arXiv:2210.07229*.
- Eric Mitchell, Charles Lin, Antoine Bosselut, Chelsea Finn, and Christopher D. Manning. 2022. [Fast model editing at scale](#).
- Fabio Petroni, Tim Rocktäschel, Sebastian Riedel, Patrick Lewis, Anton Bakhtin, Yuxiang Wu, and Alexander Miller. 2019. [Language models as knowledge bases?](#) In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 2463–2473, Hong Kong, China. Association for Computational Linguistics.
- Yuval Pinter and Michael Elhadad. 2023. [Emptying the ocean with a spoon: Should we edit models?](#)
- Adam Roberts, Colin Raffel, and Noam Shazeer. 2020. [How much knowledge can you pack into the parameters of a language model?](#)
- Jesse Vig, Sebastian Gehrmann, Yonatan Belinkov, Sharon Qian, Daniel Nevo, Simas Sakenis, Jason Huang, Yaron Singer, and Stuart Shieber. 2020. [Causal mediation analysis for interpreting neural nlp: The case of gender bias](#).
- Yunzhi Yao, Peng Wang, Bozhong Tian, Siyuan Cheng, Zhoubo Li, Shumin Deng, Huajun Chen, and Ningyu Zhang. 2023. [Editing large language models: Problems, methods, and opportunities](#). *CoRR*, abs/2305.13172.

Paul Youssef, Osman Alperen Koraş, Meijie Li, Jörg Schlötterer, and Christin Seifert. 2023. [Give me the facts! a survey on factual knowledge probing in pre-trained language models.](#)

Sumu Zhao, Damian Pascual, Gino Brunner, and Roger Wattenhofer. 2021. [Of non-linearity and commutativity in bert.](#)

Chen Zhu, Ankit Singh Rawat, Manzil Zaheer, Srinadh Bhojanapalli, Daliang Li, Felix Yu, and Sanjiv Kumar. 2020. [Modifying memories in transformer models.](#)

## A DARC - Additional Information

Correct Predictions							
Category	GPT-2-M	GPT-2-L	GPT-2-XL	Category	GPT-2-M	GPT-2-L	GPT-2-2-XL
Am. Crow	417	445	475	Dog	299	338	362
Corvus	700	768	830	Canis	718	750	836
Corvidae	687	748	848	Caniformia	365	322	393
Passeriformes	616	686	767	Carnivora	557	482	549
Aves	514	610	706	Mammalia	652	418	849
Chordata*	816	889	1007	Chordata*	453	421	474
Anamalia	725	795	903	Anamalia	725	795	903
Eukaryota	559	604	648	Eukaryota	559	604	648
<b>Baseline</b>	617	695	1208	<b>Baseline</b>	617	695	1208

Table 4: Correct Predictions - Taxonomy

Correct Predictions							
Category	GPT-2-M	GPT-2-L	GPT-2-XL	Category	GPT-2-M	GPT-2-L	GPT-2-XL
Circulatory	749	815	847	Braking	800	904	958
Digestive	832	902	756	Drivetrain	812	865	914
Endocrine	560	563	474	Electrical	945	1012	1001
Integumentary	394	429	464	Engine	790	858	892
Immune	574	620	798	Exhaust	956	968	1001
Muscular	679	761	836	Fuel	542	608	622
Nervous	563	600	841	Frame	503	541	644
Reproductive	931	1020	1099	& Body	702	766	766
Respiratory	950	987	1060	Ignition	651	669	754
Skeletal	724	791	899	& Steering	617	695	1208
Urinary	448	485	544	<b>Baseline</b>	617	695	1208
<b>Baseline</b>	617	695	1208				

Table 5: Correct Predictions - Meronomy

Birds		Dogs		Organ Systems		Auto. Systems	
Subcategory	Total Facts	Subcategory	Total Facts	Subcategory	Total Facts	Subcategory	Total Facts
American Crow	3441	Domestic Dog	3301	Circulatory	3813	Braking	3406
Corvus	3520	Canis	4018	Digestive	3436	Drivetrain	3836
Corvidae	3607	Caniformia	2510	Endocrine	2717	Electrical	4277
Passeriformes	3888	Carnivora	3252	Integumentary	3200	Engine	4159
Aves	3103	Mammalia	3083	Immune	3585	Exhaust	4876
Chordata*	3207	Chordata*	2728	Muscular	3638	Fuel	4048
Anamalia	3207	Anamalia	3207	Nervous	3931	Frame	4222
Eukaryota	3148	Eukaryota	3148	Reproductive	4254	& Body	4004
				Respiratory	4433	Ignition	3538
				Skeletal	3821	Suspension	
				Urinary	3148	& Steering	
<b>Category Total:</b>	<b>27157</b>		<b>25274</b>		<b>39976</b>		<b>36366</b>

Table 6: Dataset Statistics for Taxonomic and Meronomic Categories. (\*) The subcategory Chordata differs between category due to the requirement of mutual exclusivity between subcategories.

## **B Fact Generation Prompt Template (Respiratory System)**

### **B.1 Initial Generation**

Generate X facts about the human body's respiratory system.

Limit the size of each fact to no more than 15 words.

Do not include punctuation in any fact.

Do not reuse any of the previous facts provided.

Here is an example of three facts and their correct formatting:

The first bronchi to branch from the trachea are the right and left main bronchi

The lungs expand and contract during the breathing cycle drawing air in and out of the  
lungs

Gas exchange in the lungs occurs in millions of small air sacs



## B.2 Subject Identification and JSON Conversion

Interpret and then format each of the provided facts about X according to the following json format:

```
{
  "known_id": NONE',
  "full_fact": "COMPLETE FACT",
  "subject": "SUBJECT OF FACT",
  "attribute": "OBJECT OF FACT or FINAL WORD OF FACT",
  "prediction": "OBJECT OF FACT or FINAL WORD OF FACT",
  "prompt": "ALL OF full_fact UP TO BUT NOT INCLUDING THE
    OBJECT OF FACT OR THE FINAL WORD OF FACT",
  "group": "CATEGORY OF SUBJECT",
  "relation_id": "NONE",
  "template": "NONE",
},
```

Here are three examples of facts with their correct JSON formatting:

The first bronchi to branch from the trachea are the right and left main bronchi

```
{
  "known_id": NONE,
  "full_fact": "The first bronchi to branch from the trachea
    are the right and left main bronchi",
  "subject": "bronchi",
  "attribute": "bronchi",
  "prediction": "bronchi",
  "prompt": "The first bronchi to branch from the trachea
    are the right and left main",
  "group": "Respiratory",
  "template": "NONE",
  "relation_id": "NONE",
},
```

...

The facts to be covered are: ...

### **B.3 Example Facts - Respiratory System**

"full\_fact": "Pneumothorax is a condition where air collects in the pleural space".

"full\_fact": "Breathing efficiency varies with physical fitness",

"full\_fact": "Carbon monoxide poisoning prevents oxygen transport leading to tissue hypoxia",

"full\_fact": "Inhalation is an active process driven by muscle contractions",

"full\_fact": "The nasal cavity helps warm and humidify inhaled air before it reaches the lungs",

"full\_fact": "Hypoxia results from insufficient oxygen",

"full\_fact": "Pulmonary surfactant reduces surface tension in the alveoli",

"full\_fact": "Respiratory alkalosis can occur due to rapid breathing causing a rise in blood pH",

"full\_fact": "The pleura create a friction-reducing surface for lung expansion within the chest cavity",

"full\_fact": "Auscultation of the lungs can detect abnormal breath sounds indicating respiratory issues",

"full\_fact": "Bronchioles are smaller branches within the lungs leading to the alveoli",

"full\_fact": "The phrenic nerve controls the diaphragm's movement for breathing",

"full\_fact": "The trachea is lined with cilia to help sweep mucus and foreign particles",

"full\_fact": "The alveolar sacs are clustered at the end of the bronchioles for gas exchange",

"full\_fact": "Paranasal sinuses help humidify and warm air before it reaches the lungs",

## C Additional Experimental Data

### C.1 GPT-2-XL

Category	Last Subject Token (MLP)		Last Token (ATN)		Category	Last Subject Token (MLP)		Last Token (ATN)	
	Max at Layer	A.I.E	Max at Layer	A.I.E		Max at Layer	A.I.E	Max at Layer	A.I.E
Am. Crow	5	0.142	27	0.087	Dog	16	0.140	30	0.149
Corvus	4	0.079	30	0.074	Canis	5	0.077	31	0.094
Corvidae	16	0.052	30	0.058	Caniformia	15	0.125	28	0.124
Passeriformes	5	0.049	30	0.057	Carnivora	15	0.054	28	0.057
Aves	15	0.082	30	0.086	Mammalia	15	0.111	28	0.093
Chordata*	15	0.070	30	0.071	Chordata*	5	0.130	27	0.117
Anamalia	5	0.076	30	0.069	Anamalia	5	0.076	30	0.069
Eukaryota	11	0.054	30	0.052	Eukaryota	11	0.054	30	0.052
<b>Baseline</b>	17	0.056	31	0.086	<b>Baseline</b>	17	0.056	31	0.086

Table 7: Taxonomic Statistics - GPT-2-XL

Category	Last Subject Token (MLP)		Last Token (ATN)		Category	Last Subject Token (MLP)		Last Token (ATN)	
	Max at Layer	A.I.E	Max at Layer	A.I.E		Max at Layer	A.I.E	Max at Layer	A.I.E
Circulatory	5	0.067	27	0.109	Braking	5	0.051	27	0.073
Digestive	5	0.080	27	0.097	Drivetrain	5	0.053	27	0.077
Endocrine	5	0.079	27	0.104	Electrical	0	0.048	27	0.083
Integumentary	5	0.066	30	0.082	Engine	5	0.083	27	0.109
Immune	8	0.051	25	0.067	Exhaust	4	0.048	27	0.069
Muscular	1	0.092	27	0.107	Fuel	5	0.074	27	0.073
Nervous	8	0.037	27	0.061	Frame	5	0.031	27	0.027
Reproductive	14	0.059	27	0.099	& Body	5	0.031	27	0.027
Respiratory	14	0.051	27	0.100	Ignition	4	0.062	27	0.086
Skeletal	5	0.075	30	0.106	Suspension	5	0.050	27	0.066
Urinary	5	0.094	27	0.113	& Steering	5	0.050	27	0.066
<b>Baseline</b>	17	0.056	31	0.086	<b>Baseline</b>	17	0.056	31	0.086

Table 8: Meronomic Statistics - GPT-2-XL

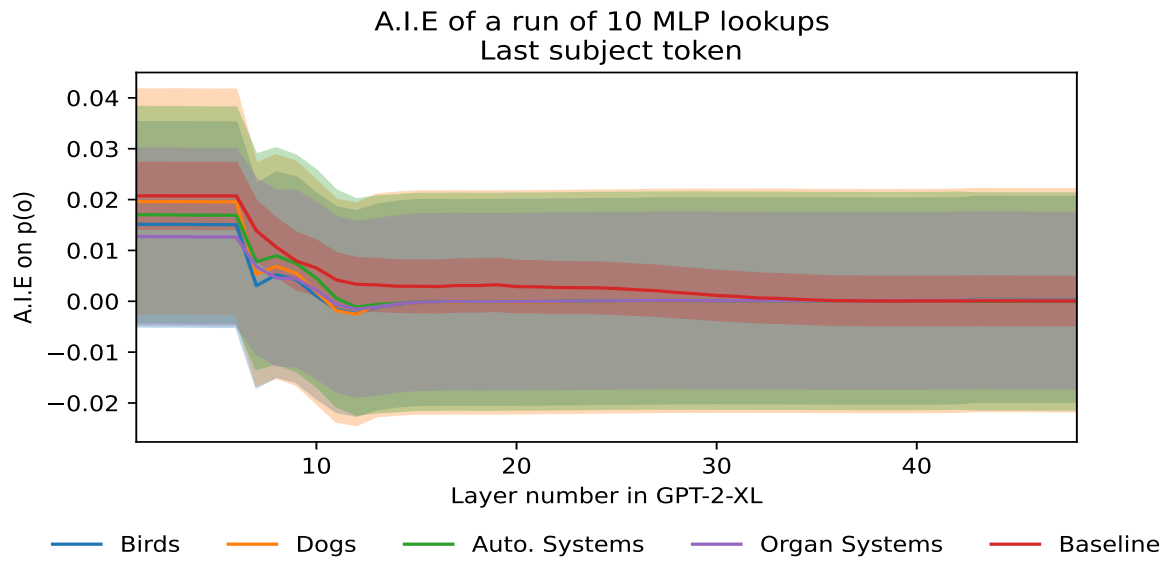


Figure 4: GPT-2-XL A.I.E Category Average - Last Token - MLP

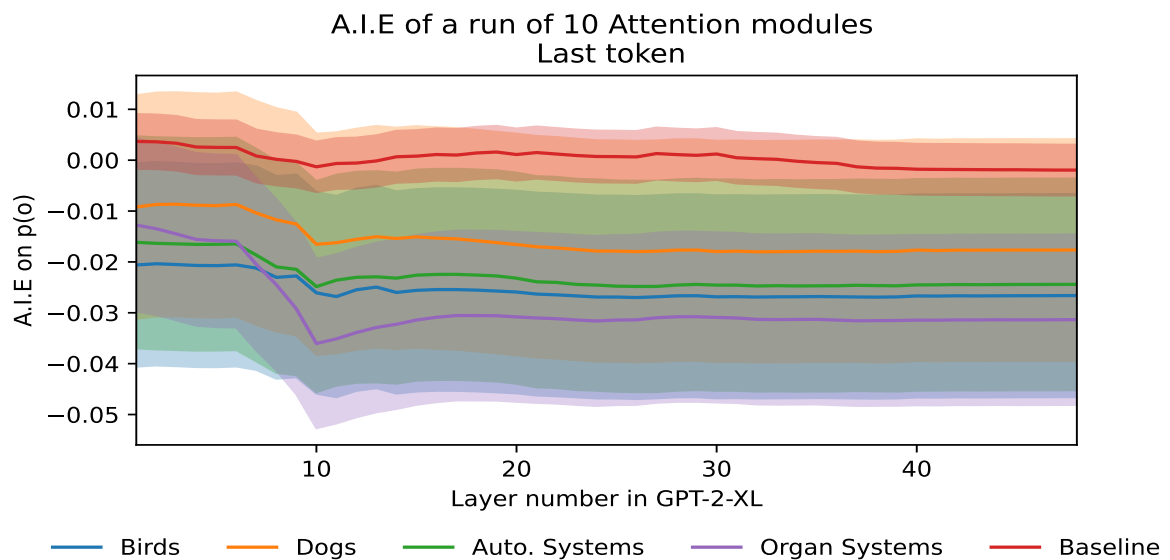


Figure 5: GPT-2-XL A.I.E Category Average - Last Token - Attention



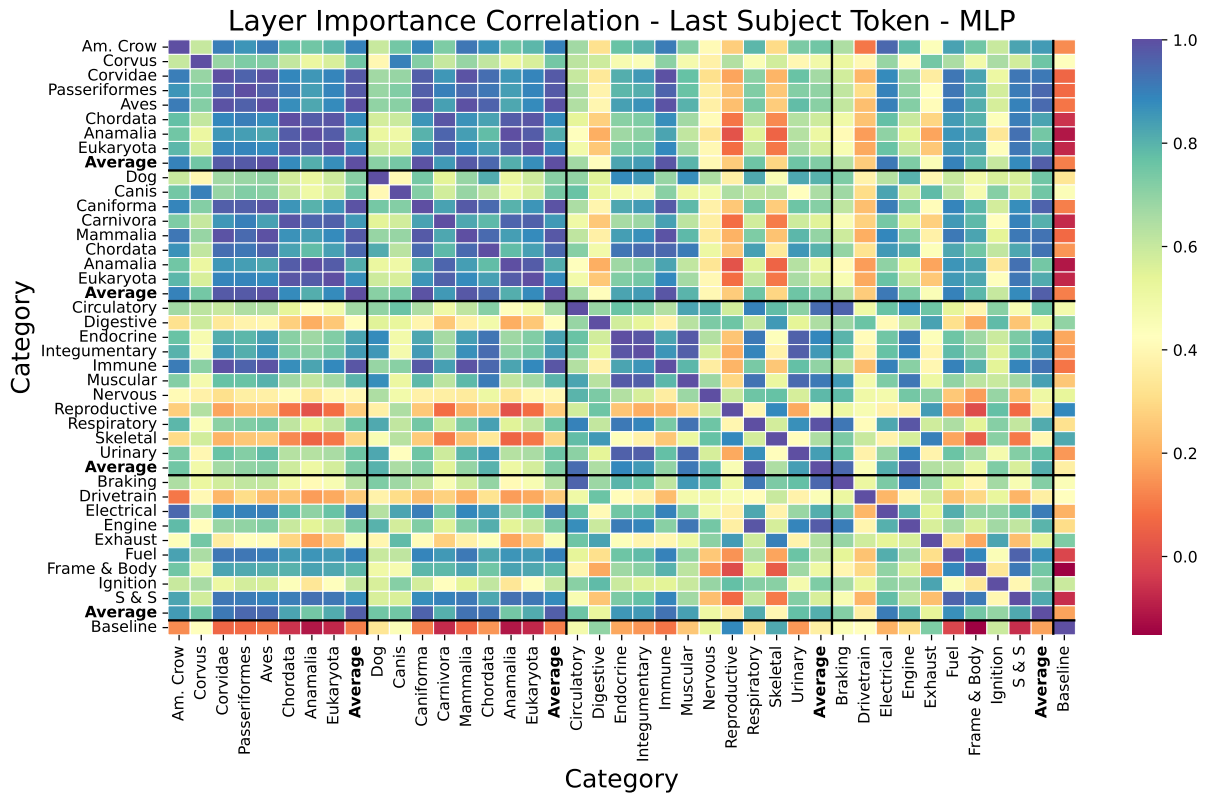


Figure 6: GPT-2-XL Layer Importance Heat Map - Last Subject Token - MLP

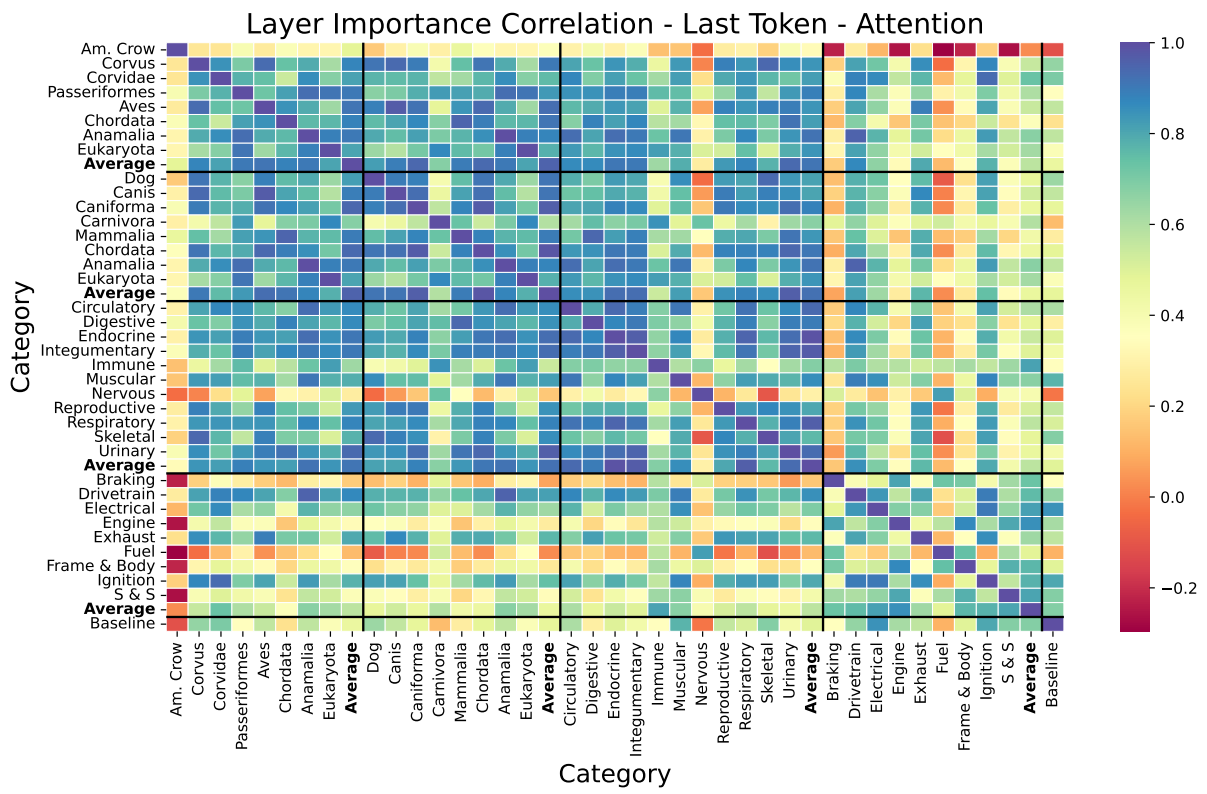


Figure 7: GPT-2-XL Layer Importance Heat Map - Last Token - Attention

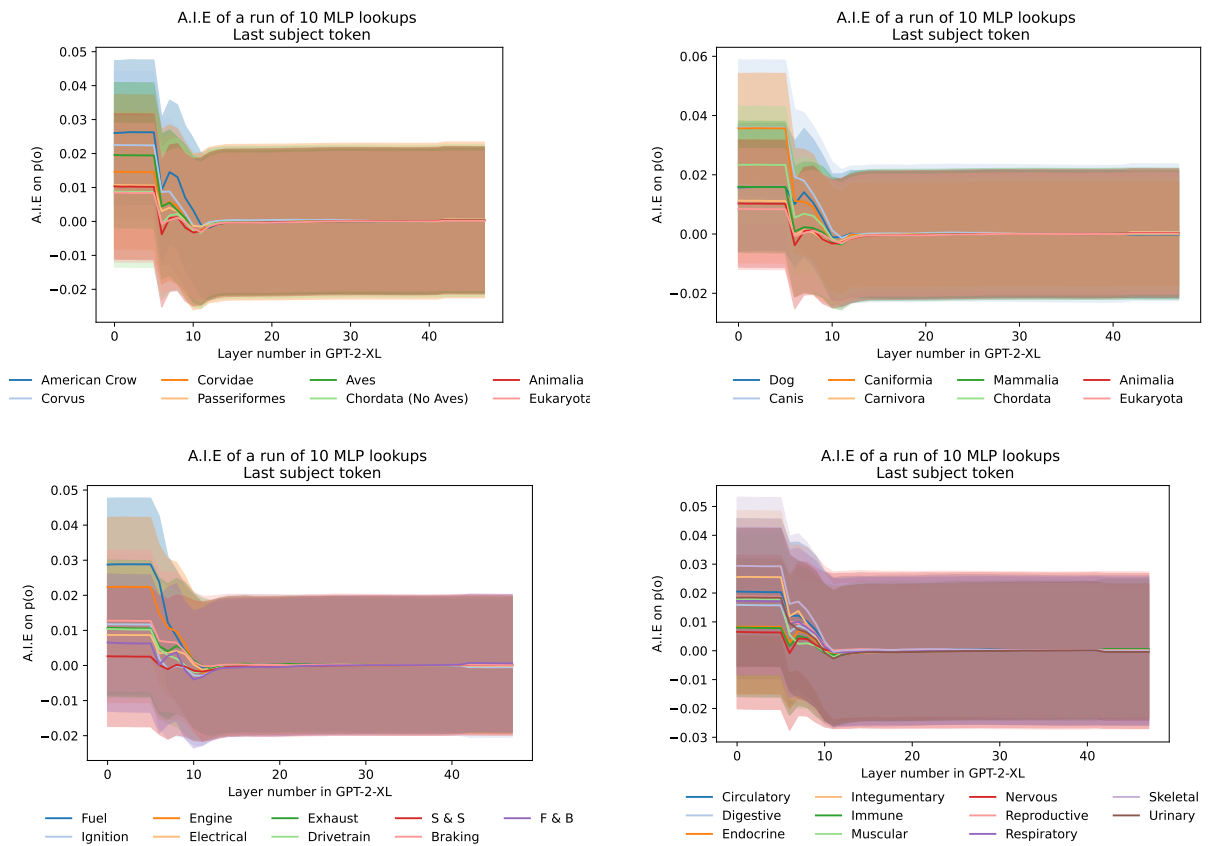


Figure 8: GPT-2-XL Line Plots - Last Subject Token - MLP

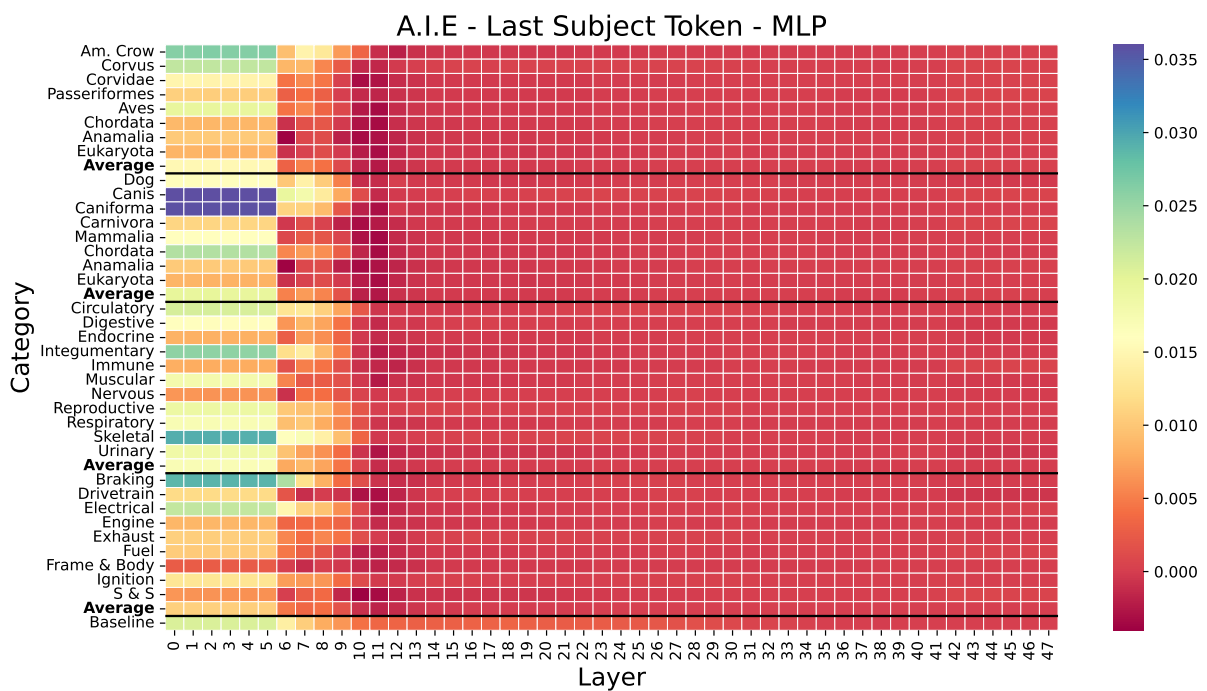


Figure 9: GPT-2-XL A.I.E Heat Map - Last Subject Token - MLP

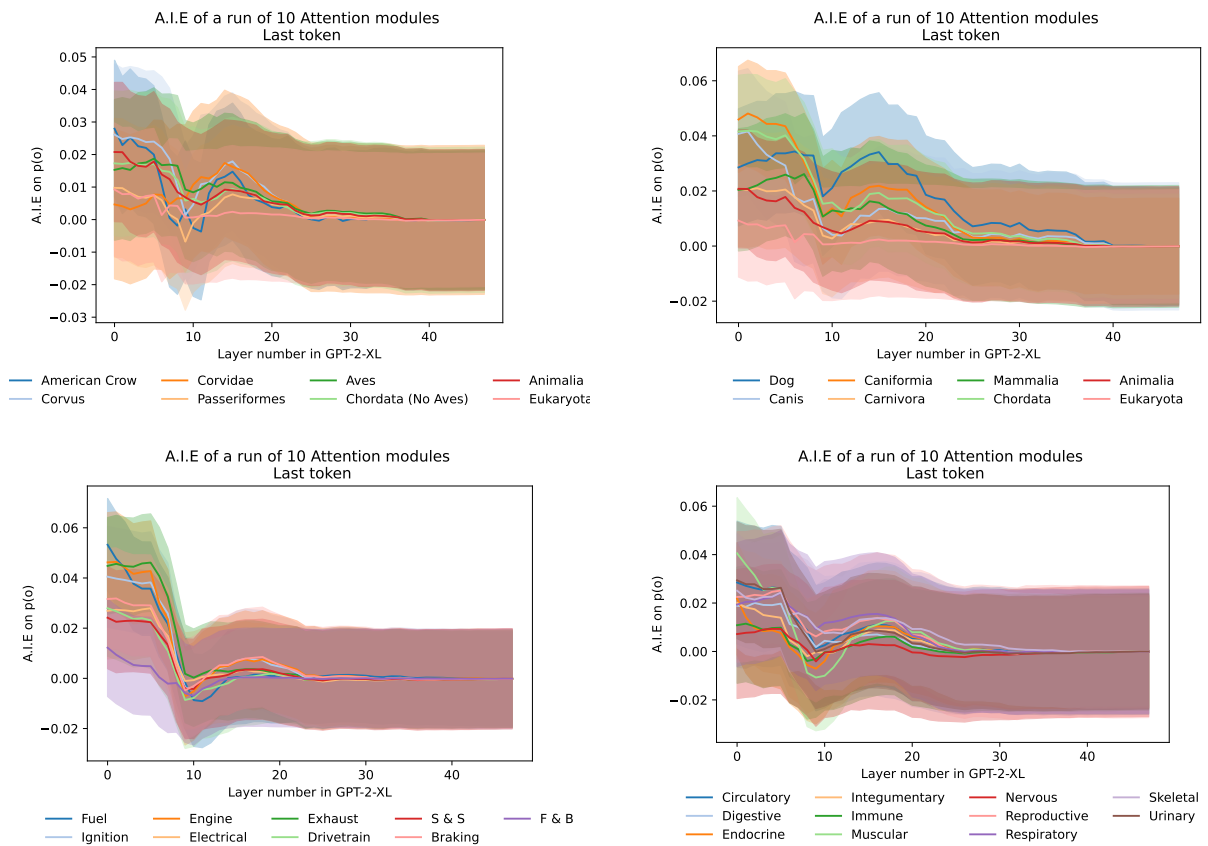


Figure 10: GPT-2-XL Line Plots - Last Token - Attention

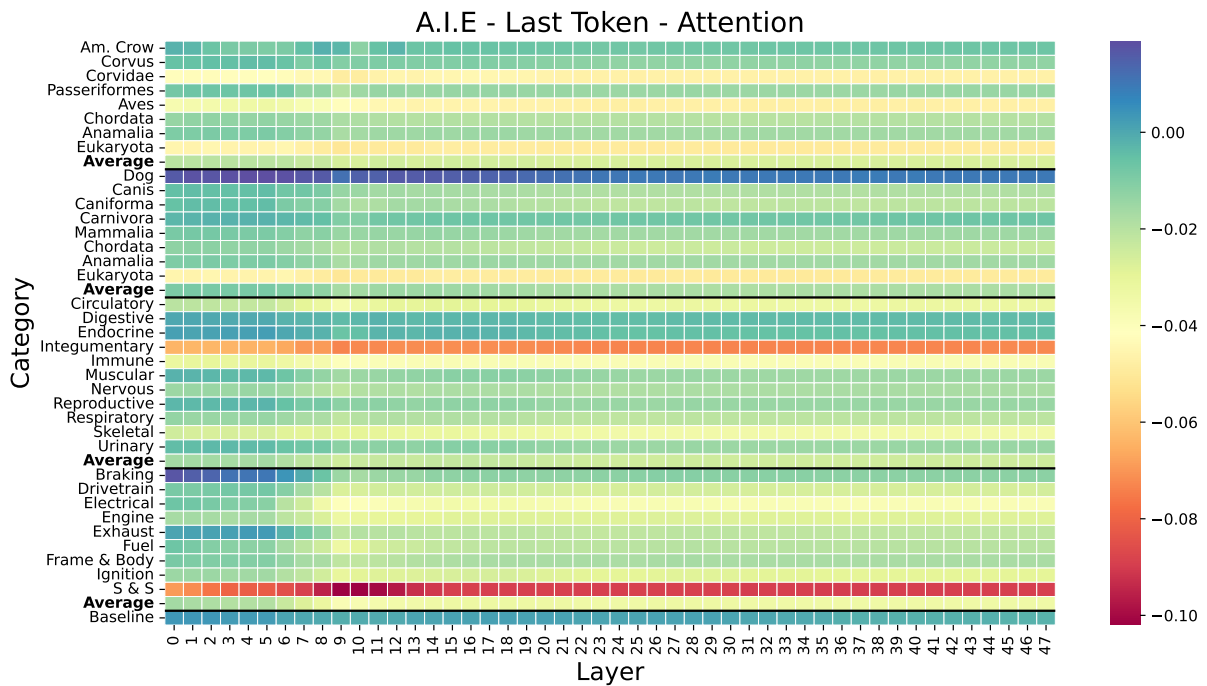


Figure 11: GPT-2-XL A.I.E. Heat Map - Last Token - Attention

## C.2 GPT-2-Large

Category	Last Subject Token (MLP)		Last Token (ATN)		Category	Last Subject Token (MLP)		Last Token (ATN)	
	Max at Layer	A.I.E	Max at Layer	A.I.E		Max at Layer	A.I.E	Max at Layer	A.I.E
Am. Crow	5	0.093	21	0.095	Dog	10	0.128	26	0.132
Corvus	5	0.067	21	0.080	Canis	5	0.070	22	0.089
Corvidae	9	0.037	22	0.60	Caniformia	5	0.146	21	0.135
Passeriformes	5	0.053	21	0.062	Carnivora	5	0.055	22	0.068
Aves	5	0.057	21	0.089	Mammalia	9	0.101	21	0.100
Chordata*	5	0.067	21	0.076	Chordata*	5	0.126	21	0.119
Anamalia	5	0.079	21	0.083	Anamalia	5	0.079	21	0.083
Eukaryota	5	0.057	22	0.060	Eukaryota	5	0.057	22	0.060
<b>Baseline</b>	5	0.061	26	0.130	<b>Baseline</b>	5	0.061	26	0.130

Table 9: Taxonomic Statistics - GPT-2-Large

Category	Last Subject Token (MLP)		Last Token (ATN)		Category	Last Subject Token (MLP)		Last Token (ATN)	
	Max at Layer	A.I.E	Max at Layer	A.I.E		Max at Layer	A.I.E	Max at Layer	A.I.E
Circulatory	5	0.076	22	0.121	Braking	5	0.058	21	0.088
Digestive	5	0.079	22	0.117	Drivetrain	5	0.062	21	0.081
Endocrine	5	0.088	22	0.110	Electrical	5	0.044	22	0.081
Integumentary	5	0.066	21	0.078	Engine	5	0.078	21	0.115
Immune	5	0.049	22	0.082	Exhaust	5	0.048	22	0.077
Muscular	5	0.094	21	0.123	Fuel	5	0.067	22	0.068
Nervous	5	0.037	22	0.068	Frame	4	0.038	22	0.036
Reproductive	5	0.060	22	0.111	& Body	5	0.063	22	0.090
Respiratory	5	0.057	22	0.111	Ignition	5	0.063	22	0.090
Skeletal	5	0.083	21	0.115	Suspension	5	0.055	21	0.085
Urinary	5	0.089	22	0.129	& Steering	5	0.055	21	0.085
<b>Baseline</b>	5	0.061	26	0.130	<b>Baseline</b>	5	0.061	26	0.130

Table 10: Meronomic Statistics - GPT-2-Large



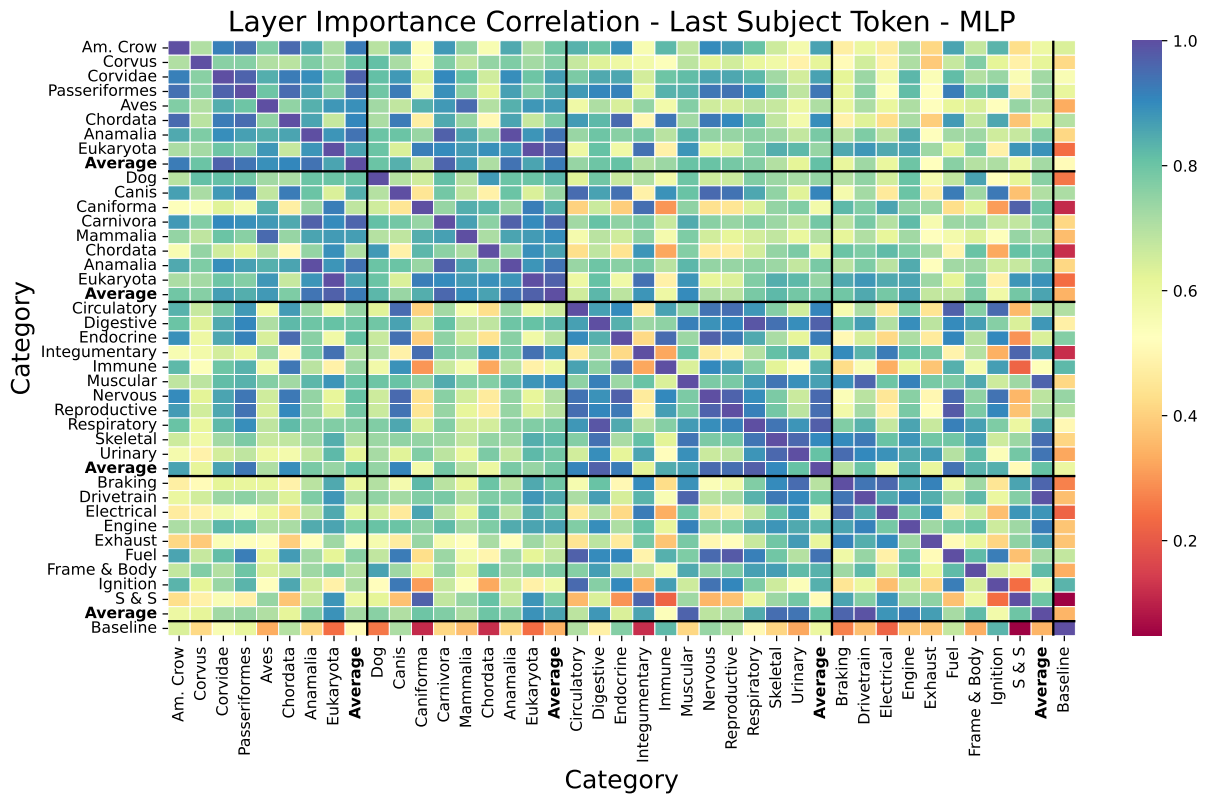


Figure 12: GPT-2-L Layer Importance Heatmap - MLP

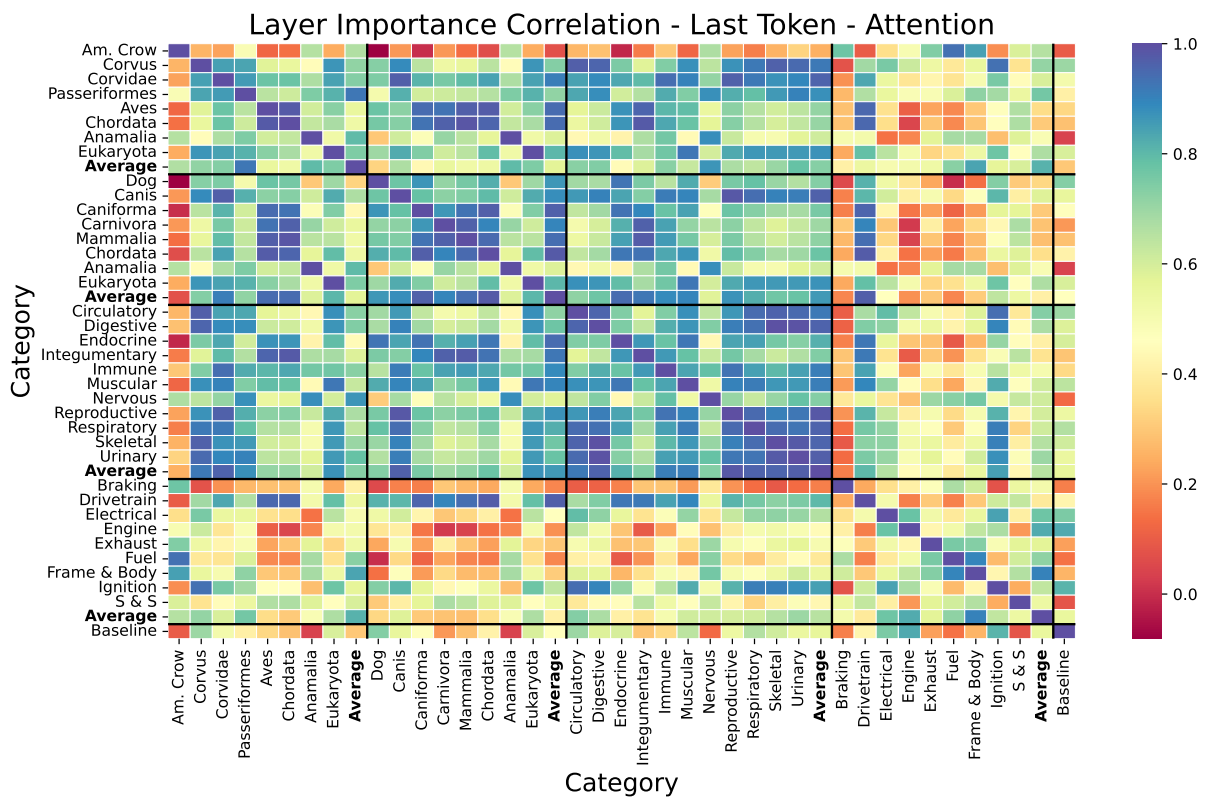


Figure 13: GPT-2-L Layer Importance Heatmap - Attention

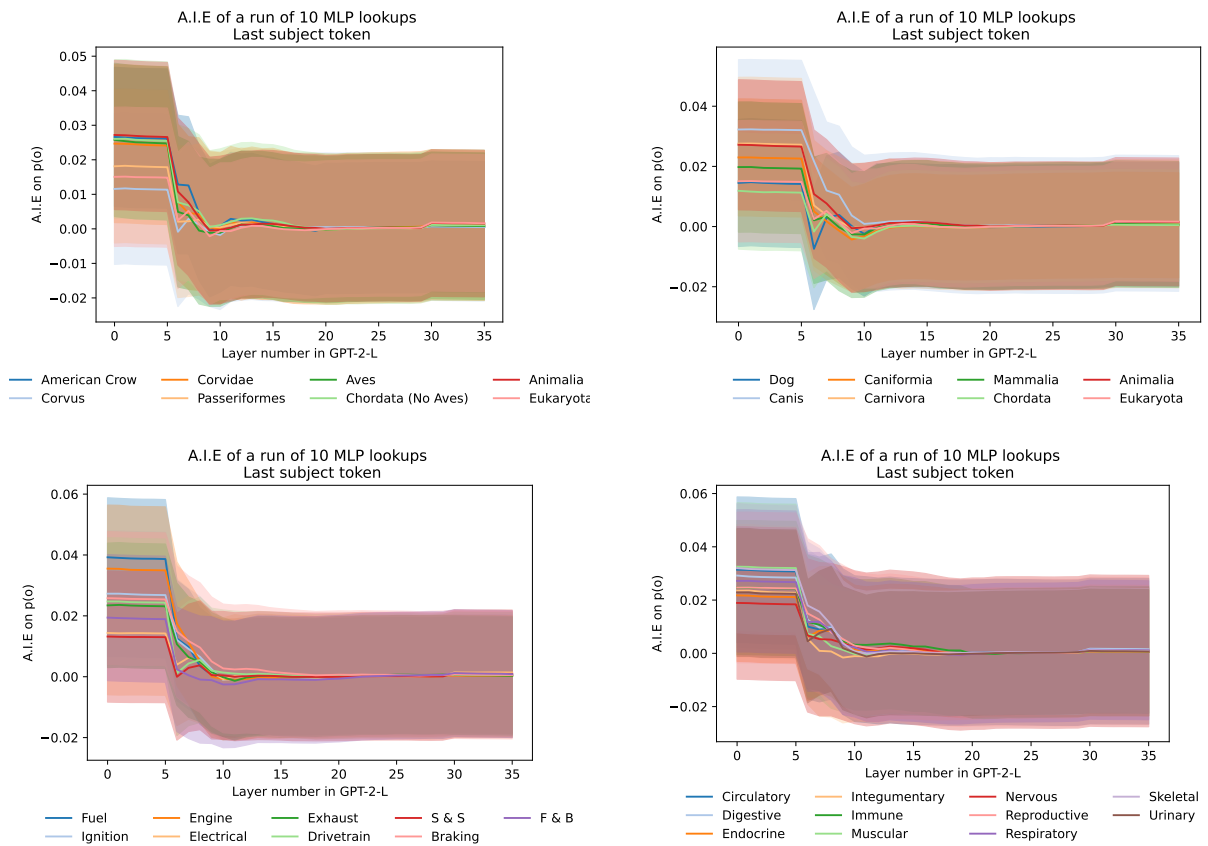


Figure 14: GPT-2-L Line Plots - Last Subject Token - MLP

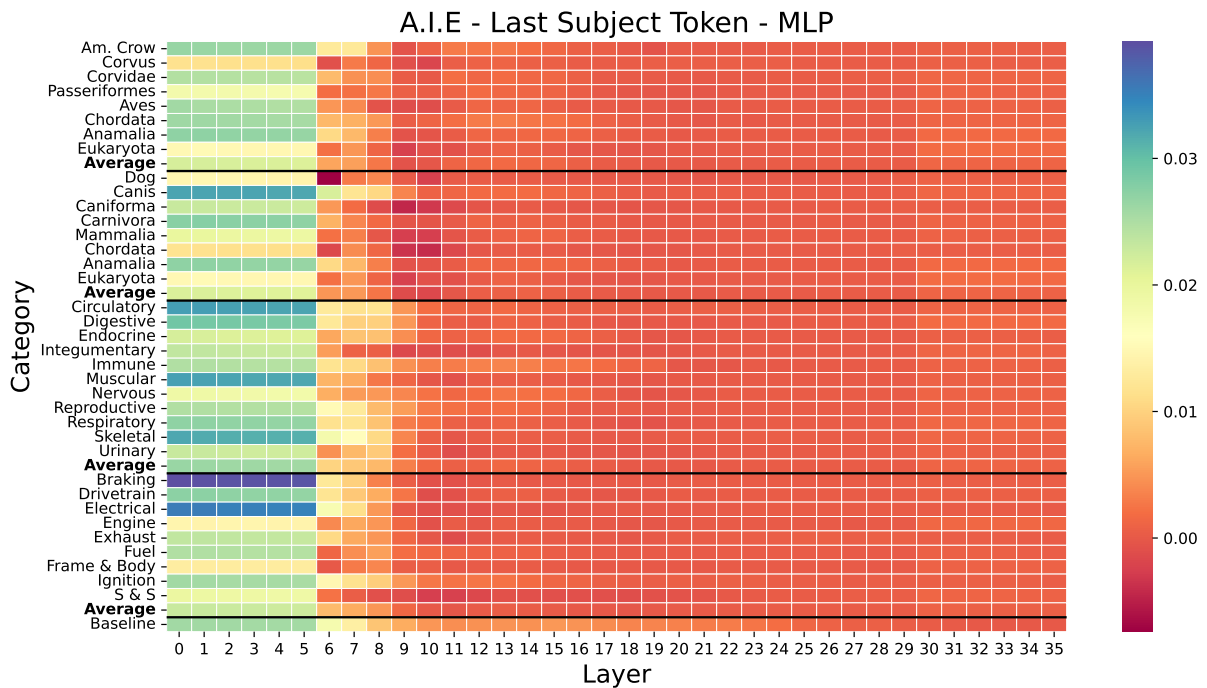


Figure 15: GPT-2-L A.I.E. Heat Map - Last Subject Token - MLP

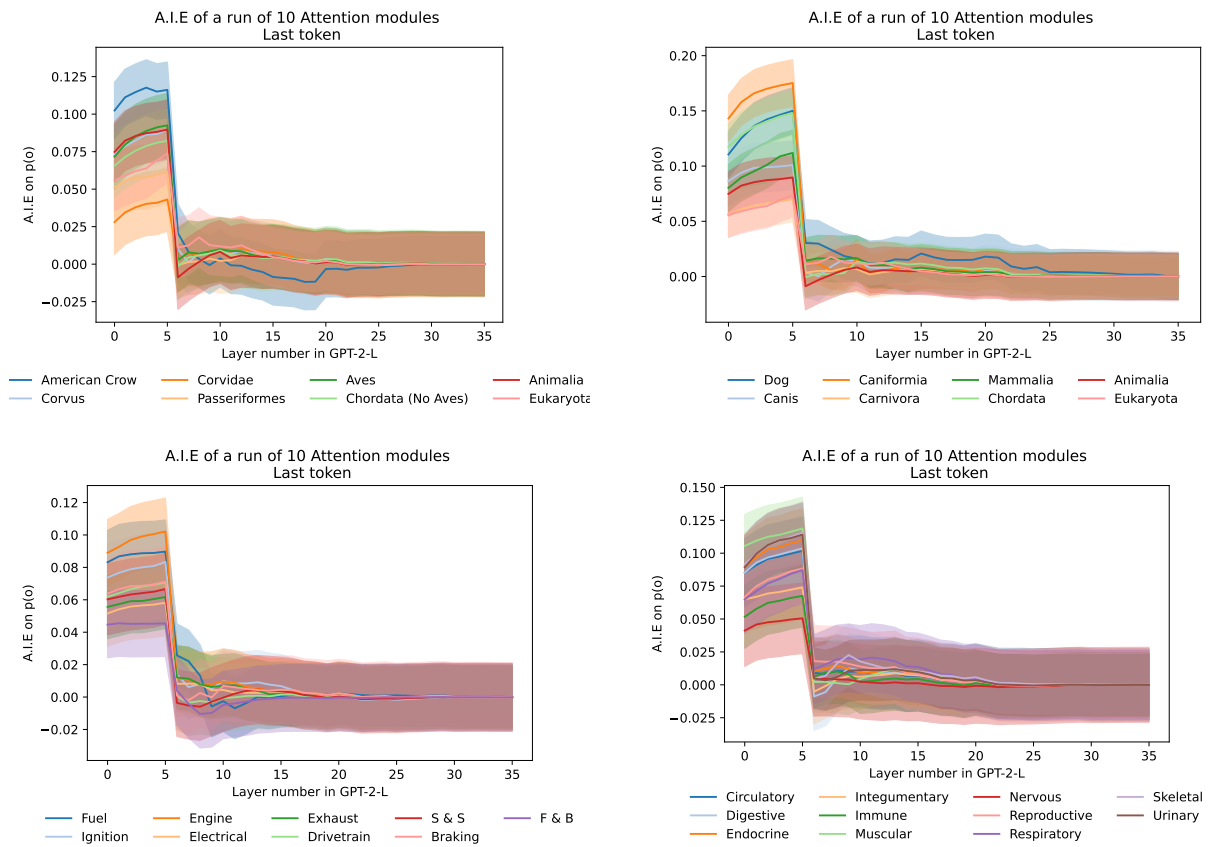


Figure 16: GPT-2-L Line Plots - Last Token - Attention

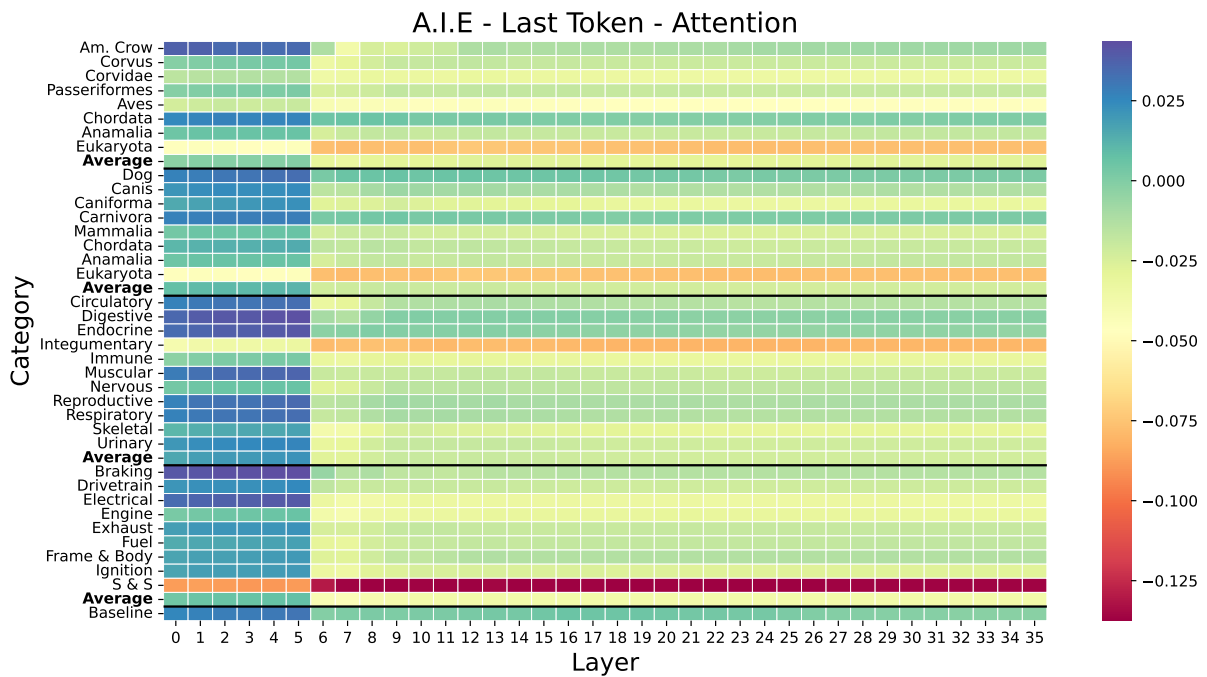


Figure 17: GPT-2-L A.I.E Heat Map - Last Token - Attention

### C.3 GPT-2-Medium

Category	Last Subject Token (MLP)		Last Token (ATN)		Category	Last Subject Token (MLP)		Last Token (ATN)	
	Max at Layer	A.I.E	Max at Layer	A.I.E		Max at Layer	A.I.E	Max at Layer	A.I.E
Am. Crow	3	0.126	15	0.118	Dog	5	0.121	19	0.200
Corvus	5	0.085	19	0.120	Canis	4	0.099	10	0.137
Corvidae	4	0.046	19	0.081	Caniformia	3	0.135	13	0.165
Passeriformes	3	0.054	19	0.092	Carnivora	3	0.057	19	0.108
Aves	3	0.084	19	0.120	Mammalia	3	0.093	19	0.132
Chordata*	3	0.063	19	0.115	Chordata*	4	0.125	19	0.154
Anamalia	3	0.093	19	0.126	Anamalia	3	0.093	19	0.126
Eukaryota	3	0.052	19	0.078	Eukaryota	3	0.052	19	0.078
<b>Baseline</b>	5	0.075	19	0.163	<b>Baseline</b>	5	0.075	19	0.163

Table 11: Taxonomic Statistics - GPT-2-Medium

Category	Last Subject Token (MLP)		Last Token (ATN)		Category	Last Subject Token (MLP)		Last Token (ATN)	
	Max at Layer	A.I.E	Max at Layer	A.I.E		Max at Layer	A.I.E	Max at Layer	A.I.E
Circulatory	3	0.068	19	0.139	Braking	2	0.053	19	0.097
Digestive	5	0.060	19	0.108	Drivetrain	3	0.050	19	0.106
Endocrine	5	0.087	19	0.135	Electrical	5	0.043	17	0.110
Integumentary	5	0.079	19	0.122	Engine	5	0.073	17	0.136
Immune	5	0.047	19	0.090	Exhaust	5	0.042	19	0.100
Muscular	4	0.092	15	0.143	Fuel	3	0.059	19	0.097
Nervous	3	0.030	19	0.081	Frame	3	0.039	19	0.050
Reproductive	5	0.052	19	0.119	& Body	3	0.039	19	0.050
Respiratory	5	0.057	19	0.138	Ignition	3	0.062	19	0.104
Skeletal	5	0.070	16	0.119	Suspension	2	0.051	16	0.091
Urinary	5	0.093	16	0.146	& Steering	5	0.075	19	0.163
<b>Baseline</b>	5	0.075	19	0.163	<b>Baseline</b>	5	0.075	19	0.163

Table 12: Meronomic Statistics - GPT-2-Medium



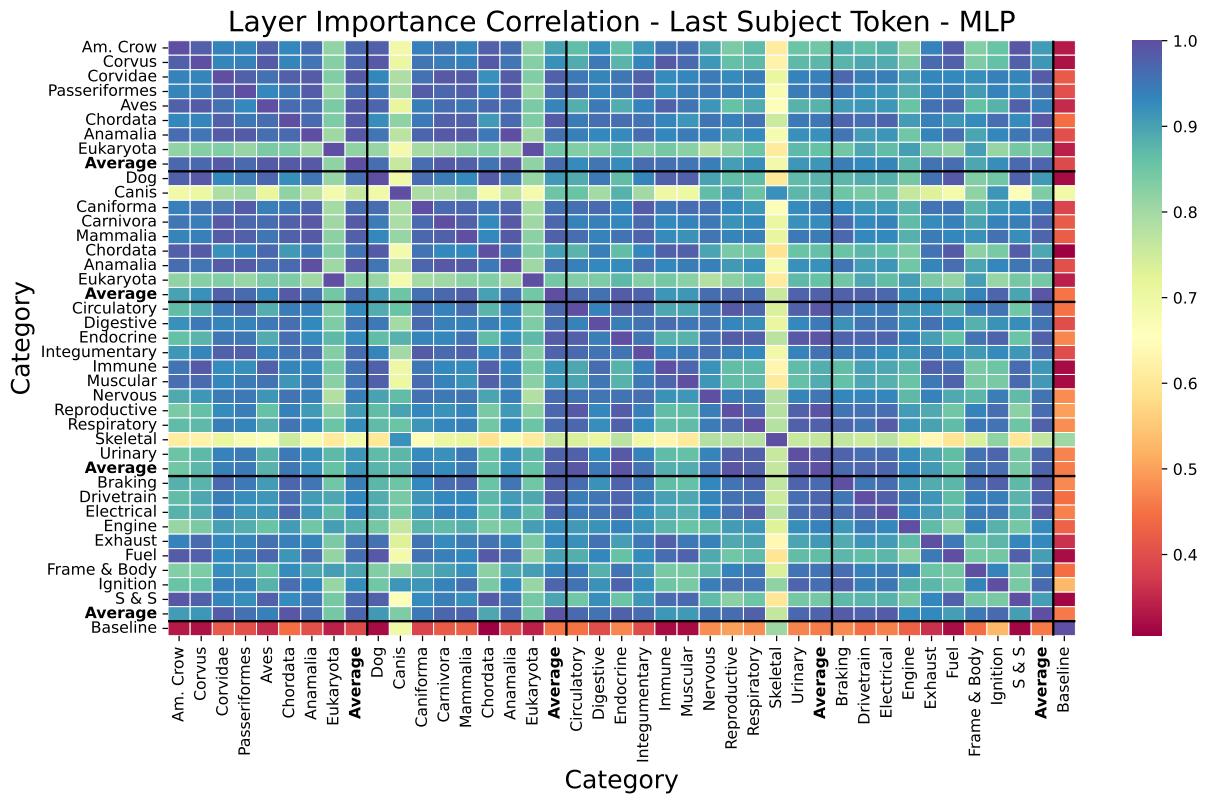


Figure 18: GPT-2-M Layer Importance Heat Map - Last Subject Token - MLP

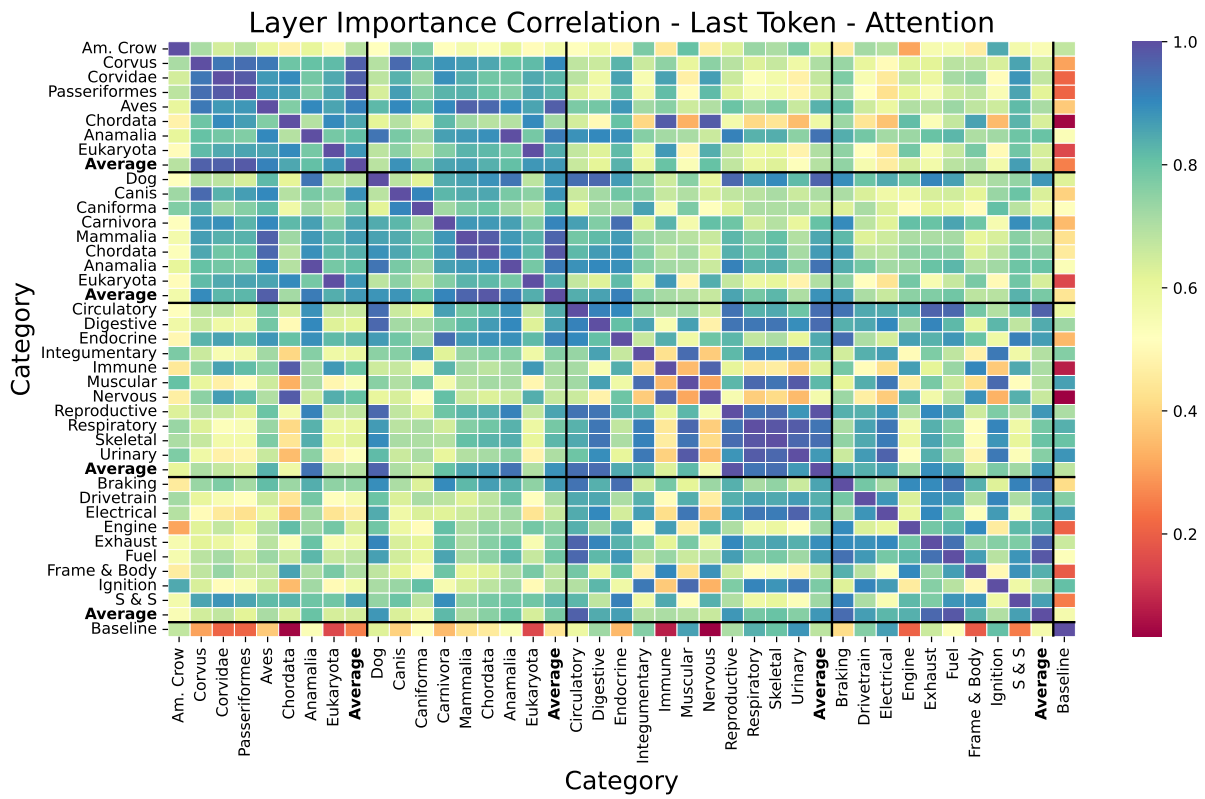


Figure 19: GPT-2-M Layer Importance Heat Map - Last Subject Token - Attention

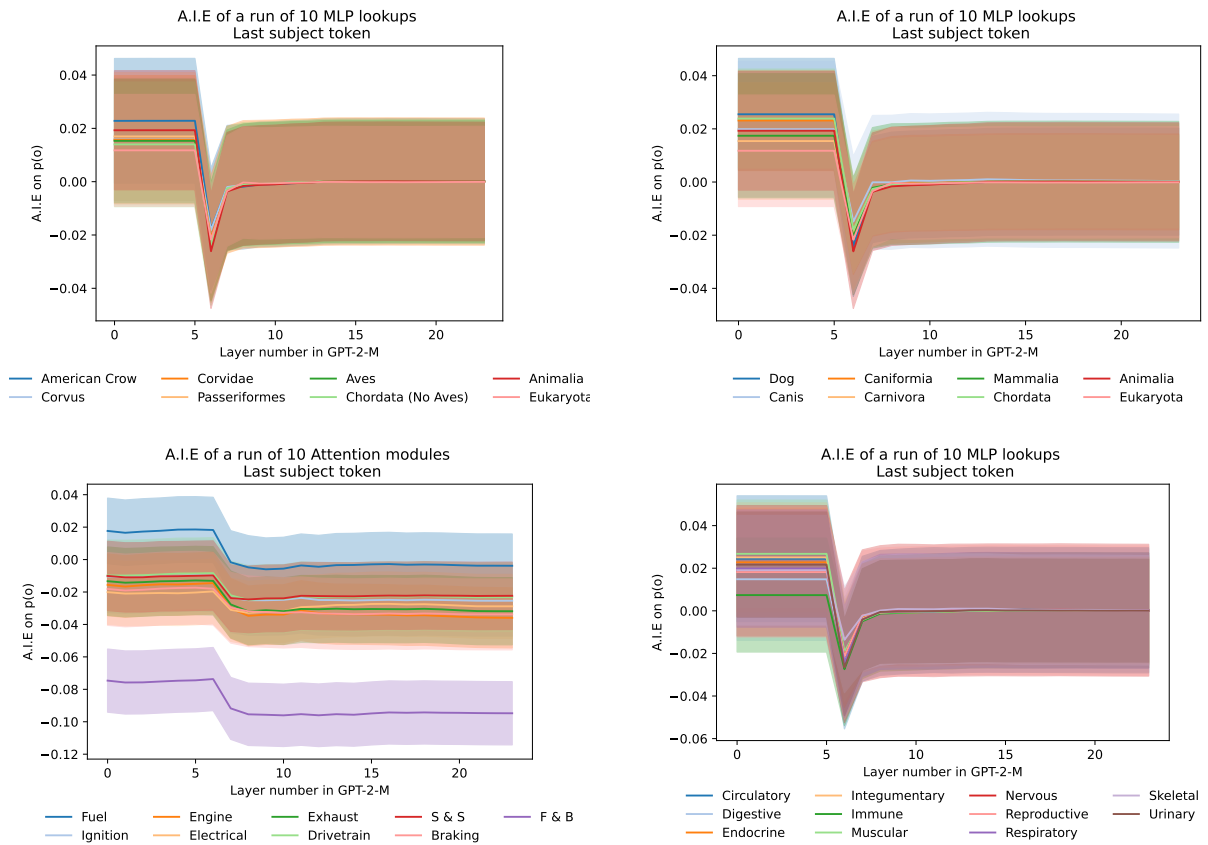


Figure 20: GPT-2-M Line Plots - Last Subject Token - MLP

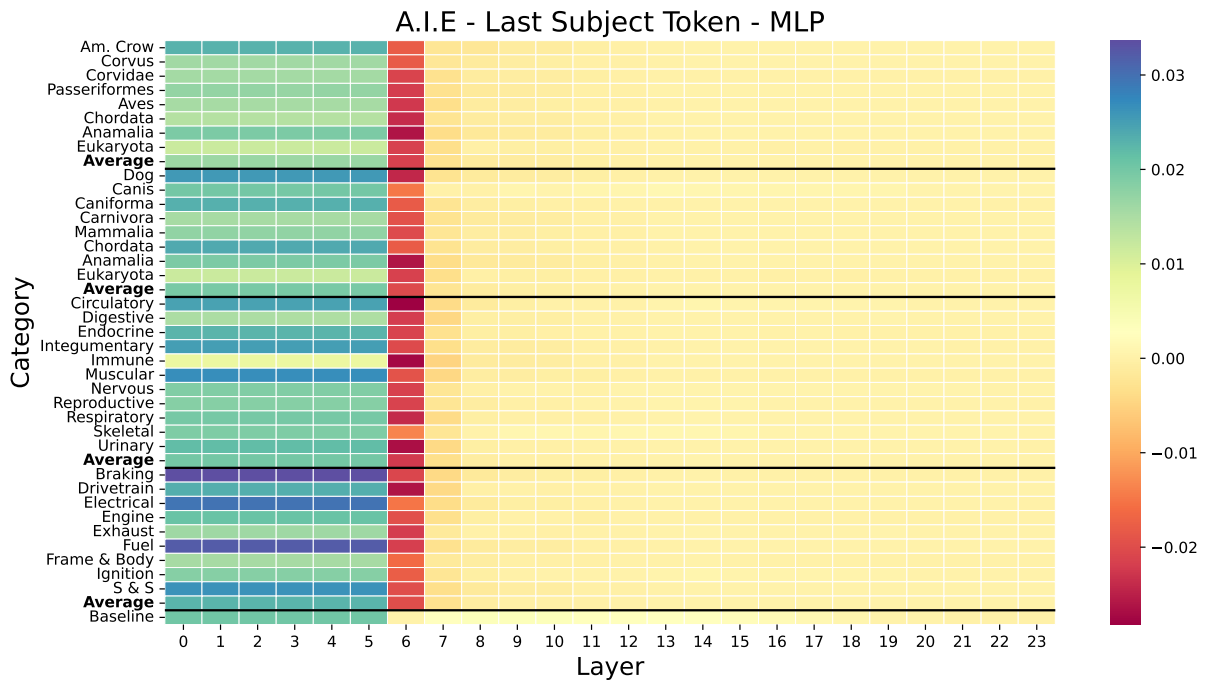


Figure 21: GPT-2-M A.I.E. Heat Map - MLP

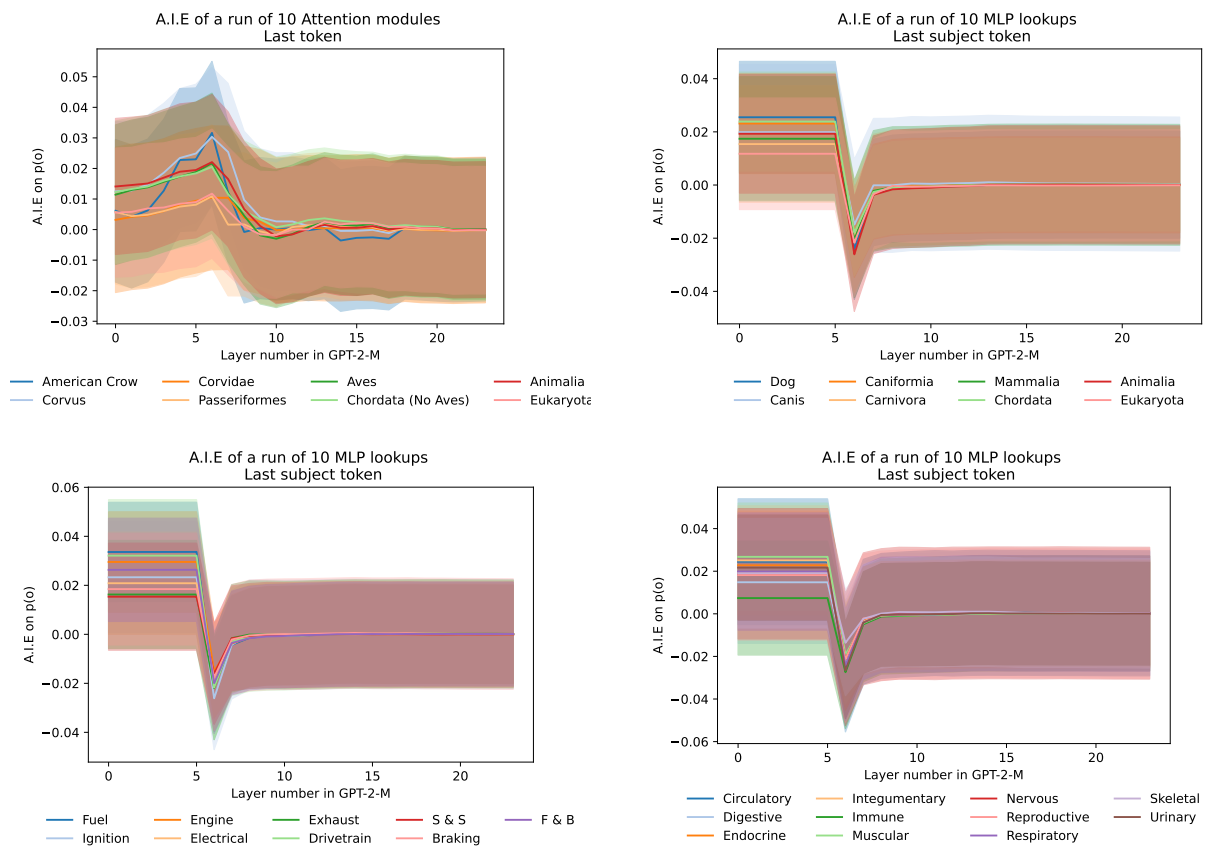


Figure 22: GPT-2-M Line Plots - Last Token - Attention

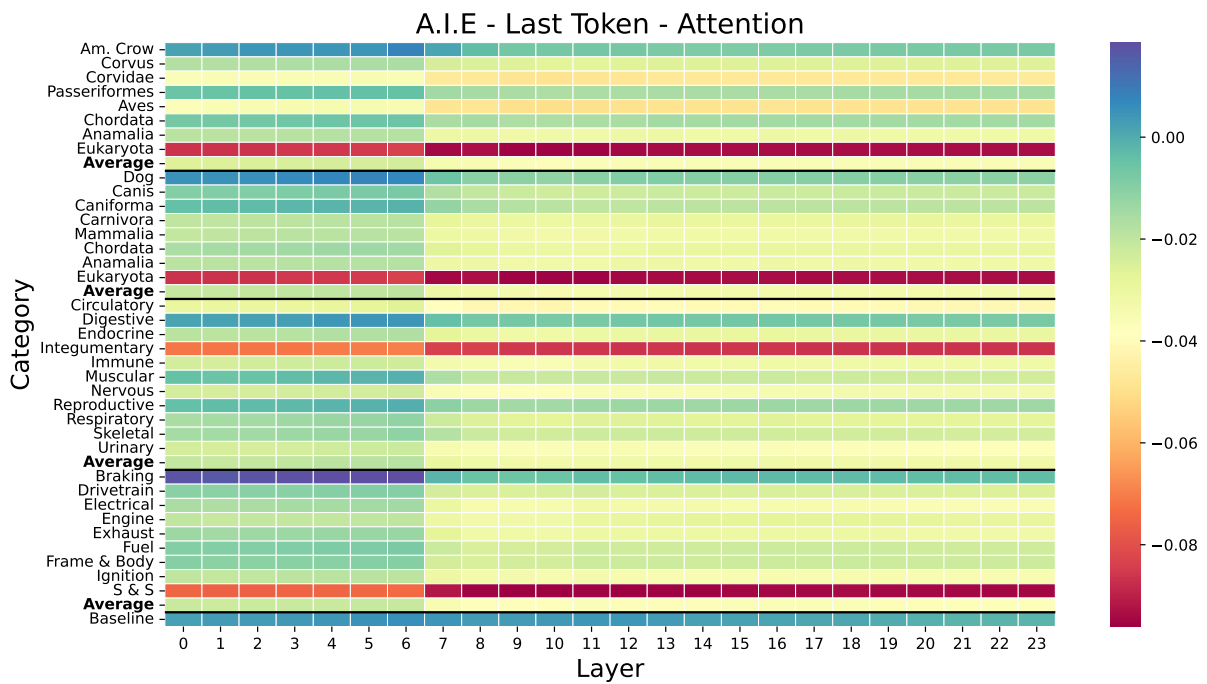


Figure 23: GPT-2-M A.I.E Heat Map - Attention