# Acknowledging Good Java Code with Code Perfumes

Philipp Straubinger University of Passau Passau, Germany Florian Obermüller University of Passau Passau, Germany Gordon Fraser University of Passau Passau, Germany

Abstract—Java remains one of the most popular programming languages in education. Although Java programming education is well supported by study materials, learners also need more immediate support on the problems they face in their own code. When this support cannot be offered by educators personally, learners can resort to automated program analysis tools such as linters, which provide feedback on potential bugs or code issues. This is constructive feedback, but it may nevertheless feel like criticism. This paper introduces code perfumes for Java, a simple program analysis technique similar to linting, but commending the correct application of good programming practices. We present a catalogue of 20 Java code perfumes related to common Java language constructs for beginner to immediate learners. Our evaluation shows that these code perfumes occur frequently in learners' code, and programs with more code perfume instances tend to have better functionality and readability. Moreover, students who incorporate more code perfumes tend to achieve higher grades. Thus, code perfumes serve as a valuable tool to acknowledge learners' successes, and as a means to inform instructors about their learners' progress.

Index Terms-Linting, Code Quality, Java, Education

#### I. INTRODUCTION

Java is one of the most frequently used languages to teach programming [1], [2], and teaching materials and self-study materials are abundantly available. However, independently of the maturity of these materials, students may struggle in their attempts to produce functioning programs. Even when they produce code that implements the desired functionalities, this is often prone to quality problems, which the students again may struggle to identify and fix on their own [3]. In a self-study scenario, or when tutors are overwhelmed with large classrooms and cannot provide help and feedback promptly, learners can resort to automated program analysis tools such as SpotBugs<sup>1</sup> or SonarLint<sup>2</sup>. Feedback provided by these tools on quality issues can help learners produce better code and supports their learning processes, and tutors benefit from insights into their students' current skills and problems or misunderstandings. However, such automated feedback tools mostly focus on pointing out negative aspects.

While this kind of corrective feedback was shown to be very helpful in gaining further cognitive skills [4], purely negative feedback may be detrimental to self-efficacy and decrease intrinsic motivation [4]. In contrast, positive feedback is considered to have better effects on motivational aspects [5]. Consequently, for effective learning feedback should consist of information about errors as well as correct behaviour to address both cognitive and motivational aspects. To this end the concept of *code perfumes* was recently introduced for the block-based Scratch programming language [6] as a means for automated positive feedback: Code perfumes are patterns of code that are considered as good programming practices or provide evidence of correctly applied code constructs, implying an understanding of a certain programming concept.

In this paper, we introduce the concept of code perfumes to the domain of text-based programming languages by proposing a set of concrete code perfumes for Java. For example, the following code shows a student approach to programming a scoring method in a chess game assignment. The first line in the method retrieves the colour of the human player from the board. However, if the ChessBoard object is null this method call results in a NullPointerException.

```
public static double score(ChessBoard board) {
  Color hColor = board.getHumanColor();
   // Method logic...
```

A better solution is to use *defensive programming* by checking parameter objects for null values before working with them. The *defensive null check* code perfume acknowledges if learners correctly apply this approach by checking whether the ChessBoard object is null at the beginning of the method, and if so reacting with an IllegalArgumentException:

```
public static double score(ChessBoard board) {
    if (board == null) {
        throw new IllegalArgumentException(
          "Board is null!");
    }
    Color hColor = board.getHumanColor();
    // Method logic...
}
```

We propose a total of 20 code perfumes covering various coding concepts, and evaluate them on a dataset of 816 student submissions to programming assignments in a university course. In detail, the contributions of this paper are as follows:

- We introduce the concept of code perfumes as a means of positive feedback to Java.
- We describe and implement a catalogue of 20 code perfumes from five categories.

<sup>&</sup>lt;sup>1</sup>https://spotbugs.github.io/, last accessed 08.06.24

<sup>&</sup>lt;sup>2</sup> https://www.sonarsource.com/products/sonarlint/, last accessed 08.06.24

- We empirically evaluate how frequently these code perfumes occur in student code.
- We empirically evaluate how the occurrence of code perfumes relates to correctness of the programs.

Our investigation shows that most of the proposed code perfumes occur frequently in Java programming assignments. Furthermore, our results suggest a relation between the occurrence of code perfumes and correctness in the form of functionality, readability and grades. These encouraging findings suggest that code perfumes can provide positive feedback for Java and inform teachers about the learning progress of students.

## II. BACKGROUND

#### A. Code Quality Problems

Even though learning to program may be hard, most students will manage to produce functioning code after some time. However, research has shown that even functionally correct programs show quality problems and that students need feedback to stop producing more [3]. For example, a common type of quality problem is *code smells*, which are code idioms that increase the likelihood of errors in future program edits or decrease the readability and understandability of the code [7]. Prior research has shown that code smells have negative effects on learning to program as they meddle with the learners' ability to modify given code [8], [9]. *Bug patterns*, on the other hand, are aspects of code that are likely to lead to undesired behaviour (i.e., bugs or defects) [10]. In particular, misconceptions of learners often manifest in bugs that follow recurring bug patterns [11], [12], [13].

While finding and removing such quality problems is inherent to coding and learning to program, tools can offer support to learners as well as teachers. Static analysis tools (i.e., linters) like *SpotBugs* and *SonarLint* can automatically detect these quality problems and generate feedback, which has been shown to help students' code quality skills [14]. Furthermore, static analysis of code patterns is part of automated feedback and grading tools like ArTEMiS [15] providing information to teachers for assessing their students.

#### B. Feedback

Feedback generated by automated program analysis tools is returned regardless of other characteristics of the student and is accordingly perceived as less threatening [5]. No hand raising is needed, thus preventing peer stigmatisation [16]. Computer generated feedback mainly focuses on bad coding practices or missing functionalities [1]. Such negative feedback may be useful in programming education in multiple ways: Teachers assessing learners' code and supporting students with their individual problems when programming need to know about their students' misunderstandings and currently lacking skills and tools that can help in analysing those [17], [18], [19]. Novices can benefit as corrective feedback helps to acquire further knowledge and cognitive skills [4], [14].

On the other hand, positive feedback is important as it leads to higher intrinsic motivation than negative feedback [5]. Previous research also suggests that more motivated learners process all kinds of feedback better [20]. This in turn would possibly lead to even higher effects of the corrective feedback. Unfortunately, positive feedback generated by automated tools is rare [1]. Most attempts to introduce positive aspects to automated feedback are task-specific and give information about what parts of a task are correct [21]. While this is useful guidance on how to solve specified tasks, it gives no information about general aspects, like style or quality. One attempt to address this deficiency in the context of Java is the use of gamification for reducing warnings produced by analysis tools [22]. While this keeps motivation high [23] and leads to better code, it only minimises the negative feedback and does not contain any information about good coding parts.

Positive feedback is more common in educational blockbased programming. For the block-based programming language Scratch [24] the Dr. Scratch [25] tool displays praise in the form of a short text such as "You're doing a great job. Keep it up!!!" and returns points on computational thinking concepts<sup>3</sup>. The LitterBox [26] static analysis tool can not only point out bug patterns and code smells but also detects *code perfumes*, which are code idioms indicating good programming practices or code showing understanding of certain programming concepts [6]. Code perfumes can be seen as the opposite of code smells or bug patterns and are not bound to a specific task but can be applied to any given project. They have been shown to appear frequently in Scratch projects and can be used as an indicator of correctness, as projects having a higher count of code perfumes tend to be more correct [6].

While Java is still one of the most used languages to learn programming [1], [2], similar positive feedback is absent, which may limit the learning effects of automated tools like ArTEMiS [15]. To address this problem, we introduce code perfumes to this domain such that holistic feedback combining positive and negative aspects can be generated automatically.

#### **III. CODE PERFUMES FOR JAVA**

Code perfumes are a general concept applicable to any programming language or skill level. In this paper, we target Java learners who already have some basic understanding, and are able to produce code using external APIs or design patterns. A specific concern related to such learners is that even though they are familiar with the syntax, they struggle to assess the quality of their code [27]. However, the code perfumes we define may also appeal to more experienced programmers.

Code perfumes are expected to have mostly positive effects on the code quality, be discernible in source code without execution, and align with language-dependent concepts. However, programmers must carefully assess their code and determine whether applying a code perfume is appropriate in a specific context, or if other solutions should be considered. This problem could be exacerbated by false positives, which is why implementations of checks for code perfumes need to aim to minimise false positives while acknowledging the need for careful application.

<sup>3</sup>http://www.drscratch.org/, last accessed 08.06.24

We categorise code perfumes based on their purpose:

- Solution Patterns: These are code structures that solve undesirable code patterns (e.g., code smells or bug patterns). They directly address and avoid matching negative patterns, but not all bug patterns imply solution patterns [28]. Ideal solution patterns provide additional positive benefits beyond eliminating negative patterns.
- **Best Practices**: Established best practices in Java development can serve as the foundation for code perfumes. Capturing best practices in code patterns allow learners to leverage the results of experienced programmers [29].
- **Contracts or Conventions**: Java contracts, often documented in method descriptions, form another basis for code perfumes. Adhering to contracts, especially from the standard library is crucial for developing correct code and effective collaboration in development teams [30].

To define code perfumes for Java, we draw inspiration from the SonarRules collection of negative patterns by SonarSource[31] and the popular book "Effective Java" by Joshua Bloch [32]. SonarRules provides established code smells, bug patterns, and vulnerabilities, influencing the creation of "solution pattern" code perfumes. "Effective Java" offers best practices and guidance for Java programming, focusing on topics such as design patterns, concurrency, and Java standard library traits. Additionally, the Common Weakness Enumeration<sup>4</sup> was considered as a background source, linking weaknesses identified by SonarRules and providing additional information. Finally, the article "Mining frequent bug-fix code changes" [33] also contributed to a code perfume definition.

#### A. Java Standard Library Code Perfumes

Code perfumes in this category emphasise the importance of understanding concepts from the Java standard library, which beginners should encounter early in their coding journey [32]. **Clone blueprint:** This code perfume focuses on implementing the java.lang.Cloneable interface to provide a copy functionality. While it may not be the ideal approach, it is a valid option if done correctly. The code perfume emphasises the importance of consistently calling **super**.clone in clone overrides in an inheritance hierarchy, to maintain the correct runtime typing of the cloned object. The code perfume aligns with the Common Weakness Enumeration (CWE-580) and the corresponding SonarSource rule (RSPEC-1182).

```
class DisplayData implements Cloneable {
  @Override
  public synchronized DisplayData clone() {
    DisplayData displayData;
    try {
        displayData = (DisplayData) super.clone();
    } catch (CloneNotSupportedException e) {
        throw new Error(e);
    }
    // Deep copy
    return displayData;
  }
}
```

<sup>4</sup>https://cwe.mitre.org/index.html, last accessed 08.06.2024

**Equals blueprint:** Overriding the equals method in the java.lang. Object class requires adherence to a specific contract, implementing an equivalence relation between instances of the class. To simplify the coding process and reduce the likelihood of errors, Joshua Bloch provides a guideline [32]. This code perfume focuses on the first two steps of Bloch's guideline, checking object references and type correctness, as the comparison of class fields can vary.

```
@Override
public boolean equals(Object o) {
    if (o == this) {
        return true;
    }
    if (!(o instanceof Pawn)) {
        return false;
    }
    // Field checks
}
```

Iterator next() follows the contract: This code perfume focuses on classes that implement the java.util.Iterator interface in Java. This interface allows for iterating over data structures, such as lists. The key methods for iteration are hasNext and next, with the latter having a contractual requirement to throw a NoSuchElementException when called without a remaining element in the iteration. This behaviour is expected by developers using iterators, and omitting it can lead to unexpected errors. This code perfume checks whether a class implementing the Iterator interface adheres to the necessary step of throwing a NoSuchElementException in the next method. It is inspired by the rule from SonarSource (RSPEC-2272), which considers the absence of this behaviour a bug.

```
public final class Range
implements Iterator<Integer> {
  @Override
  public boolean hasNext() {
    return contains(start);
  }
  @Override
  public Integer next() {
    if (!hasNext()) {
      throw new NoSuchElementException();
    }
    // Iterator logic
  }
}
```

**Override** compareTo with equals: The java.lang.Comparable interface includes the compareTo method for defining a natural ordering between instances of the class. The method's contract suggests that if two objects are equal according to the equals method, they should also be equal according to the compareTo method, and vice versa. While this is only a recommendation, it is considered good practice to override both methods. The code perfume serves as a solution pattern to the corresponding SonarSource rule (RSPEC-1210) checking the presence one of these methods.

class Command implements Comparable<Command> {
 @Override

```
public int compareTo(Command command) { ... }
```

Category	ID	Code Perfume	Туре	
	1	Clone blueprint	solution pattern, contract or convention	
Java Standard Library	2	Equals blueprint	contract or convention, best practice	
	3	Iterator next() follows the contract	contract or convention	
	4	Override compareTo with equals	solution pattern, best practice	
	5	Override equals of superclass	solution pattern	
	6	Paired equals and hashCode	contract or convention, solution pattern	
	7	Use optimized collections for Enums	best practice, solution pattern	
Java language features	8	'assert' in private method	solution pattern, best practice	
	9	At least X varargs	solution pattern	
	10	Defensive default case	solution pattern	
	11	Pattern matching with 'instanceof'	solution pattern	
	12	Resource management in try-catch	best practice, solution pattern	
	13	Synchronize accessors in pairs	solution pattern	
Unit Testing Practices	14	JUnit 5 tests can be package-private	solution pattern	
	15	Single method call when testing for runtime exceptions	solution pattern	
Design Patterns	16	Builder pattern	best practice	
	17	Singleton pattern	best practice	
	18	Copy constructor	best practice	
Others	19	Defensive null check	best practice, solution pattern	
	20	No utility instantiation	solution pattern, best practice	

}

TABLE I: Categories and types of code perfumes

```
@Override
public boolean equals(Object o) { ... }
```

**Override equals of superclass:** This code perfume addresses a common issue in inheritance hierarchies where subclasses add fields to those already defined in their superclasses. If a superclass overrides the equals method, but the subclass fails to override it, there is a potential mistake. SonarSource (RSPEC-2160) identifies this, as it may lead to unexpected behaviour where the additional fields in the subclass are ignored by the equals method.

```
public class Ancestor {
   @Override
   public boolean equals(Object o) { ... }
}
public class Child extends Ancestor {
   int additionalField;
   @Override
   public boolean equals(Object o) { ... }
}
```

Paired equals and hashCode: This code perfume highlights the importance of maintaining consistency between the equals and hashCode methods in Java. While classes can override these methods independently, it is considered best practice to override both or neither to avoid violating the contract they form. The contract, particularly for hashCode, states that objects deemed equal by the equals method should have the same hashCode. Although the contract, also denoted by SonarSource (RSPEC-1206) and CWE (CWE-581), allows distinct objects to have the same hashCode, it is recommended to override both methods together for consistent behaviour and improved performance in hash tables.

## public class SudokuBoard implements Board { @Override

public boolean equals(Object other) { ... }

```
@Override
public int hashCode() { ... }
```

**Use optimised collections for Enums:** This code perfume focuses on optimising memory usage and execution speed in Java applications, particularly when dealing with Enum types. It encourages the use of optimised classes provided by the Java standard library's Collections API for Enums. The recommendation to use these optimised collections for Enums is emphasised by Joshua Bloch [32] and two SonarSource rules (RSPEC-1640 and RSPEC-1641).

```
public class KalahBoard implements Board {
    private final EnumMap<Player, PlayerPits>
        playerPits;
    public KalahBoard( ... ) {
        this.playerPits =
            new EnumMap<>(Player.class);
        // Constructor code
    }
}
```

#### B. Java Language Feature Code Perfumes

Code perfumes in this category encourage the use of language features, idioms, and keywords in Java coding practices, with a focus on defensive programming [34] and addressing code smells or bug patterns [35].

**'assert' in private method:** While the assert keyword is useful for validating parameters, it should be avoided in public methods because assertions must be explicitly enabled at the JVM level. Best practice involves using assert in

private methods during development for parameter validation. To enhance clarity and to ease error identification, the **assert** expression should be accompanied by a message. This aligns with SonarSource's rule (RSPEC-4274) against using asserts to check public method parameters, and is also highlighted in "Effective Java" [32].

```
private boolean isMovePossible(int row,
    int diag, Color color) {
    assert isValidPosition(row, diag)
        : "Invalid coordinates";
    // Method logic
}
```

At least X varargs: This code perfume addresses the use of varargs in Java methods, emphasising a more efficient approach to set a lower bound on the number of parameters. Instead of checking the number of parameters within the method's body resulting in unnecessary code, it encourages declaring a specific number of parameters before the varargs. This approach, recommended by Joshua Bloch [32], allows for compile-time validation of the minimum argument count, improving efficiency compared to runtime checks.

```
public static boolean isWithinCharset(
    int charsetSize, int... symbols) {
    return symbols != null
        && Arrays.stream(symbols)
        .allMatch(i -> i >= 0 && i < charsetSize);
}</pre>
```

**Defensive default case:** This code perfume underscores the importance of using switch statements effectively as a cleaner alternative to chaining if-statements. The switch construct allows handling every possibility of the switch-variable, with the default case serving as a safety net to address unforeseen situations. Including a default-case at the end of a switch statement demonstrates defensive programming, reducing the risk of unexpected behaviour due to overlooked cases as reported by SonarSource (RSPEC-131 and CWE (CWE-478)). switch (firstLetter) {

```
case 'h':
    cmdHelp(token);
    break;
// More cases
default:
    printError("Invalid Command!");
    break;
```

**Pattern matching with 'instanceof':** This code perfume promotes the use of the **instanceof** operator in conjunction with pattern matching, introduced in Java 16. While the **instanceof** operator traditionally required manual casting, pattern matching now allows for a concise type-check and cast in a single **instanceof** statement. This enhances clarity and readability, as promoted by SonarSource (RSPEC-6201).

```
if (copy instanceof Game gameCopy)
  gameCopy.cells = cells.clone();
}
```

**Resource management in try-catch:** This code perfume encourages the use of the try-with-resources statement in Java to ensure the proper closing of resources within a try-catch block. The try-with-resources statement is considered a best practice inspired by SonarSource (RSPEC-2093) to prevent accidental resource leaks, especially for beginners working with file reading and I/O streams.

```
try (BufferedReader reader = new BufferedReader(
    new FileReader(file))) {
    Line line = readLine(reader, 0);
    // Method logic
}
```

Synchronize accessors in pairs: This code perfume encourages careful handling of parallelisation, emphasising the use of the synchronized keyword to synchronise specific parts of the execution flow and prevent race conditions. It particularly focuses on scenarios involving accessor methods (getters and setters) for class fields. The code perfume rewards the practice of synchronising both accessors, addressing a potential bug as identified by SonarSource (RSPEC-2886).

synchronized void setCell(int rowNr, int colNr,
 int number) { ... }

synchronized int getCell(int rowNr, int colNr)
{ ... }

## C. Unit Testing Code Perfumes

Code perfumes in this category recognise the standard practice of unit testing [36] and the need for high-quality test code to avoid maintainability issues [37], [38], [39].

**JUnit 5 tests can be package-private:** This code perfume advocates for adhering to the principle of operating with the least required privileges in Java coding. Specifically, it encourages developers to choose the narrowest scope possible for class visibility, including unit tests. With JUnit 5, both tests and test classes do not have to be public anymore, making them package-private is sufficient for JUnit to detect and execute them; inspired by SonarSource (RSPEC-5786).

```
class PerfumeTest {
  @Test
  void someTest() { ... }
```

```
old somelest() {
```

}

Single method call when testing for runtime exceptions: This code perfume emphasises the importance of testing code for expected RuntimeExceptions using frameworks like JUnit and AssertJ. It discourages chaining multiple method calls within the assertThrows or assertThatThrownBy methods, as this can obscure which specific method call caused the expected exception or whether any call did at all. The code perfume suggests using only a single method call in these methods for improved code clarity and consistency as taken from SonarSource (RSPEC-5778).

```
@Test
void someTest() {
  assertThrows(Exception.class,
      () -> callMethod());
}
```

## D. Design Pattern Code Perfumes

Code perfumes in this category acknowledge the value of design patterns in advanced programming education and their contribution to well-formed code [40], [41], [42].

**Builder pattern:** This code perfume underscores the benefits of using the Builder pattern to address the challenge of classes with numerous optional fields. Instead of creating an excessive number of constructor overloads, the Builder pattern involves an inner class responsible for constructing instances of the outer class. This approach is more flexible, allowing easier extension of the builder and the creation of multiple instances using the same builder. Joshua Bloch [32] recommends considering the Builder pattern when a class's constructor would require four or more parameters.

```
public class ToBuild {
    private ToBuild(Builder builder) { ... }
    public static class Builder {
        public ToBuild build() {
            return new ToBuild(this);
        }
    }
}
```

**Singleton pattern:** This code perfume focuses on the Singleton pattern for enforcing the existence of exactly one instance of a class. Joshua Bloch [32] describes three main ways to implement the Singleton pattern: using a public instance field, a public static instance factory method, or defining the class as an enum type with a single constant. Each approach has its advantages, and all are considered valid.

```
static final class Controller {
    private static Controller instance;
    private Controller() { }
    public static Controller getInstance() {
        return instance;
    }
}
```

#### E. Other Code Perfumes

Finally, some code perfumes fit in no other category.

**Copy constructor:** This code perfume considers object copying in Java, emphasising the pitfalls associated with the Cloneable interface, as highlighted by Joshua Bloch [32]. A copy constructor is recommended as a clean solution that takes an object of the same class as its parameter and performs a deep copy of all fields, including mutable non-primitive ones. This approach ensures the desired runtime type and is less error-prone than implementing Cloneable.

```
public Tape (Tape clone) {
   content = new LinkedList<> (clone.content);
   headPosition = clone.headPosition;
   move (Direction.NOTHING);
}
```

**Defensive null check:** This code perfume underscores the importance of caution when declaring public methods that deal with non-primitive parameter types. The risk of bugs and unexpected behaviour is increased when null values are passed as parameters. To prevent unexpected NullPointerExceptions at runtime, the code perfume recommends checking non-primitive parameters for non-null values or using annotations like @NotNull or @Nonnull to specify that null values are not allowed. Alternatively, if the method permits null values for certain parameters, using an @Nullable annotation is advised by Joshua Bloch [32].

```
public static void callPrint(
  TuringMachine turingMachine) {
   if (turingMachine != null) {
     System.out.println(turingMachine.print());
   } else {
     errorMsg("No Turing machine initialized.");
   }
```

**No utility instantiation:** This code perfume emphasises the definition of a private constructor for utility classes containing only static methods. Since utility classes do not need to be instantiated and thus need no implicit default constructor, having a single private constructor demonstrates an understanding of Java mechanics and object orientation as described by SonarSource (RSPEC-1118).

```
public final class Shell {
    private Shell() { }
    private static void process(String[] strings)
    { ... }
    private static void add(String[] strings)
        { ... }
}
```

#### F. Perfumator: A Tool to Detect Code Perfumes in Java Code

The *Perfumator* is a static analysis tool implemented in Java 17, with its primary purpose being the detection of code perfumes in abstract syntax trees (ASTs). Its functionality involves two main steps: defining static information in a JSON file and implementing a Detector class that recognises specific patterns in the AST. JavaParser is utilized by the *Perfumator* for parsing ASTs and resolving symbols. The tool offers a command-line interface featuring options like input path, output format, batch size, specifying dependencies as well as support for internationalization.

The *Perfumator* identifies instances of code perfumes in designated input files or directories and generates serialised output in JSON format containing detailed information. To enhance accuracy, the tool allows ignoring specific files and directories like the build directory during analysis. The *Perfumator* is designed to be easily extendable with new code perfumes and holds the potential for integration into other tools.

## IV. EVALUATION

To gain an initial understanding of the prevalence of the code perfumes defined in this paper, and how they relate to correctness, we applied the *Perfumator* to a large dataset of programming assignments and student solutions. This allows us to address the following research questions:

- RQ1: How common are code perfumes in Java?
- RQ2: Are code perfumes related to correctness?

#### A. Experimental Setup

In order to study code perfumes, we use a dataset derived from the "Programming II" course taught every semester at the University of Passau. This course focuses on intermediate/advanced Java programming, covering topics such as Java Swing and parallelism. The coursework consists of four programming assignments. Although the specific tasks vary

TABLE II: Assignment submissions and size

Task	Name	Total LoC	Submissions	Average LoC
0	Practice	133931	359	373
1	Algorithms	442450	809	547
2	CLI Board Game	659318	607	1086
3	GUI Board Game	609915	560	1089

between different instances of the course, they are always variations of the same type of program, and usually represent the implementation of a board game like Abalone<sup>5</sup> or Mastermind<sup>6</sup>. Due to the similarity of the solution code, we merge different variants of the same task in our dataset. The tasks include: • Task 0: Exercise task for familiarity with the automatic grading system • Task 1: Mathematical problemsolving to acquaint students with organising programs and creating complex algorithms • Task 2: Modelling the board game with a command-line interface • Task 3: Implementing a user interface for the previously modeled game

The first assignment only serves for practice, while the remaining assignments determine the overall grade. Until the submission deadline, students can re-submit as often as they wish, receiving feedback from a set of public tests. After the deadline, functionality is assessed using a set of secret tests and normalised to the range 1 (all tests pass) to 6 (no tests pass). Additionally, each submission is graded manually on readability considering coding styles, code structure, and variable/method naming on a range of 1 to 6. The overall grade is a weighted sum of functionality and readability ranging from 1 (best) to 5 (worst) with intermediate steps of .3 and .7.

We use data from this course between the winter semester of 2015/2016 to the winter semester of 2022/2023, covering 15 iterations of the course. Students who registered but did not submit a task were excluded from the analysis. This resulted in a dataset of 816 students, acknowledging that some students may have participated more than once to pass the course. Table II shows that less than half of the students submitted Task 0, which was optional. The highest number of submissions was for Task 1, the first graded task, with subsequent tasks seeing declining submission rates. The lines of code (LoC) increased with each task, with Tasks 2 and 3 having almost identical LoC counts.

To understand the limitations and applicability of our code perfumes, we also consider the Progpedia dataset [43] consisting of 16 programming assignments for undergraduate students. The dataset consists of 4362 student solutions. The assignments are very basic and cover topics from reading user input from the console to basic algorithms like Kruskal [44].

1) RQ1: How common are code perfumes in Java?: To answer this research question, we execute the *Perfumator* on all student submissions for both datasets and extract the number of code perfumes per category.

2) RQ2: Are code perfumes related to correctness?: To answer this research question, we compare the number of code perfumes with other metrics of their solutions, such as the grade on functionality, the grade on readability, the overall grades for the course, and the number of lines of code (LoC), assessed using  $CLOC^7$ . To contrast the insights gained from positive code aspects such as code perfumes, we also examine negative aspects by extracting the number of code smells using *SonarLint*<sup>2</sup>. Subsequently, we use Pearson correlation [45] to determine potential correlations between these metrics.

## B. Threats to Validity

Threats to internal validity may result from task selection, grading criteria, and inconsistencies in both automatic and manual grading processes. However, the grading process remained consistent over the years with the same supervisor and the same grading criteria. Moreover, the act of testing itself might influence students' subsequent performance, and external factors like changes in course structure or students' natural skill progression could also impact the outcomes. The *Perfumator* might not accurately detect all perfumes, but we minimized this issue by verifying the results beforehand.

Threats to external validity exist because findings might not generalise beyond the specific student population or programming course and university. Additionally, the tasks may not accurately mirror real-world programming scenarios, and changes over time in technology, education methods, or student demographics could affect the results.

*Threats to construct validity* may result from the tools utilised for assessment, which may not fully capture the intended variables or could introduce errors. All students had the possibility to analyse their graded results and discuss them with the supervisor, therefore reducing this threat. Maintaining consistency in task specifics and evaluation across different course iterations potentially affects treatment effects.

#### C. RQ1: How Common are Code Perfumes in Java?

Table III lists the overall number of code perfumes found, their distribution across tasks, and the percentage of submissions containing them. In total, the Perfumator identified 8598 instances of perfumes in the dataset. Only a few of the code perfumes are not found, which is due to the nature of the tasks: The absence of the "override equals of superclass" code perfume (ID 5) is expected, given the relatively simple project structures that may not involve extensive inheritance hierarchies. Code perfumes related to testing (IDs 14 and 15) are unsurprisingly absent, considering the absence of unit testing in the course. Similarly, design patterns (IDs 16 and 17) are infrequently used, possibly due to students' limited awareness of builder and singleton patterns or the tasks not necessitating their implementation. The copy constructor code perfume (ID 18) sees limited use, as most students opt for the cloning functionality (ID 1). However, all other code perfumes can be found frequently in the dataset, suggesting that they are relevant and suitable for the type of code we are targeting.

<sup>7</sup>https://github.com/AlDanial/cloc, last accessed 08.06.2024

<sup>&</sup>lt;sup>5</sup>https://en.wikipedia.org/wiki/Abalone\_(board\_game), last accessed 08.06.2024

<sup>&</sup>lt;sup>6</sup>https://en.wikipedia.org/wiki/Mastermind\_(board\_game), last accessed 08.06.2024

TABLE III: Code Perfumes overall and per task

ID	Total	Submissions	Task 0	Task 1	Task 2	Task 3
1	196	4.0%	0	3	97	96
2	17	0.3%	0	7	5	5
3	2	0.0%	0	0	1	1
4	281	5.8%	0	254	12	15
5	0	-	0	0	0	0
6	419	8.3%	0	259	79	81
7	10	0.1%	0	0	5	5
8	520	1.7%	1	6	257	256
9	4	0.0%	0	1	3	0
10	3656	43.3%	426	871	1346	1013
11	21	0.3%	0	2	2	17
12	134	3.0%	2	80	37	15
13	9	0.1%	0	0	0	9
14	0	-	0	0	0	0
15	0	-	0	0	0	0
16	0	-	0	0	0	0
17	17	0.2%	0	0	6	11
18	21	0.5%	0	5	7	9
19	1048	11.5%	125	271	250	402
20	2243	43.0%	4303	851	671	418

The distribution of code perfumes reveals insights into the coding behaviour of the students. For example, defensive programming practices are very prevalent among students and these assignments. Three specific code perfumes (IDs 10, 19, and 20) collectively constitute over 80% of all detected instances, indicating a strong emphasis on defensive programming. Notably, the "assert in private method" code perfume (ID 8) is frequently encountered, along with the "defensive null check" code perfume (ID 19), suggesting a preference for null checks in public methods over assertions.

The code perfume occurrences also suggest adherence to certain Java language conventions, particularly in cases where students override the equals method alongside either hashCode or compareTo (IDs 4 and 6). However, the students notably deviate from the common equals blueprint by not consistently checking object references and type correctness. An intriguing observation is also that students rarely employ synchronized accessors in pairs (ID 13), a crucial aspect introduced in the final assignment of each course. This oversight could lead to runtime exceptions and deadlocks in their implemented games. Optimised collections for enums (ID 7) are infrequently used, indicating potential unawareness of these specialised collections. The same may apply to the "at least X varargs" code perfume (ID 9), while the "pattern matching with instanceof" code perfume (ID 11) reflects the limited adoption due to its recent functionality release in 2021. This raises the question whether the inclusion of code perfumes into student feedback could help improving such deficiencies.

It is noteworthy that the frequency of finding a code perfume does not necessarily imply even distribution across all submissions. For instance, although code perfume ID 20 is encountered twice as often as code perfume ID 19, the former appears in nearly four times as many submissions as the latter (see Table III). Similarly, code perfumes 6 and 8 exhibit a similar trend, with code perfume 6 appearing in nearly five times more submissions than code perfume 8. Consequently, some students have internalised aspects represented by code perfumes and use them frequently, while those with fewer occurrences may still be in the process of adopting these constructs. It is conceivable that positive reinforcement by reporting code perfumes could support this learning process.

To better understand the limits of the code perfumes defined in this paper, we contrast this data with the ProgPedia dataset of introductory assignments, where we only found a total of 14 code perfume instances (IDs 10, 18, and 19) on 4362 student submissions. This can be attributed to the very simplistic nature of those assignments, they only consist of one file and mostly can be done in 30 to 60 LoC. While this shows that some students are aware of defensive programming this early in their programming education, more code perfumes targetting earlier, simpler stages of coding are clearly needed to fittingly evaluate students in a CS1/Algorithmics class, while our code perfumes are more fitted for students in a CS2/Software Engineering class, as shown above.

**Summary (RQ1):** The *Perfumator* identified 8598 instances of code perfumes, highlighting a significant emphasis on defensive programming practices among students, while other conventions are not as commonly embraced. Our code perfumes target intermediate learners covering design principles; more code perfumes are needed to cover beginners' code.

## D. RQ2: Are Code Perfumes Related to Correctness?

Figure 1 visualises the correlations between the metrics considered. According to Pearson correlation [45], there is a weak negative correlation between the number of code perfumes and the functionality (Fig. 1a) and readability (Fig. 1b) assigned to students assignments. Additionally, there is a moderate negative correlation between the number of code perfumes and the grades (Fig. 1c) received by the students. Since the best grade is "1", the negative correlations suggest that code perfumes can serve as an indicator for correctness as well as code quality, and thus represent a valuable tool for educators.

However, we can generally also see that LoC are correlated with functionality (Fig. 1f), readability (Fig. 1g), and grades (Fig. 1h), as more complete solutions tend to consist of more code. When normalising code perfumes per LoC, we find no correlations between code perfumes per LoC and functionality (0.01), readability (-0.04), and grades (0.06). An explanation for this is that our 20 code perfumes are too few. While code perfumes can inform tutors about their students and aspects they perform well on, for code perfumes to serve as a reliable predictor for student performance, more code perfumes will need to be defined that cover more aspects of functionality and readability. The immediate application of code perfumes for educators thus for now primarily lies in observing which aspects of code are handled well by students, or identifying students that are lacking understanding of certain concepts.

The complementary nature of code smells and code perfumes is indicated by the substantially weaker correlations between code smells and functionality (Fig. 1j), readability (Fig. 1k), and grades (Fig. 11), even though more code also

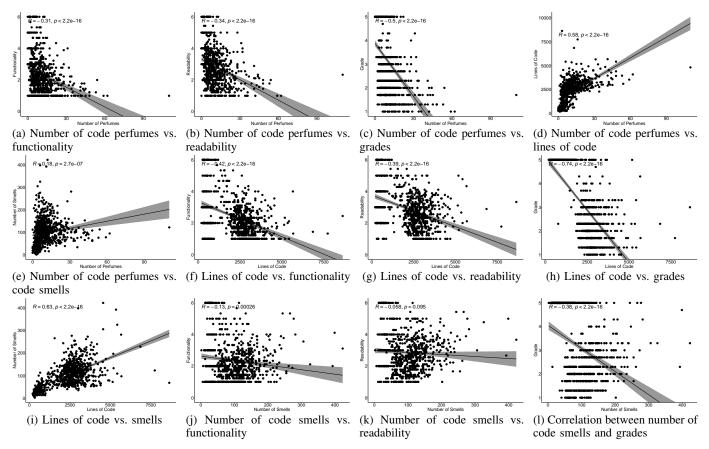


Fig. 1: Correlations between number of code perfumes, code smells, line of code, functionality, readability, and grades

leads to more code smells (Fig. 1i). The most common code smells are related to logging, cognitive complexity, optimising conditionals, multi-threading and code duplication. The analyses on code smells are influenced by the large differences between the numbers of code perfumes and code smells, as SonarLint defines 677 rules [31]. On the one hand, this reinforces the conclusion that more code perfumes are needed. On the other hand, it also suggests that neither mechanism on its own can be used for reliable grading, but the combination of negative and positive aspects provides valuable information. Thus, classic linters and the perfumator could be used in combination to create a more holistic view of the learners project helping educators support and assess their learners.

**Summary (RQ2):** The presence of code perfumes is associated with improved readability, functionality, and higher grades, and therefore represent a valuable tool to inform educators about their students progress. However, the vast difference in the number of existing code smells and code perfumes suggests future work on defining more code perfumes.

## V. CONCLUSIONS

Program analysis can point out problems in code, but they usually do not provide encouraging, positive feedback. In this paper, we therefore introduced the concept of code perfumes for Java, and presented 20 code perfumes to provide learners with constructive feedback. Our analysis indicates that many of these code perfumes are common in practice, and we find a link between the presence of code perfumes and program correctness, highlighting their potential to aid teachers' understanding of student learning progress.

While these initial findings are encouraging, our catalogue of 20 code perfumes is by no means complete, and we anticipate future work to result in many additional code perfumes. Investigating how to integrate these in the learning process will be similarly important. For example, code perfumes could be annotated directly in Integrated Development Environments (IDEs) or in gamified environments such as Gamekins [46]. Educators may need different ways to interface with code perfumes, for example by incorporating them as a metric in grading and learning systems such as ArTEMiS [15]. Finally, although our motivation originally was to support learners, there is no reason why code perfumes could not also be used to encourage professional programmers.

The *Perfumator* is available at:

## https://github.com/se2p/perfumator

#### ACKNOWLEDGEMENTS

This work is supported by the DFG under grant FR 2955/2-1, "QuestWare: Gamifying the Quest for Software Tests". Thanks to Jakob Silbereisen for his contributions to the *Perfumator*.

#### REFERENCES

- W. Conceição, M. Holanda, F. Macedo, E. Ishikawa, V. T. Nunes, and D. Da Silva, "Automatic feedback in the teaching of programming in undergraduate courses: a literature mapping," in 2022 IEEE Frontiers in Education Conference (FIE), 2022.
- [2] S. C. dos Santos, P. C. A. R. Tedesco, M. Borba, and M. Brito, "Innovative approaches in teaching programming: A systematic literature review," in *International Conference on Computer Supported Education*, 2020.
- [3] T. Effenberger and R. Pelánek, "Code quality defects across introductory programming topics," in *Proceedings of the 53rd ACM Technical Symposium on Computer Science Education - Volume 1*, SIGCSE 2022, Association for Computing Machinery, 2022.
- [4] B. Wisniewski, K. Zierer, and J. Hattie, "The power of feedback revisited: A meta-analysis of educational feedback research," *Frontiers* in Psychology, 2020.
- [5] J. Hattie, Visible Learning: A Synthesis of Over 800 Meta-Analyses Relating to Achievement. 01 2009.
- [6] F. Obermüller, L. Bloch, L. Greifenstein, U. Heuer, and G. Fraser, *Code Perfumes: Reporting Good Code to Encourage Learners*. Association for Computing Machinery, 2021.
- [7] M. Fowler, *Refactoring: Improving the Design of Existing Code*. Boston, MA, USA: Addison-Wesley, 1999.
- [8] F. Hermans and E. Aivaloglou, "Do code smells hamper novice programming? a controlled experiment on scratch programs," in 2016 IEEE 24th International Conference on Program Comprehension (ICPC), 2016.
- [9] V. Gutmann, E. Starke, and T. Michaeli, "Investigating code smells in k-12 students' programming projects: Impact on comprehensibility and modifiability," 2022.
- [10] D. Hovemeyer and W. Pugh, "Finding bugs is easy," SIGPLAN Not., 2004.
- [11] A. Swidan, F. Hermans, and M. Smit, "Programming misconceptions for school students," in *Proceedings of the 2018 ACM Conference on International Computing Education Research*, ICER '18, Association for Computing Machinery, 2018.
- [12] C. Frädrich, F. Obermüller, N. Körber, U. Heuer, and G. Fraser, "Common bugs in scratch programs," in *Proceedings of the 2020* ACM Conference on Innovation and Technology in Computer Science Education, ITICSE '20, Association for Computing Machinery, 2020.
- [13] J. Sorva, Misconceptions and the Beginner Programmer. 2018.
- [14] J. Jansen, A. Oprescu, and M. Bruntink, "The impact of automated code quality feedback in programming education," in *Post-proceedings of the Tenth Seminar on Advanced Techniques and Tools for Software Evolution* (SATTOSE), 2017.
- [15] S. Krusche and A. Seitz, "Artemis: An automatic assessment management system for interactive learning," in *Proceedings of the 49th ACM Technical Symposium on Computer Science Education, SIGCSE 2018*, ACM, 2018.
- [16] A. Collins and M. Kapur, *Cognitive Apprenticeship*, p. 109–127. Cambridge Handbooks in Psychology, Cambridge University Press, 2 ed., 2014.
- [17] T. Michaeli and R. Romeike, "Current status and perspectives of debugging in the k12 classroom: A qualitative study," in 2019 IEEE Global Engineering Education Conference (EDUCON), IEEE, 2019.
- [18] A. Yadav, S. Gretter, S. Hambrusch, and P. Sands, "Expanding computer science education in schools: understanding teacher experiences and challenges," *Computer Science Education*, 2016.
- [19] S. Sentance and A. Csizmadia, "Computing in the curriculum: Challenges and strategies from a teacher's perspective," *Education and Information Technologies*, 2017.
- [20] S. DePasque and E. Tricomi, "Effects of intrinsic motivation on feedback processing during learning," *NeuroImage*, 2015.
- [21] V. J. Marin, T. Pereira, S. Sridharan, and C. R. Rivero, "Automated personalized feedback in introductory java programming moocs," in 2017 IEEE 33rd International Conference on Data Engineering (ICDE), 2017.
- [22] S. Arai, K. Sakamoto, H. Washizaki, and Y. Fukazawa, "A gamified tool for motivating developers to remove warnings of bug pattern tools," in 2014 6th International Workshop on Empirical Software Engineering in Practice, 2014.
- [23] Z. Zhan, L. He, Y. Tong, X. Liang, S. Guo, and X. Lan, "The effectiveness of gamification in programming education: Evidence from a meta-analysis," *Computers and Education: Artificial Intelligence*, 2022.

- [24] J. Maloney, M. Resnick, N. Rusk, B. Silverman, and E. Eastmond, "The scratch programming language and environment," ACM Transactions on Computing Education (TOCE), 2010.
- [25] J. Moreno-León, G. Robles, and M. Román-González, "Dr. scratch: Automatic analysis of scratch projects to assess and foster computational thinking," *RED-Revista de Educación a Distancia*, 2015.
- [26] G. Fraser, U. Heuer, N. Körber, F. Obermüller, and E. Wasmeier, "Litterbox: A linter for scratch programs," in 43rd IEEE/ACM International Conference on Software Engineering: Software Engineering Education and Training, ICSE (SEET) 2021, IEEE, 2021.
- [27] J. Börstler, H. Störrle, D. Toll, J. van Assema, R. Duran, S. Hooshangi, J. Jeuring, H. Keuning, C. Kleiner, and B. K. MacKellar, ""i know it when I see it": Perceptions of code quality," in *Proceedings of the 2017* ACM Conference on Innovation and Technology in Computer Science Education, ITiCSE 2017, 2017.
- [28] F. Obermüller, L. Bloch, L. Greifenstein, U. Heuer, and G. Fraser, "Code perfumes: Reporting good code to encourage learners," in WiPSCE '21: The 16th Workshop in Primary and Secondary Computing Education, ACM, 2021.
- [29] L. Porter and B. Simon, "Retaining nearly one-third more majors with a trio of instructional best practices in CS1," in *The 44th ACM Technical Symposium on Computer Science Education, SIGCSE 2013*, ACM, 2013.
- [30] D. Deveaux, P. Frison, and J. Jézéquel, "Increase software trustability with self-testable classes in java," in 13th Australian Software Engineering Conference (ASWEC 2001), IEEE Computer Society, 2001.
- [31] SonarSource, "Unique rules to find bugs, vulnerabilities, security hotspots, and code smells in your java code." https://rules.sonarsource. com/java/, 2024. Accessed: 08.06.2024.
- [32] J. J. Bloch, *Effective Java*, 3rd Edition. The Java series ... from the source, Addison-Wesley, 2017.
- [33] H. Osman, M. Lungu, and O. Nierstrasz, "Mining frequent bug-fix code changes," in 2014 Software Evolution Week - IEEE Conference on Software Maintenance, Reengineering, and Reverse Engineering, CSMR-WCRE 2014, IEEE Computer Society, 2014.
- [34] J. K. Teto, R. Bearden, and D. C. Lo, "The impact of defensive programming on I/O cybersecurity attacks," in *Proceedings of the 2017* ACM Southeast Regional Conference, 2017.
- [35] P. Weill-Tessier, A. L. Costache, and N. C. C. Brown, "Usage of the java language by novices over time: Implications for tool and language design," in SIGCSE '21: The 52nd ACM Technical Symposium on Computer Science Education, ACM, 2021.
- [36] E. Daka and G. Fraser, "A survey on unit testing practices and problems," in 25th IEEE International Symposium on Software Reliability Engineering, ISSRE 2014, 2014.
- [37] R. Ramler, M. Moser, and J. Pichler, "Automated static analysis of unit test code," in 2016 IEEE 23rd International Conference on Software Analysis, Evolution, and Reengineering (SANER), IEEE, 2016.
- [38] R. C. Martin, The clean coder: a code of conduct for professional programmers. Pearson Education, 2011.
- [39] A. Van Deursen, L. Moonen, A. Van Den Bergh, and G. Kok, "Refactoring test code," in *Proceedings of the 2nd international conference* on extreme programming and flexible processes in software engineering (XP2001), Citeseer, 2001.
- [40] R. Helm, R. E. Johnson, E. Gamma, and J. Vlissides, *Design patterns: Elements of reusable object-oriented software*. Braille Jymico Incorporated Quebec, 2000.
- [41] R. Fojtik, "Design patterns in the teaching of programming," Procedia-Social and Behavioral Sciences, 2014.
- [42] A. Blewitt, A. Bundy, and I. Stark, "Automatic verification of design patterns in java," in 20th IEEE/ACM International Conference on Automated Software Engineering (ASE 2005), ACM, 2005.
- [43] J. C. Paiva, J. P. Leal, and Álvaro Figueira, "Progpedia: Collection of source-code submitted to introductory programming assignments," *Data in Brief*, 2023.
- [44] J. B. Kruskal, "On the shortest spanning subtree of a graph and the traveling salesman problem," *Proceedings of the American Mathematical society*, 1956.
- [45] I. Cohen, Y. Huang, J. Chen, J. Benesty, J. Benesty, J. Chen, Y. Huang, and I. Cohen, "Pearson correlation coefficient," *Noise reduction in speech processing*, 2009.
- [46] P. Straubinger and G. Fraser, "Gamifying a software testing course with continuous integration," in 46th IEEE/ACM International Conference on Software Engineering, ICSE 2024, 2024.