

Venturing into Uncharted Waters: The Navigation Compass from Transformer to Mamba

Yuchen Zou, Yineng Chen, Zuchao Li*, Lefei Zhang, Hai Zhao

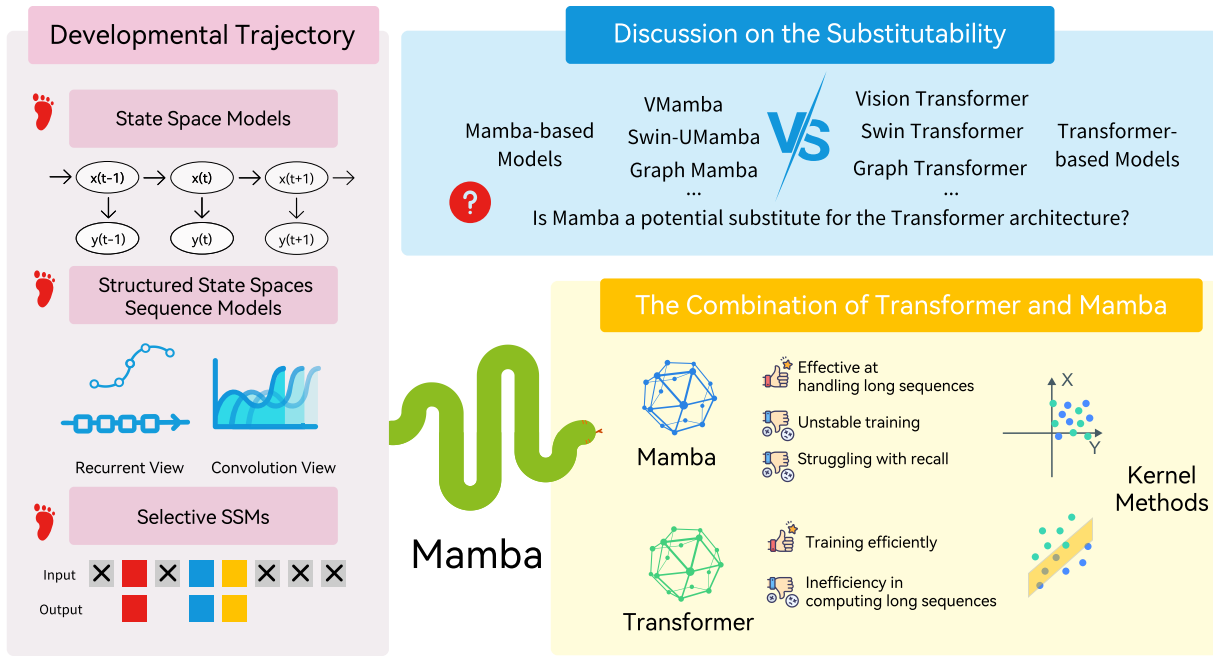


Figure 1: An overview of Mamba, including the developmental trajectory of structured state space models, a discussion on the substitutability of Mamba and Transformers, and their combination.

Abstract

Transformer, a deep neural network architecture, has long dominated the field of natural language processing and beyond. Nevertheless, the recent introduction of Mamba challenges its supremacy, sparks considerable interest among researchers, and gives rise to a series of Mamba-based models that have exhibited notable potential. This survey paper orchestrates a comprehensive discussion, diving into essential research dimensions, covering: (i) the functioning of the Mamba mechanism and its foundation on the principles of structured state space models; (ii) the proposed improvements and the integration of Mamba with various networks, exploring its potential as a substitute for Transformers; (iii) the combination of Transformers and Mamba to compensate for each other’s shortcomings. We have also made efforts to interpret Mamba and Transformer in the framework of kernel functions, allowing for a comparison of their mathematical nature within a unified context. Our paper encompasses the vast majority of improvements related to Mamba to date.

*Correspondence to: Zuchao Li <zcli-charlie@whu.edu.cn>.

This work was supported by the National Natural Science Foundation of China (No.62306216), the Natural Science Foundation of Hubei Province of China (No.2023AFB816), the Fundamental Research Funds for the Central Universities (No.2042023kf0133).

1 Introduction

Since the introduction of the transformer (Vaswani et al., 2017) architecture, which surpassed previous state-of-the-art recurrent neural network models in translation tasks, numerous large language models (LLMs) built upon the transformer framework such as GPT (Radford et al., 2018) and BERT (Devlin et al., 2018) have emerged. Moreover, Transformer has been a prevalent deep learning model extensively applied across diverse domains besides natural language processing and computer vision. However, the drawbacks of the transformer primarily lie in two aspects: firstly, its inefficiency in computing long sequences, and secondly, the limitation of its core attention module, which models only within a finite context window, and this results in performance deficiencies when handling longer sequences.

Based on recent studies on state space models (Fu et al., 2022; Poli et al., 2023) and previous studies on structured state space sequence models (S4) (Gu et al., 2021a;b), Mamba architecture has emerged with the expectation of replacing attention modules structurally. Mamba also introduces a selection mechanism that makes the SSM parameters a function of the input, achieving selective propagation and information-forgetting effects. In other words, the model can focus on or disregard specific inputs, filtering out irrelevant information and maintaining long-term memory of information relevant to the problem. Additionally, Mamba incorporates a hardware-aware algorithm, opting for a scanning approach instead of convolution for model computations, in contrast to the strategy adopted by all previous SSM models for computational efficiency, which relied on fixed time and input. This algorithm is akin to Flash Attention (Dao et al., 2022; Dao, 2023), both aimed at addressing the slow and memory-hungry nature of Transformers when dealing with long sequences with a focus on hardware-level solutions.

Due to its remarkable achievements that Mamba exhibits $5\times$ generation throughput compared with Transformer of similar size and Mamba-3B demonstrates comparable performance to Transformer twice its size, there has been a recent surge in models applying Mamba to various domains, including image haze removal (Zheng & Wu, 2024), table data processing (Ahamed & Cheng, 2024a), CT-MR image manipulation (Guo et al., 2024b). Researchers have also combined Mamba with various models such as Mixture of Experts (MoE) (Pióro et al., 2024; Anthony et al., 2024), GNNs (Behrouz & Hashemi, 2024; Wang et al., 2024a), U-Net (Ma et al., 2024b), further expanding its applicability. Nevertheless, whether Mamba can truly replace the Transformer remains a question of heated discussion.

In this survey, we navigate through research topics that cover: (i) the operation of the Mamba mechanism, grounded in the principles of structured state space models; (ii) the substitutability of Mamba for models including Vision Transformer (ViT), Graph Transformer (GT), Swin Transformer and U-Net; (iii) the combination of Transformers and Mamba to compensate for each other’s shortcomings. In the rest of this paper, We have also tried to interpret Mamba and Transformer using kernel functions, allowing us to compare their mathematical characteristics within a single framework. In the subsequent section, we explore the extent to which Mamba can potentially replace Transformer, examining the domains in which such substitution may occur and identifying any limitations. To conclude, we also discuss its current advantages and disadvantages.

This paper goes beyond a simple summary, aiming to explore and elucidate the essence of Mamba, as well as discussing its potential as a substitute for Transformer. Our carefully selected papers delve into the underlying preliminaries of Mamba(Kalman, 1960; Koller & Friedman, 2009; Gu et al., 2021b;a; 2020; 2022), the mathematical principles explaining Mamba and Transformer (Gu et al., 2022), and Mamba-based models(Zhu et al., 2024b; Liu et al., 2024g). Additionally, our paper documents the developmental trajectory of state space models, providing a comprehensive overview of the evolution of state space models and highlighting both differences and connections.

Key Takeaways We systematically and comprehensively elucidate the underlying mechanisms of Mamba. The key takeaways are:

- An overview of the developmental trajectory of state space-related models, tracing the evolution from SSMs to structured state space sequence models to selective SSMs. (Section 2).
- A discussion on the substitutability of Mamba-based models for Transformer-based models (Section 3).
- A discussion on the combination of Transformers and Mamba and a kernel method explanation of the mathematical essence including structures of Transformer and Mamba-based model.(Section 4).
- Despite the achievements of Mamba, its limitations and challenges are acknowledged and discussed (Section 5).

2 Development of State Space Models

This section delves into the fundamental mechanisms of Mamba, tracing its developmental history from the traditional state space models to structured state space sequence models and further to Selective SSM (S6).

2.1 State Spaces Models

State space model (SSM) refers to a class of probabilistic graphical models (Koller & Friedman, 2009) in the field of machine learning. The term "state space" was initially introduced by Kalman and was originally applied in the field of control engineering. Dean and Kanazawa introduced the initial temporal extension of probabilistic graphical models (Dean & Kanazawa, 1989). State space models come in various types (Durbin & Koopman, 2012), including linear state space models, nonlinear state space models, non-Gaussian state space models, and others. The objective of SSM is to compute the optimal estimation, i.e., the output, based on observed input. SSM is based on three variables that evolve: input $\{u_1, \dots, u_n\}$, state $\{x_1, \dots, x_n\}$, and output $\{y_1, \dots, y_n\}$. x_i represents latent variables, which means unobserved variables while u_i corresponds to observed state variables. y_i is deduced based on the probabilistic dependency between these two variables.

For the sake of simplicity, let time be denoted as t , the input as $u(t)$, the state as $x(t)$, and $y(t)$ represent the output. The most general state-space representation of a linear system is expressed as follows (Brogan, 1991):

$$x'(t) = A(t)x(t) + B(t)u(t) \tag{1a}$$

$$y(t) = C(t)x(t) + D(t)u(t) \tag{1b}$$

where A is the state matrix, B is the input matrix, C is the output matrix, and D is the command matrix. We use $x'(t)$ to denote the derivative of $x(t)$.

2.2 Structured State Spaces Sequence Models

Structured State Spaces Sequence Models (S4) (Gu et al., 2021a) were proposed based on a novel parameterization for the SSM, designed to handle data containing long-range dependencies (LRDs) efficiently. S4 can be viewed as a combination of SSM, HiPPO, and structured matrices. Under the assumption of linear time invariance (LTI), the matrices will remain constant. Moreover, in the context of deep learning, equation (1b) can be further simplified by equation (2b), where $Du(t) = 0$ is considered as a skip connection and it can be computed easily.

$$x'(t) = Ax(t) + Bu(t) \tag{2a}$$

$$y(t) = Cx(t) \tag{2b}$$

2.2.1 Discretization

The continuous view can handle continuous data but it is rather slow both in training and inference (Gu et al., 2021b). If we aim to apply SSM on a discrete input sequence, it is necessary to first discretize the parameters (Gu et al., 2022). One of the main differences between various S4 architectures arises from the discrepant methods of discretization. There are two distinct approaches here: the recurrent view and the convolution view. However, mathematically, they are equivalent.

The Recurrent View. Taking the commonly used Euler discretization method as an example, applying a differential approach:

$$\begin{aligned}
x(t + \Delta) &\approx x(t) + \Delta x'(t) \\
&= x(t) + \Delta (Ax(t) + Bu(t)) \\
&= (I + \Delta A)x(t) + \Delta Bu(t) \\
&= \bar{A}x(t) + \bar{B}u(t)
\end{aligned} \tag{3}$$

As a result, we transform the continuous-time model into a discrete-time model with cyclic updates. The formula (2) can be unrolled as a linear RNN. The Recurrent View provides the benefits of unbounded context in principle and highly efficient inference.

$$x_k = \bar{A}x_{k-1} + \bar{B}u_k \tag{4a}$$

$$y_k = \bar{C}x_k \tag{4b}$$

The Convolution View. Assuming the input u_i is known, starting from x_0 and y_0 , we can sequentially compute all x_i and y_i . Then equation (4) can be explicitly expanded in closed form, yielding the following result:

$$\begin{array}{lll}
x_0 = \bar{B}u_0 & x_1 = \bar{A}\bar{B}u_0 + \bar{B}u_1 & x_2 = \bar{A}^2\bar{B}u_0 + \bar{A}\bar{B}u_1 + \bar{B}u_2 & \dots \\
y_0 = \bar{C}\bar{B}u_0 & y_1 = \bar{C}\bar{A}\bar{B}u_0 + \bar{C}\bar{B}u_1 & y_2 = \bar{C}\bar{A}^2\bar{B}u_0 + \bar{C}\bar{A}\bar{B}u_1 + \bar{C}\bar{B}u_2 & \dots
\end{array}$$

Continuing in this manner, the general form of y_k is as follows:

$$y_k = \bar{C}\bar{A}^k\bar{B}u_0 + \bar{C}\bar{A}^{k-1}\bar{B}u_1 + \dots + \bar{C}\bar{A}\bar{B}u_{k-1} + \bar{C}\bar{B}u_k \tag{8}$$

$$\bar{K} \in \mathbb{R}^L := (\bar{C}\bar{B}, \bar{C}\bar{A}\bar{B}, \dots, \bar{C}\bar{A}^{L-1}\bar{B}) \tag{9}$$

In summary, equation (10) resembles a CNN and shares a similar structure to convolution. The Convolution View offers the advantages of local information and parallelizable training.

$$y = \bar{K} * u \tag{10}$$

2.2.2 HiPPO

High-order Polynomial Projection Operator (HiPPO) (Gu et al., 2020) is a general framework for online memorization for long context. The computational efficiency challenge in dealing with long sequence data primarily lies in compressing the history of input within the memory budget to learn features. Typically, the idea of online function approximation is employed and orthogonal polynomials are used as basis. When more signals are received, there is a desire to compress the entire signal still within the memory budget. In contrast to the approach of finding the optimal projection $g(t)$ of input f onto the space of polynomials, which requires complex inner product computations, using coefficient updates to represent the past states over some time, the derivation of Gu et al. suggests that obtaining the coefficients $c(t)$ of the polynomial can be easily achieved online through solving ordinary differential equations (ODEs). In other words, updating the coefficients $c(t)$ of the polynomial is done such that it provides the optimal approximation of input function $f(t)$, throughout the entire duration of the input from start to end. In this context, $c(t)$ represents the hidden state mentioned in Section 2.1. For certain $A(t) \in \mathbb{R}^{N \times N}$, $B(t) \in \mathbb{R}^{N \times 1}$, $c(t)$ takes the form of a simple linear differential equation:

$$\frac{d}{dt}c(t) = A(t)c(t) + B(t)f(t) \quad (11)$$

Due to the inherently discrete nature of the data, performing discrete operations leads to the discrete-time HIPPO recurrence:

$$c_{k+1} = A_{k+1}c_k + B_{k+1}f_k \quad (12)$$

In the context of the SSM, the crucial aspect is utilizing the HiPPO operator to choose an appropriate A and B matrix and reconstruct the entire input $u(t)$ with the best fit based on the current state $x(t)$. The matrix that computed by HiPPO and used in S4 seems to have no known mathematical interpretation and was originally defined for time-variant dynamical systems (Patro & Agneeswaran, 2024b). The instantiations of HiPPO depend on the selection of the measure, i.e., the weight that expresses the importance of different parts of the history input. For example, the HiPPO-LegT is the built on the measure of the uniform distribution on the most recent history interval, and the HiPPO-LagT adopts exponentially decaying measure. Gu et al. also proposes LegS, a novel measure that scales the uniform distribution to the whole history dynamically. This means that HiPPO-LegS can dynamically adjust weights, ensuring that historical data from different periods are appropriately considered. The matrix form of the HiPPO-LegS is as below:

$$A_{nk} = \begin{cases} (2n+1)^{1/2}(2k+1)^{1/2} & n > k \\ k+1 & n = k \\ 0 & n < k \end{cases} \quad (13)$$

To further simplify the computation, Gu et al. proposed S4D, removing the low-rank portion of the HiPPO-LegS. The detailed differences between this simplified model and S4 are as below:

- **Simplified Algorithm:** Compared to the sophisticated algebraic techniques of S4, S4D utilizes Vandermonde matrix multiplication to compute the kernel.
- **Simplified structure:** The diagonal state can be viewed as a collection of one-dimensional state space models, which facilitates understanding and implementation.
- **Based on Complex Matrices:** The matrices are diagonalized on the complex plane. In addition, the real part is forced to be negative to ensure the stability.
- **Performance Comparison:** Most experiments demonstrate S4D's comparable performance to S4, which suggests that S4D offers a simpler implementation choice without sacrificing performance.

Based on the above idea, S4D-Lin is proposed as a replacement of S4D-LegS and it is actually one of the initialization scheme of Mamba.

$$A_n = -\frac{1}{2} + i\pi n \quad (14)$$

The other scheme used in Mamba is S4D-Real,

$$A_n = -(n+1) \quad (15)$$

However, according to Gu et al., S4D-Real has the same spectrum as S4-LegS, thus its performance is inferior to S4D-Lin.

2.3 Selective SSMs

Gu & Dao argue that a basic problem of sequence modeling is compressing context into a smaller state, retaining useful information at the same time. Based on S4, Selective SSMs (S6) were proposed with the core idea of making parameters dependent on the input rather than being time-invariant. However, this introduced some challenges, such as the problem of computational efficiency. The proposed hardware-aware algorithm effectively addresses this issue.

2.3.1 Selection Mechanism

Many previous Large Language Models (LLMs) can be easily distracted by irrelevant context and do not improve their performance with increasing context length (Shi et al., 2023). However, the model can focus on inputs of interest and filter out potentially irrelevant noise with the adoption of the selection mechanism. Additionally, performance improves by simply resetting the current state to forget the historical records. LTI models cannot separate multiple sequences while the selective mechanism addresses this issue by resetting the state when the model completes processing one sequence and starts handling the next one.

S6 defines several input parameters, Δ , B , and C , and L functions with an additional dimension for the length of the data. Δ can be seen as the RNN gating mechanism, representing a step size used for discretization, and the input u_k can be considered as a sampling of the underlying continuous signal $u(t)$, where $u_k = u(k\Delta)$. A larger Δ places more emphasis on the current input, in other words, it selects the current input and forgets the current state. On the contrary, a smaller Δ tends to overlook the current input and maintains the current state. S6 performs discretization to transform continuous data Δ , A , B , into discrete data \bar{A} , \bar{B} . A employs Zero-Order Hold (ZOH) discretization, while B uses Euler discretization.

$$\bar{A} = \exp(\Delta A) \quad (16)$$

$$\bar{B} = (\Delta A)^{-1}(\exp(\Delta A) - I) \cdot \Delta B \quad (17)$$

The explanation of why ZOH discretization is used. The state space model is actually a one-order linear differential equation:

$$\frac{dx(t)}{dt} = Ax(t) + Bu(t) \quad (18)$$

After multiplying the integrating factor $e^{\int Adt}$, it is easy to get the solution

$$x(t) = e^{\int_{t_0}^t Ad\gamma} x(t_0) + \int_{t_0}^t B e^{\int_s^t Ad\gamma} u(s) ds \quad (19)$$

Set $t = t_{k+1}$ and $t_0 = t_k$, we have

$$x(t_{k+1}) = e^{A(t_{k+1}-t_k)} x(t_k) + \int_{t_k}^{t_{k+1}} B e^{A(t_{k+1}-s)} u(s) ds \quad (20)$$

By ZOH, we set $u(s) = u(t_k)$ in $[t_k, t_{k+1}]$. In addition, we have $\Delta = t_{k+1} - t_k$ by definition. Then, through easy computation, gives the formulation of \bar{A} and \bar{B} in Mamba.

$$x(t_{k+1}) = \exp(A\Delta)x(t_k) + (\Delta A)^{-1}(\exp(\Delta A) - I)\Delta B u(t_k) \quad (21)$$

2.3.2 Hardware-aware Algorithm

The naive recurrent computation uses $O(BLDN)$ FLOPs, while convolutional computation uses $O(BLD \log(L))$ FLOPs. The recurrent computation model uses fewer FLOPs than convolution. However, this brings two issues: its sequential nature and a large amount of memory. The efficient parallel scanning algorithm addresses the sequentiality problem. To tackle the memory issue, the complete state h is not stored practically. Instead, GPU's hierarchical memory structure is leveraged, storing the state h only in certain efficient memory structures and using kernel fusion. Moving from slow HBM to fast SRAM, SSM parameters (Δ , A , B , C) are discretized and computed recurrence in the SRAM. The output (B , L , D) is then stored back into the slow HBM.

3 Discussion on the Substitutability

In this chapter, we have reviewed recent work on Mamba. Most of the research involves modifications to Mamba, adapting it to different specific tasks, and comparing it with existing Transformer architectures. For example, MambaByte (Wang et al., 2024b) improves subword Transformers by performing autoregression on bytes, enabling token-free

adaptation of Mamba. MambaFormer (Park et al., 2024) combines Mamba with attention blocks and applies it to in-context learning tasks. UVM-Net (Zheng & Wu, 2024) utilizes a designed Bi-SSM module to capture local features and long-range dependencies, comparing it with the popular dehazing architecture Transformer. The following are some representative works that may replace Vision Transformer, Graph Transformer, Swin Transformer/U-Net, etc.

3.1 Vision Transformer

Vision Transformer (ViT) (Dosovitskiy et al., 2020) has achieved tremendous success in applying Transformer to the field of computer vision. It segments images into patches and flattens these patches, effectively treating them as sequence tokens similar to those in natural language processing tasks.

The recently proposed Vision Mamba (Vim) (Zhu et al., 2024b) outperforms DeiT in ImageNet1k image classification tasks. It demonstrates a 2.8x improvement in processing high-resolution images compared to DeiT, with an 86.8% reduction in GPU memory consumption. The core of Vision Mamba lies in the introduction of a bidirectional SSM for global visual context modeling. Vmamba (Liu et al., 2024g) introduces the Cross Scan Module (CSM) to consider spatial relationships on the two-dimensional plane. Vmamba exhibits linear complexity and a global receptive field, demonstrating competitiveness in comparisons with DeiT and Swin Transformer.

Transformer employs MLP for channel mixing and attention for sequence mixing. In contrast, SiMBA (Patro & Agneswaran, 2024a) introduces Einstein FFT (EinFFT) for channel modeling through specific eigenvalue computations, and utilizes the Mamba block for sequence modeling.

According to the data in Table 3.1, when comparing models on the ImageNet-1K dataset, models based on Mamba have fewer parameters than transformer models of similar sizes. However, there is no clear advantage in terms of FLOPs and accuracy.

Additionally, Cheng et al. utilize Vim in the area of single image super-resolution (SISR), unleashing the potential of mamba in the context of high resolution image. Building upon Vmamba’s SS2D, high-order visual state space (H-VSS) (Wu et al., 2024) employs a structure similar to Transformers, where the self-attention layer is replaced by the proposed High-order 2D-selective-scan (H-SS2D). Through higher-order interactions, H-VSS gradually reduces the introduction of redundant information during the SS2D operation process. EfficientVMamba (Pei et al., 2024) enhances the selective scanning approach of Vmamba’s CSM by incorporating an atrous-based strategy for efficient skip sampling. ZigMamba (Hu et al., 2024) considers spatial continuity within the scanning scheme, similarly improving upon Vmamba’s scanning methodology. LocalMamba (Huang et al., 2024b) also modifies CSM by partitioning tokens into distinct windows, facilitating traversal within each window.

3.2 Swin Transformer/U-Net

U-Net (Ronneberger et al., 2015) is a widely used convolutional neural network architecture for biomedical image processing. It employs an encoder-decoder structure and uses skip connections to concatenate the corresponding feature maps from the encoder to the decoder, preserving details. Swin Transformer (Liu et al., 2021), on the other hand, is a transformer architecture for visual images. It processes patches hierarchically, utilizing shifted windows for local self-attention, and performs well on various benchmarks.

The models obtained by transforming Mamba through a combination of U-Net and Swin Transformer are predominantly used in medical image processing. U-Mamba (Ma et al., 2024b) stands out as the pioneering network to integrate the Mamba framework into biomedical image analysis tasks. It employs a hybrid CNN-SSM (Structured Self-Attention) module and exhibits superior performance on datasets for organ segmentation, instrument segmentation, and cell segmentation when compared to state-of-the-art methods based on CNN and Transformer. Building upon U-Mamba, Swin-UMamba (Liu et al., 2024c) incorporates a pre-training strategy based on ImageNet. The training results on the aforementioned datasets not only surpass models based on CNN and ViT but also outperform the original U-Mamba model. SegMamba (Xing et al., 2024) and nnMamba (Gong et al., 2024) are both applied to 3D biomedical images. SegMamba, which enhances U-Net, demonstrates the ability to process volumetric features at a resolution of $64 \times 64 \times 64$. It surpasses the performance of the Transformer-based approach, SwinUNETR-V2, on the BraTS2023 brain tumor segmentation dataset. On the other hand, nnMamba incorporates the Mamba block into CNNs and excels in various tasks such as 3D image segmentation, classification, and landmark detection, outperforming current state-of-the-art methods. In the domain of cross-modal registration for deformable Magnetic Resonance (MR) and Computed

Table 1: **Accuracy comparison across various models on ImageNet-1K.** The results of ResNet, ResNetXt50, RegNetY, ViT, DeiT, Swin, S4ND, Vim, VMamba and SiMBA were referenced from (Liu et al., 2024g),(Zhu et al., 2024b) and (Patro & Agneeswaran, 2024a).

method	image size	#param.	FLOPs	ImageNet top-1 acc
Convnets				
ResNet-18	224 × 224	12M	1.8G	69.8
ResNet-50	224 × 224	25M	3.8G	76.2
ResNet-101	224 × 224	45M	7.6G	77.4
Res-Net-152	224 × 224	60M	11.3G	78.3
ResNetXt50-32x4d	224 × 224	25M	4.2G	77.6
RegNetY-4G	224 × 224	21M	4.0G	80.0
RegNetY-8G	224 × 224	39M	8.0G	81.7
RegNetY-16G	224 × 224	84M	16.0G	82.9
Transformer				
ViT-B/16	384 × 384	86M	55.4G	77.9
ViT-L/16	384 × 384	307M	190.7G	76.5
DeiT-S	224 × 224	22M	4.6G	79.8
DeiT-S	224 × 224	86M	17.5G	81.8
DeiT-B	384 × 384	86M	55.4G	83.1
Swin-T	224 × 224	29M	4.5G	81.3
Swin-S	224 × 224	50M	8.7G	83.0
Swin-B	224 × 224	88M	15.4G	83.5
SSMs				
S4ND-ViT-B	224 × 224	89M	-	80.4
Vim-Ti	224 × 224	7M	-	73.1
Vim-S	224 × 224	26M	-	80.3
VMamba-T	224 × 224	22M	4.5G	82.5
VMamba-S	224 × 224	44M	9.1G	83.6
VMamba-B	224 × 224	75M	15.2G	83.9
SiMBA-S(MLP)	224 × 224	26.5M	5.0G	84.0
SiMBA-B(MLP)	224 × 224	40.0M	9.0G	84.7
SiMBA-L(EinFFT)	224 × 224	36.6M	7.6G	83.9

Tomography (CT), MambaMorph (Guo et al., 2024b) inherits from VoxelMorph, which is based on U-Net, and exhibits superior performance compared to the Transformer-based TransMorph on the SR-Reg dataset. Mamba-UNet (Wang et al., 2024h), employing the VMamba architecture with injected skip connections, outperforms UNet and SwinUNet on an MRI dataset for multi-structure heart segmentation. Semi-Mamba-UNet (Wang & Ma, 2024a) integrates a visual mamba-based UNet architecture with a conventional UNet into a semi-supervised learning (SSL) framework to generate pseudo-labels and cross-supervise each other. It is compared with various SSL frameworks on an MRI dataset. Weak-Mamba-UNet (Wang & Ma, 2024b) is a weakly-supervised learning (WSL) framework that incorporates UNet, SwinUNet, and Mamba-UNet for efficient long-range dependency modeling, stacking structured state-space models hierarchically to address raw sensor data prediction tasks. VM-UNet (Ruan & Xiang, 2024), rooted in a pure SSM model, combines elements from VMamba and U-Net. Experimental results on the ISIC17, ISIC18, and Synapse datasets showcase its competitiveness in biomedical image analysis tasks. The subsequent introduction of VM-UNetV2 (Zhang et al., 2024b) improved the performance of VM-UNet.

Table 2: **Results of different U-Net-based Mamba models across various datasets.** Provide only one example of transformer-based models for reference. * means using a Mamba-based decoder. The outcomes of UMamba and Swin-UMamba were cited from (Liu et al., 2021). SegMamba’s results were sourced from (Xing et al., 2024). The results of MambaMorph were obtained from (Guo et al., 2024b). Mamba-UNet’s results were derived from (Wang et al., 2024h). Semi-Mamba-UNet’s outcomes were referenced from (Wang & Ma, 2024a). VM-UNet’s results were cited from (Ruan & Xiang, 2024).

Datasets	Methods	Based Models		Transformer-based	Domain	Evaluation Metrics				
		U-Net	Others			Dice↑	HD95↓	DSC↑	NSD↑	F1↑
Abdomen MRI	U-Mamba_Bot	✓	-	UNETR	Organ segmentation	-	-	0.7588	0.8285	-
Abdomen MRI	U-Mamba_Enc	✓	-	UNETR	Organ segmentation	-	-	0.7625	0.8327	-
Abdomen MRI	Swin-UMamba*	✓	U-Mamba	SwinUNETR	Organ segmentation	-	-	0.7705	0.8376	-
Abdomen MRI	Swin-UMamba	✓	U-Mamba	SwinUNETR	Organ segmentation	-	-	0.7768	0.8442	-
Endoscopy	U-Mamba_Bot	✓	-	UNETR	Instrument segmentation	-	-	0.6540	0.6692	-
Endoscopy	U-Mamba_Enc	✓	-	UNETR	Instrument segmentation	-	-	0.6303	0.6451	-
Endoscopy	Swin-UMamba*	✓	U-Mamba	SwinUNETR	Instrument segmentation	-	-	0.6717	0.6871	-
Endoscopy	Swin-UMamba	✓	U-Mamba	SwinUNETR	Instrument segmentation	-	-	0.6774	0.6926	-
Microscopy	U-Mamba_Bot	✓	-	UNETR	Cell segmentation	-	-	-	-	0.5389
Microscopy	U-Mamba_Enc	✓	-	UNETR	Cell segmentation	-	-	-	-	0.5607
Microscopy	Swin-UMamba*	✓	U-Mamba	SwinUNETR	Cell segmentation	-	-	-	-	0.5850
Microscopy	Swin-UMamba	✓	U-Mamba	SwinUNETR	Cell segmentation	-	-	-	-	0.5836
BraTS2023	SegMamba	✓	-	nnFormer	3D biomedical images	0.9132	3.5600	-	-	-
SR-Reg	MambaMorph	✓	VoxelMorph	TransMorph	Deformable image registration	0.8271	2.0000	-	-	-
MRI Cardiac Test Set	Mamba-UNet	✓	VMamba	Swin-UNet	2D biomedical images	0.9281	2.4645	-	-	-
MRI Cardiac Test Set	Semi-Mamba-UNet	✓	SSL framework	-	Medical image segmentation	0.8396	6.2139	-	-	-
MRI Cardiac Test Set	Weak-Mamba-UNet	✓	WSL framework	-	Medical image segmentation	0.9171	3.9597	-	-	-
ISIC17	VM-UNet	✓	VMamba	Swin-UNet	2D medical image segmentation	-	-	89.03	-	-
ISIC18	VM-UNet	✓	VMamba	Swin-UNet	2D medical image segmentation	-	-	89.71	-	-
Synapse	VM-UNet	✓	VMamba	Swin-UNet	2D medical image segmentation	-	19.21	81.08	-	-

3.3 Graph Transformer

Graph Neural Networks (GNNs) suffer from drawbacks such as excessive compression and inadequate capture of long-range dependencies. Currently, the most widely used is Graph Transformer (GT) (Yun et al., 2019). However, the high computational cost of GT makes it perform well on small-scale datasets but limits its applicability to larger datasets. Two proposed solutions are sparse attention and subgraph tokenization. The GraphGPS framework (Rampášek et al., 2022) allows the replacement of fully connected with sparse attention, resulting in $O(N + E)$ complexity. However, this requires costly Laplacian eigen-decomposition (PE) and structural encoding (SE) to achieve optimal performance, still bringing the complexity to $O(N^2)$ (Behrouz & Hashemi, 2024). On the other hand, passing subgraph tokens to Message-Passing Neural Networks (MPNNs) (Gilmer et al., 2020) may lead to issues such as over-smoothing (Rusch et al., 2023), over-squashing (Di Giovanni et al., 2023), and poor capture of long-range dependencies (Dwivedi et al., 2022). To address these challenges, Mamba is introduced as a solution with linear complexity.

Graph-Mamba (Wang et al., 2024a) adopts the GPS framework and incorporates a designed Graph-Mamba block (GMB). The GMB employs a heuristic sorting of nodes based on the idea that more crucial nodes should have access to more context. This heuristic sorting adjusts the priority of input nodes, allowing for improved processing of important nodes with more context. The results demonstrate that Graph-Mamba outperforms in long-range graph prediction tasks.

Graph Mamba (Behrouz & Hashemi, 2024) introduces a graph tokenization process that produces a long sequence of diverse subgraphs. Let $G = (V, E)$ represent a graph, where $V = v_1, \dots, v_n$ denotes the set of nodes and $E \subseteq V \times V$ is the set of edges. We assume each node $v \in V$ has a subset of nodes $S \subseteq V$ as the set of the neighbors of v . We employ $G[S]$ to signify the induced subgraph formed by nodes in set S . Starting from node v , randomly sample paths

of length \hat{m} . Let $T_{\hat{m},i}(v)(i = 0, \dots, M)$ denote the set of all nodes on this sampled path. In equation 22, $G[T_{\hat{m}}(v)]$ represents the subgraph of a sample of the \hat{m} -hop neighborhood of node v and the sequence of $G[T_{\hat{m}}(v)]$ corresponds to the tokens of node v .

$$G[T_{\hat{m}}(v)] = G\left[\bigcup_{i=1}^M T_{\hat{m},i}(v)\right] \quad (22)$$

Subsequently, employ an encoder ϕ to encode the subgraph of node v in equation 23, where $x_v^0 \in \mathbf{X}$ is the feature vector corresponding to each node, and $\mathbf{X} \in \mathbb{R}^{n \times d}$ is the feature matrix describing the nodes.

$$x_v^{((i-1)s+j)} = \phi\left(G[T_i^j(v)], \mathbf{X}_{T_i^j(v)}\right) \quad (23)$$

Graph Mamba also proposes bidirectional State Space Models (SSMs) for graphs, utilizing forward and backward scans, which aligns with the approach proposed in earlier works (Zhu et al., 2024b; Wang et al., 2022). This bidirectional approach ensures that preceding tokens contain information from succeeding tokens and vice versa. Graph Mamba achieves outstanding performance on long-range, small-scale, large-scale, and anisotropic benchmark datasets while consuming less GPU memory.

3.4 Others

The remaining improvements for Mamba primarily focus on three aspects. Firstly, enhancements are made to the Mamba architecture itself. Most works involve integrating different modules to combine the ability of SSM to capture long-range dependencies with other modules to complete downstream tasks. For example, FD-Vision Mamba (Zheng & Zhang, 2024) integrates the advantages of CNN local pattern recognition and SSM for endoscope exposure correction tasks. Mamba models combined with MoE (Pióro et al., 2024; Anthony et al., 2024) address the issue of high memory usage in MoE. LOCOST (Bronnec et al., 2024) combines state space models with an encoder-decoder architecture, achieving a computational complexity of $O(L \log L)$, which outperforms models based on sparse attention patterns and enables the handling of longer input sequences. DenseMamba (He et al., 2024a) selectively integrates shallow hidden states into deeper layers, preserving fine-grained information in the final output.

Secondly, there are modifications to handle different types of data objects that Mamba processes. MambaTab (Ahamed & Cheng, 2024a) is designed to handle tabular data and demonstrates superior performance compared to state-of-the-art baselines, including Transformers and CNN-based models. Mamba is a suitable for managing intricate long structures, such as genomics (Schiff et al., 2024), audio(Quan & Li, 2024), and video (Chen et al., 2024b; Li et al., 2024b). Recently, there have been proposals to extend one-dimensional Mamba models to higher dimensions. For instance, Point Mamba (Liang et al., 2024b) enhances Point Cloud Transformers by proposing a reordering strategy that strengthens the global modeling capability of SSM through geometric scanning order. The model proposed by Liu et al. also deals with point clouds and devises a sorting strategy based on octrees for the raw irregular points. STG-Mamba (Li et al., 2024c) is designed for processing dynamic Spatial-Temporal Graph (STG) data. Additionally, Mamba-ND (Li et al., 2024d) extends the Mamba architecture to handle arbitrary multi-dimensional data.

Thirdly, Mamba-based models are employed across various domains.

He et al. introduce Pan Mamba in the pan-sharpening domain, introducing Channel Swapping Mamba Block and Cross-modality Mamba Block. Res-Vmamba (Chen et al., 2024a) integrates a residual learning framework into the VMamba model for food classification. ClinicalMamba (Yang et al., 2024d) is a generative clinical language model pretrained on clinical notes, while Cobra (Zhao et al., 2024) and VL-Mamba (Qiao et al., 2024) integrates the efficient Mamba language model into the visual modality. Additionally, Mamba4Rec (Liu et al., 2024a) applies Mamba in the domain of efficient sequential recommendation. In the domain of human-computer interaction, MambaTalk (Xu et al., 2024b) enhances gesture diversity and rhythm through multimodal integration, whereas MambaIR (Guo et al., 2024a) is utilized in the field of image restoration. Moreover, Mamba-in-Mamba (Chen et al., 2024f) explores both global and local information, employed for infrared small target detection. Many models, including those proposed by Hu et al.; Zheng & Zhang; Zhang et al.; Fei et al.; Teng et al., integrate Mamba into diffusion models. Furthermore, Mamba is employed in time series forecasting (Wang et al., 2024g; Ahamed & Cheng, 2024b; Xu et al., 2024a), image fusion (Cao et al., 2024; Peng et al., 2024), and remote sensing change detection tasks (Zhang et al., 2024a; Chen et al., 2024d).

Table 3: A summary of the various fields where Mamba-based models are applied.

domain	model
Vision	
Image generation	(Hu et al., 2024; Zheng & Zhang, 2024; Zhang et al., 2024f) (Zhu et al., 2024a; Fei et al., 2024; Teng et al., 2024; Mo & Tian, 2024)
Image fusion	(Cao et al., 2024; Peng et al., 2024)
Image restoration	(Guo et al., 2024a; Fu et al., 2024; Zheng & Wu, 2024; Li et al., 2024a) (Zhen et al., 2024; Zhou et al., 2024a; Deng & Gu, 2024)
Image enhancement	(Lin et al., 2024; Zhang et al., 2024e; Bai et al., 2024)
Image classification	(Chen et al., 2024a; Sheng et al., 2024; Zhou et al., 2024d; Yao et al., 2024) (Chen et al., 2024e; Yue & Li, 2024)
Image segmentation	(Khan et al., 2024; Tsai et al., 2024; Yuan et al., 2024; Liu et al., 2024f) (Archit & Pape, 2024; Ma et al., 2024c; Yang et al., 2024c; Tang et al., 2024) (Wu et al., 2024; Xie et al., 2024; Zhang et al., 2024b; Liao et al., 2024) (Ma et al., 2024b; Ruan & Xiang, 2024)
Object detection	(Wang et al., 2024e; Chen et al., 2024f; Ma et al., 2024a; Verma et al., 2024)
Change detection	(Zhang et al., 2024a; Chen et al., 2024d)
Video processing	(Yang et al., 2024b; Gao et al., 2024; Chaudhuri & Bhattacharya, 2024) (Chen et al., 2024b; Li et al., 2024b; Chen et al., 2024c)
Language	
LLMs	(Yang et al., 2024d; Lieber et al., 2024; Ren et al., 2024; He et al., 2024a) (De et al., 2024)
Mutli-modal	
Multi-modal LLMs	(Qiao et al., 2024; Zhao et al., 2024; Liu et al., 2024b)
Multi-modality object detection	(Dong et al., 2024)
Multi-modality image fusion	(Li et al., 2024f)
Multi-modality semantic segmentation	(Wan et al., 2024)
Multi-modality 3D medical images	(Yang et al., 2024a)
Image data & genomic data	(Zhou et al., 2024b; Chen et al., 2024g)
RGB-Event based tracking	(Huang et al., 2024a)
Others	
Time series forecasting	(Wang et al., 2024g; Ahamed & Cheng, 2024b; Xu et al., 2024a; Shi, 2024) (Zeng et al., 2024; Liang et al., 2024a; Wang et al., 2024g)
Point cloud	(Liang et al., 2024b; Liu et al., 2024e; wei Chen et al., 2024; Han et al., 2024) (Wang et al., 2024f; Liu et al., 2024d; Li et al., 2024e; Zhou et al., 2024c) (Zhang et al., 2024c)
Sequential recommendation	(Liu et al., 2024a; Wang et al., 2024d)
Audio processing	(Chen et al., 2024h; Erol et al., 2024; Lin & Hu, 2024; Shams et al., 2024)
Speech processing	(Zhang et al., 2024d; Chao et al., 2024; Li & Chen, 2024; Jiang et al., 2024)
3D processing	(Mo, 2024; Shen et al., 2024)
Gesture synthesis	(Xu et al., 2024b)
DNA sequence modeling	(Schiff et al., 2024)
4D light fields	(xia et al., 2024)
Network traffic	(Chu et al., 2024; Wang et al., 2024c)
Motion style transfer	(Qian et al., 2024)

3.5 Discussion

Mamba-based models outperform Transformer-based models primarily because the Mamba architecture has linear complexity, while the attention mechanism has a complexity of $O(N^2)$. With hardware-aware algorithm, Mamba-based models have lower FLOPs. This advantage is particularly evident in high-resolution image processing, which is crucial in biomedical image processing. Moreover, when dealing with complex data such as large graphs and multi-dimensional data, Mamba-based models theoretically perform better.

However, research indicates that Mamba maintain a fixed-size recurrent state, but struggle at recall (Arora et al., 2024). Mamba’s potential in handling visual images has also been questioned (Yu & Wang, 2024). Researchers conducted experiments on the ImageNet-1K classification task (Russakovsky et al., 2015) using a model based on gated CNN blocks but without SSM, and the model outperformed architectures like VMamba.

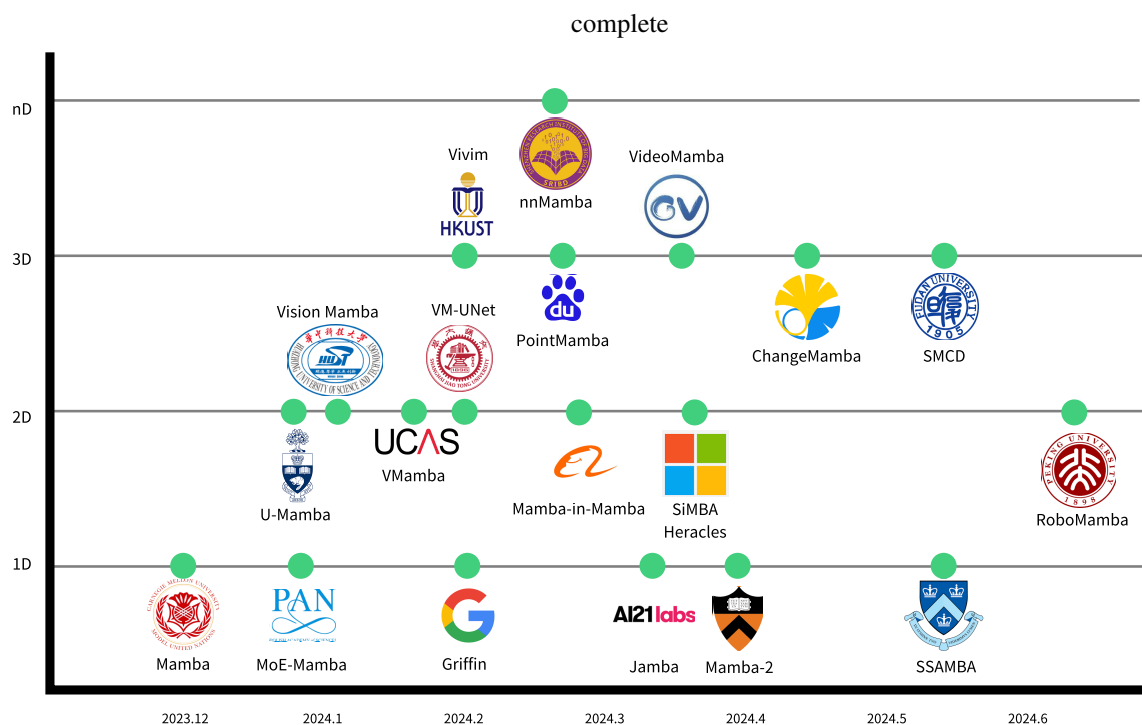


Figure 2: Representative works from the emergence of Mamba to the present (Gu & Dao, 2023; Pióro et al., 2024; De et al., 2024; Lieber et al., 2024; Dao & Gu, 2024; Shams et al., 2024; Ma et al., 2024b; Zhu et al., 2024b; Liu et al., 2024g; Ruan & Xiang, 2024; Chen et al., 2024f; Patro & Agneeswaran, 2024a; Patro et al., 2024; Liu et al., 2024b; Yang et al., 2024b; Liang et al., 2024b; Li et al., 2024b; Chen et al., 2024d; Qian et al., 2024; Gong et al., 2024).

4 The Combination of Transformer and Mamba

Despite Mamba’s impressive performance in long sequences and autoregressive tasks, it still has certain issues. It requires sophisticated initialization techniques and specialized implementations to achieve high quality and runtime performance (Fu et al., 2023), which lead to stability problems when scaling SSM to large network sizes. Also, Mamba is more efficient to train than RNNs but how to train SSMs as efficiently as Transformers remains a challenge. However, recent studies suggest that there are now theoretical explanations bridging the conceptual gap between SSMs and attention-based models (Dao & Gu, 2024). Moreover, an increasing number of models combining Transformers and SSMs are being proposed, indicating that this integration might become a major trend in the future.

4.1 Transformers are SSMs

4.1.1 Softmax Self-attention

The most common variant of attention is softmax attention. Given query Q , key K , and value V matrices, the attention output is calculated as follows where $Q, K, V \in \mathbb{R}^{(T,P)}$:

$$Y = \text{softmax}(QK^T) \cdot V \quad (24)$$

where T denotes the sequence or time axis, with subscripts indexing into the first dimension, for example, $X_t, Y_t \in \mathbb{R}^P$.

4.1.2 SSD Framework

The state space dual (SSD) is made through the abstractions of structured matrices (Dao & Gu, 2024). SSD layer can be considered a specific form of the selective SSM. The diagonal structured A used in Mamba is further simplified to a scalar multiplied by an identity structure. a_i are input-dependent scalars bounded in $[0, 1]$ and L is an additional mask matrix. The dual form can be represented as:

$$(L \circ QK^T) \cdot V, L_{ij} = \begin{cases} a_i \times \dots \times a_{j+1} & i \geq j \\ 0 & i < j \end{cases} \quad (25)$$

L can be viewed as replacing the heuristic positional embeddings of the Transformer with masks related to different data positions. a_i can also be viewed as the selective mechanism in Mamba. In addition, after discarding softmax, sequence computation can be achieved using linear scaling through the linear attention framework (Katharopoulos et al., 2020b).

Through this mathematical explanation, researches successfully integrated the Transformer and Mamba architectures, and trained the Mamba-2 model (Dao & Gu, 2024), which addresses issues such as training instability in Mamba.

4.2 Another Explanation: Formulate Models as Kernel Methods

In this section, we will explore the recently proposed views on framing Transformer and RNN as kernel methods, which sheds light on a novel and illuminating way to analyze the performance of these networks and may lead to the birth of new update models. We will further explain that under the kernel method, Mamba will be unified with the RNN structure.

4.2.1 A Brief Review on Kernel Method

The tasks in real life are often not linearly separable, and a feasible method is to project the data into high dimensional feature space. However, the mapping is always not accessible or computationally expensive. Kernel method is introduced to solve this issue by directly defining the inner product in the high dimensional space without specifying the high-dimensional mapping.

The minimization of an optimization problem can utilize the kernel method thanks to the following Representer Theorem

$$\min_{\omega} \frac{1}{n} \sum_{i=1}^n L(\omega^T \phi(x_i), y_i) + \frac{\lambda}{2} \|\omega\|_2^2, \lambda \geq 0 \quad (26)$$

If the above optimization has optimal solutions, then it must be of the form

$$\omega^* = \sum_{i=1}^n \alpha_i \phi(x_i) \quad (27)$$

Common used kernel functions including linear kernel, polynomial kernel, Sigmoid kernel, etc. Introducing kernel methods into the analysis of deep learning has been a popular direction and more work should be done to investigate the correlations between the two methods.

4.2.2 Transformer-type

Tsai et al. frames the attention in transformer as a kernel method noticing that both of them can measure the similarities of two different elements of input sequences. Specifically, the kernel-based formulation can be presented as:

$$\text{ATTENTION}(x_q; M(x_q, S_{x_k})) = \sum_{x_k \in M(x_q, S_{x_k})} \frac{k(x_q, x_k)}{\sum_{x'_k \in M(x_q, S_{x_k})} k(x_q, x'_k)} v(x_k) \quad (28)$$

where x_q, x_k denote queries and keys, $v(\cdot)$ is the value function, $k(\cdot, \cdot)$ represents the given kernel function, and S_{x_k} is the set representation of the keys. $M(\cdot, \cdot)$ is named as the filtering function, decides how keys operate with queries corresponding to different Transformer models.

A promising research field is to investigate the construction of the kernel function. A typical work is the linear attention (Katharopoulos et al., 2020a), which replaces the softmax with the linear dot-product of a kernel feature map, the exponential linear unit $elu(\cdot)$:

$$\phi(x) = elu(x) + 1 \quad (29)$$

In this way, the complexity is reduced from quadratic to $\mathcal{O}(N)$.

4.2.3 RNN-type

Fermanian et al. investigates the interpretation of RNN within the framework of continuous neural network equations, framing it as kernel methods in a suitable Reproducing Kernel Hilbert Space (RKHS). Specifically, most recurrent-structured network, including RNN, LSTM and GRU can presented as a unified framework

$$h_{j+1} = h_j + \frac{1}{T} f(h_j, x_{j+1}), 0 \leq j \leq T - 1 \quad (30)$$

where $f(\cdot)$ is the feedforward model, h_j represents the hidden state and x_j represents the input data. [todo] This equation can be regarded as a discrete counterpart of a continuous-time ODE

$$dH_t = f(H_t, X_t) dt \quad (31)$$

and the approximation can be guaranteed by the proposition assuming f is Lipschitz continuous in h and x

$$\|H_{j/T} - h_j\| \leq c_1/T \quad (32)$$

Then rewrite the above ODE into CDE under the same assumption

$$d\bar{H}_t = F(\bar{H}_t) d\bar{X}_t \quad (33)$$

The step-N Taylor expansion of the solution H of the above equation is presented as

$$H_t^N = H_0 + \sum_{k=1}^N \frac{1}{k!} \sum_{1 \leq i_1, \dots, i_k \leq d} S_{[0,t]}^{(i_1, \dots, i_k)(X)} F^{i_1} \star \dots \star F^{i_k}(H_0) \quad (34)$$

where $S_{[0,t]}^{(i_1, \dots, i_k)(X)}$ is the signature and \star is the product as below

$$F \star G = \sum_j \frac{\partial G}{\partial h_j} F_j \quad (35)$$

Simplifying the signature as $S(X)$, the signature kernel in the Hilbert space \mathcal{H} can be introduced

$$(X, Y) \mapsto \langle S(\bar{X}), S(\bar{Y}) \rangle \quad (36)$$

4.2.4 Comparison

The kernel construction of RNN-type models and Transformer-type models adopt different approaches. Due to the attention computation of Transformer, it is easy to turn it into a kernel function. However, RNN needs a sophisticated analysis from discrete to continuous and from ODE to CDE and finally the signature properties in the Hilbert space.

The common idea is that modifying the formulation of the kernel is possible to be a future study field. In addition, expressing the original network architecture equations in kernel structure may aid in analyzing their stability and generalization properties.

4.3 Transformers and SSMs: Future Trends

There have been various efforts to combine the advantages of Transformers with those of SSMs. Zuo et al. integrate an S4 layer into the base layer of the State Space Augmented Transformer and apply efficient local attention techniques to the remaining layers. Fathi et al. propose a hybrid layer named the Block-State Transformer (BST), which internally combines an SSM sublayer for long-range context and a Block Transformer sublayer for short-term sequence representation. Jamba (Lieber et al., 2024), a new language model based on a hybrid Transformer-Mamba MoE architecture, provides flexibility for balancing performance and memory requirements while maintaining high throughput. Subsequent developments have applied the integration of Transformer and Mamba to fields such as time series forecasting (Xu et al., 2024a), high-resolution image processing (Patro et al., 2024), text-to-image diffusion models (Fei et al., 2024) and point cloud analysis (wei Chen et al., 2024; Wang et al., 2024f). Combining the advantages of efficient training with Transformers and Mamba’s strengths in handling long sequence data may become a major development direction in the future.

5 Conclusion

In this paper, we make a survey about Mamba including the developmental trajectory of SSM, discussion on the substitutability and discussion on the combination of Transformer and Mamba. Considering its superior linear complexity compared to the $O(N^2)$ complexity of the attention mechanism, especially in domains requiring long contexts such as high-resolution images, video, and complex multidimensional data like large graphs, Mamba has the potential to replace Transformer. However, considering the drawbacks of Mamba such as unstable training and struggles with recall, the viewpoint asserting that Mamba can replace Transformer still lacks sufficient research and experiments to conclusively support this claim. On the other hand, the combination of Transformer and Mamba may become a future development direction.

References

- Md Atik Ahamed and Qiang Cheng. Mambatab: A simple yet effective approach for handling tabular data. *arXiv preprint arXiv:2401.08867*, 2024a.
- Md Atik Ahamed and Qiang Cheng. Timemachine: A time series is worth 4 mambas for long-term forecasting. *arXiv preprint arXiv:2403.09898*, 2024b.
- Quentin Anthony, Yury Tokpanov, Paolo Glorioso, and Beren Millidge. Blackmamba: Mixture of experts for state-space models. *arXiv preprint arXiv:2402.01771*, 2024.
- Anwai Archit and Constantin Pape. Vim-unet: Vision mamba for biomedical segmentation, 2024.
- Simran Arora, Sabri Eyuboglu, Michael Zhang, Aman Timalsina, Silas Alberti, Dylan Zinsley, James Zou, Atri Rudra, and Christopher Ré. Simple linear attention language models balance the recall-throughput tradeoff. *arXiv preprint arXiv:2402.18668*, 2024.
- Jiesong Bai, Yuhao Yin, Qiyuan He, Yuanxian Li, and Xiaofeng Zhang. Retinexmamba: Retinex-based mamba for low-light image enhancement, 2024.
- Ali Behrouz and Farnoosh Hashemi. Graph mamba: Towards learning on graphs with state space models. *arXiv preprint arXiv:2402.08678*, 2024.

-
- William L Brogan. *Modern control theory*. Pearson education india, 1991.
- Florian Le Bronnec, Song Duong, Mathieu Ravaut, Alexandre Allauzen, Nancy F Chen, Vincent Guigue, Alberto Lumbreras, Laure Soulier, and Patrick Gallinari. Locost: State-space models for long document abstractive summarization. *arXiv preprint arXiv:2401.17919*, 2024.
- Zihan Cao, Xiao Wu, Liang-Jian Deng, and Yu Zhong. A novel state space model with local enhancement and state sharing for image fusion. *arXiv preprint arXiv:2404.09293*, 2024.
- Rong Chao, Wen-Huang Cheng, Moreno La Quatra, Sabato Marco Siniscalchi, Chao-Han Huck Yang, Szu-Wei Fu, and Yu Tsao. An investigation of incorporating mamba for speech enhancement, 2024.
- Soumyabrata Chaudhuri and Saumik Bhattacharya. Simba: Mamba augmented u-shiftgcn for skeletal action recognition in videos, 2024.
- Chi-Sheng Chen, Guan-Ying Chen, Dong Zhou, Di Jiang, and Dai-Shi Chen. Res-vmamba: Fine-grained food category visual classification using selective state space models with deep residual learning. *arXiv preprint arXiv:2402.15761*, 2024a.
- Guo Chen, Yifei Huang, Jilan Xu, Baoqi Pei, Zhe Chen, Zhiqi Li, Jiahao Wang, Kunchang Li, Tong Lu, and Limin Wang. Video mamba suite: State space model as a versatile alternative for video understanding. *arXiv preprint arXiv:2403.09626*, 2024b.
- Haoxing Chen, Yan Hong, Zizheng Huang, Zhuoer Xu, Zhangxuan Gu, Yaohui Li, Jun Lan, Huijia Zhu, Jianfu Zhang, Weiqiang Wang, and Huaxiong Li. Demamba: Ai-generated video detection on million-scale genvideo benchmark, 2024c.
- Hongruixuan Chen, Jian Song, Chengxi Han, Junshi Xia, and Naoto Yokoya. Changemamba: Remote sensing change detection with spatio-temporal state space model. *arXiv preprint arXiv:2404.03425*, 2024d.
- Keyan Chen, Bowen Chen, Chenyang Liu, Wenyan Li, Zhengxia Zou, and Zhenwei Shi. Rsmamba: Remote sensing image classification with state space model, 2024e.
- Tianxiang Chen, Zhentao Tan, Tao Gong, Qi Chu, Yue Wu, Bin Liu, Jieping Ye, and Nenghai Yu. Mim-istd: Mamba-in-mamba for efficient infrared small target detection. *arXiv preprint arXiv:2403.02148*, 2024f.
- Ying Chen, Jiajing Xie, Yuxiang Lin, Yuhang Song, Wenxian Yang, and Rongshan Yu. Survmamba: State space model with multi-grained multi-modal interaction for survival prediction, 2024g.
- Yujie Chen, Jiangyan Yi, Jun Xue, Chenglong Wang, Xiaohui Zhang, Shunbo Dong, Siding Zeng, Jianhua Tao, Lv Zhao, and Cunhang Fan. Rawbmamba: End-to-end bidirectional state space model for audio deepfake detection, 2024h.
- Cheng Cheng, Hang Wang, and Hongbin Sun. Activating wider areas in image super-resolution. *arXiv preprint arXiv:2403.08330*, 2024.
- Andrew Chu, Xi Jiang, Shinan Liu, Arjun Bhagoji, Francesco Bronzino, Paul Schmitt, and Nick Feamster. Feasibility of state space models for network traffic generation, 2024.
- Tri Dao. Flashattention-2: Faster attention with better parallelism and work partitioning. *arXiv preprint arXiv:2307.08691*, 2023.
- Tri Dao and Albert Gu. Transformers are ssms: Generalized models and efficient algorithms through structured state space duality. *arXiv preprint arXiv:2405.21060*, 2024.
- Tri Dao, Dan Fu, Stefano Ermon, Atri Rudra, and Christopher Ré. Flashattention: Fast and memory-efficient exact attention with io-awareness. *Advances in Neural Information Processing Systems*, 35:16344–16359, 2022.
- Soham De, Samuel L Smith, Anushan Fernando, Aleksandar Botev, George Cristian-Muraru, Albert Gu, Ruba Haroun, Leonard Berrada, Yutian Chen, Srivatsan Srinivasan, et al. Griffin: Mixing gated linear recurrences with local attention for efficient language models. *arXiv preprint arXiv:2402.19427*, 2024.

-
- Thomas Dean and Keiji Kanazawa. A model for reasoning about persistence and causation. *Computational intelligence*, 5(2):142–150, 1989.
- Rui Deng and Tianpei Gu. Cu-mamba: Selective state space models with channel learning for image restoration, 2024.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. Bert: Pre-training of deep bidirectional transformers for language understanding. *arXiv preprint arXiv:1810.04805*, 2018.
- Francesco Di Giovanni, Lorenzo Giusti, Federico Barbero, Giulia Luise, Pietro Lio, and Michael M Bronstein. On over-squashing in message passing neural networks: The impact of width, depth, and topology. In *International Conference on Machine Learning*, pp. 7865–7885. PMLR, 2023.
- Wenhao Dong, Haodong Zhu, Shaohui Lin, Xiaoyan Luo, Yunhang Shen, Xuhui Liu, Juan Zhang, Guodong Guo, and Baochang Zhang. Fusion-mamba for cross-modality object detection, 2024.
- Alexey Dosovitskiy, Lucas Beyer, Alexander Kolesnikov, Dirk Weissenborn, Xiaohua Zhai, Thomas Unterthiner, Mostafa Dehghani, Matthias Minderer, Georg Heigold, Sylvain Gelly, et al. An image is worth 16x16 words: Transformers for image recognition at scale. *arXiv preprint arXiv:2010.11929*, 2020.
- James Durbin and Siem Jan Koopman. *Time series analysis by state space methods*, volume 38. OUP Oxford, 2012.
- Vijay Prakash Dwivedi, Ladislav Rampásek, Michael Galkin, Ali Parviz, Guy Wolf, Anh Tuan Luu, and Dominique Beaini. Long range graph benchmark. *Advances in Neural Information Processing Systems*, 35:22326–22340, 2022.
- Mehmet Hamza Erol, Arda Senocak, Jiu Feng, and Joon Son Chung. Audio mamba: Bidirectional state space model for audio representation learning, 2024.
- Mahan Fathi, Jonathan Pilault, Pierre-Luc Bacon, Christopher Pal, Orhan Firat, and Ross Goroshin. Block-state transformer. *arXiv preprint arXiv:2306.09539*, 2023.
- Zhengcong Fei, Mingyuan Fan, Changqian Yu, Debang Li, Youqiang Zhang, and Junshi Huang. Dimba: Transformer-mamba diffusion models. *arXiv preprint arXiv:2406.01159*, 2024.
- Adeline Fermanian, Pierre Marion, Jean-Philippe Vert, and Gérard Biau. Framing rnn as a kernel method: A neural ode approach. *Advances in Neural Information Processing Systems*, 34:3121–3134, 2021.
- Daniel Y Fu, Tri Dao, Khaled K Saab, Armin W Thomas, Atri Rudra, and Christopher Ré. Hungry hungry hippos: Towards language modeling with state space models. *arXiv preprint arXiv:2212.14052*, 2022.
- Daniel Y Fu, Elliot L Epstein, Eric Nguyen, Armin W Thomas, Michael Zhang, Tri Dao, Atri Rudra, and Christopher Ré. Simple hardware-efficient long convolutions for sequence modeling. In *International Conference on Machine Learning*, pp. 10373–10391. PMLR, 2023.
- Hang Fu, Genyun Sun, Yinhe Li, Jinchang Ren, Aizhu Zhang, Cheng Jing, and Pedram Ghamisi. Hdmba: Hyperspectral remote sensing imagery dehazing with state space model, 2024.
- Yu Gao, Jiancheng Huang, Xiaopeng Sun, Zequn Jie, Yujie Zhong, and Lin Ma. Matten: Video generation with mamba-attention, 2024.
- Justin Gilmer, Samuel S Schoenholz, Patrick F Riley, Oriol Vinyals, and George E Dahl. Message passing neural networks. *Machine learning meets quantum physics*, pp. 199–214, 2020.
- Haifan Gong, Luoyao Kang, Yitao Wang, Xiang Wan, and Haofeng Li. nnmamba: 3d biomedical image segmentation, classification and landmark detection with state space model. *arXiv preprint arXiv:2402.03526*, 2024.
- Albert Gu and Tri Dao. Mamba: Linear-time sequence modeling with selective state spaces. *arXiv preprint arXiv:2312.00752*, 2023.
- Albert Gu, Tri Dao, Stefano Ermon, Atri Rudra, and Christopher Ré. Hippo: Recurrent memory with optimal polynomial projections. *Advances in neural information processing systems*, 33:1474–1487, 2020.

-
- Albert Gu, Karan Goel, and Christopher Ré. Efficiently modeling long sequences with structured state spaces. *arXiv preprint arXiv:2111.00396*, 2021a.
- Albert Gu, Isys Johnson, Karan Goel, Khaled Saab, Tri Dao, Atri Rudra, and Christopher Ré. Combining recurrent, convolutional, and continuous-time models with linear state space layers. *Advances in neural information processing systems*, 34:572–585, 2021b.
- Albert Gu, Isys Johnson, Aman Timalsina, Atri Rudra, and Christopher Ré. How to train your hippo: State space models with generalized orthogonal basis projections. *arXiv preprint arXiv:2206.12037*, 2022.
- Hang Guo, Jinmin Li, Tao Dai, Zhihao Ouyang, Xudong Ren, and Shu-Tao Xia. Mambair: A simple baseline for image restoration with state-space model. *arXiv preprint arXiv:2402.15648*, 2024a.
- Tao Guo, Yinuo Wang, and Cai Meng. Mambamorph: a mamba-based backbone with contrastive feature learning for deformable mr-ct registration. *arXiv preprint arXiv:2401.13934*, 2024b.
- Xu Han, Yuan Tang, Zhaoxuan Wang, and Xianzhi Li. Mamba3d: Enhancing local features for 3d point cloud analysis via state space model, 2024.
- Wei He, Kai Han, Yehui Tang, Chengcheng Wang, Yujie Yang, Tianyu Guo, and Yunhe Wang. Densemamba: State space models with dense hidden connection for efficient large language models. *arXiv preprint arXiv:2403.00818*, 2024a.
- Xuanhua He, Ke Cao, Keyu Yan, Rui Li, Chengjun Xie, Jie Zhang, and Man Zhou. Pan-mamba: Effective pan-sharpening with state space model. *arXiv preprint arXiv:2402.12192*, 2024b.
- Vincent Tao Hu, Stefan Andreas Baumann, Ming Gui, Olga Grebenkova, Pingchuan Ma, Johannes Fischer, and Bjorn Ommer. Zigma: Zigzag mamba diffusion model. *arXiv preprint arXiv:2403.13802*, 2024.
- Ju Huang, Shiao Wang, Shuai Wang, Zhe Wu, Xiao Wang, and Bo Jiang. Mamba-fetrack: Frame-event tracking via state space model, 2024a.
- Tao Huang, Xiaohuan Pei, Shan You, Fei Wang, Chen Qian, and Chang Xu. Localmamba: Visual state space model with windowed selective scan. *arXiv preprint arXiv:2403.09338*, 2024b.
- Xilin Jiang, Cong Han, and Nima Mesgarani. Dual-path mamba: Short and long-term bidirectional selective structured state space models for speech separation, 2024.
- Rudolph Emil Kalman. A new approach to linear filtering and prediction problems. *Journal of Basic Engineering*, 1960.
- Angelos Katharopoulos, Apoorv Vyas, Nikolaos Pappas, and François Fleuret. Transformers are rnns: Fast autoregressive transformers with linear attention. In *International conference on machine learning*, pp. 5156–5165. PMLR, 2020a.
- Angelos Katharopoulos, Apoorv Vyas, Nikolaos Pappas, and François Fleuret. Transformers are rnns: Fast autoregressive transformers with linear attention. In *International conference on machine learning*, pp. 5156–5165. PMLR, 2020b.
- Abbas Khan, Muhammad Asad, Martin Benning, Caroline Roney, and Gregory Slabaugh. Convolution and attention-free mamba-based cardiac image segmentation, 2024.
- Daphne Koller and Nir Friedman. *Probabilistic graphical models: principles and techniques*. MIT press, 2009.
- Dong Li, Yidi Liu, Xueyang Fu, Senyan Xu, and Zheng-Jun Zha. Fouriemamba: Fourier learning integration with state space models for image deraining, 2024a.
- Kai Li and Guo Chen. Spmamba: State-space model is all you need in speech separation, 2024.
- Kunchang Li, Xinhao Li, Yi Wang, Yinan He, Yali Wang, Limin Wang, and Yu Qiao. Videomamba: State space model for efficient video understanding. *arXiv preprint arXiv:2403.06977*, 2024b.

-
- Lincan Li, Hanchen Wang, Wenjie Zhang, and Adelle Coster. Stg-mamba: Spatial-temporal graph learning via selective state space model. *arXiv preprint arXiv:2403.12418*, 2024c.
- Shufan Li, Harkanwar Singh, and Aditya Grover. Mamba-nd: Selective state space modeling for multi-dimensional data. *arXiv preprint arXiv:2402.05892*, 2024d.
- Yixuan Li, Weidong Yang, and Ben Fei. 3dmambacomplete: Exploring structured state space model for point cloud completion, 2024e.
- Zhe Li, Haiwei Pan, Kejia Zhang, Yuhua Wang, and Fengming Yu. Mambadfuse: A mamba-based dual-phase model for multi-modality image fusion, 2024f.
- Aobo Liang, Xingguo Jiang, Yan Sun, Xiaohou Shi, and Ke Li. Bi-mamba+: Bidirectional mamba for time series forecasting, 2024a.
- Dingkang Liang, Xin Zhou, Wei Xu, Xingkui Zhu, Zhikang Zou, Xiaoqing Ye, Xiao Tan, and Xiang Bai. Pointmamba: A simple state space model for point cloud analysis, 2024b.
- Weibin Liao, Yinghao Zhu, Xinyuan Wang, Chengwei Pan, Yasha Wang, and Liantao Ma. Lightm-unet: Mamba assists in lightweight unet for medical image segmentation, 2024.
- Opher Lieber, Barak Lenz, Hofit Bata, Gal Cohen, Jhonathan Osin, Itay Dalmedigos, Erez Safahi, Shaked Meir, Yonatan Belinkov, Shai Shalev-Shwartz, et al. Jamba: A hybrid transformer-mamba language model. *arXiv preprint arXiv:2403.19887*, 2024.
- Jiaju Lin and Haoxuan Hu. Audio mamba: Pretrained audio state space model for audio tagging, 2024.
- Wei-Tung Lin, Yong-Xiang Lin, Jyun-Wei Chen, and Kai-Lung Hua. Pixmamba: Leveraging state space models in a dual-level architecture for underwater image enhancement, 2024.
- Chengkai Liu, Jianghao Lin, Jianling Wang, Hanzhou Liu, and James Caverlee. Mamba4rec: Towards efficient sequential recommendation with selective state space models. *arXiv preprint arXiv:2403.03900*, 2024a.
- Jiaming Liu, Mengzhen Liu, Zhenyu Wang, Lily Lee, Kaichen Zhou, Pengju An, Senqiao Yang, Renrui Zhang, Yandong Guo, and Shanghang Zhang. Robomamba: Multimodal state space model for efficient robot reasoning and manipulation, 2024b.
- Jiarun Liu, Hao Yang, Hong-Yu Zhou, Yan Xi, Lequan Yu, Yizhou Yu, Yong Liang, Guangming Shi, Shaoting Zhang, Hairong Zheng, et al. Swin-umamba: Mamba-based unet with imagenet-based pretraining. *arXiv preprint arXiv:2402.03302*, 2024c.
- Jiuming Liu, Jinru Han, Lihao Liu, Angelica I. Aviles-Rivero, Chaokang Jiang, Zhe Liu, and Hesheng Wang. Mamba4d: Efficient long-sequence point cloud video understanding with disentangled spatial-temporal state space models, 2024d.
- Jiuming Liu, Ruiji Yu, Yian Wang, Yu Zheng, Tianchen Deng, Weicai Ye, and Hesheng Wang. Point mamba: A novel point cloud backbone based on state space model with octree-based ordering strategy. *arXiv preprint arXiv:2403.06467*, 2024e.
- Mushui Liu, Jun Dan, Ziqian Lu, Yunlong Yu, Yingming Li, and Xi Li. Cm-unet: Hybrid cnn-mamba unet for remote sensing image semantic segmentation, 2024f.
- Yue Liu, Yunjie Tian, Yuzhong Zhao, Hongtian Yu, Lingxi Xie, Yaowei Wang, Qixiang Ye, and Yunfan Liu. Vmamba: Visual state space model. *arXiv preprint arXiv:2401.10166*, 2024g.
- Ze Liu, Yutong Lin, Yue Cao, Han Hu, Yixuan Wei, Zheng Zhang, Stephen Lin, and Baining Guo. Swin transformer: Hierarchical vision transformer using shifted windows. In *Proceedings of the IEEE/CVF international conference on computer vision*, pp. 10012–10022, 2021.
- Hui Ma, Sen Lei, Turgay Celik, and Heng-Chao Li. Fer-yolo-mamba: Facial expression detection and classification based on selective state space, 2024a.

-
- Jun Ma, Feifei Li, and Bo Wang. U-mamba: Enhancing long-range dependency for biomedical image segmentation. *arXiv preprint arXiv:2401.04722*, 2024b.
- Xianping Ma, Xiaokang Zhang, and Man-On Pun. Rs3mamba: Visual state space model for remote sensing images semantic segmentation, 2024c.
- Shentong Mo. Efficient 3d shape generation via diffusion mamba with bidirectional ssms, 2024.
- Shentong Mo and Yapeng Tian. Scaling diffusion mamba with bidirectional ssms for efficient image and video generation, 2024.
- Jongho Park, Jaeseung Park, Zheyang Xiong, Nayoung Lee, Jaewoong Cho, Samet Oymak, Kangwook Lee, and Dimitris Papailiopoulos. Can mamba learn how to learn? a comparative study on in-context learning tasks. *arXiv preprint arXiv:2402.04248*, 2024.
- Badri N. Patro and Vijay S. Agneeswaran. Simba: Simplified mamba-based architecture for vision and multivariate time series, 2024a.
- Badri N. Patro, Suhas Ranganath, Vinay P. Namboodiri, and Vijay Srinivas Agneeswaran. Heracles: A hybrid ssm-transformer model for high-resolution image and time-series analysis. *arXiv preprint arXiv:2403.18063v2*, 2024.
- Badri Narayana Patro and Vijay Srinivas Agneeswaran. Mamba-360: Survey of state space models as transformer alternative for long sequence modelling: Methods, applications, and challenges, 2024b.
- Xiaohuan Pei, Tao Huang, and Chang Xu. Efficientvmamba: Atrous selective scan for light weight visual mamba. *arXiv preprint arXiv:2403.09977*, 2024.
- Siran Peng, Xiangyu Zhu, Haoyu Deng, Zhen Lei, and Liang-Jian Deng. Fusionmamba: Efficient image fusion with state space model. *arXiv preprint arXiv:2404.07932*, 2024.
- Maciej Pióro, Kamil Ciebiera, Krystian Król, Jan Ludziejewski, and Sebastian Jaszczur. Moe-mamba: Efficient selective state space models with mixture of experts. *arXiv preprint arXiv:2401.04081*, 2024.
- Michael Poli, Stefano Massaroli, Eric Nguyen, Daniel Y Fu, Tri Dao, Stephen Baccus, Yoshua Bengio, Stefano Ermon, and Christopher Ré. Hyena hierarchy: Towards larger convolutional language models. *arXiv preprint arXiv:2302.10866*, 2023.
- Ziyun Qian, Zeyu Xiao, Zhenyi Wu, Dingkan Yang, Mingcheng Li, Shunli Wang, Shuaibing Wang, Dongliang Kou, and Lihua Zhang. Smcd: High realism motion style transfer via mamba-based diffusion, 2024.
- Yanyuan Qiao, Zheng Yu, Longteng Guo, Sihan Chen, Zijia Zhao, Mingzhen Sun, Qi Wu, and Jing Liu. V1-mamba: Exploring state space models for multimodal learning. *arXiv preprint arXiv:2403.13600*, 2024.
- Changsheng Quan and Xiaofei Li. Multichannel long-term streaming neural speech enhancement for static and moving speakers. *arXiv preprint arXiv:2403.07675*, 2024.
- Alec Radford, Karthik Narasimhan, Tim Salimans, Ilya Sutskever, et al. *Improving language understanding by generative pre-training*. OpenAI, 2018.
- Ladislav Rampásek, Michael Galkin, Vijay Prakash Dwivedi, Anh Tuan Luu, Guy Wolf, and Dominique Beaini. Recipe for a general, powerful, scalable graph transformer. *Advances in Neural Information Processing Systems*, 35: 14501–14515, 2022.
- Liliang Ren, Yang Liu, Yadong Lu, Yelong Shen, Chen Liang, and Weizhu Chen. Samba: Simple hybrid state space models for efficient unlimited context language modeling, 2024.
- Olaf Ronneberger, Philipp Fischer, and Thomas Brox. U-net: Convolutional networks for biomedical image segmentation. In *Medical Image Computing and Computer-Assisted Intervention—MICCAI 2015: 18th International Conference, Munich, Germany, October 5-9, 2015, Proceedings, Part III 18*, pp. 234–241. Springer, 2015.

-
- Jiacheng Ruan and Suncheng Xiang. Vm-unet: Vision mamba unet for medical image segmentation. *arXiv preprint arXiv:2402.02491*, 2024.
- T Konstantin Rusch, Michael M Bronstein, and Siddhartha Mishra. A survey on oversmoothing in graph neural networks. *arXiv preprint arXiv:2303.10993*, 2023.
- Olga Russakovsky, Jia Deng, Hao Su, Jonathan Krause, Sanjeev Satheesh, Sean Ma, Zhiheng Huang, Andrej Karpathy, Aditya Khosla, Michael Bernstein, Alexander C. Berg, and Li Fei-Fei. ImageNet Large Scale Visual Recognition Challenge. *International Journal of Computer Vision (IJCV)*, 115(3):211–252, 2015. doi: 10.1007/s11263-015-0816-y.
- Yair Schiff, Chia-Hsiang Kao, Aaron Gokaslan, Tri Dao, Albert Gu, and Volodymyr Kuleshov. Caduceus: Bi-directional equivariant long-range dna sequence modeling. *arXiv preprint arXiv:2403.03234*, 2024.
- Siavash Shams, Sukru Samet Dindar, Xilin Jiang, and Nima Mesgarani. Ssamba: Self-supervised audio representation learning with mamba state space model, 2024.
- Qihong Shen, Zike Wu, Xuanyu Yi, Pan Zhou, Hanwang Zhang, Shuicheng Yan, and Xinchao Wang. Gamba: Marry gaussian splatting with mamba for single view 3d reconstruction, 2024.
- Jiamu Sheng, Jingyi Zhou, Jiong Wang, Peng Ye, and Jiayuan Fan. Dualmamba: A lightweight spectral-spatial mamba-convolution network for hyperspectral image classification, 2024.
- Freda Shi, Xinyun Chen, Kanishka Misra, Nathan Scales, David Dohan, Ed H Chi, Nathanael Schärli, and Denny Zhou. Large language models can be easily distracted by irrelevant context. In *International Conference on Machine Learning*, pp. 31210–31227. PMLR, 2023.
- Zhuangwei Shi. Mambastock: Selective state space model for stock prediction. *arXiv preprint arXiv:2402.18959*, 2024.
- Hao Tang, Lianglun Cheng, Guoheng Huang, Zhenguang Tan, Junhao Lu, and Kaihong Wu. Rotate to scan: Unet-like mamba with triplet ssm module for medical image segmentation, 2024.
- Yao Teng, Yue Wu, Han Shi, Xuefei Ning, Guohao Dai, Yu Wang, Zhenguo Li, and Xihui Liu. Dim: Diffusion mamba for efficient high-resolution image synthesis. *arXiv preprint arXiv:2405.14224*, 2024.
- Ting Yu Tsai, Li Lin, Shu Hu, Ming-Ching Chang, Hongtu Zhu, and Xin Wang. Uu-mamba: Uncertainty-aware u-mamba for cardiac image segmentation, 2024.
- Yao-Hung Hubert Tsai, Shaojie Bai, Makoto Yamada, Louis-Philippe Morency, and Ruslan Salakhutdinov. Transformer dissection: a unified understanding of transformer’s attention via the lens of kernel. *arXiv preprint arXiv:1908.11775*, 2019.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. Attention is all you need. *Advances in neural information processing systems*, 30, 2017.
- Tushar Verma, Jyotsna Singh, Yash Bhartari, Rishi Jarwal, Suraj Singh, and Shubhkarman Singh. Soar: Advancements in small body object detection for aerial imagery using state space models and programmable gradients, 2024.
- Zifu Wan, Yuhao Wang, Silong Yong, Pingping Zhang, Simon Stepputtis, Katia Sycara, and Yaqi Xie. Sigma: Siamese mamba network for multi-modal semantic segmentation, 2024.
- Chloe Wang, Oleksii Tsepa, Jun Ma, and Bo Wang. Graph-mamba: Towards long-range graph sequence modeling with selective state spaces. *arXiv preprint arXiv:2402.00789*, 2024a.
- Junxiong Wang, Jing Nathan Yan, Albert Gu, and Alexander M Rush. Pretraining without attention. *arXiv preprint arXiv:2212.10544*, 2022.
- Junxiong Wang, Tushaar Gangavarapu, Jing Nathan Yan, and Alexander M Rush. Mambabyte: Token-free selective state space model. *arXiv preprint arXiv:2401.13660*, 2024b.
- Tongze Wang, Xiaohui Xie, Wenduo Wang, Chuyi Wang, Youjian Zhao, and Yong Cui. Netmamba: Efficient network traffic classification via pre-training unidirectional mamba, 2024c.

Yuda Wang, Xuxin He, and Shengxin Zhu. Echomamba4rec: Harmonizing bidirectional state space models with spectral filtering for advanced sequential recommendation, 2024d.

Zeyu Wang, Chen Li, Huiying Xu, and Xinzhong Zhu. Mamba yolo: Ssms-based yolo for object detection, 2024e.

Zicheng Wang, Zhenghao Chen, Yiming Wu, Zhen Zhao, Luping Zhou, and Dong Xu. Pointramba: A hybrid transformer-mamba framework for point cloud analysis, 2024f.

Zihan Wang, Fanheng Kong, Shi Feng, Ming Wang, Han Zhao, Daling Wang, and Yifei Zhang. Is mamba effective for time series forecasting? *arXiv preprint arXiv:2403.11144*, 2024g.

Ziyang Wang and Chao Ma. Semi-mamba-unet: Pixel-level contrastive cross-supervised visual mamba-based unet for semi-supervised medical image segmentation. *arXiv preprint arXiv:2402.07245*, 2024a.

Ziyang Wang and Chao Ma. Weak-mamba-unet: Visual mamba makes cnn and vit work better for scribble-based medical image segmentation. *arXiv preprint arXiv:2402.10887*, 2024b.

Ziyang Wang, Jian-Qing Zheng, Yichi Zhang, Ge Cui, and Lei Li. Mamba-unet: Unet-like pure visual mamba for medical image segmentation. *arXiv preprint arXiv:2402.05079*, 2024h.

Jia wei Chen, Yu jie Xiong, and Yong bin Gao. Pointabm:integrating bidirectional state space model with multi-head self-attention for point cloud analysis, 2024.

Renkai Wu, Yinghao Liu, Pengchen Liang, and Qing Chang. H-vmunet: High-order vision mamba unet for medical image segmentation. *arXiv preprint arXiv:2403.13642*, 2024.

Wang xia, Yao Lu, Shunzhou Wang, Ziqi Wang, Peiqi Xia, and Tianfei Zhou. Lfmamba: Light field image super-resolution with state space model, 2024.

Jianhao Xie, Ruofan Liao, Ziang Zhang, Sida Yi, Yuesheng Zhu, and Guibo Luo. Promamba: Prompt-mamba for polyp segmentation, 2024.

Zhaohu Xing, Tian Ye, Yijun Yang, Guang Liu, and Lei Zhu. Segmamba: Long-range sequential modeling mamba for 3d medical image segmentation. *arXiv preprint arXiv:2401.13560*, 2024.

Xiongxiao Xu, Yueqing Liang, Baixiang Huang, Zhiling Lan, and Kai Shu. Integrating mamba and transformer for long-short range time series forecasting. *arXiv preprint arXiv:2404.14757*, 2024a.

Zunnan Xu, Yukang Lin, Haonan Han, Sicheng Yang, Ronghui Li, Yachao Zhang, and Xiu Li. Mambataalk: Efficient holistic gesture synthesis with selective state space models. *arXiv preprint arXiv:2403.09471*, 2024b.

Guangqian Yang, Kangrui Du, Zhihan Yang, Ye Du, Yongping Zheng, and Shujun Wang. Cmvim: Contrastive masked vim autoencoder for 3d multi-modal representation learning for ad classification, 2024a.

Yijun Yang, Zhaohu Xing, and Lei Zhu. Vivim: a video vision mamba for medical video object segmentation. *arXiv preprint arXiv:2401.14168*, 2024b.

Yuhuan Yang, Chaofan Ma, Jiangchao Yao, Zhun Zhong, Ya Zhang, and Yanfeng Wang. Remember: Referring image segmentation with mamba twister, 2024c.

Zhichao Yang, Avijit Mitra, Sunjae Kwon, and Hong Yu. Clinicalmamba: A generative clinical language model on longitudinal clinical notes. *arXiv preprint arXiv:2403.05795*, 2024d.

Jing Yao, Danfeng Hong, Chenyu Li, and Jocelyn Chanussot. Spectralmamba: Efficient mamba for hyperspectral image classification, 2024.

Weihao Yu and Xinchao Wang. Mambaout: Do we really need mamba for vision? *arXiv preprint arXiv:2405.07992*, 2024.

Chunyu Yuan, Dongfang Zhao, and Sos S. Aгаian. Mucm-net: A mamba powered ucm-net for skin lesion segmentation, 2024.

-
- Yubiao Yue and Zhenzhang Li. Medmamba: Vision mamba for medical image classification. *arXiv preprint arXiv:2403.03849*, 2024.
- Seongjun Yun, Minbyul Jeong, Raehyun Kim, Jaewoo Kang, and Hyunwoo J Kim. Graph transformer networks. *Advances in neural information processing systems*, 32, 2019.
- Chaolv Zeng, Zhanyu Liu, Guanjie Zheng, and Linghe Kong. C-mamba: Channel correlation enhanced state space models for multivariate time series forecasting, 2024.
- Haotian Zhang, Keyan Chen, Chenyang Liu, Hao Chen, Zhengxia Zou, and Zhenwei Shi. Cdmamba: Remote sensing image change detection with mamba. *arXiv preprint arXiv:2406.04207*, 2024a.
- Mingya Zhang, Yue Yu, Limei Gu, Tingsheng Lin, and Xianping Tao. Vm-unet-v2 rethinking vision mamba unet for medical image segmentation. *arXiv preprint arXiv:2403.09157*, 2024b.
- Tao Zhang, Xiangtai Li, Haobo Yuan, Shunping Ji, and Shuicheng Yan. Point cloud mamba: Point cloud learning via state space model, 2024c.
- Xiangyu Zhang, Qiquan Zhang, Hexin Liu, Tianyi Xiao, Xinyuan Qian, Beena Ahmed, Eliathamby Ambikairajah, Haizhou Li, and Julien Epps. Mamba in speech: Towards an alternative to self-attention, 2024d.
- Xuanqi Zhang, Haijin Zeng, Jinwang Pan, Qiangqiang Shen, and Yongyong Chen. Llemamba: Low-light enhancement via relighting-guided mamba with deep unfolding network, 2024e.
- Zeyu Zhang, Akide Liu, Ian Reid, Richard Hartley, Bohan Zhuang, and Hao Tang. Motion mamba: Efficient and long sequence motion generation with hierarchical and bidirectional selective ssm. *arXiv preprint arXiv:2403.07487*, 2024f.
- Han Zhao, Min Zhang, Wei Zhao, Pengxiang Ding, Siteng Huang, and Donglin Wang. Cobra: Extending mamba to multi-modal large language model for efficient inference. *arXiv preprint arXiv:2403.14520*, 2024.
- Zou Zhen, Yu Hu, and Zhao Feng. Freqmamba: Viewing mamba from a frequency perspective for image deraining, 2024.
- Zhuoran Zheng and Chen Wu. U-shaped vision mamba for single image dehazing. *arXiv preprint arXiv:2402.04139*, 2024.
- Zhuoran Zheng and Jun Zhang. Fd-vision mamba for endoscopic exposure correction. *arXiv preprint arXiv:2402.06378*, 2024.
- Huiling Zhou, Xianhao Wu, Hongming Chen, Xiang Chen, and Xin He. Rsdehamba: Lightweight vision mamba for remote sensing satellite image dehazing, 2024a.
- Jiaying Zhou, Mingzhou Jiang, Junde Wu, Jiayuan Zhu, Ziyue Wang, and Yueming Jin. Mgi: Multimodal contrastive pre-training of genomic and medical imaging, 2024b.
- Qingyuan Zhou, Weidong Yang, Ben Fei, Jingyi Xu, Rui Zhang, Keyi Liu, Yeqi Luo, and Ying He. 3dmambaipf: A state space model for iterative point cloud filtering via differentiable rendering, 2024c.
- Weilian Zhou, Sei-Ichiro Kamata, Haipeng Wang, Man-Sing Wong, Huiying, and Hou. Mamba-in-mamba: Centralized mamba-cross-scan in tokenized mamba model for hyperspectral image classification, 2024d.
- Lianghui Zhu, Zilong Huang, Bencheng Liao, Jun Hao Liew, Hanshu Yan, Jiashi Feng, and Xinggang Wang. Dig: Scalable and efficient diffusion models with gated linear attention, 2024a.
- Lianghui Zhu, Bencheng Liao, Qian Zhang, Xinlong Wang, Wenyu Liu, and Xinggang Wang. Vision mamba: Efficient visual representation learning with bidirectional state space model. *arXiv preprint arXiv:2401.09417*, 2024b.
- Simiao Zuo, Xiaodong Liu, Jian Jiao, Denis Charles, Eren Manavoglu, Tuo Zhao, and Jianfeng Gao. Efficient long sequence modeling via state space augmented transformer. *arXiv preprint arXiv:2212.08136*, 2022.