Utilizing Weak-to-Strong Consistency for Semi-Supervised Glomeruli Segmentation

Irina Zhang¹
Jim Denholm¹
Azam Hamidinekoo¹
Oskar Ålund²
Christopher Bagnall¹
Joana Palés Huix^{2,4}
Michal Sulikowski¹
Ortensia Vito³
Arthur Lewis¹
Robert Unwin³
Magnus Söderberg²
Nikolay Burlutskiy¹
Talha Qaiser¹

YISHUO.ZHANG1@ASTRAZENECA.COM
JIM.DENHOLM@ASTRAZENECA.COM
AZAM.HAMIDINEKOO@ASTRAZENECA.COM
OSKAR.ALUND@ASTRAZENECA.COM
CHRISTOPHER.BAGNALL1@ASTRAZENECA.COM
JOANA.PALESHUIX@ASTRAZENECA.COM
MICHAL.SULIKOWSKI@ASTRAZENECA.COM
ORTENSIA.VITO@ASTRAZENECA.COM
ARTHUR.LEWIS@ASTRAZENECA.COM
ROBERT.UNWIN@ASTRAZENECA.COM
MAGNUS.SODERBERG@ASTRAZENECA.COM
NIKOLAY.BURLUTSKIY@ASTRAZENECA.COM
TALHA.QAISER1@ASTRAZENECA.COM

- $^{1}\ \textit{Imaging and Data Analytics, Clinical Pharmacology \& Safety Sciences, R\&D, AstraZeneca, \ UK}$
- 2 Pathology, Clinical Pharmacology & Safety Sciences, R&D, AstraZeneca, Sweden
- ³ Translational Science and Experimental Medicine, AstraZeneca, UK

Editors: Under Review for MIDL 2024

Abstract

Accurate segmentation of glomerulus instances attains high clinical significance in the automated analysis of renal biopsies to aid in diagnosing and monitoring kidney disease. Analyzing real-world histopathology images often encompasses inter-observer variability and requires a labor-intensive process of data annotation. Therefore, conventional supervised learning approaches generally achieve sub-optimal performance when applied to external datasets. Considering these challenges, we present a semi-supervised learning approach for glomeruli segmentation based on the weak-to-strong consistency framework validated on multiple real-world datasets. Our experimental results on 3 independent datasets indicate superior performance of our approach as compared with existing supervised baseline models such as U-Net and SegFormer.

Keywords Chronic kidney disease, semi-supervised learning, computational pathology

1. Introduction

Chronic kidney disease (CKD) involves the loss of kidney function over time with little or no reversal. CKD affects more than 800 million people and is expected to become the fifth-highest cause of death worldwide by 2040 (Vanholder et al., 2021). Accurate diagnosis requires pathologists to examine tissue morphology on renal biopsies. This involves identification and quantification of glomeruli, the primary filtration units responsible for filtering plasma. Digitization of biopsies enabled researchers to develop AI models to automatically segment glomeruli on Whole Slide Images (WSIs). However, existing models often generalize poorly on real-world datasets (RWDs) due to the high variability of histopathology images collected from multiple sources.

⁴ KTH Royal Institute of Technology, Sweden

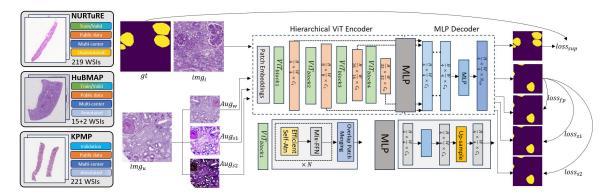


Figure 1: The schematic diagram of our semi-supervised model, contains an encoder and decoder. The training loss was jointly optimized for supervised and unsupervised samples.

Other work on glomeruli segmentation— Previous studies investigating glomeruli segmentation using RWDs are relatively scarce. Li et al. (2023) proposed combining contrastive learning and consistency regularization for the detection of glomeruli instead of pixel-level segmentation. Saikia et al. (2023) designed a light-weight U-Net using MLP-based encoders for glomeruli segmentation. However, Schena et al. (2022) suggested AI models analysing renal biopsies trained on limited retrospective data might perform differently on RWDs.

Our contribution— We propose a semi-supervised-learning (SSL) approach to improve glomeruli segmentation on renal biopsies from diverse, large-scale RWDs, including: (I) NURTuRE (the National Unified Renal Translational Research Enterprise), the first kidney biobank for CKD collected from 13 nephrology centers across the UK (Taal et al., 2023); (II) KPMP (Kidney Precision Medicine Project), a prospective cohort to investigate the mechanisms of CKD obtained from 9 sites across the US (de Boer et al., 2021); (III)) HuBMAP (Hacking the Kidney Competition) (Howard, 2020) and HuBMAP (Hacking the Human Vasculature Competition) (Howard, 2023), two publicly available renal resection datasets. Our algorithm leverages both labeled and unlabeled data and noticeably outperformed supervised baseline models when validated on external datasets.

2. Methods

We adapted UniMatch SSL (Yang et al., 2023) and SegFormer (Xie et al., 2021) to build the framework shown in Figure 1 for glomeruli segmentation on Periodic Acid Schiff (PAS)-stained renal biopsies collected from diverse multi-center real-world cohorts.

Supervised baseline models. We compared the performance of the winning solution for HuBMAP – Hacking the Kidney competition (Attention U-Net) (Howard, 2020) and SegFormer (Xie et al., 2021), a light-weight segmentation model based on vision transformers. We chose SegFormer for semi-supervised training in the following steps given its better overall performance.

Semi-supervised glomeruli segmentation. In SSL, the core task is to define a valid training strategy to leverage unlabeled data. Sohn et al. (2020) propose a weak-to-strong consistency regularization by using high-confidence predictions made on weakly-augmented image as pseudo labels and train the model to make consistent predictions on strongly-augmented versions of the same image.

						ıt	Label	Sup BL	Our method
Dataset	Method	Precision	Recall	Dice					
HuBMAP Vasculature	Sup baseline (SegFormer)	0.95	0.545	0.685	KPMP		(3)		(3)
	Sup baseline (U-Net)	0.954	0.491	0.646	4	100 m			
	UniMatch _{SF} (the proposed)	0.874	0.761	0.814	1BMA	1	T	A	Y CANY
КРМР	Sup baseline (SegFormer)	0.947	0.622	0.751	Hu				
	Sup baseline (U-Net)	0.945	0.606	0.737					
	UniMatch _{SF} (the proposed)	0.93	0.647	0.763	uRE			. 0	
NURTuRE Labeled	Sup baseline (SegFormer)	0.822	0.528	0.643		2			
	Sup baseline (U-Net)	0.81	0.523	0.634	NON		13	1	a a
	UniMatch _{SF} (the proposed)	0.823	0.573	0.675					

Figure 2: (left) Quantitative results, (right) and a few examples showing qualitative results of the proposed approach as compared to supervised (Sup) baselines.

UniMatch (Yang et al., 2023) expands the perturbation space proposed by FixMatch (Sohn et al., 2020) by training the model to make consistent predictions on unlabeled input images after weak augmentation, feature perturbation, and two different strong augmentations. The expanded multi-stream perturbation approach enables the model to capture comprehensive details between these strong and weak augmented images.

3. Results and Discussion

Datasets: D1-a: NURTuRE (Taal et al., 2023) contains 13,145 image patches from 198 WSIs, gathered from 11 centers without annotations. **D1-b:** NURTuRE Labeled, 1700 patches from 21 WSIs from the 2 hold-out centers **D2:** KPMP (de Boer et al., 2021), 20,868 patches from 210 annotated WSIs. **D3-a:** HuBMAP Kidney (Howard, 2020), 3706 image patches from 15 annotated WSIs. **D3-b:** HuBMAP-Vasculature (Howard, 2023), 416 image patches extracted from 2 annotated WSIs. All image patches excluding from D3-b were of 1024×1024 and for D3-b the patch size was 512×512 at $20 \times$ magnification.

Implementation details: The models were trained with an initial learning rate of 0.0001 using Stochastic Gradient Descent (SGD) optimizer with a momentum of 0.9. We used a batch size of 10 and trained all the models for 30 epochs. We used D3-a for supervised training and D1-a as unlabeled data in SSL. External validation was performed on D1-b, D2, and D3-b.

Results: Figure 2 reports the segmentation results of our approach against the supervised baselines. For supervised baselines, we observed that SegFormer overall performs better than U-Net, even though SegFormer-b1 (13.7M) has only one-tenth of the parameters of U-Net (134.1M), making it more cost-efficient to fine-tune or retrain. For the proposed variant of UniMatch_{SF}, we opted to use SegFormer-b1 as encoder and MLP as decoder. Our SSL approach allowed the model to learn from unlabeled images from RWD and perform significantly better on all 3 validation datasets (D1-b, D2, and D3-b) in terms of dice and recall metrics while attaining comparable precision.

This study highlights the significance of SSL approaches for handling multi-center real-world histopathology data. We believe that the presented line of research can be extended to classify different types of glomerular diseases or morphological changes, potentially assisting pathological examination of renal biopsies.

References

- Ian H de Boer, Charles E Alpers, Evren U Azeloglu, Ulysses GJ Balis, Jonathan M Barasch, Laura Barisoni, Kristina N Blank, Andrew S Bomback, Keith Brown, Pierre C Dagher, et al. Rationale and design of the kidney precision medicine project. *Kidney international*, 99(3):498–510, 2021.
- Addison Howard. Hubmap hacking the kidney, 2020. URL https://kaggle.com/competitions/hubmap-kidney-segmentation.
- Addison Howard. Hubmap hacking the human vasculature, 2023. URL https://kaggle.com/competitions/hubmap-hacking-the-human-vasculature.
- Jing Li, Qiming He, Yiqing Liu, Yanxia Wang, Tian Guan, Jing Ye, Yonghong He, and Zhe Wang. Glomerular lesion recognition based on pathology images with annotation noise via noisy label learning. *IEEE Access*, 2023.
- Franchis N Saikia, Yuji Iwahori, Taisei Suzuki, Manas Kamal Bhuyan, Aili Wang, and Boonserm Kijsirikul. Mlp-unet: Glomerulus segmentation. *IEEE Access*, 2023.
- Francesco P Schena, Riccardo Magistroni, Fedelucio Narducci, Daniela I Abbrescia, Vito W Anelli, and Tommaso Di Noia. Artificial intelligence in glomerular diseases. *Pediatric Nephrology*, 37(11):2533–2545, 2022.
- Kihyuk Sohn, David Berthelot, Nicholas Carlini, Zizhao Zhang, Han Zhang, Colin A Raffel, Ekin Dogus Cubuk, Alexey Kurakin, and Chun-Liang Li. Fixmatch: Simplifying semi-supervised learning with consistency and confidence. *Advances in neural information processing systems*, 33:596–608, 2020.
- Maarten W Taal, Bethany Lucas, Paul Roderick, Paul Cockwell, David C Wheeler, Moin A Saleem, Simon DS Fraser, Rosamonde E Banks, Tim Johnson, Lorna J Hale, et al. Associations with age and glomerular filtration rate in a referred population with chronic kidney disease: methods and baseline data from a uk multicentre cohort study (nurture-ckd). Nephrology Dialysis Transplantation, 38(11):2617–2626, 2023.
- Raymond Vanholder, Lieven Annemans, Aminu K Bello, Boris Bikbov, Daniel Gallego, Ron T Gansevoort, Norbert Lameire, Valerie A Luyckx, Edita Noruisiene, Tom Oostrom, et al. Fighting the unbearable lightness of neglecting kidney health: the decade of the kidney. Clinical kidney journal, 14(7):1719–1730, 2021.
- Enze Xie, Wenhai Wang, Zhiding Yu, Anima Anandkumar, Jose M Alvarez, and Ping Luo. Segformer: Simple and efficient design for semantic segmentation with transformers. *Advances in neural information processing systems*, 34:12077–12090, 2021.
- Lihe Yang, Lei Qi, Litong Feng, Wayne Zhang, and Yinghuan Shi. Revisiting weak-to-strong consistency in semi-supervised semantic segmentation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 7236–7246, 2023.