
CaLMQA: Exploring culturally specific long-form question answering across 23 languages

Shane Arora^{◇*} Marzena Karpinska^{♡*} Hung-Ting Chen[◇]
 Ipsita Bhattacharjee[♡] Mohit Iyer^{♡†} Eunsol Choi^{◇†}
 University of Texas at Austin[◇] University of Massachusetts Amherst[♡]
 {shane.arora, hungtingchen, eunsol}@utexas.edu
 {mkarpinska, ibhattacharj, miyyer}@umass.edu

Abstract

Large language models (LLMs) are used for *long-form question answering* (LFQA), which requires them to generate paragraph-length answers to complex questions. While LFQA has been well-studied in English, this research has not been extended to other languages. To bridge this gap, we introduce CaLMQA, a collection of 1.5K complex culturally specific questions spanning 23 languages and 51 culturally agnostic questions translated from English into 22 other languages. We define culturally specific questions as those uniquely or more likely to be asked by people from cultures associated with the question’s language. We collect naturally-occurring questions from community web forums and hire native speakers to write questions to cover under-resourced, rarely-studied languages such as Fijian and Kirundi. Our dataset contains diverse, complex questions that reflect cultural topics (e.g. traditions, laws, news) and the language usage of native speakers. We automatically evaluate a suite of open- and closed-source models on CaLMQA by detecting incorrect language and token repetitions in answers, and observe that the quality of LLM-generated answers degrades significantly for some low-resource languages. Lastly, we perform human evaluation on a subset of models and languages. Manual evaluation reveals that model performance is significantly worse for culturally specific questions than for culturally agnostic questions. Our findings highlight the need for further research in non-English LFQA and provide an evaluation framework.

🔗 <https://github.com/2015aroras/CaLMQA>

📄 <https://huggingface.co/datasets/shane.arora/CaLMQA>

© MIT

1 Introduction

Long-form question answering (LFQA), in which a system must answer open-ended questions in one or more paragraphs, is an important application of large language models (LLMs) as many users use LLMs to gather information. To facilitate LFQA model development and evaluation, the research community has produced datasets [1, 2] and models [3, 4]. However, existing LFQA work centers predominately around English and other “high-resource” languages [1, 4–8].

Initial multilingual QA work focused on translation from English [9–11]. Such dependence on English limits the breadth of topics covered and may introduce language artifacts not found in naturally occurring text [12]. More recent work [13] collected questions in target language Wikipedia corpus, alleviating English-centric focus. Yet, most of their questions are simple factoid questions

^{*†}These authors contributed equally to this work.

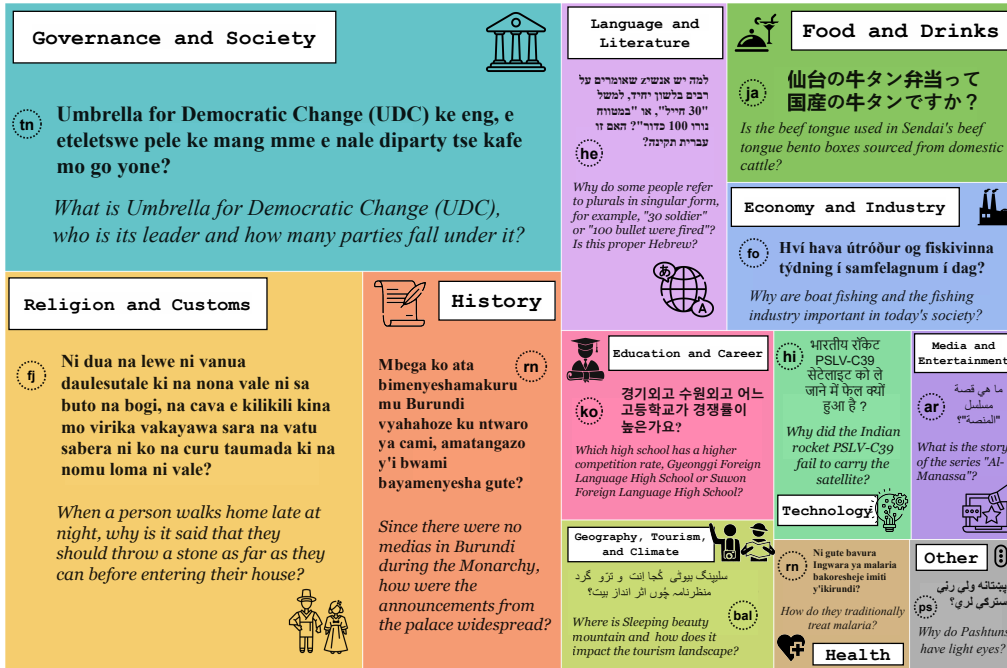


Figure 1: Distribution of topics in CALMQA, with box size indicating the frequency of each topic. Each topic is accompanied by an example and its English translation. Table 8 contains the descriptions of the topics, and Table 6 contains the mapping of language abbreviations to languages. See §B for classification details.

(e.g., How far is Uranus from Earth?) and cover general topics that are discussed in Wikipedia. In this work, we focus on *culturally specific* questions, which we define as questions uniquely or more likely to be asked by people from cultures commonly associated with the question’s language.

We present **Cultural Long-form Multilingual Question Answering (CALMQA)**, the first multilingual LFQA dataset with a focus on culturally specific questions. Our dataset consists of 1.5K culturally specific questions spanning 23 high- to low-resource languages¹ and a broad range of topics (Figure 1). These questions include both naturally-occurring questions collected from community web forums as well as questions written by hired native speakers. To highlight the challenges posed by culturally specific questions, we provide a set of 51 *culturally agnostic* questions in English, which we translate into 22 other languages for a total of 1.1K questions.

We evaluate seven state-of-the-art models on how well they can answer questions in CALMQA. Traditional lexical metrics used for short-form QA have been shown to not correlate with human preference judgments in long-form QA [14, 15], and metrics do not easily transfer from English to other languages [16–19]. Therefore, we first focus on simple surface-level metrics such as language detection (specifically, whether a model’s answer is in the same language as the question) and token repetition. While CLAUDE-3-OPUS, GPT-4-TURBO and GPT-4O perform better than GEMINI-1.5-PRO, MIXTRAL-8X22B, AYA-13B and LLAMA-3-70B, all models we study suffer from basic surface-level issues. Moreover, the ability to generate satisfactory answers varies significantly across languages. Notably, we find that all models perform suboptimally in languages like Tswana and Tongan, and none of the models reliably generate text in Afar. Qualitative analysis reveals that some models (particularly MIXTRAL-8X22B and LLAMA-3-70B) often apologize or convey lack of understanding when prompted with non-English questions. Moreover, LLAMA-3-70B predominantly generates texts in English and Spanish, while rarely generating answers in the expected language. Overall, we find that existing systems fail even at our simple surface-level sanity check automatic evaluation.

We further conduct a human evaluation on a subset of the data (spanning five languages) for the best-performing models. Native speakers evaluate answers based on factuality errors, omissions and

¹We define low-resource languages as those not supported by Google Translate or lacking their own Wikipedia resource as of June 2024.

general issues and rank the models’ answers by their overall quality. Our analysis of the annotations reveals that omissions and factuality issues are strong predictors of answer quality ratings. We also observe a significant difference between the ratings of culturally specific and culturally agnostic questions, with the latter being twice more likely to receive higher ratings regardless of the generation model. Together, our work establishes the foundation for studying culturally specific long-form question answering for 23 languages.

2 Related Work

Non-English QA Datasets Many multilingual QA and RC (reading comprehension) datasets [9–11, 20] have been built by translating resources like Wikipedia, SQuAD [21, 22] and Natural Question [23]. TyDiQA [13] and XQA [24] are noteworthy exceptions, sourcing questions using human annotators and Wikipedia’s “Did you know?” sections respectively. Monolingual QA datasets span a greater set of languages, including Arabic [25], Catalan [26], Czech [27], Korean [28], Persian [29], Slovak [30], Swahili [31], and Vietnamese [32]. Recent survey papers [33, 34] discuss multilingual datasets but do not include multilingual long-form QA datasets. Other types of multilingual datasets (e.g. instruction-tuning datasets [35]) can contain multilingual LFQA instances.

Cultural knowledge in LLMs Liu et al. [36], a recent survey of cultural NLP, taxonomizes cultural NLP works into 10 categories including values [37–39], norms and morals [40, 41], and knowledge. Cultural knowledge has been explored through the creation of knowledge bases [42, 43] as well as benchmarks and datasets for tasks like probing [44–46] and short-form QA. Cultural knowledge QA works include non-English information-seeking benchmarks in the style of MMLU [47–52] and common sense datasets [53–55] and evaluations [56]. We are not aware of any existing LFQA datasets of cultural knowledge; surveys of cultural NLP [36, 57] do not mention any such datasets.

Long-Form QA Several English datasets have been created for LFQA [1, 5–8]. The only non-English LFQA dataset we are aware of is the Chinese dataset WebCPM [4]. Automatic evaluation of LFQA is a developing space. Prior work has established that lexical metrics such as ROUGE and BERTScore [58] does not correlate well with human judgements [15, 14, 59, 60, 59]. Recent work [61] uses GPT-4 as a judge of coherency, relevance, factual consistency and accuracy in LFQA, and show correlations between GPT-4 and human judgements of these features.

3 CaLMQA: Cultural Long-form Multilingual Question Answering

We explore LLM performance on realistic culturally specific long-form questions that cannot be acquired by translating English questions. To facilitate this analysis, we collect the CaLMQA dataset, where each example consists of (1) a question in its original language, (2) its original language, (3) the question translated to English, (4) a boolean tag indicating whether the question is culturally specific, and (5) an optional human-written reference answer (present for high- and mid-resource languages). We describe our data collection process and present dataset statistics.

3.1 Data Collection

We collect our dataset through two processes. For high- and mid-resource languages, we follow prior work [1] by collecting questions from community Q&A forums. For low resource languages where web content is severely limited, we hire freelancers to write cultural-specific questions.

Collecting cultural-specific questions for high- and mid-resource languages from community Q&A forums Many countries have their own community forums where people can exchange information, similar to Quora, Reddit or StackExchange in English. From such websites, we can collect real user questions. We collect culturally specific questions from these websites via crowdsourcing. First, we ask crowdworkers to provide a website in their language that contains a high volume of complex questions, paired with answers, covering a diverse range of topics. We ask workers to provide examples of culturally specific questions and real users’ answers from the identified websites along with their English translations. We manually review provided examples and websites, using Google Translate to get English translations of website content. This process

yields websites in eleven languages: English, Arabic, Chinese, German, Hebrew, Hindi, Hungarian, Japanese, Korean, Russian and Spanish. Survey details are in §A.1.

DETAILS We hired workers on the Prolific² platform, selecting English-proficient crowdworkers whose native language matches the target language. For a subset of languages, the authors of this paper collected the questions. Workers collected culturally specific questions with their answers from the website(s) in their native language (\$0.65-1.33 USD per question).

QUALITY CONTROL We ran a qualification task for crowdworkers on the definition of culturally specific long-form questions. Qualification test details are provided in §A.2. All questions and answers were reviewed by an author; workers provided clarifications or replaced unsuitable questions as needed (suitability criteria is in §A.2). The websites and the total collected questions are in Table 3. This process yielded a total of 923 questions with answers at a cost of \$1427 USD.

Collecting cultural-specific questions for low-resource languages Unlike any existing LFQA datasets, a particular focus of our study is *low-resource languages*, of which we select twelve to include in CALMQA: Afar, Balochi, Faroese, Fijian, Hiligaynon, Kirundi, Papiamentu, Pashto, Samoan, Tongan, Tswana, and Wolof. We gather culturally specific questions in these languages by hiring freelancers who are native speakers of those languages. We chose languages with scarce online resources that are not well-studied in prior work, but for which we could also find at least one bilingual annotator (in English).

DETAILS We hired 29 native speakers (one to three annotators per language, depending on their availability) on Upwork.³ Each annotator received guidelines, completed a paid (\$7 USD) comprehension test, and then wrote culturally specific questions with English translations. The annotators were asked to write questions that require a long-form answer with content specific to the region the language is spoken in. They were compensated \$0.65-1.00 USD per question based on their hourly rates. As collecting answers for all these languages would be prohibitively expensive, we collected answers only for Kirundi along with their English translations (\$2 USD per question, \$106 USD total). This process yielded a total of 548 questions with English translations at a cost of \$833 USD. The entire protocol was reviewed and deemed *exempt* by the Institutional Review Board. Please refer to §A.3 for more details.

QUALITY CONTROL All annotators were required to complete a short comprehension task designed to test their understanding of the guidelines. All submitted questions were reviewed by at least one of the authors and replacement or clarifications were provided if necessary.

Collecting culturally agnostic questions in 22 languages through translation To conduct a controlled experiment showing how well LLMs can answer questions that require culturally specific knowledge compared to those that do not, we collected a small set of similarly complex questions that can be answered without culturally specific knowledge. They differ from our previously collected question in terms of topics, focusing more on scientific domain.

We manually select 51 English questions from Reddit ELI5 [1]. Our selection criteria is that the question should not be culturally specific, should be relatively short, and can be answered without technical jargon. Then, we use GPT-4 Turbo to translate these questions into all other languages except Balochi, Fijian and Kirundi. For these three languages, we pay for workers from the low-resource culturally specific collection process to do the translations, at \$30 USD per language.

3.2 Dataset Analysis

CALMQA consists of 1,471 culturally specific questions and 51 culturally agnostic questions that are translated from English into 22 other languages. Table 1 and appendix Table 4 summarize the statistics of culturally specific and culturally agnostic questions respectively. We measure the length of questions with bytes following prior work [13] as the number of tokens is hard to compare across languages due to different compression rates [62].

The length of culturally specific questions varies greatly across languages. High- and mid-resource language questions are generally longer than low-resource language questions; the former all average

²<https://www.prolific.com/>

³<https://www.upwork.com/>

Table 1: Data statistics of high- & mid-resource language (left) and low-resource language (right) culturally specific questions. We report the number of bytes in the UTF-8 encoding. Collecting answers for all low-resource languages would be prohibitively expensive; we collect them for Kirundi only.

LANGUAGE	# Q	Q. BYTES (AVG/STD)	A. BYTES (AVG/STD)	LANGUAGE	# Q	Q. BYTES (AVG/STD)	A. BYTES (AVG/STD)
English	78	275.7 / 189.0	674.1 / 475.9	Afar	25	43.7 / 16.5	N/A
Arabic	85	74.3 / 61.3	2105.0 / 2378.6	Balochi	65	122.7 / 52.4	N/A
Chinese	75	193.4 / 329.5	588.8 / 939.7	Faroese	30	47.8 / 16.6	N/A
German	96	304.6 / 227.4	1169.0 / 744.7	Fijian	75	75.0 / 36.9	N/A
Hebrew	96	142.5 / 84.2	2043.6 / 1934.9	Hiligaynon	65	93.4 / 39.1	N/A
Hindi	91	122.4 / 52.8	3618.8 / 1867.1	Kirundi	53	64.6 / 21.2	557.2 / 160.9
Hungarian	75	301.1 / 279.8	379.3 / 333.2	Papiamento	10	66.8 / 28.5	N/A
Japanese	75	512.0 / 359.3	920.6 / 637.1	Pashto	75	64.8 / 26.9	N/A
Korean	75	126.3 / 138.7	1008.6 / 936.3	Samoan	25	51.2 / 19.3	N/A
Russian	75	310.3 / 438.3	4546.7 / 5067.9	Tongan	10	81.2 / 19.2	N/A
Spanish	102	429.9 / 271.1	852.0 / 817.9	Tswana	65	87.2 / 43.4	N/A
				Wolof	50	45.3 / 18.9	N/A
Total	923	253.5 / 279.1	1640.8 / 2291.3	Total	548	75.1 / 41.3	557.2 / 160.9

above 100 bytes while the latter all average below, with the exception of Arabic and Balochi. This phenomenon occurs because high-resource languages generally consist of a question and accompanying context, an artifact of questions from online Q&A forums. This context is often unnecessary but infeasible to remove in an automatic manner, especially for non-English languages. By contrast, our low-resource language questions are manually written by workers and our workers are not told to contextualize their questions, resulting in overall shorter text. See Table 5 for examples.

To better understand the types of questions that we have collected, we categorize our questions based on their topic. We manually curate a set of categories based on a random selection of 25 questions and use GPT-4-TURBO to classify all the culturally specific questions. Figure 1 shows the categories by number of questions and provides an example question from each category. The details about the categorization can be found in Appendix§B.

4 Experiments

We evaluate the performance of state-of-the-art large language models (LLMs) on CALMQA.

4.1 Models

We evaluate four closed-source LLMs (CLAUDE-3-OPUS, GEMINI-1.5-PRO, GPT-4-TURBO, GPT-4O [63–66]) and three open-source LLMs (AYA-13B, LLAMA-3-70B, MIXTRAL-8X22B [67–69]). Key information about the models is summarized in Table 10 in §C.

Answer Generation Each model is prompted with a question from our dataset in a zero-shot setup without additional instructions. We believe this approach accurately mirrors how humans typically seek information. We use greedy decoding and limit outputs to 2048 tokens. LLAMA-3-70B and MIXTRAL-8X22B are run through the APIs exposed by together.ai⁴, and AYA-13B is run across two A40 GPUs for 5 days. The total cost of API calls is \$530 USD.⁵

4.2 Automatic Evaluation

We gain a preliminary understanding of the models’ multilingual capabilities by applying a set of automatic metrics to answers generated by the models. These metrics do **not** assess the correctness of

⁴<https://www.together.ai/>

⁵We note the total cost of calls for each model as follows: GEMINI-1.5-PRO \$17 USD, GPT-4O \$40 USD, GPT-4-TURBO \$80, LLAMA-3-70B and MIXTRAL-8X22B \$4 USD, and CLAUDE-3-OPUS \$390 USD.

the model generated answers; correctness metrics have not been developed for multilingual text, and metrics for English text may not transfer to other languages [16, 17]. Instead, our metrics address more basic questions: are answers in the correct language, and are they free from the degenerate repetitions that have historically affected language model outputs [70, 71]? We consider achieving high scores in our automatic evaluation as a pre-requisite for correctly addressing the questions.

Evaluation Metric We measure two surface-level attributes of each generated answer: (1) the language of the generated answer, and (2) how repetitive the answer is.

- **Failure to generate answer in target language (Incorrect lang) ↓**: We check whether models generate answer sentences in the target language. We use `polyglot` (<https://pypi.org/project/polyglot/>) and `langid` (<https://pypi.org/project/py3langid/>) toolkits to identify the language of the answer. Since we cover low resource languages, we first validate language identification toolkits by evaluating whether they can identify the language of questions correctly. The question identification accuracy was high, ranging 90–100% for most languages. However, none of the tools can reliably detect Balochi, Hiligaynon, Kirundi or Papiamento. We exclude these languages for this evaluation. Details about the results of the language identification for questions can be found in the appendix (Table 9).
- **Repetitions ↓**: We tokenize the generated answers with `tiktoken` (<https://github.com/openai/tiktoken>) toolkit using the `o200_base` encoding. Then, we mark answers where at least 20 consecutive tokens were repeated at least four times as repetitive.
- **Without surface issues ↑**: We combine language identification and repetition detection to report a simple metric for evaluating a model’s basic multilingual capabilities. Some systems (e.g., GEMINI-1.5-PRO) generate an API error message when prompted with low-resource languages, effectively rendering them unusable for users of the languages. Thus we measure the percentage of answers that are generated in the target language without API errors and do not have repetitions. We again exclude Balochi, Hiligaynon, Kirundi or Papiamento from this evaluation due to the lack of robust language identification toolkit.

Results Table 2 reports the model performance, macro-averaged across languages. We report the proportion of answers with each issue (incorrect language and repetition), and the proportion of answers without the surface issues we capture.

We observe that CLAUDE-3-OPUS, GPT-4-TURBO, and GPT-4O generally perform well across most languages with almost no issues. AYA-13B and MIXTRAL-8X22B are most affected by repetitions. In contrast, LLAMA-3-70B’s generations are mostly free of repetitions, which is likely due to the fact that the model rarely generates text in languages other than English and Spanish.

Table 2: Model performances on CALMQA, macro-averaged across languages. We consider an answer to have surface-level issues if it is not in the target language, has degenerate repetitions or is empty due to an API error. GEMINI-1.5-PRO returns API errors for many low-resource languages questions (see Figure 2), which is reflected in the last column.

MODEL	Incorrect lang (%) ↓	Repetitions (%) ↓	W/o surface issues (%) ↑
CLAUDE-3-OPUS	4.56	0.26	95.23
GPT-4-TURBO	5.50	1.47	93.06
GPT-4O	4.65	2.80	92.28
GEMINI-1.5-PRO	0.81	0.05	57.83
MIXTRAL-8X22B	32.62	12.74	57.83
AYA-13B	21.61	52.34	37.76
LLAMA-3-70B	78.61	0.60	20.83

Figure 2 reports per-language performance. We find that most models suffer in Afar, with only 24%–32% of answers generated in the correct language. Notably, Afar lacks its own Wikipedia and ultimately no model is able to effectively generate text in this language.⁶ MIXTRAL-8X22B and AYA-13B exhibit weaker performance in generating text in certain low-resource languages, including Faroese, Tongan, and Tswana, while GEMINI-1.5-PRO simply returns an API error message when prompted with these languages, making it essentially unusable for users of the languages. In the

⁶AYA-13B is the only other model for which 36% of generations are identified as correctly produced in Afar; however, it suffers from repetition issues.

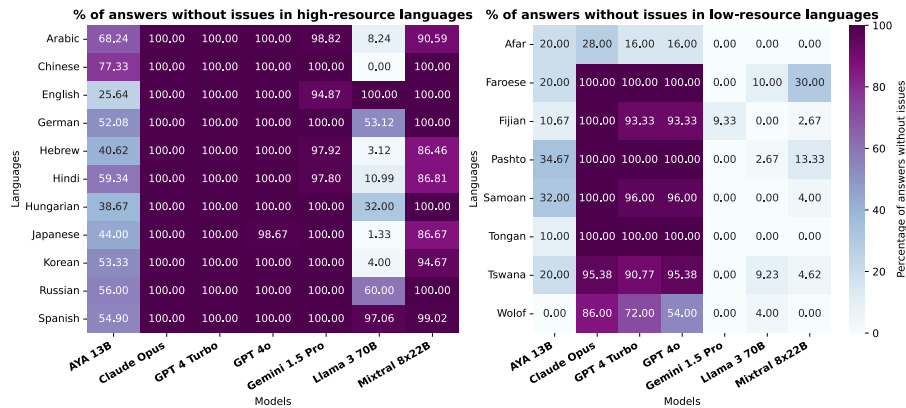


Figure 2: Percentage of model answers without surface issues per language. The left heatmap depicts high- and mid-resource languages and the right depicts low-resource languages.

cases of GPT-4-TURBO and GPT-4O, repetitions are most prominent for Afar and Wolof. Figure 5 and Figure 6 in Appendix §C presents the full results.

Analysis of model errors We further analyzed the responses for specific textual indicators. Detected patterns in model responses are presented with examples in Table 11.

Our textual analysis demonstrates issues in MIXTRAL-8X22B responses for low-resource languages. 31.47% of MIXTRAL-8X22B responses to questions in low-resource languages contain phrases like “sorry”, “apologize” or “understand” (e.g., *"I'm sorry for any confusion, but it seems you're using a language that I'm not currently able to understand or translate."*). MIXTRAL-8X22B responses to questions in high-resource languages do not contain these apology-related keywords, revealing an inability to answer the question specifically in low-resource languages. The apologetic textual markers were seen in less than 1% of other models' responses except for LLAMA-3-70B's, where they were present in 14.74% of low-resource and 10.48% of high-resource language answers.

Textual indicators also uncover deficiencies in LLAMA-3-70B responses. Notably, 37.87% of responses from LLAMA-3-70B explicitly mention the English name of the language (e.g., *"I see you're speaking in Balochi!"*), indicating that although the system recognizes the language of the question, it nonetheless responds in English. This is in contrast to MIXTRAL-8X22B, which does so in 7.21% of responses, GPT-4-TURBO at 1.84%, and less than 1% for other models. Additionally, approximately 19.71% of LLAMA-3-70B responses include terms like “translate” or “translation” (e.g., *"I apologize, but I'm having trouble understanding your question. Could you please rephrase or translate your question into a language I can understand, such as English?"*), where the system either declines to answer (with or without apology), requests an English translation, or provides a translation itself. In comparison, 8.43% of MIXTRAL-8X22B responses exhibit similar behavior, with less than 1% for other models. Lastly, we observed an unusually high proportion of emojis in responses generated by LLAMA-3-70B, with 17.54% containing at least one emoji.

Limitations of automatic evaluation While we can identify obvious surface-level issues in generated responses, such as incorrect language or repetitions, we are unable to automatically assess the overall quality of responses. An ideal answer should not only be free from such issues but also be factually accurate, complete, and useful to the user. Recently introduced factuality metrics such as FActScore [18, 19] are limited to answers produced in English and primarily evaluate factuality, thus neglecting aspects like content selection and the presentation of information. Therefore, we conduct a human evaluation, which is described in the next section.

4.3 Human Evaluation

The automatic evaluation described in the previous section only assesses surface-level information and does not consider the quality of the information in the answers. While expensive, human evaluation

can provide a more comprehensive assessment. We perform human evaluation for a subset of five languages, Kirundi, Fijian, Hindi, German, and English.

Evaluation setup We evaluate answers produced by CLAUDE-3-OPUS, GPT-4-TURBO, and MIXTRAL-8x22B. We sampled 10 culturally specific questions for each language and 10 culturally agnostic questions shared across languages, translated from English into each respective language.⁷ German and Hindi annotators are recruited via Prolific, while Fijian and Kirundi annotators are recruited via Upwork. English annotations are performed by one of the authors of this paper. All annotators are native speakers of their respective languages and participated in the question collection process.

The annotators are presented with a question, a gold answer (if applicable), and answers generated by the three models in random order. The annotators are tasked with: (1) identifying whether the answer is in the correct language, (2) marking minor and major mistakes (including factual mistakes and grammar issues),⁸ (3) evaluating factual accuracy, (4) noting significant content omissions, (5) commenting on the overall quality of each answer, and (6) rating each answer on a 5-point scale (excellent, good, average, poor, unusable). Upon completing the ratings, annotators rank the three answers from best to worst and provide a free-form explanation for their ranking. We provide details, including workflow (Figure 8), in §D. Each question took approximately 20–40 minutes to evaluate, with annotators receiving compensation of \$7.50 USD per question and an additional \$8.00 USD for reviewing the guidelines, totaling \$158 USD per language. The overall cost of the evaluation was approximately \$720 USD.⁹ The study was submitted for the review to the University of Massachusetts Amherst Institutional Review Board and received a *non-human subject* determination.

Results Figure 3 shows the rating distribution for the models’ responses. Overall, 38% of MIXTRAL-8x22B answers received the lowest ratings, compared to 8% for CLAUDE-3-OPUS answers and 5% for GPT-4-TURBO answers. Conversely, only 15% of MIXTRAL-8x22B answers received the highest ratings, compared to 43% for CLAUDE-3-OPUS and 59% for GPT-4-TURBO answers. These results indicate that MIXTRAL-8x22B performs the worst and GPT-4-TURBO performs the best of the three models. To affirm this assertion, we fit a cumulative link mixed model (`c1mm()`) for predicting ratings from model (Table 13 in the appendix), with annotators nested within language included as a random effect.¹⁰ We find that a MIXTRAL-8x22B answer has a 88% chance of having a lower rating than a CLAUDE-3-OPUS answer ($p<.001$) and a 94% chance of having a lower rating than a GPT-4-TURBO answer ($p<.001$). Also, a CLAUDE-3-OPUS answer has a 30% chance of having a lower rating than a GPT-4-TURBO answer ($p<.001$).

Answer ratings are lower for culturally specific questions Figure 3 suggests that the models’ generate worse answers for culturally specific questions than for culturally agnostic questions. To check this, we fit a cumulative link mixed model for predicting ratings from question type (Table 15), with annotators nested within language included as a random effect. We see that an answer to a culturally agnostic question has a 67% chance of having a higher rating than an answer to a culturally specific question ($p<.001$).

Factuality and omission issues are strong predictors of answer rating To determine which variables of this experiment (e.g., model, question type, factuality issues, omissions) correlate with answer rating, we fit cumulative link mixed models for predicting the rating, with each variable being used as the sole predictor of a separate model. Table 18 shows R^2 values of these models. We observe

⁷For culturally specific questions, annotators selected 10 questions they were confident in answering accurately. For culturally agnostic questions, we supplied annotators with bullet-point answers in English.

⁸This step was included to help the annotators visualize any issues with the answer. Hence, we did not require annotators to classify errors beyond a simple minor vs major distinction.

⁹We also covered Upwork charges which the platform impose on the freelancers.

¹⁰We utilized `c1mm` from the `ordinal` package [72] because of the ordinal nature of our response variable (ratings) and repeated measures, with annotators rating each model multiple times for different questions. Using `c1mm` also allows us to model the annotators as random effects, which accounts for individual differences in rating behavior and helps isolate the true effect of the fixed factor (e.g., generation model or factual errors).

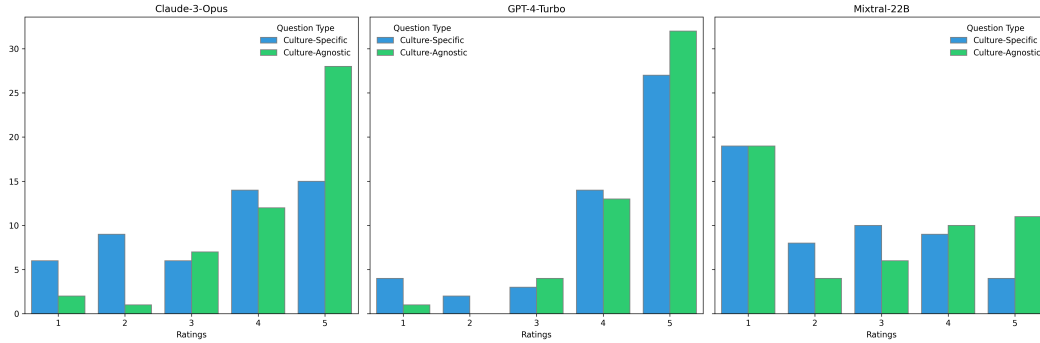


Figure 3: Distribution of ratings by model and question type. *Agn.* refers to culturally agnostic questions, while *spec.* refers to culturally specific questions. Each model generates 50 answers per question type.

high marginal R^2 for the factuality issues model ($R^2=0.560$) and the omissions model ($R^2=0.740$), indicating that these factors are strong predictors of answer rating.¹¹

Analysis using annotator comments We extract more details about answer quality from the comments provided by the annotators. For each comment field, we iteratively develop an annotation schema to analyze the submitted comments. We manually annotate the comments using these schemas, and link these results to the corresponding ratings and scores provided by the annotators. Annotation schemas and evaluation results are in Appendix §D. Below we discuss some insights we gain from this data.

Factuality issues on dates, entities, and events occurred only for culturally specific questions.

All 12 issues regarding incorrect dates, entity and events (e.g., “It is mentioned that Nifty was launched in 1995 but it was actually launched in 1996.”) occur in culturally specific answers. We hypothesise that this is due to a greater prevalence of dates, entities and events in culturally specific questions. A large portion of culturally specific questions relate to RELIGION, BELIEFS, CUSTOMS, AND TRADITIONS and HISTORY, which are topics where dates, entities and events are often important. By contrast, our culturally agnostic questions have a high amount of HEALTH AND WELLNESS questions, for which dates, entities and events are typically not relevant.

GPT-4-TURBO answers rank first due to content.

We analyze the reasons mentioned for ranking each model’s answers as best (multiple reasons may contribute to a particular answer being ranked first). Having good CONTENT (e.g. due to being complete; see Table 23 for a description) is a reason for GPT-4-TURBO being chosen as best answer 51% of the time (e.g. “Answer 1 (GPT-4-TURBO) is the perfect answer and explains all the points needed to understand how to play the game ‘Teen Patti’.”). In the culturally agnostic setting, where CLAUDE-3-OPUS and GPT-4-TURBO perform comparably, more GPT-4-TURBO wins (48%) are attributed to CONTENT than CLAUDE-3-OPUS wins (32%). The full result can be found in §D (Table 19).

CLAUDE-3-OPUS performance significantly decreases on culturally specific questions.

As shown in Figure 3, the distribution of 5-point ratings for CLAUDE-3-OPUS drops substantially from 56% to 32% when answering culturally specific questions. A c1mm model, with ratings as the response variable and both model and question type as predictors, reveals that a CLAUDE-3-OPUS answer to a culturally specific question has an 80% chance of receiving a lower rating compared to a culturally agnostic question ($p<.001$). Post-hoc analysis further indicates that CLAUDE-3-OPUS’s performance is not statistically different from GPT-4-TURBO’s on culturally agnostic questions, making GPT-4-TURBO superior only for culturally specific questions.

¹¹In case of mixed effects models, *marginal* R^2 refers to the proportion of variance explained by the fixed effects (predictors) alone. We also report the *conditional* R^2 , which represents the proportion of variance explained by both the fixed and random effects [73].

Limitations of our human evaluation We employed one annotator per language, which may affect the reliability of results for each language. Consequently, we refrain from making claims about model performance based on language. Unfortunately, securing multiple annotators for low-resource languages proved challenging due to the scarcity of workers with adequate linguistic expertise.

Our human evaluation only required workers to provide ratings and information on factuality, omissions and language issues. Since information about helpfulness, completeness, artificiality, fluency and clarity were optional, we do not have enough data to draw correlations between these aspects of answers and our required measures. Cambazoglu et al. [59] depicts a detailed LFQA evaluation that can be performed with this sort of data.

While our human evaluation sample size of 100 questions initially raised concerns about drawing data-backed conclusions, we found it sufficient to identify statistically significant results. However, a larger sample size could potentially uncover additional insights and nuances in model performance.

5 Conclusion & Future Work

We present CALMQA, the first multilingual long-form QA dataset featuring 2.6K culturally specific or culturally agnostic questions covering 23 languages ranging from high- to low-resource. We conducted an automatic evaluation of seven state-of-the-art models on CALMQA, revealing a significant increase in surface-level issues in model-generated answers to low-resource language questions, particularly those generated by LLAMA-3-70B and MIXTRAL-8X22B. GEMINI-1.5-PRO failed to process input in low-resource languages, returning API errors.

While recent models, such as CLAUDE-3-OPUS and GPT-4-TURBO show little surface-level errors, human evaluation reveals that the quality of generated answer are still limited, especially for culturally specific questions in low-resource languages. Our experiments underscore the need for more robust automatic evaluation metrics that are effective across multiple languages. The prevalence of responses generated primarily in English, especially by LLAMA-3-70B and MIXTRAL-8X22B, highlights the need for improving multilingual generation capability. We release gathered human reference answers in 11 languages to support future research. Finally, the scarcity of data for certain languages, such as Afar, underscores the need for more efficient cross-lingual transfer.

Limitations

While we strive to cover as many aspects of the cultures represented in CALMQA as possible, we acknowledge that it is not feasible to encompass every cultural nuance. Additionally, for low-resource languages, we employed workers to manually write questions, which impacts scalability. Finally, our culturally agnostic questions are translations from English performed by GPT-4-TURBO, and thus may not match the quality of human translations.

Our automatic evaluation relies on surface-level measures such as language detection and token repetitions. While this approach allows us to determine that current LLMs still struggle with producing outputs in the correct language and without repetitions, it does not assess the factuality or fluency of outputs that lack these surface-level issues. This underscores the need for comprehensive metrics to evaluate overall answer quality in multilingual LFQA, which we leave to future work.

Our human evaluation uses 100 questions across 5 languages to demonstrate that models struggle to generate well-written, factual, and complete answers in non-English languages. Large-scale human evaluation is time-consuming and prohibitively expensive, and finding workers proficient in low-resource languages presented a significant challenge, constraining our evaluation efforts. However, we have shown that we can statistically justify various insights about LLM multilingual capabilities with our scale of data.

Ethical Considerations

The protocols for data collection and human evaluation described in this paper were reviewed and deemed *exempt* by the Institutional Review Board. All annotators provided informed consent for the use and publication of their annotations and collected questions. They were compensated fairly for their work, with their preferred rates respected for both the question collection and evaluation tasks.

Acknowledgments and Disclosure of Funding

We extend our gratitude to the annotators from Prolific and Upwork for their hard work and for sharing their expertise about their culture. This project was supported by NSF grant RI-2312948.

References

- [1] Angela Fan, Yacine Jernite, Ethan Perez, David Grangier, Jason Weston, and Michael Auli. Eli5: Long form question answering, 2019.
- [2] Chaitanya Malaviya, Subin Lee, Sihao Chen, Elizabeth Sieber, Mark Yatskar, and Dan Roth. Expertqa: Expert-curated questions and attributed answers, 2024.
- [3] Reiichiro Nakano, Jacob Hilton, Suchir Balaji, Jeff Wu, Long Ouyang, Christina Kim, Christopher Hesse, Shantanu Jain, Vineet Kosaraju, William Saunders, Xu Jiang, Karl Cobbe, Tyna Eloundou, Gretchen Krueger, Kevin Button, Matthew Knight, Benjamin Chess, and John Schulman. Webgpt: Browser-assisted question-answering with human feedback, 2022.
- [4] Yujia Qin, Zihan Cai, Di Jin, Lan Yan, Shi Liang, Kunlun Zhu, Yankai Lin, Xu Han, Ning Ding, Huadong Wang, Ruobing Xie, Fanchao Qi, Zhiyuan Liu, Maosong Sun, and Jie Zhou. Webcpm: Interactive web search for chinese long-form question answering. *ArXiv*, abs/2305.06849, 2023. URL <https://api.semanticscholar.org/CorpusID:258615343>.
- [5] Ivan Stelmakh, Yi Luan, Bhuwan Dhingra, and Ming-Wei Chang. Asqa: Factoid questions meet long-form answers, 2023.
- [6] Valeriia Bolotova-Baranova, Vladislav Blinov, Sofya Filippova, Falk Scholer, and Mark Sanderson. WikiHowQA: A comprehensive benchmark for multi-document non-factoid question answering. In Anna Rogers, Jordan Boyd-Graber, and Naoaki Okazaki, editors, *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 5291–5314, Toronto, Canada, July 2023. Association for Computational Linguistics. doi: 10.18653/v1/2023.acl-long.290. URL <https://aclanthology.org/2023.acl-long.290>.
- [7] Amir Soleimani, Christof Monz, and Marcel Worring. NLQuAD: A non-factoid long question answering data set. In Paola Merlo, Jorg Tiedemann, and Reut Tsarfaty, editors, *Proceedings of the 16th Conference of the European Chapter of the Association for Computational Linguistics: Main Volume*, pages 1245–1255, Online, April 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.eacl-main.106. URL <https://aclanthology.org/2021.eacl-main.106>.
- [8] Andrei Dulceanu, Thang Le Dinh, Walter Chang, Trung Bui, Doo Soon Kim, Manh Chien Vu, and Seokhwan Kim. PhotoshopQuiA: A corpus of non-factoid questions and answers for why-question answering. In Nicoletta Calzolari, Khalid Choukri, Christopher Cieri, Thierry Declerck, Sara Goggi, Koiti Hasida, Hitoshi Isahara, Bente Maegaard, Joseph Mariani, H el ene Mazo, Asuncion Moreno, Jan Odijk, Stelios Piperidis, and Takenobu Tokunaga, editors, *Proceedings of the Eleventh International Conference on Language Resources and Evaluation (LREC 2018)*, Miyazaki, Japan, May 2018. European Language Resources Association (ELRA). URL <https://aclanthology.org/L18-1438>.
- [9] Mikel Artetxe, Sebastian Ruder, and Dani Yogatama. On the cross-lingual transferability of monolingual representations. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*. Association for Computational Linguistics, 2020. doi: 10.18653/v1/2020.acl-main.421. URL <http://dx.doi.org/10.18653/v1/2020.acl-main.421>.
- [10] Patrick Lewis, Barlas Oguz, Ruty Rinott, Sebastian Riedel, and Holger Schwenk. MLQA: Evaluating cross-lingual extractive question answering. In Dan Jurafsky, Joyce Chai, Natalie Schluter, and Joel Tetreault, editors, *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 7315–7330, Online, July 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.acl-main.653. URL <https://aclanthology.org/2020.acl-main.653>.

- [11] Shayne Longpre, Yi Lu, and Joachim Daiber. Mkqa: A linguistically diverse benchmark for multilingual open domain question answering, 2021.
- [12] Gennadi Lembersky, Noam Ordan, and Shuly Wintner. Language Models for Machine Translation: Original vs. Translated Texts . *Computational Linguistics*, 38(4):799–825, 12 2012. ISSN 0891-2017. doi: 10.1162/COLI_a_00111. URL https://doi.org/10.1162/COLI_a_00111.
- [13] Jonathan H. Clark, Eunsol Choi, Michael Collins, Dan Garrette, Tom Kwiatkowski, Vitaly Nikolaev, and Jennimaria Palomaki. Tydi qa: A benchmark for information-seeking question answering in typologically diverse languages, 2020.
- [14] Fangyuan Xu, Yixiao Song, Mohit Iyyer, and Eunsol Choi. A critical evaluation of evaluations for long-form question answering, 2023.
- [15] Kalpesh Krishna, Aurko Roy, and Mohit Iyyer. Hurdles to progress in long-form question answering, 2021.
- [16] Haoqiang Kang, Terra Blevins, and Luke Zettlemoyer. Comparing hallucination detection metrics for multilingual generation, 2024.
- [17] Fajri Koto, Jey Han Lau, and Timothy Baldwin. Evaluating the efficacy of summarization evaluation across languages. *ArXiv*, abs/2106.01478, 2021. URL <https://api.semanticscholar.org/CorpusID:235313819>.
- [18] Sewon Min, Kalpesh Krishna, Xinxu Lyu, Mike Lewis, Wen tau Yih, Pang Wei Koh, Mohit Iyyer, Luke Zettlemoyer, and Hannaneh Hajishirzi. Factscore: Fine-grained atomic evaluation of factual precision in long form text generation, 2023.
- [19] Yixiao Song, Yekyung Kim, and Mohit Iyyer. Veriscore: Evaluating the factuality of verifiable claims in long-form text generation, 2024. URL <https://arxiv.org/abs/2406.19276>.
- [20] Iñigo Alonso, Maite Oronoz, and Rodrigo Agerri. Medexpqa: Multilingual benchmarking of large language models for medical question answering, 2024.
- [21] Pranav Rajpurkar, Jian Zhang, Konstantin Lopyrev, and Percy Liang. Squad: 100,000+ questions for machine comprehension of text, 2016.
- [22] Pranav Rajpurkar, Robin Jia, and Percy Liang. Know what you don’t know: Unanswerable questions for squad, 2018.
- [23] Tom Kwiatkowski, Jennimaria Palomaki, Olivia Redfield, Michael Collins, Ankur Parikh, Chris Alberti, Danielle Epstein, Illia Polosukhin, Matthew Kelcey, Jacob Devlin, Kenton Lee, Kristina N. Toutanova, Llion Jones, Ming-Wei Chang, Andrew Dai, Jakob Uszkoreit, Quoc Le, and Slav Petrov. Natural questions: a benchmark for question answering research. *Transactions of the Association of Computational Linguistics*, 2019.
- [24] Jiahua Liu, Yankai Lin, Zhiyuan Liu, and Maosong Sun. XQA: A cross-lingual open-domain question answering dataset. In Anna Korhonen, David Traum, and Lluís Màrquez, editors, *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 2358–2368, Florence, Italy, July 2019. Association for Computational Linguistics. doi: 10.18653/v1/P19-1227. URL <https://aclanthology.org/P19-1227>.
- [25] Hussein Mozannar, Elie Maamary, Karl El Hajal, and Hazem Hajj. Neural Arabic question answering. In Wassim El-Hajj, Lamia Hadrach Belguith, Fethi Bougares, Walid Magdy, Imed Zitouni, Nadi Tomeh, Mahmoud El-Haj, and Wajdi Zaghrouani, editors, *Proceedings of the Fourth Arabic Natural Language Processing Workshop*, pages 108–118, Florence, Italy, August 2019. Association for Computational Linguistics. doi: 10.18653/v1/W19-4612. URL <https://aclanthology.org/W19-4612>.
- [26] Carlos Rodriguez-Penagos, Carme Armentano-Oller, Marta Villegas, Maite Melero, Aitor Gonzalez, Ona de Gibert Bonet, and Casimiro Carrino Pio. The catalan language club, 2021.

- [27] Radoslav Sabol, Marek Medved, and Aleš Horák. Czech question answering with extended squad v3.0 benchmark dataset. In *RASLAN*, 2019. URL <https://api.semanticscholar.org/CorpusID:210077362>.
- [28] Seungyoung Lim, Myungji Kim, and Jooyoul Lee. Korquad1.0: Korean qa dataset for machine reading comprehension, 2019.
- [29] Arefeh Kazemi, Jamshid Mozafari, and Mohammad Ali Nematbakhsh. Persianquad: The native question answering dataset for the persian language. *IEEE Access*, PP:1–1, 2022. URL <https://api.semanticscholar.org/CorpusID:247358286>.
- [30] Daniel Hládek, Ján Staš, Jozef Juhár, and Tomáš Koctúr. Slovak dataset for multilingual question answering. *IEEE Access*, 11:32869–32881, 2023. URL <https://api.semanticscholar.org/CorpusID:257801559>.
- [31] Barack Wamkaya Wanjawa, Lilian D. A. Wanzare, Florence Indede, Owen McOnyango, Lawrence Muchemi, and Edward Ombui. Kenswquad—a question answering dataset for swahili low-resource language. *ACM Transactions on Asian and Low-Resource Language Information Processing*, 22:1 – 20, 2022. URL <https://api.semanticscholar.org/CorpusID:248524870>.
- [32] Kiet Van Nguyen, Kiet Van Nguyen, Duc-Vu Nguyen, Anh Gia-Tuan Nguyen, and Ngan Luu-Thuy Nguyen. A vietnamese dataset for evaluating machine reading comprehension. In *International Conference on Computational Linguistics*, 2020. URL <https://api.semanticscholar.org/CorpusID:222066698>.
- [33] Andreas Chandra, Affandy Fahrizain, Ibrahim, and Simon Willyanto Laufried. A survey on non-english question answering dataset, 2021.
- [34] Anna Rogers, Matt Gardner, and Isabelle Augenstein. Qa dataset explosion: A taxonomy of nlp resources for question answering and reading comprehension. *ACM Computing Surveys*, 55(10):1–45, February 2023. ISSN 1557-7341. doi: 10.1145/3560260. URL <http://dx.doi.org/10.1145/3560260>.
- [35] Shivalika Singh, Freddie Vargus, Daniel Dsouza, Börje F. Karlsson, Abinaya Mahendiran, Wei-Yin Ko, Herumb Shandilya, Jay Patel, Deividas Maticunas, Laura OMahony, Mike Zhang, Ramith Hettiarachchi, Joseph Wilson, Marina Machado, Luisa Souza Moura, Dominik Krzemiński, Hakimeh Fadaei, Irem Ergün, Ifeoma Okoh, Aisha Alaagib, Oshan Mudannayake, Zaid Alyafeai, Vu Minh Chien, Sebastian Ruder, Surya Guthikonda, Emad A. Alghamdi, Sebastian Gehrmann, Niklas Muennighoff, Max Bartolo, Julia Kreutzer, Ahmet Üstün, Marzieh Fadaee, and Sara Hooker. Aya dataset: An open-access collection for multilingual instruction tuning, 2024.
- [36] Chen Cecilia Liu, Iryna Gurevych, and Anna Korhonen. Culturally aware and adapted nlp: A taxonomy and a survey of the state of the art. 2024. URL <https://api.semanticscholar.org/CorpusID:270285720>.
- [37] Tarek Naous, Michael J. Ryan, Alan Ritter, and Wei Xu. Having beer after prayer? measuring cultural bias in large language models, 2024.
- [38] Jiho Jin, Jiseon Kim, Nayeon Lee, Haneul Yoo, Alice Oh, and Hwaran Lee. Kobbq: Korean bias benchmark for question answering. *Transactions of the Association for Computational Linguistics*, 12:507–524, 2023. URL <https://api.semanticscholar.org/CorpusID:260334475>.
- [39] Yan Tao, Olga Viberg, Ryan S. Baker, and Rene F. Kizilcec. Cultural bias and cultural alignment of large language models, 2024. URL <https://arxiv.org/abs/2311.14096>.
- [40] Weiyan Shi, Ryan Li, Yutong Zhang, Caleb Ziems, Chunhua yu, Raya Horesh, Rogério Abreu de Paula, and Diyi Yang. Culturebank: An online community-driven knowledge base towards culturally aware language technologies, 2024.
- [41] Abhinav Rao, Akhila Yerukola, Vishwa Shah, Katharina Reinecke, and Maarten Sap. Normad: A benchmark for measuring the cultural adaptability of large language models, 2024.

- [42] Yi Fung, Ruining Zhao, Jae Doo, Chenkai Sun, and Heng Ji. Massively multi-cultural knowledge acquisition & lm benchmarking, 2024.
- [43] Tuan-Phong Nguyen, Simon Razniewski, Aparna S. Varde, and Gerhard Weikum. Extracting cultural commonsense knowledge at scale. *Proceedings of the ACM Web Conference 2023*, 2022. URL <https://api.semanticscholar.org/CorpusID:252907608>.
- [44] Amr Keleg and Walid Magdy. Dlama: A framework for curating culturally diverse facts for probing the knowledge of pretrained language models, 2023.
- [45] Da Yin, Hritik Bansal, Masoud Monajatipoor, Liunian Harold Li, and Kai-Wei Chang. GeoM-LAMA: Geo-diverse commonsense probing on multilingual pre-trained language models. In Yoav Goldberg, Zornitsa Kozareva, and Yue Zhang, editors, *Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing*, pages 2039–2055, Abu Dhabi, United Arab Emirates, December 2022. Association for Computational Linguistics. doi: 10.18653/v1/2022.emnlp-main.132. URL <https://aclanthology.org/2022.emnlp-main.132>.
- [46] Li Zhou, Taelin Karidi, Nicolas Garneau, Yong Cao, Wanlong Liu, Wenyu Chen, and Daniel Hershcovich. Does mapo tofu contain coffee? probing llms for food-related cultural knowledge. *ArXiv*, abs/2404.06833, 2024. URL <https://api.semanticscholar.org/CorpusID:269033101>.
- [47] Dan Hendrycks, Collin Burns, Steven Basart, Andy Zou, Mantas Mazeika, Dawn Xiaodong Song, and Jacob Steinhardt. Measuring massive multitask language understanding. *ArXiv*, abs/2009.03300, 2020. URL <https://api.semanticscholar.org/CorpusID:221516475>.
- [48] Eunsu Kim, Juyoung Suk, Philhoon Oh, Haneul Yoo, James Thorne, and Alice Oh. Click: A benchmark dataset of cultural and linguistic intelligence in korean. *ArXiv*, abs/2403.06412, 2024. URL <https://api.semanticscholar.org/CorpusID:268357672>.
- [49] Fajri Koto, Haonan Li, Sara Shatnawi, Jad Doughman, Abdelrahman Boda Sadallah, Aisha Alraeesi, Khalid Almubarak, Zaid Alyafeai, Neha Sengupta, Shady Shehata, Nizar Habash, Preslav Nakov, and Timothy Baldwin. Arabicmmlu: Assessing massive multitask language understanding in arabic. *ArXiv*, abs/2402.12840, 2024. URL <https://api.semanticscholar.org/CorpusID:267760288>.
- [50] Haonan Li, Yixuan Zhang, Fajri Koto, Yifei Yang, Hai Zhao, Yeyun Gong, Nan Duan, and Tim Baldwin. Cmmlu: Measuring massive multitask language understanding in chinese. *ArXiv*, abs/2306.09212, 2023. URL <https://api.semanticscholar.org/CorpusID:259164635>.
- [51] Fajri Koto, Nurul Aisyah, Haonan Li, and Timothy Baldwin. Large language models only pass primary school exams in indonesia: A comprehensive test on indommlu. In *Conference on Empirical Methods in Natural Language Processing*, 2023. URL <https://api.semanticscholar.org/CorpusID:263829211>.
- [52] Guijin Son, Hanwool Lee, Sungdong Kim, Seungone Kim, Niklas Muennighoff, Taekyoon Choi, Cheonbok Park, Kang Min Yoo, and Stella Biderman. Kmmlu: Measuring massive multitask language understanding in korean. *ArXiv*, abs/2402.11548, 2024. URL <https://api.semanticscholar.org/CorpusID:267750587>.
- [53] Junho Myung, Nayeon Lee, Yi Zhou, Jiho Jin, Rifki Afina Putri, Dimosthenis Antypas, Hsuvas Borkakoty, Eunsu Kim, Carla Perez-Almendros, Abinew Ali Ayele, Víctor Gutiérrez-Basulto, Yazmín Ibáñez-García, Hwaran Lee, Shamsuddeen Hassan Muhammad, Kiwoong Park, Anar Sabuhi Rzayev, Nina White, Seid Muhie Yimam, Mohammad Taher Pilehvar, Nedjma Ousidhoum, Jose Camacho-Collados, and Alice Oh. Blend: A benchmark for llms on everyday knowledge in diverse cultures and languages, 2024.
- [54] Haryo Akbarianto Wibowo, Erland Hilman Fuadi, Made Nindyatama Nityasya, Radityo Eko Prasojo, and Alham Fikri Aji. Copal-id: Indonesian language reasoning with local culture and nuances. *ArXiv*, abs/2311.01012, 2023. URL <https://api.semanticscholar.org/CorpusID:264935209>.

- [55] Fajri Koto, Rahmad Mahendra, Nurul Aisyah, and Timothy Baldwin. Indoculture: Exploring geographically-influenced cultural commonsense reasoning across eleven Indonesian provinces. *ArXiv*, abs/2404.01854, 2024. URL <https://api.semanticscholar.org/CorpusID:268856961>.
- [56] Siqi Shen, Lajanugen Logeswaran, Moontae Lee, Honglak Lee, Soujanya Poria, and Rada Mihalcea. Understanding the capabilities and limitations of large language models for cultural commonsense. In Kevin Duh, Helena Gomez, and Steven Bethard, editors, *Proceedings of the 2024 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers)*, pages 5668–5680, Mexico City, Mexico, June 2024. Association for Computational Linguistics. URL <https://aclanthology.org/2024.naacl-long.316>.
- [57] Daniel Hershcovich, Stella Frank, Heather Lent, Miryam de Lhoneux, Mostafa Abdou, Stephanie Brandl, Emanuele Bugliarello, Laura Cabello Piqueras, Ilias Chalkidis, Ruixiang Cui, Constanza Fierro, Katerina Margatina, Phillip Rust, and Anders Søgaard. Challenges and strategies in cross-cultural nlp. *ArXiv*, abs/2203.10020, 2022. URL <https://api.semanticscholar.org/CorpusID:247594499>.
- [58] Tianyi Zhang, Varsha Kishore, Felix Wu, Kilian Q. Weinberger, and Yoav Artzi. BertScore: Evaluating text generation with bert. *ArXiv*, abs/1904.09675, 2019. URL <https://api.semanticscholar.org/CorpusID:127986044>.
- [59] Berkant Barla Cambazoglu, Valeriia Bolotova-Baranova, Falk Scholer, Mark Sanderson, Leila Tavakoli, and W. Bruce Croft. Quantifying human-perceived answer utility in non-factoid question answering. *Proceedings of the 2021 Conference on Human Information Interaction and Retrieval*, 2021. URL <https://api.semanticscholar.org/CorpusID:232066842>.
- [60] Anthony Chen, Gabriel Stanovsky, Sameer Singh, and Matt Gardner. Evaluating question answering evaluation. In *Conference on Empirical Methods in Natural Language Processing*, 2019. URL <https://api.semanticscholar.org/CorpusID:207901226>.
- [61] Meghana Moorthy Bhat, Rui Meng, Ye Liu, Yingbo Zhou, and Semih Yavuz. Investigating answerability of llms for long-form question answering. *ArXiv*, abs/2309.08210, 2023. URL <https://api.semanticscholar.org/CorpusID:262013357>.
- [62] Orevaoghene Ahia, Sachin Kumar, Hila Gonen, Jungo Kasai, David R. Mortensen, Noah A. Smith, and Yulia Tsvetkov. Do all languages cost the same? tokenization in the era of commercial language models. *ArXiv*, abs/2305.13707, 2023. URL <https://api.semanticscholar.org/CorpusID:258841465>.
- [63] Anthropic. The Claude 3 Model Family: Opus, Sonnet, Haiku. Technical report, Anthropic, 2024. URL https://www-cdn.anthropic.com/de8ba9b01c9ab7cbabf5c33b80b7bbc618857627/Model_Card_Claude_3.pdf. Accessed: 2024-05-23.
- [64] Gemini Team. Gemini 1.5: Unlocking multimodal understanding across millions of tokens of context, 2024.
- [65] OpenAI. Gpt-4 technical report, 2024.
- [66] OpenAI. Model release blog: GPT-4o. Technical report, OpenAI, 2024. URL <https://openai.com/index/hello-gpt-4o/>. Accessed: 2024-05-23.
- [67] Ahmet Üstün, Viraat Aryabumi, Zheng-Xin Yong, Wei-Yin Ko, Daniel D’souza, Gbemileke Onilude, Neel Bhandari, Shivalika Singh, Hui-Lee Ooi, Amr Kayid, Freddie Vargus, Phil Blunsom, Shayne Longpre, Niklas Muennighoff, Marzieh Fadaee, Julia Kreutzer, and Sara Hooker. Aya model: An instruction finetuned open-access multilingual language model, 2024.
- [68] AI@Meta. Llama 3 model card. 2024. URL https://github.com/meta-llama/llama3/blob/main/MODEL_CARD.md.
- [69] Mistral AI. Cheaper, Better, Faster, Stronger. Technical report, Mistral AI, 2024. URL <https://mistral.ai/news/mixtral-8x22b/>. Accessed: 2024-06-19.

- [70] Ari Holtzman, Jan Buys, Li Du, Maxwell Forbes, and Yejin Choi. The curious case of neural text degeneration, 2020. URL <https://arxiv.org/abs/1904.09751>.
- [71] Darcey Riley and David Chiang. A continuum of generation tasks for investigating length bias and degenerate repetition. In Jasmijn Bastings, Yonatan Belinkov, Yanai Elazar, Dieuwke Hupkes, Naomi Saphra, and Sarah Wiegrefe, editors, *Proceedings of the Fifth BlackboxNLP Workshop on Analyzing and Interpreting Neural Networks for NLP*, pages 426–440, Abu Dhabi, United Arab Emirates (Hybrid), December 2022. Association for Computational Linguistics. doi: 10.18653/v1/2022.blackboxnlp-1.36. URL <https://aclanthology.org/2022.blackboxnlp-1.36>.
- [72] Rune H. B. Christensen. *ordinal—Regression Models for Ordinal Data*, 2023. URL <https://CRAN.R-project.org/package=ordinal>. R package version 2023.12-4.
- [73] Shinichi Nakagawa, Paul C. D. Johnson, and Holger Schielzeth. The coefficient of determination² and intra-class correlation coefficient from generalized linear mixed-effects models revisited and expanded. *Journal of The Royal Society Interface*, 14(134):20170213, September 2017. ISSN 1742-5662. doi: 10.1098/rsif.2017.0213. URL <http://dx.doi.org/10.1098/rsif.2017.0213>.
- [74] Maxim Tkachenko, Mikhail Malyuk, Andrey Holmanyuk, and Nikolai Liubimov. Label Studio: Data labeling software, 2020-2022. URL <https://github.com/heartexlabs/label-studio>. Open source software available from <https://github.com/heartexlabs/label-studio>.

A Data Collection

This appendix provides extra details about the processes used to collect data for CALMQA. §A.1 describes the identification of websites used for data collection. §A.2 outlines the data collection methods for high- and mid-resource languages, and §A.3 details the data collection process for low-resource languages. Table 5 contains example entries from the dataset. Table 4 and Table 6 provide more details on the number of questions and languages included in the dataset.

A.1 Website Survey

We conducted a survey to find websites with non-English cultural questions. The instructions outlined the survey’s goal, defined a good website, and specified what constitutes a culturally specific question. Our criteria for a good website included:

- At least 500 answered "good" questions (as defined below). Websites could contain other questions as we could filter them out.
- Most questions and answers should be in a non-English language.
- Questions should cover a diverse range of topics, not just one or two broad areas (e.g., fashion, technology).
- The website should contain culturally specific questions not found on English websites or in English QA datasets.
- The website should have a large community of contributors with many questions answered.

The survey evolved through an iterative process of piloting and refining based on the results.

Survey participants were English-proficient crowdworkers on the Prolific platform (<https://www.prolific.com>), whose native language was not English. The survey took about 10 minutes to complete, and we paid \$10 for valid responses, totaling \$510. We considered a response valid if it showed a good-faith effort, even if the website was of insufficient quality or duplicated in another response. From 51 responses, we obtained 4 websites used for question collection. Some websites were rejected despite having good questions because the proportion of good to bad questions was too low for feasible collection. Remaining websites were identified by the authors. See Table 3 for the full list of websites employed.

Table 3: Websites from which cultural questions were obtained, with the number of questions retrieved by website. Multiple websites were used for a given language if workers were struggling with a given website.

WEBSITE	LANGUAGE	ISO	# Q	URL
Ejaba	Arabic	ar	29	https://www.ejaba.com/
Ujeeb	Arabic	ar	56	https://ujeeb.com/
Zhihu	Chinese	zh	75	https://www.zhihu.com/
Reddit ELI5	English	en	78	https://www.reddit.com/r/explainlikeimfive/
Gutefrage	German	de	96	https://www.gutefrage.net/
Quora	Hebrew	he	96	https://he.quora.com
Let’s Diskuss	Hindi	hi	91	https://hi.letsdiskuss.com/
Gyakori kérdések	Hungarian	hu	75	https://www.gyakorikerdesek.hu/
Yahoo Japan	Japanese	ja	17	https://chiebukuro.yahoo.co.jp/
OKWave	Japanese	ja	58	https://okwave.jp/
Naver	Korean	ko	75	https://kin.naver.com/qna/
Yandex	Russian	ru	75	https://yandex.ru/q/
Todoexpertos	Spanish	es	102	https://www.todoexpertos.com/

A.2 High- and Mid-Resource Culturally Specific Questions

Culturally specific questions in high-resource languages were collected by workers from the websites in Table 3. Each collector was required to read guidelines, pass a guidelines understanding test and complete a test pilot of 5 questions in order to qualify for the main task. This protocol was reviewed by the Institutional Review Board.

Guidelines We provided a guidelines slideshow detailing the rules for selecting questions. The main rules for questions were:

1. The question should require long answer.
2. The question should be culture specific.
3. A native speaker would ask this [question].
4. The question should be objective.
5. Questions should not need pictures/links.

Guidelines Understanding Test Our guidelines understanding test consisted of a form consisting of 11 multiple-selection multiple-choice graded questions. The first question assessed question was “Which of these are listed as **important rules for questions** in the guidelines? (you should select all correct answers)”, which required showing understanding of long-form culturally specific information-seeking questions. The remaining 10 questions were curated examples of questions that each may or may not have had issues. Test takers were required to select all the reasons why a question was not suitable according to the guidelines, or select that the question was suitable. We reviewed test results manually, and accordingly chose which workers to pass. We provided passing workers with the test answers, so that they could learn from their mistakes. We paid workers \$3.33 USD for completing the test.

A.3 Low-Resource Culturally Specific Questions

Questions for low-resource languages were collected by hiring native speakers proficient in English through Upwork. They were paid \$0.65 to \$1.00 USD per submitted question with its English

Table 4: Data statistics of high- & mid-resource language (left) and low-resource language (right) culturally agnostic questions. We report the number of bytes in the UTF-8 encoding.

LANGUAGE	# Q	Q. BYTES (AVG/STD)	LANGUAGE	# Q	Q. BYTES (AVG/STD)
English	51	67.1 / 31.7	Afar	51	81.1 / 39.8
Arabic	51	108.7 / 56.4	Balochi	51	96.1 / 48.5
Chinese	51	68.1 / 31.4	Faroese	51	75.1 / 34.5
German	51	82.2 / 39.8	Fijian	51	92.5 / 40.6
Hebrew	51	93.0 / 42.9	Hiligaynon	51	83.6 / 39.7
Hindi	51	184.2 / 90.3	Kirundi	51	88.2 / 43.1
Hungarian	51	82.3 / 38.2	Papiamentu	51	74.1 / 35.3
Japanese	51	104.3 / 50.6	Pashto	51	118.1 / 55.6
Korean	51	93.0 / 43.3	Samoaan	51	80.5 / 37.6
Russian	51	134.6 / 70.8	Tongan	51	102.4 / 47.9
Spanish	51	83.6 / 36.1	Tswana	51	88.8 / 43.4
			Wolof	51	78.2 / 44.1

translation. Annotators were required to read the guidelines and complete a short comprehension task, for which they were paid \$7 USD. Additionally, answers to all Kirundi questions were paid \$2 USD per answer. This protocol was reviewed by the Institutional Review Board.

Annotators were instructed to write up to 25 questions in their native language along with English translations, ensuring the questions met the following criteria:

- The question requires a long-form answer (at least 3-4 sentences).
- The question is culturally specific, meaning it is more likely to be asked in the region where the language is spoken.
- The question is something a native speaker of the language might ask.
- The question has an objective answer (i.e., not based on opinions).

B Question Categorization

In this section we describe the process of categorizing all questions into predefined set of categories.

Method We selected 25 random culturally specific questions from the dataset. We manually created a list of broad categories with descriptions and examples, and then 2 authors independently applied the categorization on the 25 questions. We reviewed disagreements and accordingly refined the categories. Then we used GPT-4o to categorize using the prompts in Table 7, with temperature set to 0.0. After minor clarifications to category descriptions, we found that GPT-4o produced adequate categories for all 25 questions. We consequently used the model to categorize all of CALMQA. Our final categories, with descriptions and examples, can be found in Table 8.

Results Figure 4 shows the number of questions by category and language. We observe that one of RELIGION, BELIEFS, CUSTOMS, AND TRADITIONS, GOVERNANCE AND SOCIETY and HISTORY is the top category of almost every language (the exceptions being English and Korean). Furthermore, RELIGION, BELIEFS, CUSTOMS, AND TRADITIONS is the predominantly the top category for low-resource languages (10/12). This difference is likely due to the question collection process for low-resource languages.

C Automatic Evaluation

In this section of the appendix we present the details of automatic evaluation. All evaluated models are listed in Table 10. Examples of the model tendencies detected by automatic evaluation are in Table 11.

Table 5: Examples of entries in CALMQA. Metadata like source are omitted here.

FIELD	CONTENT
Language	English
Question (Original)	Why is the game development industry laying off so many people? It feels like every day I see a post about some big game development studio laying off a large chunk of their workforce. What are the causes of this?
Question (English)	Why is the game development industry laying off so many people? It feels like every day I see a post about some big game development studio laying off a large chunk of their workforce. What are the causes of this?
Culturally Specific	True
Answer	There's two main reasons that are impacting not just the game dev industry but others as well. The first reason is that there's been a lot of corporate acquisitions lately like Microsoft buying Activision-Blizzard (AB). When that happens you get a lot of redundant positions that the parents company can absorb, which means there's going to be layoffs in the future. As an example, say there's a department at AB in charge of hiring / Talent acquisition. Microsoft already has a department that does that, so most of those people (minus a few token employees who know the AB company culture) will be let go. The second reason is tied around interest rates. That is an ELI5 in itself, but basically for most of the last decade it was super cheap to get money and use that for projects. Now, it's significantly more expensive to get a loan for money, so companies are less willing to spend money and/or need to cut back because they were supported by cheap money. So as an example, say you're a small game dev in 2013. You can probably get a loan from a Venture Capital (VC) fund for almost zero interest, and there's tons of VCs available to offer you money. Because of that, it's easy to get money to fund your game studio. Fast forward to 2023, and now there are fewer VCs and they charge more interest for their loans. This means you either can't fund your studio or you need to make cuts to survive on the money you generate on your own.
Language	Hungarian
Question (Original)	Hogyan lehet kikeverni a Horthy-kori sisakok színét?
Question (English)	How can you mix the color of helmets from the Horthy era?
Culturally Specific	True
Answer	M35 tábori sisak. Neten rákeresve találsz róla képeket. Nem kell megijedni a sok árnyalattól, annak idején sem volt tökéletesen egységes. Ez egy zöldesbarna szín. Talán a RAL6025 áll a legközelebb hozzá. Festékboltban kikeverik géppel. Nem drágább, mint külön megvenni hozzá egy egy dobozzal a festéket és kevergetni. Ecsettel festették az eredetit.
Language	Fijian
Question (Original)	Na cava na vuna era vinakata kina na Nasi ni veiyanyanu mera sa lesi i Viti Levu?
Question (English)	What is the reason the nurses from the outer islands want to be assigned to Viti Levu?
Culturally Specific	True
Answer	N/A
Language	Kirundi
Question (Original)	Ni kubera iki twama dukeneye gushira ama aprikasiyo ku gihe? Hoba iki iyo tutabikoze?
Question (English)	Why do we need to constantly do software updates? What happens if I don't?
Culturally Specific	False
Answer	N/A

Table 6: Linguistic and usage information of the languages in the CALMQA dataset

LANGUAGE	ISO	FAMILY	Branch	MORPHOLOGY	ORDER	SCRIPT	Region	SPEAKERS
High- & Mid-Resource								
Arabic	ar	Afro-Asiatic	Semitic	fusional	SVO	Arabic alphabet	Arab world	720M
Chinese	zh	Sino-Tibetan	Sinitic	analytic	SVO	Hanzi	Mainland China, Taiwan, Singapore	1.38B
English	en	Indo-European	Germanic	analytic	SVO	Latin	World-wide	1.5B
German	de	Indo-European	Germanic	fusional	SVO	Latin	Germany, Austria, Switzerland, etc.	133M
Hebrew	he	Afro-Asiatic	Semitic	fusional	SVO	Hebrew script	Israel	9.3M
Hindi	hi	Indo-European	Indo-Iranian	fusional	SOV	Devanagari	India	610M
Hungarian	hu	Uralic	Finno-Ugric	agglutinative	SVO	Latin	Hungary	13M
Japanese	ja	Japonic	Japanese	agglutinative	SOV	Kanji, Kana	Japan	123M
Korean	ko	Koreanic	Korean	agglutinative	SOV	Hangul	Korea	82M
Russian	ru	Indo-European	Balto-Slavic	fusional	SVO	Cyrillic	Russia, Russian-speaking world	255M
Spanish	es	Indo-European	Italic	fusional	SVO	Latin	Spain, Central and South Americas, the US	559M
Low-Resource								
Afar	aa	Afro-Asiatic	Cushitic	agglutinative	SOV	Latin	Ethiopia, Djibouti, Eritrea	2.6M
Balochi	bal	Indo-European	Indo-Iranian	agglutinative	SOV	Balochi Standard Alphabet	Pakistan, Iran, Afghanistan	8.8M
Faroese	fo	Indo-European	Germanic	fusional	SVO	Latin	Faroe Islands, Denmark	69K
Fijian	fj	Austronesian	Malayo-Polynesian	agglutinative	VOS	Latin	Fiji	640K
Hiligaynon	hil	Austronesian	Malayo-Polynesian	analytic	VSO	Latin	Philippines	9.1M
Kirundi	rn	Niger-Kongo	Atlantic-Congo	agglutinative	SVO	Latin	Burundi	12-13M
Papiamentu	pap	Portuguese-based creole	Afro-Portuguese	analytic	SVO	Latin	Aruba, Curaçao, Bonaire	300K
Pashto	ps	Indo-European	Indo-Iranian	fusional	SOV	Pashto alphabet	Afghanistan, Pakistan and Iran	58.8M
Samoan	sm	Austronesian	Malayo-Polynesian	analytic	VSO	Latin	Samoa	510K
Tongan	to	Austronesian	Polynesian	agglutinative	VSO	Latin	Tonga	187K
Tswana	tn	Niger-Kongo	Atlantic-Congo	agglutinative	SVO	Latin	Botswana, South Africa, Zimbabwe	13.9M
Wolof	wo	Niger-Kongo	Atlantic-Congo	agglutinative	SVO	Latin primarily	Senegal	12.3M

Language accuracy Figure 5 displays the percentage of responses each model generated in the correct language, independent of correctness or fluency of the answer. We used `polyglot` (<https://pypi.org/project/polyglot/>) and `langid` (<https://pypi.org/project/py3langid/>) for language identification, choosing them based on their performance for specific languages. This identification was also applied to the questions to estimate its performance across languages. Our pipeline accurately recognized 100% of instances in 14 languages. For other languages, accuracy typically remained above 90%, with Fijian at 98.67%, Russian at 97.33%, Tongan at 96.92%, Samoan at 92.00%, and Wolof at 90% (see Table 9). However, identification accuracy for Kirundi was notably lower at 35.85%, as the libraries frequently misclassified it as the closely related Kinyarwanda. The automatic identification process failed entirely for Balochi, Hiligaynon, and Papiamentu, which is reflected in seemingly low performance for these languages across all the models.

Repetitions Figure 6 illustrates the percentage of responses affected by repetitions, analyzed by language across different models. To identify these repetitions, we employed `tiktoken` (<https://github.com/openai/tiktoken>) with the `o200_base` encoding. We specifically identified instances where at least 20 consecutive tokens were repeated at least four times within an answer.

Answer statistics: We compute the lengths of generated answers using `tiktoken` with the `o200k_base` encoding. Table 12 presents statistics for the length of answers generated by each model. To account for variations in token count due to the language of generation and the presence of repetitions, we provide separate statistics for all answers and for those produced in the correct

Table 7: Prompts used with GPT-4o to categorize questions. Strings in the form *[form]* are placeholders that are replaced at runtime. The categories used are in Table 8.

LANGUAGE	PROMPT
English	<p>You are categorizing questions about different cultures into specific categories. Your task is to assign one category to each question. Here are the available categories:</p> <p>education and career – <i>[Education and Career Description]</i>. Example: <i>[Education and Career Example]</i> <i>[categories]</i>... health and wellness – <i>[Health and Wellness Description]</i>. Example: <i>[Health and Wellness Example]</i> other – <i>[Other Description]</i></p> <p>Here is the question to categorize: <original_question><i>[question]</i></original_question></p> <p>Categorize this question into one of the categories. Output your choice in the following format: <category>category name</category></p> <p>Your choice:</p>
All except English	<p>You are categorizing questions about different cultures into specific categories. Your task is to assign one category to each question. Here are the available categories:</p> <p>education and career – <i>[Education and Career Description]</i>. Example: <i>[Education and Career Example]</i> <i>[categories]</i>... health and wellness – <i>[Health and Wellness Description]</i>. Example: <i>[Health and Wellness Example]</i> other – <i>[Other Description]</i></p> <p>Here is the question to categorize: <original_question><i>[question]</i></original_question> <translation><i>[translation]</i></translation></p> <p>Categorize this question into one of the categories. Output your choice in the following format: <category>category name</category></p> <p>Your choice:</p>

language without repetitions. Finally, we provide the percentage of answers produced in English for a non-English question in Figure 7.

D Human Evaluation

In this section, we present the details of human evaluation.

Evaluation Task The evaluation was conducted using LabelStudio [74]. On the UI, annotators were presented with a question, a gold answer (if applicable), and three competitive answers in random order. The annotation process for each answer involved: (1) marking any mistakes,¹² (2) stating whether the answer is in the correct language, (3) evaluating factual accuracy, (4) noting any content omissions, (5) commenting on the overall quality of each answer, (6) rating each answer on a 5-point scale (excellent, good, average, poor, unusable). Upon completing the ratings, annotators ranked the three answers from best to worst and provided a free-form explanation for their ranking. Figure 8 illustrates the overall flow of the evaluation task. The study was submitted for the review to Institutional Review Board and received a *non-human subject* determination.

¹²This step was included to help the annotators visualize any issues with the answer.

Table 8: Categories of questions in CALMQA.

CATEGORY	DESCRIPTION	EXAMPLE
EDUCATION AND CAREER	Questions related to school, education system, jobs and career paths. Includes developing new skills for new jobs.	<i>Why do young children drop out of school?</i>
GOVERNANCE AND SOCIETY	Questions about laws, governance and policies, as well as politics and social issues.	<i>What are the reasons why Japan cannot have casinos?</i>
GEOGRAPHY, TOURISM, AND CLIMATE	Questions concerning the geography, climatic conditions, environmental factors of a region, tourism and travelling.	<i>What is the significance of Gorée Island?</i>
TECHNOLOGY	Questions about the technology, technological advancements, uses of technology and digital innovation.	<i>Are stores that accept VISA debit cards marked VISA? Or is it a store with a VISA PLUS mark?</i>
ECONOMY AND INDUSTRY	Questions regarding modern-day economic practices, key industries, trade, and economic development.	<i>Why is our country not developing like others?</i>
MEDIA AND ENTERTAINMENT	Questions about the media and entertainment specific to the region.	<i>Why are trademarks obscured on broadcast?</i>
FOOD AND DRINKS	Questions related to culinary traditions, typical foods and beverages, preparation methods, culinary practices, and cultural significance of meals.	<i>Why is bread with sausage called a sandwich in Russia?</i>
HISTORY	Questions about historical events, significant figures, and important periods that have shaped a culture.	<i>How did the Bujumbura market burn?</i>
LANGUAGE, ART AND LITERATURE	Questions about the language, dialects, as well as art forms and literary works/traditions.	<i>Why is the Balochi Language categorized into its three main dialects?</i>
RELIGION, BELIEFS, CUSTOMS, AND TRADITIONS	Questions regarding religious practices, beliefs, rituals, customs, traditions, and holiday.	<i>In the Islamic religious teaching, what's the meaning of the seven tens?</i>
HEALTH AND WELLNESS	Questions related to traditional and modern health practices, public health issues, and well-being.	<i>Why methadone? What makes it "better" than other opioids for maintenance therapy or tapering off another drug?</i>
OTHER	Questions that do not fit neatly into the above categories.	

Guidelines and Consent We provided human evaluation guidelines, describing how to use the interface (including a tutorial video) and explaining each of the steps in the annotation process. The guidelines link to the consent form.

Data Human evaluation was done for answers generated by CLAUDE-3-OPUS, GPT-4-TURBO, and MIXTRAL-8X22B for questions in English, German, Hindi, Fijian and Kirundi. For culturally specific questions, annotators chose 10 questions in their language that they felt confident they knew the answer to. For culturally agnostic questions, we sampled 10 English culturally agnostic questions, and used the original English and the translations into the 4 other languages. We provided annotators with bullet-point answers in English for the culturally agnostic questions.

Workers and Cost German and Hindi annotators were recruited via Prolific, while Fijian and Kirundi annotators were recruited via Upwork. English annotations were performed by one of the authors. All annotators were native speakers of their respective languages and had participated in the question collection. Each question took approximately 20–40 minutes to evaluate, with annotators receiving compensation of \$7.50 USD per question and an additional \$8.00 USD for reviewing

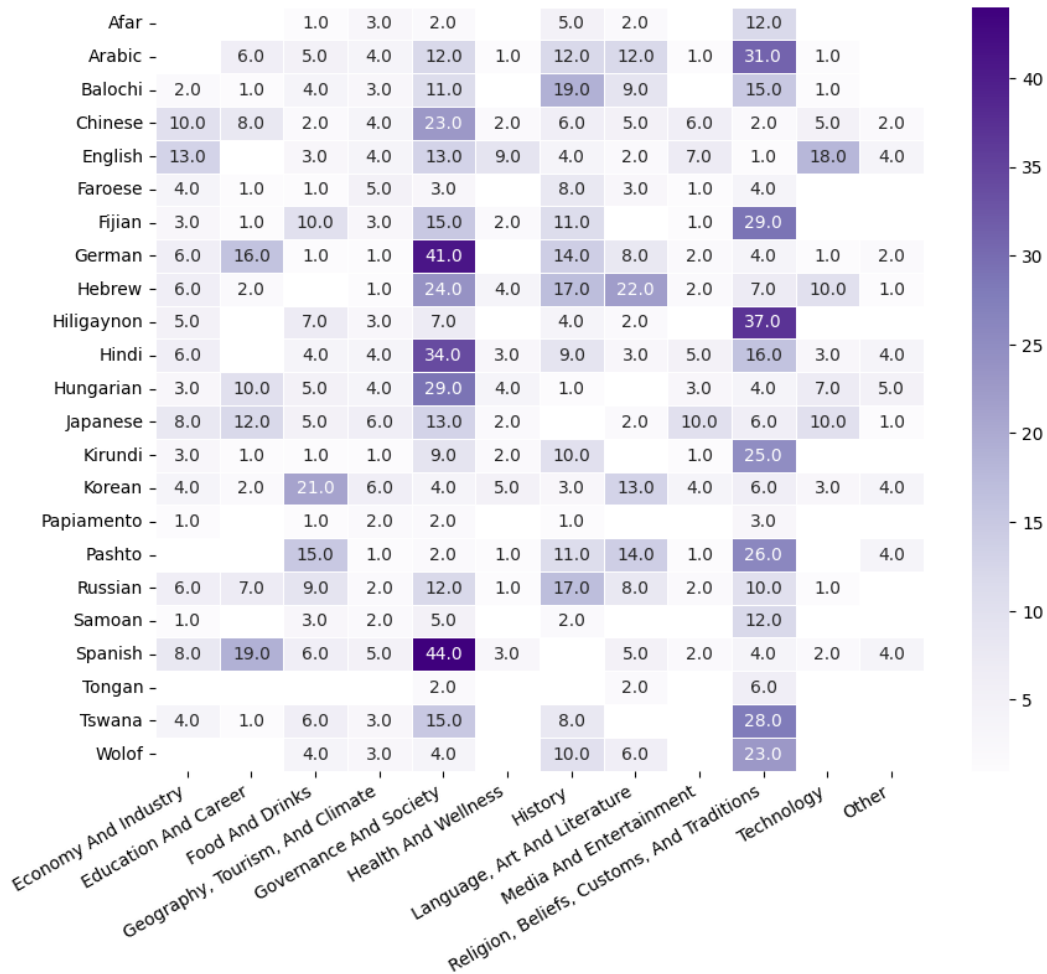


Figure 4: Number of questions by category and language.

the guidelines, totaling \$158 USD per language. The overall cost of the evaluation amounted to approximately \$720 USD.¹³

Results Figure 9 and Figure 10 show the results of annotation for whether the answer was generated in the same language as the question (see Table 20 for detailed counts). Figure 11 and Figure 12 display the annotations of the severity of factual issues in each answer (see Table 21 for detailed counts). Figure 13 and Figure 14 present the annotations of the severity of omissions in each answer (see Table 22 for detailed counts). Figure 15 and Figure 16 show the rankings of the models for both culturally specific and culturally agnostic questions. Finally, Figure 17 shows the distributions of scores assigned for each model by the question type and language of generation.

Statistical analysis We conducted a statistical analysis using the `c1mm()` function from the `ordinal` package in R. Each model was fitted with the ordinal ratings (1–5) as the response variable and different predictors, allowing for random intercepts for annotators. Table 15 shows the results of a model with question type (either culturally specific or culturally agnostic) as the predictor. Table 16 presents the results of an analysis with model type, question type, and their interaction as predictors, complemented by Table 17, which shows the results of a post-hoc analysis. Finally, Table 18 displays the R^2 values for models with different predictors, namely model type, question type, omission ratings, factuality ratings, and language accuracy ratings.

¹³We also covered Upwork charges which the platform impose on the freelancers.



Figure 5: Percentage of responses generated in the correct language by model for culture specific questions. Blank cells for GEMINI-1.5-PRO indicate languages where the API returned an error message. It is important to note that language detection libraries performed poorly for Balochi, Hiligaynon, and Papiamento. Additionally, detection accuracy for Kirundi was compromised, with instances of Kirundi being incorrectly identified as Kinyarwanda. Please see Table 9 for details.

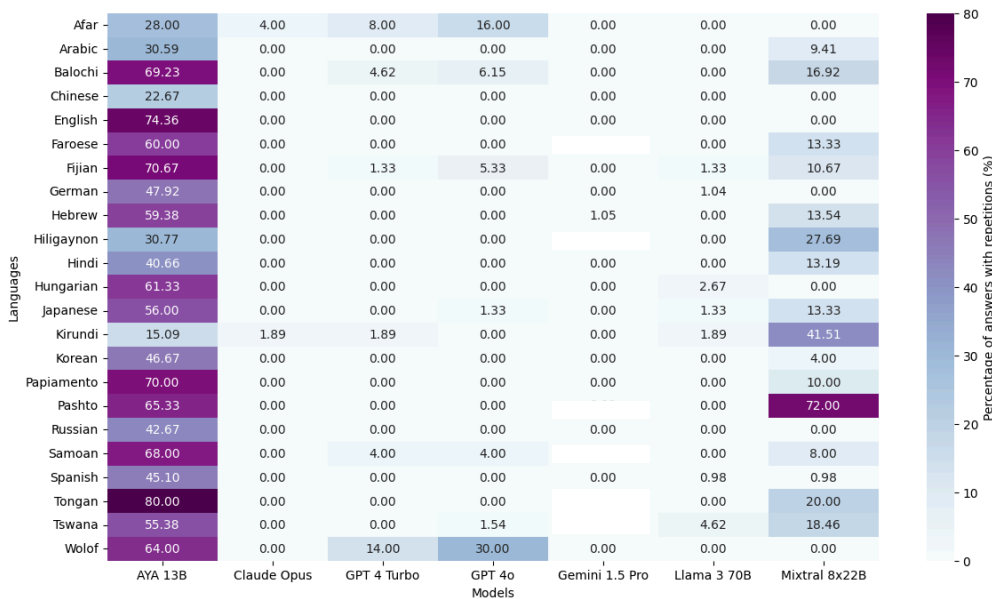


Figure 6: Percentage of answers with identified repetitions for culturally specific questions

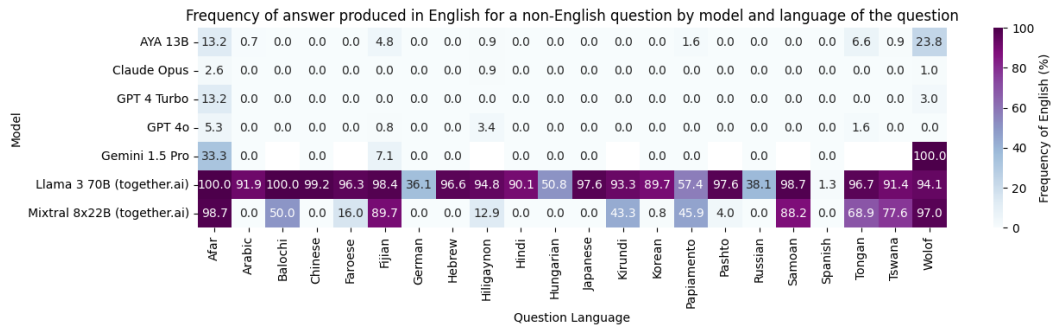


Figure 7: Percentage of answers produced in English for a non-English question by model which produced the answer

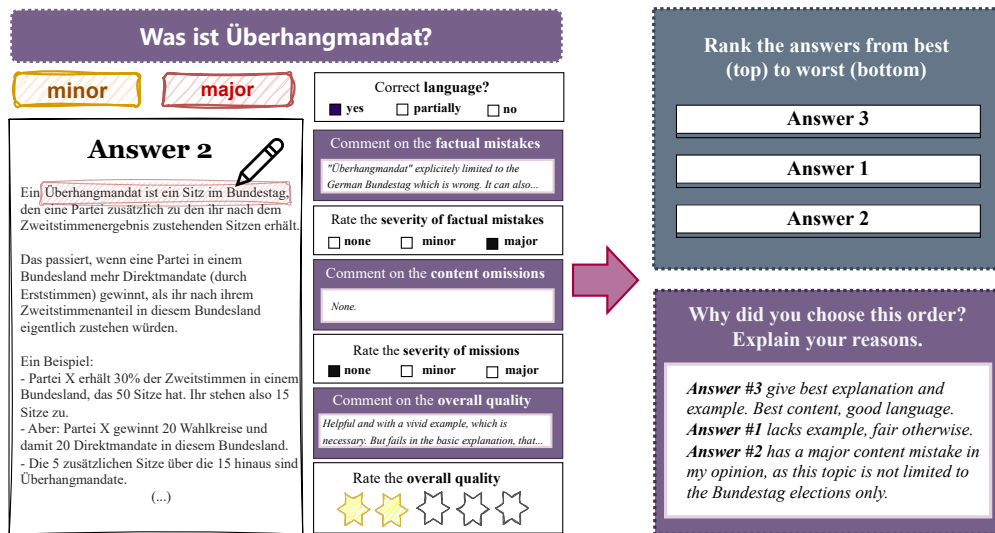


Figure 8: Our human evaluation pipeline. The annotator has to first read the answer, mark and classify all the mistake, and then comment and rate different properties of the answer. Once they have completed evaluating all three answers they are asked to rank them with respect to each other and provide a justification for the ranking. The example shows a culturally specific questions and one answer in German. The answer was produced by CLAUDE-3-OPUS.

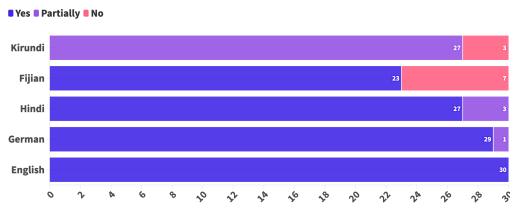


Figure 9: Annotations on Language Correctness for Culturally Specific Questions

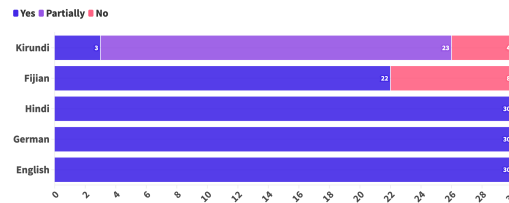


Figure 10: Annotations on Language Correctness for Agnostic-Specific Questions




Figure 11: Factuality issues as assessed by the annotators by model for **culturally specific** questions




Figure 12: Factuality issues as assessed by the annotators by model for **culturally agnostic** questions




Figure 13: Omissions as assessed by the annotators by model for **culturally specific** questions




Figure 14: Omissions as assessed by the annotators by model for **culturally agnostic** questions




Figure 15: Number of times each model was ranked as *first*, *second*, and *last* for **culturally specific** questions.




Figure 16: Number of times each model was ranked as *first*, *second*, and *last* for **culturally agnostic** questions.

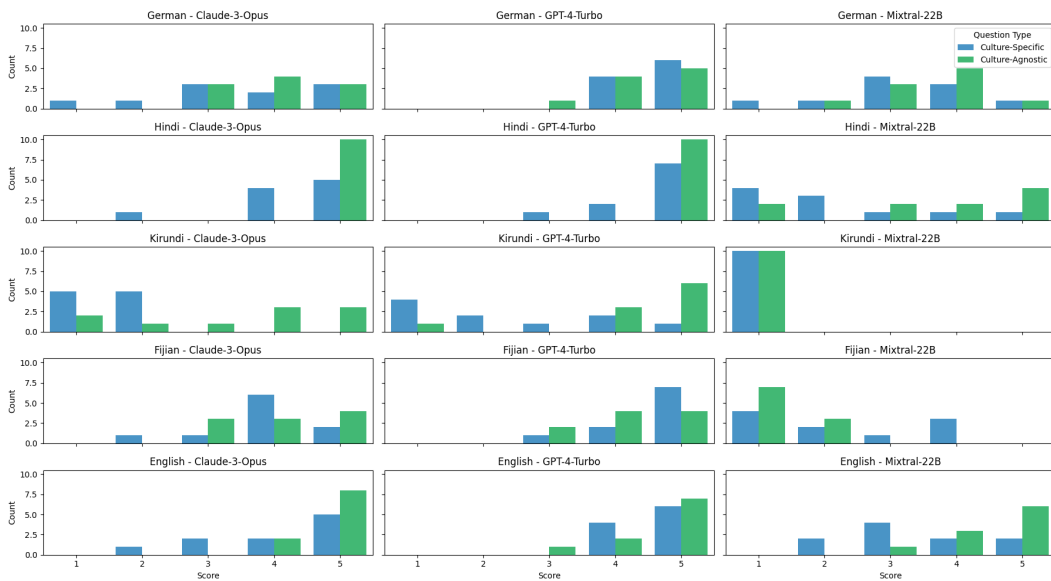


Figure 17: Scores distribution by language and model for Culturally Specific and Culturally Agnostic questions

Table 9: Accuracy of the language detection pipeline on the test set made from questions in the given language. Note that the language detection libraries are often more accurate on longer texts (i.e., texts longer than the length of a single question).

LANGUAGE	LANG ID	ACCURACY (%)
Afar	aa	100.00
Arabic	ar	100.00
Balochi	bal	0.00
Chinese	zh	100.00
English	en	100.00
Faroese	fo	100.00
Fijian	fj	98.67
German	de	100.00
Hebrew	he	100.00
Hiligaynon	hil	0.00
Hindi	hi	100.00
Hungarian	hu	100.00
Japanese	ja	100.00
Kirundi	rn	35.85
Korean	ko	100.00
Papiamentu	pap	0.00
Pashto	ps	100.00
Russian	ru	97.33
Samoan	sm	92.00
Spanish	es	100.00
Tongan	to	100.00
Tswana	tn	96.92
Wolof	wo	90.00

Table 10: General information about models we evaluate using CALMQA.

MODEL	CHECKPOINT	AVAIL.	# PARAM
GPT-4-TURBO	gpt-4-0125-preview	closed	?
GPT-4o	gpt-4o-2024-05-13	closed	?
CLAUDE-3-OPUS	claude-3-opus-20240229	closed	?
GEMINI-1.5-PRO	gemini-1.5-pro-preview-0514	closed	?
LLAMA-3-70B	Meta-Llama-3-70B-Instruct x	open-weight	70B
MIXTRAL-8x22B	Mixtral-8x22B-Instruct-v0.1 x	open-weight	8x22B
AYA-13B	aya-101 x	open-weight	13B

Analysis of the annotations We conducted manual analyses of the comments provided by the annotators. For each analysis, we iteratively designed an annotation schema to analyze the submitted comments. Table 23 describes the annotation schema used for analyzing the comments on model ranking (i.e., the annotator’s reason for ranking a model 1st, 2nd, or 3rd). The results of this analysis are presented in Table 24. Table 25 describes the categories used to analyze the comments on factuality. The results of this analysis are presented in Table 26. Finally, Table 27 describes the categories used to analyze the general comments left by the annotators for each answer. The results of this analysis are presented in Table 28 and Table 29.

D.1 Additional Insights

We capture here insights gained from analyzing human evaluation that we could not fit in the main body of text.

Table 12: Mean, median, and standard deviation of token counts in answers generated by different models. To account for variations in token count due to the language of generation and the presence of repetitions, we provide separate statistics for all answers and for answers produced in the correct language without repetitions. Token counts were computed using `tiktoken` with the `o200k_base` encoding.

MODEL	All Data			Correct Lang / No Repetitions		
	MEAN	MEDIAN	STD	MEAN	MEDIAN	STD
CLAUDE-3-OPUS	296.4	293	88.9	302.2	297	79.2
GPT-4-TURBO	472.6	482	155.2	468.9	477	147.2
GPT-4o	446.6	425	268	434.9	430	184.8
GEMINI-1.5-PRO	265.6	270	247.1	421.6	421	177.7
AYA-13B	867.2	345	894.7	53.7	34	64.4
LLAMA-3-70B	395.9	410	171.4	478.7	484	138.8
MIXTRAL-8X22B	305.3	237	281.9	255.4	252	114

Table 13: Results of cumulative link mixed model with ordinal ratings as the response variable and model as the predictor.

Formula	rating ~ model + (1 language/annotator)			
Random Effects				
Group	Name	Variance	Std. Dev.	
language	(Intercept)	0.7175	0.847	
Number of groups:		5		
Fixed Effects				
Coefficient	Estimate	Std. Error	z value	Pr(> z)
GPT-4-TURBO	0.8635	0.2885	2.993	0.00276 **
MIXTRAL-8X22B	-1.9493	0.2844	-6.854	7.18e-12 ***
Significance codes:		0 '****' 0.001 '***' 0.01 '**' 0.05 '.' 0.1 ' ' 1		

Table 14: Post-hoc analysis for the model in Table 13. Tests performed using the `emmeans` library in R.

Contrast	Estimate	SE	df	z-ratio	p-value
CLAUDE-3-OPUS – GPT-4-TURBO	-0.863	0.288	Inf	-2.993	0.0078
CLAUDE-3-OPUS – MIXTRAL-8X22B	1.949	0.284	Inf	6.854	<.0001
GPT-4-TURBO – MIXTRAL-8X22B	2.813	0.315	Inf	8.936	<.0001

P value adjustment: Tukey method for comparing a family of 3 estimates

Table 15: Results of cumulative link mixed model with ordinal ratings as the response variable and question type (culturally specific vs culturally agnostic) as the predictor.

Formula	rating ~ type + (1 language/annotator)				
	Random Effects				
Group	Name	Variance	Std. Dev.		
annotator	(Intercept)	0.9418	0.9705		
Number of Groups: annotator			5		
	Fixed Effects				
Coefficient	Estimate	Std. Error	z value	Pr(> z)	
Culturally Agnostic	0.7259	0.2192	3.312	0.000926***	
Significance codes:	0 '***'	0.001 '**'	0.01 '*'	0.05 '.'	0.1 ' ' 1

Table 16: Cumulative link mixed model fitted with the Laplace approximation fitted with `c1mm()` in R. The response variable is the ratings (an ordinal variable on a 5-point scale), with predictors being model (CLAUDE-3-OPUS, GPT-4-TURBO, or MIXTRAL-8X22B) and question type (culturally specific and culturally agnostic). Annotator nested within language is included as a random effect. The baseline model is CLAUDE-3-OPUS and the baseline question type is culturally specific. Model's conditional R^2 is 0.497 (including random effects) and marginal R^2 is 0.266 (only fixed effects). Please refer to Table 17 for post-hoc analysis.

Formula	rating ~ model * type + (1 language/annotator)			
Random effects:				
Groups	Name	Variance	Std.Dev.	
Language	(Intercept)	0.7566	0.8698	
Annotator:Language	(Intercept)	0.7566	0.8698	
Fixed effects:				
Coefficient	Estimate	Std. Error	z-value	Pr(> z)
GPT-4-TURBO	1.1679	0.3868	3.020	0.002531 **
MIXTRAL-8X22B	-1.7013	0.3853	-4.415	1.01e-05 ***
Culturally Agnostic	1.3561	0.3956	3.428	0.000607 ***
GPT-4-TURBO:Culturally Agnostic	-0.6182	0.5849	-1.057	0.290489
MIXTRAL-8X22B:Culturally Agnostic	-0.7163	0.5467	-1.310	0.190109

Table 17: Post-hoc analysis for the model in Table 16 with Bonferroni adjustment. Spec. refers to culturally specific questions while Agn. refers to culturally agnostic questions. Tests performed using the `emmeans` library in R.

Contrast	Estimate	SE	df	z-ratio	p-value
Spec. CLAUDE-3-OPUS- Agn. CLAUDE-3-OPUS	-1.356	0.396	Inf	-3.428	0.0091
Spec. CLAUDE-3-OPUS- Spec. GPT-4-TURBO	-1.168	0.387	Inf	-3.020	0.0380
Spec. CLAUDE-3-OPUS- Agn. GPT-4-TURBO	-1.906	0.424	Inf	-4.492	0.0001
Spec. CLAUDE-3-OPUS- Spec. MIXTRAL-8X22B	1.701	0.385	Inf	4.415	0.0002
Spec. CLAUDE-3-OPUS- Agn. MIXTRAL-8X22B	1.061	0.374	Inf	2.835	0.0687
Agn. CLAUDE-3-OPUS- Spec. GPT-4-TURBO	0.188	0.412	Inf	0.457	1.0000
Agn. CLAUDE-3-OPUS- Agn. GPT-4-TURBO	-0.550	0.442	Inf	-1.242	1.0000
Agn. CLAUDE-3-OPUS- Spec. MIXTRAL-8X22B	3.057	0.429	Inf	7.123	<.0001
Agn. CLAUDE-3-OPUS- Agn. MIXTRAL-8X22B	2.418	0.414	Inf	5.842	<.0001
Spec. GPT-4-TURBO- Agn. GPT-4-TURBO	-0.738	0.436	Inf	-1.694	1.0000
Spec. GPT-4-TURBO- Spec. MIXTRAL-8X22B	2.869	0.420	Inf	6.836	<.0001
Spec. GPT-4-TURBO- Agn. MIXTRAL-8X22B	2.229	0.404	Inf	5.514	<.0001
Agn. GPT-4-TURBO- Spec. MIXTRAL-8X22B	3.607	0.462	Inf	7.800	<.0001
Agn. GPT-4-TURBO- Agn. MIXTRAL-8X22B	2.967	0.445	Inf	6.669	<.0001
Spec. MIXTRAL-8X22B- Agn. MIXTRAL-8X22B	-0.640	0.383	Inf	-1.669	1.0000

Table 18: Conditional and Marginal R^2 values for different predictors. We fit cumulative link mixed models (`cglm()` in R) with *ratings* as the response variable and different predictors. All models included random intercepts for annotators. Omission, Factuality, and Language Accuracy were treated as ordinal variables (no issues > minor issues > major issues), whereas Q-Type and Model are categorical variables with two and three levels respectively. The last model was fitted with the interaction between the Model and the Q-Type. The Conditional R^2 refers to the variance explained by both fixed effects (predictors) and random effects (annotators), while Marginal R^2 refers to the variance explained by fixed effects only.

Predictor	Conditional R^2	Marginal R^2
Model	0.214	0.189
Omission	0.752	0.740
Factuality	0.614	0.560
Language Acc.	0.339	0.327
Q-Type	0.093	0.061
Model * Q-Type	0.497	0.266

Table 19: Win rates of the three models in human-evaluated 3-way comparisons of answers for 100 questions. Reasons behind the annotators’ decisions are provided, with separate reason counts for *culturally specific* and *culturally agnostic* questions. A breakdown of reasons into finer-grained categories is provided in Table 23.

MODEL	WIN RATE	REASON	# (spec./agn.)	COMMENT
GPT-4-TURBO	55%	CONTENT	27 / 24	Answer 1 (GPT-4-TURBO) is the perfect answer and explains all the points needed to understand how to play the game 'Teen Patti'.
		LANGUAGE/FORMAT	11 / 7	Answer 3 (GPT-4-TURBO) is very well structured and easy to follow. It covers all the information as well.
		FACTUALITY/RELEVANCE	10 / 3	A3 (GPT-4-TURBO) is more factual than A1 (CLAUDE-3-OPUS) and A2 (MIXTRAL-8X22B).
CLAUDE-3-OPUS	36%	CONTENT	6 / 16	Answer 3 (CLAUDE-3-OPUS) covers the topic in its entirety and hence is ranked 1st.
		LANGUAGE/FORMAT	5 / 13	Answer 2 (CLAUDE-3-OPUS) is more readable because the information is listed as points.
		FACTUALITY/RELEVANCE	6 / 6	A3 (CLAUDE-3-OPUS) is more detailed and factual than A1 (GPT-4-TURBO) and A2 (MIXTRAL-8X22B).
MIXTRAL-8X22B	9%	CONTENT	2 / 1	A1 (MIXTRAL-8X22B) is better explained than A2 (CLAUDE-3-OPUS) and A3 (GPT-4-TURBO).
		LANGUAGE/FORMAT	3 / 2	All answers have equal quality content, so they are distinguished by their structure/verbosity. Answer 3 (MIXTRAL-8X22B) has a very natural structure. Answer 2 (GPT-4-TURBO) and answer 1 (CLAUDE-3-OPUS) have redundancies and answer 1's are slightly worse.
		FACTUALITY/RELEVANCE	1 / 0	Answer 2 (MIXTRAL-8X22B) was slightly more specific to Western Europe than Answer 1 (GPT-4-TURBO), but both were roughly equal in quality.

Table 20: Count of instances generated in the language of the question by model and question-type, and the language being evaluated

LANGUAGE	MODEL	CULTURALLY SPECIFIC			CULTURALLY AGNOSTIC		
		YES	PARTIALLY	NO	YES	PARTIALLY	NO
German	CLAUDE-3-OPUS	10	0	0	10	0	0
	GPT-4-TURBO	10	0	0	10	0	0
	MIXTRAL-8X22B	9	1	0	10	0	0
Hindi	CLAUDE-3-OPUS	9	1	0	10	0	0
	GPT-4-TURBO	10	0	0	10	0	0
	MIXTRAL-8X22B	8	2	0	10	0	0
Kirundi	CLAUDE-3-OPUS	0	10	0	1	9	0
	GPT-4-TURBO	0	10	0	1	9	0
	MIXTRAL-8X22B	0	7	3	1	5	4
Fijian	CLAUDE-3-OPUS	10	0	0	10	0	0
	GPT-4-TURBO	10	0	0	10	0	0
	MIXTRAL-8X22B	3	0	7	2	0	8
English	CLAUDE-3-OPUS	10	0	0	10	0	0
	GPT-4-TURBO	10	0	0	10	0	0
	MIXTRAL-8X22B	10	0	0	10	0	0

Table 21: Factuality issues in model generation by model, question type and language of the question

LANGUAGE	MODEL	CULTURALLY SPECIFIC			CULTURALLY AGNOSTIC		
		NONE	MINOR	MAJOR	NONE	MINOR	MAJOR
German	CLAUDE-3-OPUS	8	1	1	10	0	0
	GPT-4-TURBO	8	2	0	10	0	0
	MIXTRAL-8X22B	8	2	0	9	1	0
Hindi	CLAUDE-3-OPUS	7	2	1	10	0	0
	GPT-4-TURBO	7	3	0	10	0	0
	MIXTRAL-8X22B	1	4	5	6	2	2
Kirundi	CLAUDE-3-OPUS	0	1	9	3	4	3
	GPT-4-TURBO	0	4	6	3	6	1
	MIXTRAL-8X22B	0	0	10	0	0	10
Fijian	CLAUDE-3-OPUS	7	3	0	8	2	0
	GPT-4-TURBO	8	2	0	3	7	0
	MIXTRAL-8X22B	5	5	0	5	5	0
English	CLAUDE-3-OPUS	8	1	1	9	1	0
	GPT-4-TURBO	10	0	0	9	1	0
	MIXTRAL-8X22B	7	2	1	9	1	0

Table 22: Count of omission issues by severity type, model, and language for culturally specific and culturally agnostic questions

LANGUAGE	MODEL	CULTURALLY SPECIFIC			CULTURALLY AGNOSTIC		
		None	Minor	Major	None	Minor	Major
German	CLAUDE-3-OPUS	6	1	3	7	3	0
	GPT-4-TURBO	6	4	0	8	2	0
	MIXTRAL-8X22B	1	7	2	3	6	1
Hindi	CLAUDE-3-OPUS	8	1	1	10	0	0
	GPT-4-TURBO	9	0	1	10	0	0
	MIXTRAL-8X22B	3	1	6	4	4	2
Kirundi	CLAUDE-3-OPUS	0	0	10	4	3	3
	GPT-4-TURBO	2	2	6	6	3	1
	MIXTRAL-8X22B	0	0	10	0	0	10
Fijian	CLAUDE-3-OPUS	6	3	1	6	4	0
	GPT-4-TURBO	8	1	1	7	3	0
	MIXTRAL-8X22B	3	0	7	0	0	10
English	CLAUDE-3-OPUS	6	3	1	8	2	0
	GPT-4-TURBO	9	1	0	10	0	0
	MIXTRAL-8X22B	3	2	5	5	5	0

Table 23: Categories used for analysis of reasons for specific ranking of the answers

TYPE	DESCRIPTION	EXAMPLE
<i>Content: Completeness/Explanation</i>		
COMPLETENESS	The answer was perceived as complete.	Answer 3 (Claude-3-Opus) covers the topic in its entirety and hence is ranked 1st. [Hindi]
EXPLANATION/EXAMPLES	The answer included useful explanation and/or examples.	A3 (Gpt-4-Turbo) is better explained than A1 and A2. [Fijian]
DETAILS/BACKGROUND	The answer included details and/or necessary background.	Answer 1 (GPT-4-Turbo) and 2 (Claude-3-Opus) are similar but answer 1 has detailed information about the methods to measure body mass compared to 2. [Hindi]
GENERAL	The answer was general, which was appropriate for the given question.	Answer 3 (GPT-4-Turbo) is perfect. The writing style of the answer is the best compared to the other answers. For instance, it mentions the timeline in general rather than pointing out exact years of the event (In my opinion, different sources and online transcripts have a little variation in years in terms of history so it is the best to keep it general). [Hindi]
<i>Language/Presentation</i>		
LANGUAGE	The answer was fluent/used better language or was less AI-like.	Both answer 1 (GPT-4-Turbo) and 3 (Claude-3-Opus) are good. Answer 1 sounds more human-like which is why it is ranked 1st. [Hindi]
STRUCTURE	The structure of the answer was better.	All answers have equal quality content, so they are distinguished by their structure/verbosity. Answer 3 (Mixtral-22B) has a very natural structure. [English]
SIMPLE/CLEAR/SPECIFIC	The answer was clear and/or simple, to the point.	Answer 3 (GPT-4-Turbo) is slightly clearer than answer 1 (Claude-3-Opus). [English]
SUCCINCT	The answer was succinct.	All three answers are complete by content in my view (good answer requires more, but that is more than question covers). Answer two (Mixtral-22B) I regard the best, as the density of content in a few lines is awesome - in most of the other questions, "death by long text and details" is valid, here I opt for short and good. [German]
<i>Factuality/Correctness</i>		
FACTUAL	The answer is better in terms of factuality.	A3 (GPT-4-Turbo) is more factual than A1 (Claude-3-Opus) and A2 (Mixtral-22B). [Fijian]
RELEVANT	The answer is the most relevant to the question. Often mentioned when other answers were irrelevant.	Answer 3 (GPT-4-Turbo) is placed in the first position because it is relevant though not specific to Burundi. It could be used if it were specific. It has some important information (...). [Kirundi]
NO ISSUES	There were no apparent issues in the answer.	Answer 3 (Claude-3-Opus) had no notable issues. [English]
PARTIAL ANSWER	The answer at least partially addresses the question (while other answers may be refusals, repetitions, or simply irrelevant/wrong).	Answer 3 (GPT-4-Turbo) is the only one that tries to answer the question. The other 2 just point out differences between the medications. [English]

Table 24: Count of different reasons mentioned by the annotator for ranking each model’s answer as the best out of three. Note that in some cases more than one reason might have been give by the annotator. *Spec.* refers to Culturally Specific questions, while *Agn.* refers to Culturally Agnostic questions.

Model	Type	Completeness - Explanation				Language - Presentation				Factuality - Correctness			
		Complete	Explanation	Details	General	Language	Structure	Simple	Succinct	Factual	Relevant	No issues	Partial ans
CLAUDE-3-OPUS	<i>Spec.</i>	4	0	2	0	1	2	1	1	1	1	2	2
GPT-4-TURBO	<i>Spec.</i>	11	5	9	2	3	2	4	2	4	1	2	3
MIXTRAL-8X22B	<i>Spec.</i>	1	1	0	0	1	0	1	1	1	0	0	0
CLAUDE-3-OPUS	<i>Agn.</i>	11	0	4	1	2	1	7	3	1	1	4	0
GPT-4-TURBO	<i>Agn.</i>	14	4	6	0	1	4	1	1	0	0	2	1
MIXTRAL-8X22B	<i>Agn.</i>	0	0	1	0	0	1	0	1	0	0	0	0

Table 25: Categories used for analysis of comments on the factuality of the answers

TYPE	DESCRIPTION	COMMENT EXAMPLE (LANGUAGE/MODEL)
<i>Direct Factual Errors</i>		
DATE	Issues involving incorrect temporal references.	<i>It is mentioned that Nifty was launched in 1995 but it was actually launched in 1996. [Hindi/GPT-4-TURBO]</i>
ENTITY	Incorrect entity such as a person, place, or organization.	<i>Almost everything is incorrect because the answer states that Ntare Rugamba is the person who accepted to die in the place of the king, while Ntare Rugamba is the king who ruled before the King Mwezi Gisabo. [Kirundi/GPT-4-TURBO]</i>
EVENT	Errors in the details or occurrence of events.	<i>It says that Aurangzeb got the mosque built at the place, however this claim is very strong. He got the temple destroyed but it is not sure if he got the mosque built, as it was a decade after the demolition of the temple. [Hindi/MIXTRAL-8x22B]</i>
REASON	Incorrect reasons or causative explanations for events or situations.	<i>"Ni o lobika na ligamu, o sa vakalevutaka na kena yawa mai yalomu" means folding your elbow increase the distance from your spirit" [Fijian/GPT-4-TURBO]</i>
<i>Contextual and Logical Errors</i>		
SCOPE	Errors involving the incorrect extent or range of a fact.	<i>"Überhangmandat" explicitly limited to the German Bundestag which is wrong. It can also apply for regional votes for a single state for instance. [German/CLAUDE-3-OPUS]</i>
ILLOGICAL	Statements that are logically inconsistent or defy common sense.	<i>Yes, there is an error in the phrases "e rawa ni vakavuna na turu ni wai ni mata ena vuku ni kena vakacacani na mata ni mata" means the cutting of onion can damage the eye of the eye sounds grammatically incorrect. [Fijian/GPT-4-TURBO]</i>
NEGATION	Incorrect use of negation or statements that present the opposite of what is true.	<i>Answer implies that internists are not PCPs [English/CLAUDE-3-OPUS]</i>
PLACEMENT	Inaccuracies resulting from the improper contextual placement of information.	<i>Putting "7. secondhand smoke" as a dot point incorrectly suggests that it is a reason why smoking is bad for the heart [English/CLAUDE-3-OPUS]</i>
<i>Interpretative and Relevance Errors</i>		
IRRELEVANT OR HALLUCINATED	All information in the answer is irrelevant or is fabricated.	<i>The entire answer is wrong. The question is to state the difference between General and OBC category of people (based on caste and society status), but the answer is about general and gynecology practitioners (doctors). It is irrelevant to the question. [Hindi/MIXTRAL-8x22B]</i>
DIFFERENT CULTURE	The answer includes references to the wrong culture.	<i>The answer given is incorrect because it is not specific to Burundi. It is in Kinyarwanda and talks about Rwanda. [Kirundi/CLAUDE-3-OPUS]</i>
UNCLEAR OR UNDOCUMENTED	Facts that are not clearly expressed or lack sufficient documentation or sourcing.	<i>The phrase "leweka" is not clear in the content. This issue might have a typo error. [Fijian/CLAUDE-3-OPUS]</i>
NOT AN ANSWER	The model refuses to answer usually producing the response in English sometimes accompanied with an attempt to translate the question.	<i>Incorrect language. (refusal to answer produced in English) [Fijian/MIXTRAL-8x22B]</i>

Table 26: Count of different types of factuality issues mentioned by annotators in their comments. The issues are presented by question type (*culturally specific* or *culturally agnostic*) and by model which generated the answer. The taxonomy used for this annotation can be found in Table 25.

MODEL	TYPE	UNCLEAR/ UNDOC.	DATE	ENTITY	EVENT	REASON	SCOPE
CLAUDE-3-OPUS	<i>Spec.</i>	1	1	2	1	0	2
GPT-4-TURBO	<i>Spec.</i>	0	1	1	0	0	1
MIXTRAL-8X22B	<i>Spec.</i>	1	1	2	2	1	1
CLAUDE-3-OPUS	<i>Agn.</i>	2	0	0	0	0	0
GPT-4-TURBO	<i>Agn.</i>	5	0	0	0	1	0
MIXTRAL-8X22B	<i>Agn.</i>	2	0	0	0	1	0

MODEL	TYPE	ILLOGICAL	PLACEMENT	NEGATION	IRRELEVANT OR HALLUCINATED	DIFFERENT CULTURE	NOT AN ANSWER
CLAUDE-3-OPUS	<i>Spec.</i>	4	0	1	6	4	0
GPT-4-TURBO	<i>Spec.</i>	2	1	0	0	7	0
MIXTRAL-8X22B	<i>Spec.</i>	3	0	2	7	0	8
CLAUDE-3-OPUS	<i>Agn.</i>	1	1	0	6	0	0
GPT-4-TURBO	<i>Agn.</i>	1	1	1	4	0	0
MIXTRAL-8X22B	<i>Agn.</i>	0	0	1	5	0	10

Table 27: Categories used for the analysis of annotators' general comments on the quality of answers

CATEGORY	DESCRIPTION	COMMENT EXAMPLE (LANGUAGE/MODEL)
<i>Content Issues</i>		
UNHELPFULNESS	Annotator cannot discern the question's answer from the provided answer text	<i>This answer is not very helpful because it not specific to Burundi. Of course it contains some relevant information, but it lacks specificity. [Kirundi/GPT-4-TURBO]</i>
IRRELEVANCE	Contains information not needed to answer the question	<i>The answer is irrelevant to the question and it isn't helpful. It explains a completely different thing (explains the importance of blood sample rather than explaining why the blood sample is taken from the elbow area). [Hindi/MIXTRAL-8x22B]</i>
UNDERSPECIFICITY	Ideas are not explained in sufficient detail	<i>Some instances of generic reasons without much detail about how it applies in Western Europe in particular. [English/GPT-4-TURBO]</i>
INCOMPLETENESS	Extra information is needed to understand the answer	<i>The points mentioned in the answer are true but they do not cover the entirety of the topic. ... So it could be said that the answer is subjective rather than complete and clear. [Hindi/GPT-4-TURBO]</i>
REPETITIVENESS	Some phrase or idea is repeated	<i>The phrases "Sa vakamura na noda vakarau ni dau-tama o ira na iTaukei vulagi.....," is repeated in almost every line... [Fijian/MIXTRAL-8x22B]</i>
GRAMMAR/SPELLING	Grammar or spelling mistakes are present	<i>There is a minor error, and the system might have spelled "nodra" incorrectly. [Fijian/CLAUDE-3-OPUS]</i>
<i>Content Merits</i>		
HELPFULNESS	Information needed to answer the question is present and understandable	<i>It is helpful because it tells us the reasons for updating apps: Security, Good performance and New features. [Kirundi/GPT-4-TURBO]</i>
COMPLETENESS	Answer does not need extra information to be understood	<i>It is complete, even makes an arc from outer core to inner core and a comparison to the sun surface temperature. So it covers more for what has been asked for but I like this additional information. [German/GPT-4-TURBO]</i>
<i>Presentation Issues</i>		
ARTIFICIALITY	Perceived by the annotator to be written by AI	<i>Structure with asterix and enumeration very artificial / non human like. [German/GPT-4-TURBO]</i>
NON-FLUENCY	Reading the text is awkward/difficult for the annotator	<i>...Also Argument 5 is "estimation" and this is again mentioned in the summary -> a bit stange and hence not fluent. [German/CLAUDE-3-OPUS]</i>
INCLARITY	Answer ideas or terms are difficult to understand	<i>Fluent and complete, but not clear, as complex word i.e. Zytokinen (Cytokines) are not explained. [German/CLAUDE-3-OPUS]</i>
<i>Presentation Merits</i>		
NATURALITY	Perceived by the annotator to be human-written/natural	<i>Complete, but so different to the other answers. most human-like answer as being relatively general to a more or less vague question. [German/CLAUDE-3-OPUS]</i>
FLUENCY	Written in a smooth manner and easy to read	<i>There are no inaccuracies in the answer which makes it helpful. It makes use of easier vocabulary which sounds fluent. [Hindi/CLAUDE-3-OPUS]</i>
CLARITY	Ideas are expressed in an easy-to-understand manner	<i>The answer is complete and helpful. It is very clear because the information is subdivided into general and OBC sections and it is easy to follow. [Hindi/GPT-4-TURBO]</i>

Table 28: Counts of different types of issues noted in annotators’ comments about general answer quality. The issues are presented by question type (*culturally specific* or *culturally agnostic*) and by model which generated the answer. The taxonomy used for this annotation can be found in Table 27. Our UI suggested to annotators to make comments (positive or negative) about categories marked with *.

MODEL	TYPE	UNHELPLEFULNESS*	INCOMPLETENESS*	ARTIFICIALITY*	NON-FLUENCY*	INCLARITY*
CLAUDE-3-OPUS	<i>Spec.</i>	9	13	4	4	10
GPT-4-TURBO	<i>Spec.</i>	6	7	4	2	5
MIXTRAL-8X22B	<i>Spec.</i>	20	17	19	10	15
CLAUDE-3-OPUS	<i>Agn.</i>	3	5	5	1	1
GPT-4-TURBO	<i>Agn.</i>	1	4	11	1	5
MIXTRAL-8X22B	<i>Agn.</i>	16	14	17	8	9
MODEL	TYPE	IRRELEVANCE	UNDERSPECIFY	REPETITIVENESS	GRAMMAR/SPELLING	
CLAUDE-3-OPUS	<i>Spec.</i>	1	1	0	1	
GPT-4-TURBO	<i>Spec.</i>	4	1	0	2	
MIXTRAL-8X22B	<i>Spec.</i>	4	7	4	1	
CLAUDE-3-OPUS	<i>Agn.</i>	1	1	2	1	
GPT-4-TURBO	<i>Agn.</i>	0	0	0	7	
MIXTRAL-8X22B	<i>Agn.</i>	3	1	4	0	

Table 29: Counts of different types of merits noted in annotators’ comments about general answer quality. The merits are presented by question type (*culturally specific* or *culturally agnostic*) and by model which generated the answer. The taxonomy used for this annotation can be found in Table 27. Our UI suggested to annotators to make comments (positive or negative) about all these categories.

MODEL	TYPE	HELPLEFULNESS	COMPLETENESS	NATURALITY	FLUENCY	CLARITY
CLAUDE-3-OPUS	<i>Spec.</i>	24	19	24	22	22
GPT-4-TURBO	<i>Spec.</i>	24	20	27	22	19
MIXTRAL-8X22B	<i>Spec.</i>	13	7	18	15	12
CLAUDE-3-OPUS	<i>Agn.</i>	26	20	30	22	30
GPT-4-TURBO	<i>Agn.</i>	29	24	26	17	25
MIXTRAL-8X22B	<i>Agn.</i>	16	12	22	13	16